




Series  
TCX

SIZE 12 CRIMP REMOVABLE SOCKET CONTACT

JN1123 CS 12

Issue:  
01 MARCH 2002

Page  
1 / 1

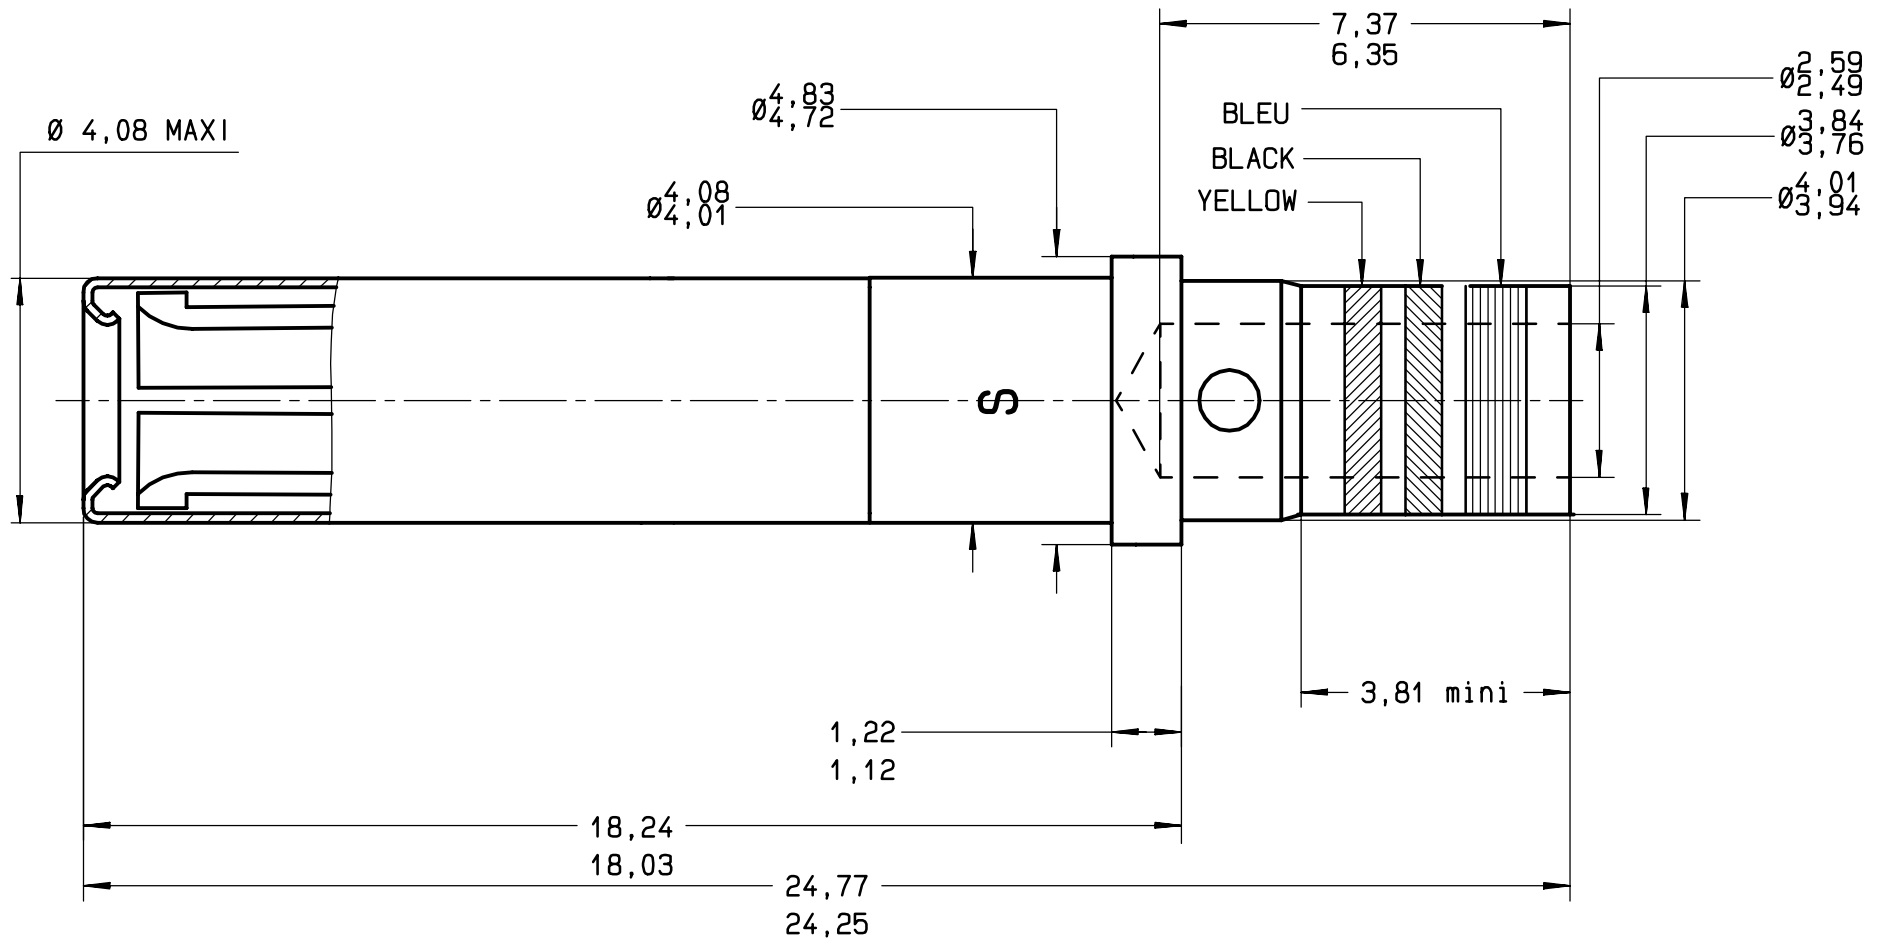

MATERIAL :

BODY CONTACT : BERYLLIUM COPPER ALLOY 1/2 HARD  
PROTECTIVE SLEEVE: STAINLESS STEEL PER AISI 305

FINISH :

CONTACT BODY : PLATING .00005 INCH OF GOLD PER MIL-G-45204 TYPE I OR II GRADE C OR D CLASS 1 OVER NICKEL PER QQ-N-290  
PROTECTIVE SLEEVE: PASSIVATED PER QQ-P-35

WIRES ACCOMODATED : AWG 12-14

INSULATOR DIAMETER: 2,90 MAX - 2,31 MIN

STRIP LENGTH : 6,0

TOOLING

CRIMPING TOOL : M22520/1-01 RADIALL 282 291

SELECTOR POSITION : 8 FOR AWG 12

7 FOR AWG 14

POSITIONER : M22520/1-11 RADIALL 282 579

INSERTION AND EXTRACTION TOOL : M81969/28-02 RADIALL 282 547

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112-9311

CREATION				
PEN: M970106323A				
NOM: COUTHON				
DATE: 01 MARCH 2002				
APPR.:	Issue	Revisions	Name	Approved