





TITLE **6 dB 6 - 18 GHz DIRECTIONAL COUPLER**

LTR. **C**

DRAWING:

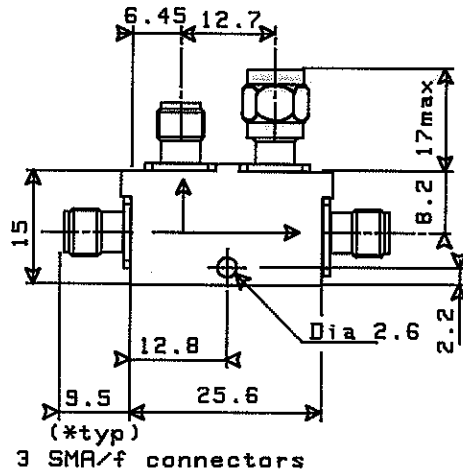

General tolerance: ± 0.5 mm

ELECTRICAL CHARACTERISTICS:

FREQUENCY RANGE	: 6 - 18 GHz
IMPEDANCE	: 50 Ohms
COUPLING (*)	: 6 dB \pm 1 dB
FREQUENCY SENSITIVITY	: \pm 0.5 dB
DIRECTIVITY	: 15 dB mini
INSERTION LOSS	: 2.2 dB max.
V.S.W.R.	: 1.40 max.
AVERAGE POWER	: 50 W CW at 25°C
PEAK POWER	: 3 kW (1µS, 1%) at 25°C

MECHANICAL CHARACTERISTICS:

CONNECTORS	: SMA female per MIL C 39012
TERMINATION (on isolated port)	: 50 Ω 1 W
MAXIMUM WEIGHT	: 30 g

ENVIRONMENTAL CHARACTERISTICS:

OPERATING TEMPERATURE RANGE	: - 40°C + 100°C
STORAGE TEMPERATURE RANGE	: - 40°C + 100°C

(*) Frequency sensitivity is included in coupling.

Tentative data subject to change without notice.

3294 - 8902

PEN	QUALITY	 B					
	<i>Perthel</i>						
PAGE	DATE	NAME	LTR	REVISIONS	DATE APP.		
	1 / 1	16/01/90	K. LUCIEN				
				C	Nominal coupling -> coupling	12/10/90	K.I.
				B	New format	02/08/90	K.I.