




Coupling-Decoupling Network C D N L-801 S 9

IEC 61000-4-6

AE Port	Dsub9
EUT Port	Dsub9
Leads	screened cable 9 lines
Max. Voltage	100 V
Max. Current	0,25 A
IN Port	BNC 50 Ohm
Frequency range	0,15 ... 230 MHz
HF Power Dissipation	4 Watt

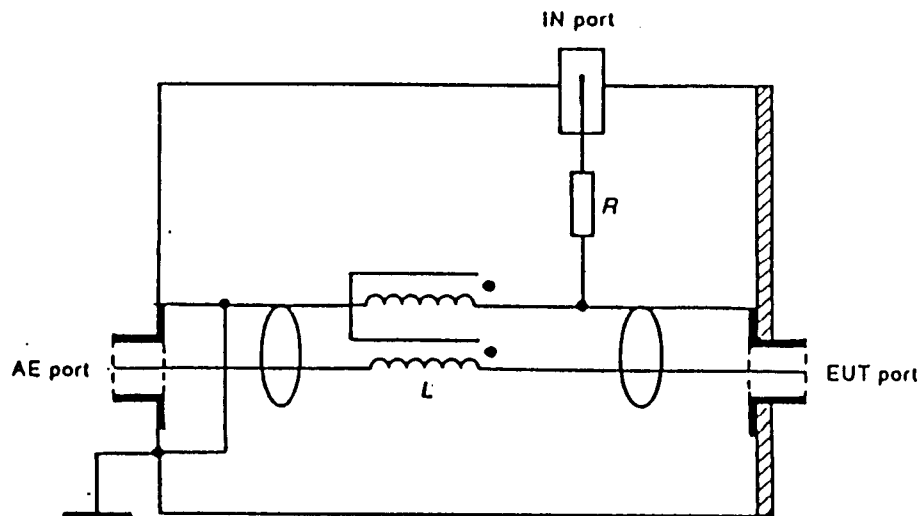

IEC 247MM


SCHWARZBECK MESS - ELEKTRONIK

Tel.: +49(0)6228/1001 www.schwarzbeck.de office@schwarzbeck.de

L 801 S9





CDN, Daten 9 Leiter geschirmt, Sub-D Buchse 9-pol.

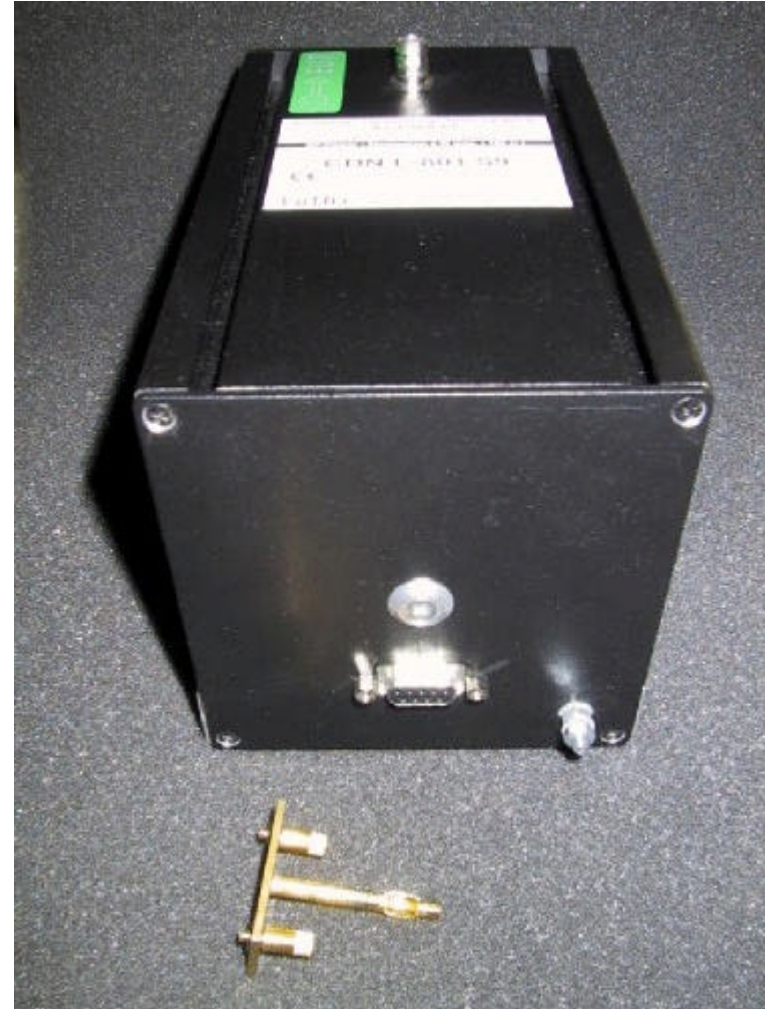

CDN Data 9 leads screened, D-sub 9 female

**CDN Impedance and K-factor
in the frequency range 150 kHz - 230 MHz
in a test setup according to IEC 61000-4-6**

CDN Type S9

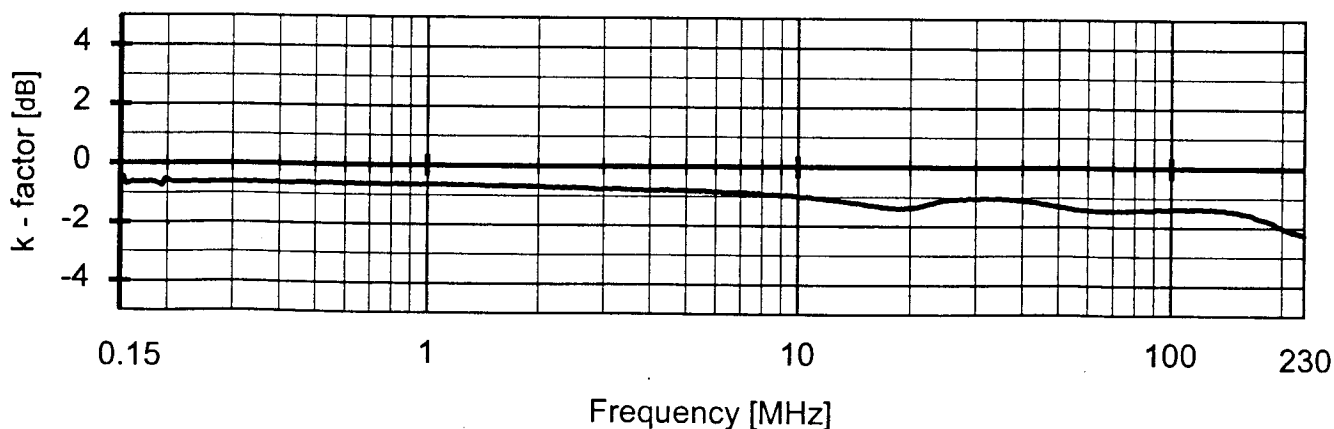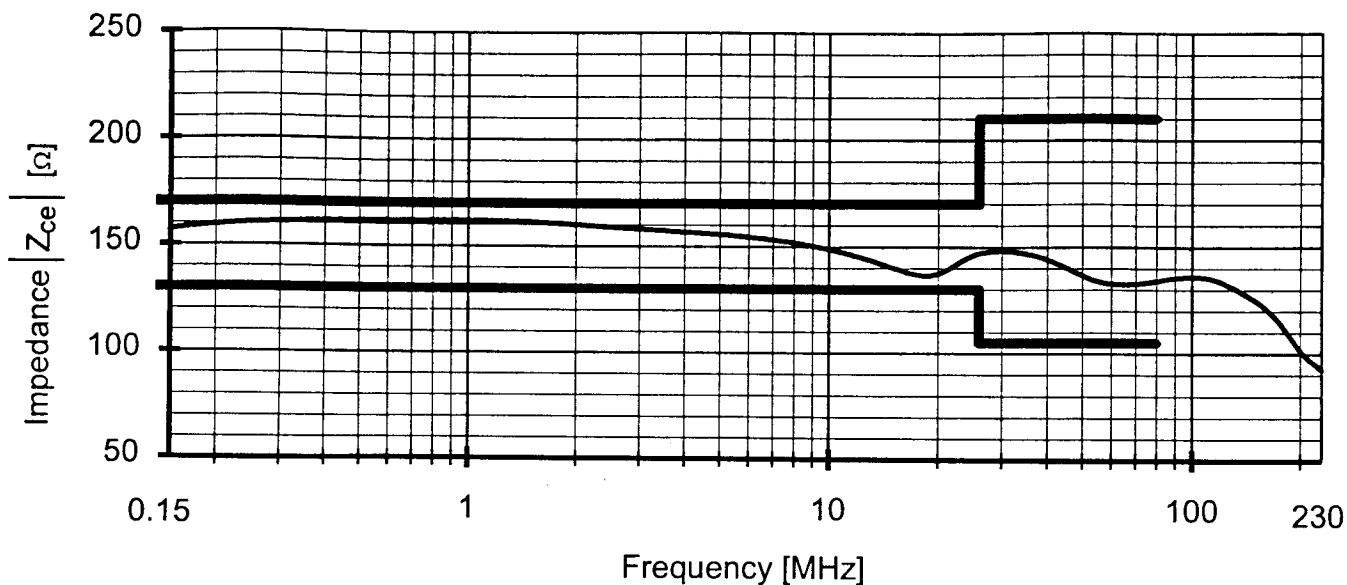

Equipment used:

Network Analyzer Typ ZVR
50 Ω to 150 Ω Adaptor
50 Ω to 150 Ω Adaptor

Inv. Nr. 4110
Inv. Nr. 4159
Inv. Nr. 4160

Location:

Reference for K-factor
Measurement Impedance
Measurement K-factor

EB15

Date and time:

2002.04.26 11:14
2002.08.16 08:56
2002.08.16 09:08