



# 4410A

## GPS Disciplined Rb Reference

### KEY FEATURES

- Provides Five Timing Signal Types
  - 1 PPS: 4 TTL Outputs
  - 10 MHz: 4 Sinewave Outputs  
1 TTL Output
  - IRIG-B: 4 Modulated Outputs  
2 DC Level Shift Outputs
- Front Panel Time Display
- Front Panel LEDs Indicate System Status
- Ethernet Monitoring
- Stratum 1 via GPS

The 4410A is a time and frequency recovery system that generates precise signals traceable to UTC. It utilizes a GPS disciplined rubidium frequency reference to provide timing outputs characterized by the short-term stability of the atomic reference and the long-term stability of GPS.

The versatility of the TSC 4410A makes it suitable for a variety of applications. It provides multiple copies of 5 different timing signals on the rear of the 1U-high, 19" rack-mount chassis.

Year, day, and time-of-day are displayed on the front panel. The standard Ethernet connection simplifies integration with complex systems by allowing health and status information to be monitored remotely.



4410A GPS Disciplined Rb Reference

## 4410A Specifications

### ELECTRICAL SPECIFICATIONS

- GPS Antenna input: BNC female with 5 V on center conductor
- 10 MHz Sine output (4)
  - Connector: BNC female
  - Level:  $13 \pm 1$  dBm
  - Impedance:  $50 \pm 5\Omega$
  - SSB Phase noise
    - 10 Hz -90 dBc/Hz
    - 100 Hz -128 dBc/Hz
    - 1 kHz -140 dBc/Hz
    - 10 kHz -148 dBc/Hz
    - 100 kHz -148 dBc/Hz
  - Long term stability in Holdover:  $<5 \times 10^{-11}$  per month
- 10 MHz TTL Output (1)
  - Connector: BNC female
  - Level: 3 V into  $50\Omega$
- 1PPS Output (4)
  - Connector: BNC female
  - Level: 4.5 V into  $50\Omega$
  - Impedance:  $50 \pm 5\Omega$
  - UTC Offset accuracy: 50 ns RMS
  - Holdover accuracy: 1  $\mu$ s @ 24 hours
- IRIG-B Modulated output (4)
  - Connector: BNC female
  - Timecode: IRIG-B 123
  - Level: 3 Vpp into  $50\Omega$
  - Impedance:  $50 \pm 5\Omega$
  - Accuracy:  $7 \pm 2$   $\mu$ s relative to 1PPS
- IRIG-B DC Level shift output (2)
  - Connector: BNC female
  - Timecode: IRIG-B 003
  - Level: 4.4 V into  $50\Omega$


### ENVIRONMENTAL & PHYSICAL SPECIFICATIONS

- Temperature range: 0°C-50°C (operating)
- Humidity: 0-95% Non-condensing (operating)
- AC Input: 90 – 264 V AC, 85 W, 47 – 63 Hz
- Dimensions: 1.75" (4.45 cm) H x 19" (48.26 cm) W x 12" (30.48 cm) D
- Weight: 9 lb (4 kg)

### OPTIONS

- 001 GPS Antenna
- 002 30 m GPS Antenna cable
- 003 60 m GPS Antenna cable
- 004 Lightning arrestor

### Allan Deviation $\sigma_y(\tau)$

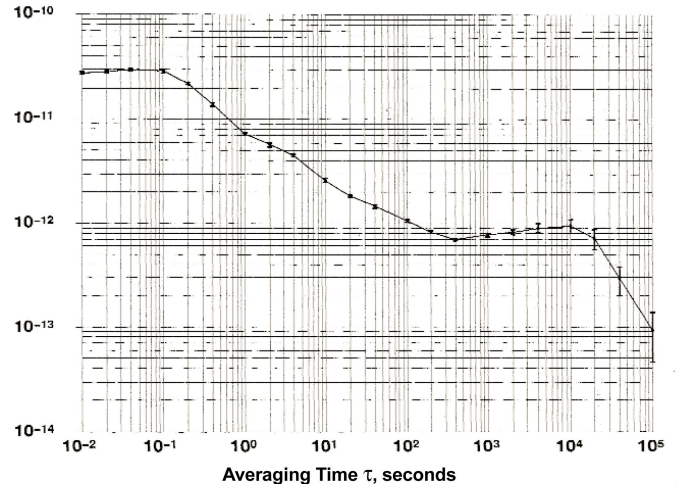

Typical Frequency Stability



Rear View



**SYMMETRICOM, INC.**  
 2300 Orchard Parkway  
 San Jose, California  
 95131-1017  
 tel: 408.433.0910  
 fax: 408.428.7896  
 info@symmetricom.com  
 www.symmetricom.com