

# **VOLTCRAFT**<sub>®</sub>

#### **VOLTCRAFT® - TOP PERFORMANCE IN EVERY WAY**

"For more than 25 years, our product range has been dynamically adapting to the constant changes in the industry. We commit to offering first-class quality to our customers while delivering an excellent cost-performance ratio. This philosophy remains the cornerstone of Voltcraft's success."

# HS-100 SUSPENDED SCALE

VERSION 08/09

CE

Nº 12 42 61

This sturdy suspended scale allows weight measurements of heavy items. The scale can be suspended by the delivered stainless steel carabiner hook.

# **HIGHLIGHTS**

Up to 100 kg //


Resolution 100 g //

Wear-free expansion measurement strips //

Auto power-off //

Tare function //

Stainless steel hook //

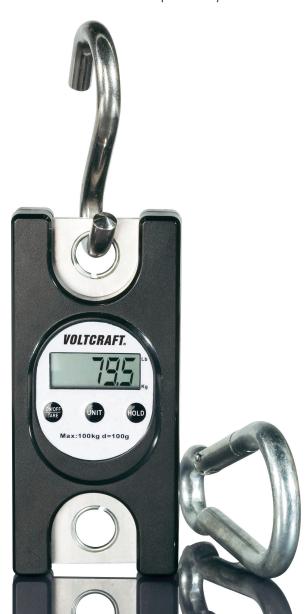

### **GENERAL SPECIFICATIONS**

**WEIGHING RANGE:** 2 - 100 kg / 4 - 220 lb **VOLTAGE SUPPLY:** 2 x 3 V button cell (CR2032) **NET. WEIGHT (BATTERY NOT INCLUDED):** 530 g **SCALE WEIGHT WITHOUT ACCESSORIES:** approx. 175 g **DIMENSIONS (W x H x D):** 70 x 150 x 30 mm

#### **TECHNICAL DATA**

Current consumption:	< 8.2 mA
Operating temperature:	10 °C to 30 °C
Storage temperature:	-20 °C to +60 °C
Relative air humidity:	max. 80 % RH, non-condensing
Weight units:	kg / lb
Resolution "d":	100 g / 0.2 lb
Tolerance:	± 300 g / ± 0.6 lb
Overload display:	O-Ld
Automatic cut-off:	approx. 2 minutes
Measuring sensor:	wear-free stain gauge
Eye diameter:	15 mm
LCD size:	37 x 15 mm

## PACKAGE CONTENT

Suspended scales // Carabiner hook // Weighing hook // 2 button cells // Operating instructions

This data sheet is published by Voltcraft®, Lindenweg 15, D-92242 Hirschau / Germany, Phone +49 180 586 582 7. The data sheet reflects the current technical specifications at time of print. We reserve the right to change the technical or physical specifications.

© Copyright 2009 by Voltcraft®. \*02\_08/09\_03-SB