

DEPARTMENT OF THE ARMY SUPPLY BULLETIN

Storage Serviceability Standard for USAECOM Materiel

POWER SUPPLIES (FSC 5820)

Headquarters, Department of the Army, Washington, D.C.
30 January 1970

| | Paragraph | Page |
|--|-----------|------|
| Section | | |
| I. INTRODUCTION | | |
| Purpose..... | 1 | 1 |
| Scope | 1 | 1 |
| General | 3 | 1 |
| Definitions | 4 | 2 |
| Reporting of supply bulletin improvements..... | 5 | 2 |
| II. STORAGE AND SPECIAL INSTRUCTIONS | | |
| Preservation, packaging, and packing..... | 6 | 2 |
| Marketing..... | 7 | 2 |
| Storage | 8 | 2 |
| Appendix A. REFERENCE | | 2 |
| B. FEDERAL STOCK NUMBERS AND TEST REQUIREMENTS | | 3 |
| C. PRESERVATION, PACKAGING AND PACKING..... | | 4 |
| D. STORAGE QUALITY ASSURANCE PROVISIONS..... | | 5 |

SECTION I. INTRODUCTION

1. Purpose. This bulletin provides a storage serviceability standard which establishes uniform criteria for determining the acceptability of the items designated herein for continued storage and/or issue, on the condition that all specifications and requirements applicable to the items have previously been met at the time of receipt from new procurement, or after repair, overhaul, or rebuild by a CONUS depot maintenance shop.

2. Scope. This bulletin applies to all activities engaged in the receipt, storage, and issue of USAECOM power supplies (FSC5820) 5820 listed in appendix B with the applicable Federal stock numbers.

3. General. It is the Army's objective to attain and maintain a constant materiel readiness status for materiel in depot stocks. The scope of such an objective is of such

magnitude that only general guidelines are provided by chapter 3, section VIII of TM 743-200-1 for the quality evaluation of materiel in the custody of supply and storage activities. This standard supplements TM 743-200-1 by providing a systematic procedure for storage cyclic inspection of the power supplies specified in paragraph 2, and indicates the limiting degree of deterioration, damage, unsatisfactory storage practices, and other characteristics which are acceptable. It also establishes the basis for identifying materiel requiring segregation, remedial care and preservation, or reclassification action. Applicable requirements of the standard may be used for performing receipt and preshipment quality control inspections.

4. Definitions. *a.* Definitions for the majority of specialized terms used can be found in MIL-STD-109B.

b. Definitions for other specialized terms are as follows:

(1) *Storage serviceability standard.* A

written procedure providing storage methods and standards and prescribing the necessary requirements for the surveillance of materiel in storage.

(2) *Storage quality level (SQL).* That quality level applicable to storage sampling inspection expressed in terms of percent defective or defects per 100 units, whichever is applicable, specified for a given group of defects of a product. It is the maximum allowable accidental departure from specification requirements which can be tolerated.

5. Reporting of Supply Bulletin Improvements. Reporting of errors, omissions, and recommendations for improving this publication by the individual user is encouraged. Reports should be submitted on DA Form 2028 (Recommended Changes to Publications) and forwarded direct to Commanding General, U. S. Army Electronics Command, ATTN: AMSEL-ME-NMP-EM, Fort Monmouth, N. J. 07703.

SECTION II. STORAGE AND SPECIAL INSTRUCTIONS

6. Preservation, Packaging, and Packing. Preservation, packaging, and packing will be in accordance with the requirements listed in appendix C. Items designated by 17-digit code shall be preserved and packaged in accordance with MIL-STD-726; packing shall conform to the requirements specified in MIL-P-55585 (EL). Items designated by military specifications shall be preserved, packaged, and packed in accordance with the requirements in the cited specification. Items designated by an asterisk (*) shall be preserved, packaged, and packed in accordance with the special instructions cited for the item.

7. Marking. Marking will be in accordance with MIL-STD-129D.

8. Storage. *a. Type.* Controlled humidity warehouse or heated warehouse.

b. Age Control. Power supplies will be issued on a first-in-first-out (FIFO) basis by date of manufacture or date of rebuild.

c. Shelf Life. Power supplies are subject to deterioration during storage and are required to be inspected and tested as specified in appendix D.

APPENDIX A REFERENCES

MIL-R-10138

Radio Receiving Set AN/
GRR-5 (Components
of).

MIL-P-11475

Power Supplies PP-281
()/GRC and PP-282

| | | | |
|-------------|---|------------------|---|
| MIL-R-11539 | Radio Set, Non Tactical Radio Equipment (Components of). | MIL-P-55585 (EL) | Packing and Marking Re- quirements for South- east Asia and Stratcom and Preparation for De- livery Requirements of Electronics Equipment and Components. |
| MIL-P-11672 | Power Supply PP-327 () | | |
| MIL-P-12471 | Power Supplies PP-109 () /GR and PP- 112()/GR. | MIL-STD-109B | Quality Assurance Terms and Definitions. |
| MIL-P-12965 | Power Supply (Rectifier Power Unit RA-61()) and Mounting FT-14. | MIL-STD-129D | Marking for Shipment and Storage. |
| MIL-A-55147 | Amplifier, Power Supply Group OA-3633()/ GRC. | MIL-STD-726C | Packaging Requirements Code. |
| MIL-R55219 | Radio Set AN/GRC-50V (Units of). | TM 743-200-1 | Storage and Materials Handling |

APPENDIX B

FEDERAL STOCK NUMBERS AND TEST REQUIREMENTS

| Type | FSN. | Publication | Test requirements |
|------------------|---------------|-------------------|------------------------------|
| PP-109/GR | 5820-284-0231 | *REP 433 | Perform all tests |
| PP-112/GR | 5820-284-0230 | *REP 433 | Perform all tests |
| PP-281/GRC | 5820-500-4375 | *REP 435 | Perform all tests |
| PP-282/GRC | 5820-500-1678 | *REP 435 | Perform all tests |
| PP-308/URR | 5820-500-4376 | *REP 62 | Perform all tests |
| PP-327/GRC-9Y | 5820-500-4419 | *REP 699 | Perform all tests |
| PP-327A/GRC-9Y | 5820-557-8629 | *REP 699 | Perform all tests |
| PP-650/URR | 5820-500-4444 | *REP 611 | Section IV, para 14 |
| PP-804/U | 5820-500-4421 | TM 11-5820-267-15 | Chapter 7 |
| PP-846/U | 5820-500-4428 | *REP 734 | Perform all tests |
| PP-867/U | 5820-284-0228 | *REP 736 | Perform all tests |
| PP-868/U | 5820-500-4381 | *REP 736 | Perform all tests |
| PP-869/U | 5820-284-0229 | *REP 736 | Perform all tests |
| PP-894/GRC-32B | 5820-500-4418 | *REP 1266 | Perform all tests |
| PP-1126/U | 5820-500-4383 | TM 11-5104 | Chapter 3, section III |
| PP-1127/U | 5820-500-4397 | TM 11-5104 | Chapter 3, section III |
| PP-1128/U | 5820-500-4382 | TM 11-5104 | Chapter 3, section III |
| PP-1494/U | 5820-682-3399 | *REP 1372 | Perform all tests |
| PP-2054/GRC | 5820-889-0857 | TM 11-5820-461-35 | Paragraphs 10.1 through 10.6 |
| PP-2684/GRC-109 | 5820-823-2363 | TM 11-5820-474-14 | Paragraph 100 |
| PP-2685/GRC- 109 | 5820-823-2364 | TM 11-5820-474-14 | Paragraph 101 |
| PP-4514/FRC-74 | 5820-942-0821 | TM 11-5820-590-35 | Paragraph 5-9 |
| PP-4763/GRC | 5820-037-7960 | TM 11-5820-765-35 | Chapter 4 |
| RA-61 | 5820-230-7305 | *REP 543 | Perform all tests |
| RA-120 | 5820-311-5701 | *REP 876 | Perform all tests |

*These REP publications may be obtained from Commanding General, U. S. Army Electronics Command, ATTN: AMSEL-ME-NMP-PS, Fort Monmouth, N. J. 07703.

APPENDIX C

PRESERVATION, PACKAGING AND PACKING

| Type | Requirements |
|-----------------|-----------------------------|
| PP-109/GR | MIL-P-12471 |
| PP-112/GR | MIL-P-12471 |
| PP-281/GRC | MIL-P-11475 |
| PP-282/GRC | MIL-P-11475 |
| PP-308/URR | MIL-R-10138 |
| PP-327/GRC 9y | MIL-P-11672 |
| PP-327A/GRC 9y | MIL-P-11672 |
| PP-660/URR | 4Q-1-1-00-00-JJ-X-ED-0-00-A |
| PP-804/U | MIL-R-11539 |
| PP-846/U | MIL-R-11539 |
| PP-867/U | MIL-R-11539 |
| PP-868/U | MIL-R-11539 |
| PP-869/U | MIL-R-11539 |
| PP-894/GRC-32B* | |
| PP-1126/U | MIL-R-11539 |
| PP-1127/U | MIL-R-11539 |
| PP-1128/U | MIL-R-11539 |
| PP-1494/U* | |
| PP-2054/GRC | MIL-R-55219 |
| PP-2684/GRC-109 | 4Q-1-1-00-00-JJ-X-ED-0-00-A |
| PP-2685/GRC-109 | 4Q-1-1-00-00-JJ-X-ED-0-00-A |
| PP-4514/FRC-74* | |
| PP-4763/GRC* | |
| RA-61 | MIL-P-12965 |
| RA-120 | 4Q-1-1-00-GH-BC-A-ED-O-O-A |

1. Preservation and Packaging. Preservation and packaging shall be level A or C, as specified.

a. Level A.

(1) *Cleaning.* Cleaning shall be accomplished in accordance with process C-1 of MIL-P-116.

(2) *Drying.* Drying shall be accomplished in accordance with the applicable procedure of MIL-P-116.

(3) *Preservation application.* None required.

(4) *Unit packaging.* Unit packaging shall be in accordance with the methods prescribed in MIGP-116 and as specified in this appendix.

(a) *Technical literature.* Each technical literature shall be packaged method IC-1.

(b) *Packaging development.* Each power supply shall be packaged individually in accordance with method IIB of MIL-P-116.

*Use special packaging instructions (para. 1, 2, and 3 above).

Packaging shall be developed in accordance with method IIB, using kinds and types of materials which, when applied, will afford adequate protection against corrosion, deterioration, and damage during worldwide shipment, handling and storage.

The outer container of a method IIB package shall conform to the requirements of PPP-E-636, type CF, class weather-resistant. Closure shall be in accordance with the appendix of the box specification.

b. *Level C.* Each power supply shall be preserved and packaged in a way that will afford adequate protection against corrosion, deterioration, and damage during shipment from the supply source to the first receiving activity.

2. Packing. Packing shall be level A, B, or C, as specified.

a. Level A.

(1) Each power supply, packaged as specified in paragraph 1, shall be packed in close fitting boxes conforming to PPP-B-621, class 2, or box cleated plywood PPP-B-601 overseas type. Place the technical literature, packaged as specified in paragraph *1a(4)(a)*, on top of the packaged unit directly under the lid of the container.

(2) Closure shall be in accordance with the applicable container specification or appendix thereto.

(3) Metal strapping, conforming to QQ-S-781, type 1, class B, shall be applied to wood and wood-cleated shipping containers in accordance with the requirements of the applicable box specification or appendix thereto. Fiberboard shipping containers shall be reinforced by pressure-sensitive filament tape banding, or nonmetallic strapping conforming to PPP-T-97, type IV, and PPP-S-760, type II, respectively; selection of the material

and application shall be in accordance with the appendix of the applicable box specification.

b. Level B. Each power supply, packaged as specified in paragraph 1, shall be packed as specified in paragraph *2a*, except that the nailed wooden box shall conform to PPP-B-621, class 1 or PPP-B-601 class domestic.

c. Level C. Each power supply shall be packed in shipping containers in a way that will afford adequate protection against damage to the package and its contents during shipment from the supply source to the first receiving activity. Shipping containers shall comply with the rules and regulations of the common carrier as applicable to the mode of transportation.

3. Inspection. Inspection of military packaging shall be in accordance with MIL-P-116.

APPENDIX D

STORAGE QUALITY ASSURANCE PROVISIONS

1. Index Number. The four-digit index number of this storage quality assurance provision (SQAP) (reserved for future use in automatic data processing) is to be assigned.

2. Federal Stock Number. Each item listed in appendix B, with its Federal stock number, is subject to the provisions of this SQAP.

3. Definitions. Special terms used in this SQAP are defined as follows:

a. Acceptance Quality Level (AQL). The nominal value expressed in terms of percent defective or defects per 100 units, whichever is applicable, specified for a given group of defects of a product. It is the maximum allowable accidental departure from specification requirements which can be tolerated.

b. Storage Quality Level (SQL). That quality level applicable to storage sampling inspection expressed in terms of percent defective or defects per 100 units, whichever is applicable, specified for a given group of defects of a product. It is the maximum allowable accidental departure from specification requirements which can be tolerated.

c. Defect. Any nonconformance of the unit of product with specified requirements.

d. Defective Unit. A unit of product which contains one or more defects.

e. Critical Defect. A defect that judgment and experience indicate is likely to result in hazardous or unsafe conditions for individuals using, maintaining, or depending on the product performance of the tactical function of a major end item, such as a ship, aircraft, tank, missile, or space vehicle.

f. Major Defect. A defect other than critical that could result in failure, or materially reduce the usability of the product for its intended purpose.

g. Minor Defect. A defect that does not materially reduce the usability of the unit of product for its intended purpose, or is a departure from established standards having little bearing on the effective use or operation of the unit.

h. Mechanical- Visual Inspection. An inspection by visual means to observe the item and/or its packaging and packing to detect deficiencies. Mechanical-visual inspection may require disassembly.

i. Technical Inspection. A complete functional inspection, including disassembly, where required, and performance testing and/or

laboratory testing.

4. Specifications, Technical Manuals, and Other Documents. The following documents, of the latest issue in effect, contain inspection and testing information, data, and instructions applicable to these quality assurance provisions:

| <i>Publication</i> | <i>Title</i> |
|--------------------|--|
| DA Pam 310-4 | Index of Technical Manuals, Technical Bulletins, Supply Manuals (types 7, 8, and 9), Supply Bulletins, and Lubrication Orders. |
| DA Pam 310-7 | U. S. Army Equipment Index of Modification Work Orders. |
| AR 725-50 | Requisitioning, Receipt, and Issue System. |
| MIL-P-116E | Preservation, Methods of. |
| MIL-P-11268F | Parts, Materials and Processes Used in Electronic Communication Equipment. |
| MIL-M-13231A | Marking of Electronic Items. |
| MIL-STD-105D | Sampling Procedures and Tables for Inspection by Attributes. |
| MIL-STD-109B | Quality Assurance Terms and Definitions. |
| MIL-STD-129D | Marking for Shipment and Storage. |
| MIL-STD-130 | Identification Marking of U. S. Military Property. |
| MIL-STD-252 | Wired Equipment, Classification of Visual and Mechanical Defects. |
| MIL-STD-726 | Packaging Requirements Code. |
| TB SIG 355-1 | Depot Inspection Standard for Repaired Signal Equipment. |
| TB SIG 365-2 | Depot Inspection Standard for Refinishing Repaired Signal Equipment. |
| TB SIG 355-3 | Depot Inspection Standard for Moisture and Fungus Resistant Treatment. |
| TB SIG 355-4 | Depot Inspection Standard for Balancing Rotating Parts and Assemblies. |
| TB 750-236 | Calibration Requirements for the Maintenance of Army Materiel. |
| *REP 62 | Specific Standard for Power Supply PP-308/URR. |
| *REP 433 | Specific Standard for Radio Sets AN/GRC-3, 4, 6, 7, 8; AN/VRQ-1, 2, 3; Power Supplies PP-109/GR, PP-112/GR. |
| *REP 435 | Specific Standard for Radio Sets AN/GRC-3, 4, 6, 7, 8; AN/VRC-1, 7, 13, |

● These REP publications may be obtained from Commanding General, U. S. Army Electronics Command, ATTN: AMSEL ME-NMP-PS, Fort Monmouth, N. J. 07703.

| | |
|-------------------|---|
| | 14,15; Power Supplies PP-281/GRC, PP-282/GRC, PP-448/GRC. |
| *REP 543 | Specific Standard for Power Supply RA-61. |
| *REP 611 | Specific Standard for Radio Receivers R-220/URR, R-644/URR; Power Supply PP-660/URR. |
| *REP 699 | Specific Standard for Radio Set AN/GRC-9; Power Supply PP-327/GRC-9y- |
| *REP 734 | Specific Standard for Power Supply PP-846/U. |
| *REP 736 | Specific Standard for Radio Set AN/VRC-19; Power Supplies PP-867/U, PP-868/U, PP-869/U. |
| *REP 876 | Specific Standard for Power Supply RA-120. |
| *REP 1266 | Specific Standard for Power Supply PP-894/GRC-32B. |
| *REP 1372 | Specific Standard for Power Supply PP-1494/U. |
| TM 11-5104 | Power Supplies PP-1126/U, PP-1127/U and PP-1128/U (Field Maintenance). |
| TM 11-5820-267-15 | Operator, Organizational, DS, GS, and Depot Maintenance Manual Including Repair Parts and Special Tools List: Power Supply PP-804/U. |
| TM 11-5820-461-35 | DS, GS, and Depot Maintenance Manual: Radio Sets AN/GRC-500V) 1, 2, 3, 4, and 5 and Radio Sets AN/GRC-50A(V) 1, 2, 3, 4, 5, 6, 7, and 8 and Test Facilities Kit MK-715/GRC. |
| TM 11-5820-474-14 | Organizational, DS, and GS Maintenance manual: Radio Set AN/GRC-109. |
| TM 11-5820-590-35 | DS, GS, and Depot Maintenance Manual: Radio Sets AN/PRC-74 and AN/PRC-74A and Power Supply PP-4514/PRC-74. |
| TM 11-5820-765-35 | Direct Support, General support, and Depot Maintenance Manual Including Repair Parts and Special Tools List: Power Supply PP-4763/GRC and Power Supply PP-4763A/GRC. |
| TM 38-750 | Army Equipment Record Procedures. |

5. Other Directives.

| <i>Publication</i> | <i>Title</i> |
|--------------------|---|
| AR 795-17 | General Policies and Principles for Furnishing Army Materiel on a Grant Aid Basis. |
| AR 795-204 | General Policies and Principles for Furnishing Defense Articles and Services on a Sale or Loan Basis. |

6. Inspection Criteria. a. Lot Criteria.

(1) *Lot definition.* A lot is defined as a group of like items from which a sample is to be drawn and inspected to determine conformance with the acceptability criteria. The following are examples:

(a) A group of like items in storage which were received in a shipment with the following identical markings:

- 1 Purchase order number.
- 2 Date packaged or packed.
- 3 Depot certification stamp and date.

(b) A group of like items repaired or rebuilt by the Maintenance Division in one production run.

(2) *Lot formation.* The items shall be assembled into identifiable lots. Each lot shall, as far as practicable, consist of units of product of a single type, grade, class, size, and composition manufactured repaired, or rebuilt at the same time and stored under the same conditions.

(3) *Lot size.* The lot size is the total number of individual like items in the lot that is to be inspected.

b. Sampling Procedure.

(1) *Sample selection.* Select samples of material in a way which will assure that each unit in the lot has an equal chance of being selected. Biased methods, such as selecting items from the same position in a container, pallets, or stacks; taking items all **from** one location; or selecting items that appear defective; will not be used.

(2) *Sample size.* Use table I of MIL-STD-105D, General Inspection Level II, to obtain the sample size code letter, and table II-A of MIL-STD-105D to obtain the sample size using the storage quality levels shown in (3) below.

(3) Storage quality levels (SQL).

(a) Mechanical-visual inspection: Critical SQL 1.0 percent; major SQL 2.5 percent; minor SQL 10 percent.

(b) Electrical: Critical SQL **1.0** percent; major SQL 2.5 percent.

(c) Preservation, packaging, packing, and marking: major SQL 4.0 percent; minor SQL 10 percent.

(d) The acceptance or reject number

for the above SQL shall be the same as those shown for comparable acceptance quality levels (AQL) in table II-A of MIL-STD-105D.

c. Inspection Requirements. The following mechanical-visual inspections shall be performed:

(1) Inspect **case** for physical damage, condition, and finish.

(2) Inspect **all** controls **and** switches for proper operation and loose or missing hardware.

(3) Inspect all connectors, plugs, and cord receptacles for condition and damage.

(4) Inspect assembly for physical damage, condition, missing parts, foreign objects, and finish.

(5) Inspect cabling and wiring for potential short circuits, cuts, breaks, fraying, deterioration, kinks, and strain.

(6) Inspect solder connections for missing solder, cold solder, insufficient solder, excessive solder, and improper wrap.

(7) Inspect for illegible, incorrect, or missing markings.

(8) Inspect for corrosion, dirt, moisture, and fungus.

(9) Inspect all parts and hardware for damage and condition.

d. Test Requirements. Perform those tests that are specified for each power supply listed in appendix B.

e. Defect Classification.

(1) Mechanical-Visual.

(a) *Critical.* Refer to the definition of a critical defect.

(b) Major.

1. Damage due to handling or storage (crushed, deformed, or broken).

2. Soldering: defects as listed in MIL-STD-252A.

3. Solderless connectors: defects as listed in MIL-STD-252A.

4. Cabling and wiring: defects as listed in MIL-STD-252A.

5. Hardware: defects as listed in MIL-STD-252A.

6. Foreign objects: defects as listed in MIL-STD-252A.

7. Potential short circuits: defects as listed in MIL-STD-252A.

8. Finish: defects as listed in MIL-STD-252A.

9. Marking: defects as listed in MIL-STD-252A.

10. Parts: defects as listed in MIL-STD-252A.

11. Contacts: defects as listed in MIL-STD-252A.

12. Plating, painting, or MFP missing.

13. Dimensional: a dimensional defect which directly affects interchangeability, assembly, or operation.

(c) Minor.

1. Soldering: defects as listed in MIL-STD-252A.

2. Solderless connectors: defects as listed in MIL-STD-252A.

3. Cabling and wiring: defects as listed in MIL-STD-252A.

4. Hardware: defects as listed in MIL-STD-252A.

5. Finish: defects as listed in MIL-STD-252A.

6. Marking: defects as listed in MIL-STD-252A.

7. Parts: defects as listed in MIL-STD-252A.

8. Contacts: defects as listed in MIL-STD-252A.

(2) Electrical.

(a) Critical. Refer to the definition of a critical defect.

(b) Major. Any electrical defect, other than critical, that does not meet the requirements specified for each item shall be considered a major defect.

(c) Minor. None. All electrical defects shall be considered critical or major, as applicable.

(3) Packaging and marking - major.

(a) Use of improper or defective material.

(b) Quantity in unit package not as specified.

(c) Incorrect packaging method applied.

(d) Cushioning or padding omitted,

(e) Cushioning or padding inadequate for the protection of the barrier material from projections, sharp edges, or other similar features of the item.

(f) Cushioning inadequate for the physical and mechanical protection of the item.

(g) Unsealed, punctured, or improperly sealed barrier bag, wrap, or envelope.

(h) Stock number omitted, incorrect, or illegible.

(i) Nomenclature omitted, incorrect, or illegible.

(j) Marking of quantity of items in package omitted, incorrect, or illegible.

(k) Different stock numbered items in the same unit package.

(4) Packaging and marking - minor.

(a) Item not properly blocked or braced within the unit package to prevent movement.

(b) Packaging material damaged.

(c) Conforming or cushioning wraps are not snug fitting and contain voids.

(d) Air not expelled from barrier before sealing.

(e) Any item of marking information, other than *(3)(h)*, *(i)*, and *(j)* above listed under major defects, omitted, incorrect, or illegible.

(5) Packing and marking - major.

(a) Use of improper or defective material.

(b) Quantity in pack not as specified.

(c) Gross weight in excess of specified amount.

(d) Box closure not as specified.

(e) Type, grade, class, and style of the shipping container not as specified.

(f) Strapping omitted (when required).

(g) Strapping inadequate or incorrectly applied (when required).

(h) Items not adequately blocked,

braced, or cushioned within the shipping container to prevent movement or damage.

(i) Shipping documents or packing list omitted.

(j) Stock number omitted, incorrect, or illegible.

(k) Nomenclature omitted, incorrect, or illegible.

(l) Marking of quantities of items in pack omitted, incorrect, or illegible.

(m) Destination marking omitted, incorrect, or illegible.

(n) Special marking or labeling (when required) omitted, incorrect, or illegible.

(o) Overseas code marking (when required) omitted, incorrect, or illegible.

(6) Packing and marking - minor.

(a) Unsealed carton.

(b) Defective taping or sealing of carton.

(c) Any other box defect which may be considered minor by definition of MIL-STD-105.

(d) Any item of required marking information, other than (5)(j) through (o) above listed under major defects, omitted, incorrect, or illegible.

f. Calibration of Measuring and Test Equipment. All measuring and test equipment shall have been calibrated and certified within its prescribed period, in accordance with TB 750-236 before use. Certification shall be affixed in such a way as to preclude any altering or tampering.

g. Storage Inspection Records. Results of inspections and tests shall be recorded on data sheets and a copy attached to each unit.

7. Inspection Frequency. *a.* Controlled humidity warehouse: 60 months.

b. Heated warehouse: 36 months.

c. Unheated warehouse: 18 months.

8. Type of Storage. Controlled humidity warehouse or heated warehouse.

9. Other Instructions. *a. Rejected Lots.* Each rejected lot shall be tagged and reclassified into the proper condition code in accordance with AR 725-50. For other than new material, all defective units in a lot shall be repaired, or disposition requested in accordance with AMC and depot procedures.

b. Repackaging of Samples Inspected. Restore the packaging of the samples inspected and accepted to the level of the lot from which the samples were drawn.

10. Special Requirements. If the subject items are allocated for Foreign Military Sales, Grant Aid, or Loan, the following additional requirements must be met:

a. Policies and Special Conditions.

| <i>Publication</i> | <i>Title</i> |
|--------------------|---|
| AR 795-17 | General Policies and Principles for Furnishing Army Materiel on a Grant Aid Basis. |
| AR 795-204 | General Policies and Principles for Furnishing Defense Articles and Services on a Sale or Loan Basis. |
| DD Form 1513 | Offer and Acceptance. |

Note. Special terms, conditions, and agreements with the customer country and shown on DD Form 1513 must be complied with as well as special instructions from the responsible commodity command.

b. Basic Issue List Items (BILI). BILI deck, normally furnished to the depots by USAECOM BILL Office, Lexington Blue Grass Army Depot, Lexington, Kentucky, Office symbol AMSEI-ME-NMP-MR-L, shall be used.

c. Level A Packaging and Packing. Level A packaging and packing is mandatory for Foreign Military Sales and Grant Aid shipments.

d. Depot Documentation. Depot documentation of final acceptance shall be furnished the ECOM quality check team *before* ECOM inspection.

By Order of the Secretary of the Army:

W. C. WESTMORELAND,
General, United States Army,
Chief of Staff.

Official:

KENNETH G. WICKHAM,
Major General, United States Army,
The Adjutant General.

Distribution

Active Army:

| | |
|---------------------------|------------------------|
| CNGB (1) | USAWECOM (3) |
| ACSC-E (2) | Armies (2) |
| USAARENBD (1) | Corps (2) |
| USACDCCEA (1) | USAESC (40) |
| USACDCCEA Ft Huachuca (1) | USMACV (19) |
| USAMC (1) | USARV (5) |
| USCONARC (5) | Army Depots (2) except |
| ARADCOM (2) | SAAD (50) |
| OS Maj Comd (4) | LBAD (20) |
| USASTRATCOM (2) | TOAD (20) |
| LOGCOMD (2) except | LEAD (7) |
| 1st & 9th (5) | ANAD (10) |
| USAMICOM (3) | ATAD (10) |
| USAECOM (3) | Gen Deps (2) |
| USATECOM (3) | Sig Sec Gen Deps (5) |
| USAMUCOM (3) | Sig Deps (12) |

NG: State AC (3)

USAR: None

For explanation of abbreviations used, see AR 319-50.

* U. S. GOVERNMENT PRINTING OFFICE: 1970 - 390/940/1420.

END




6-5-83

DATE





DEPARTMENT OF THE ARMY
MICROFORM
TEST TARGET

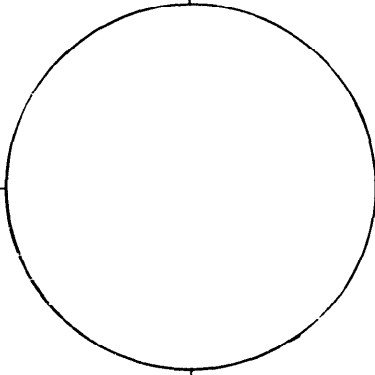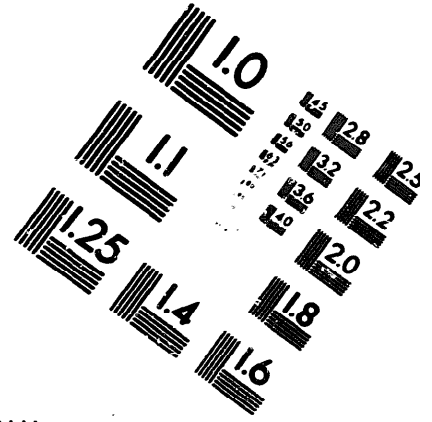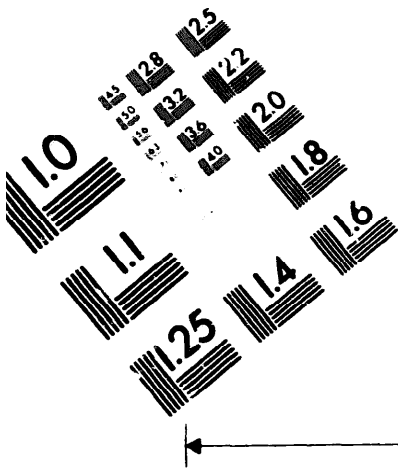

150 MM

1.0 mm (e= 81 mm)

ABCDEFGHIJKLMN OPQRSTUVWXYZ 1234567890
abcdefghijklmnopqrstuvwxyz \$%& /%# 1/2 1/4 3/4 ---+ x&@*

1.5 mm (e= 1.09 mm)

ABCDEFGHIJKLMN OPQRSTUVWXYZ 1234567890
abcdefghijklmnopqrstuvwxyz \$%& /%# 1/2 1/4 3/4 ---+ x&@*

2.0 mm (e= 1.37 mm)

ABCDEFGHIJKLMN OPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
1234567890 \$%& /%# 1/2 1/4 3/4 ---+ x&@*

2.5 mm (e= 1.77 mm)

ABCDEFGHIJKLMN OPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
1234567890 \$%& /%# 1/2 1/4 3/4 ---+ x&@*

1.0 mm (e= 81 mm)

ABCDEFGHIJKLMN OPQRSTUVWXYZ 1234567890
abcdefghijklmnopqrstuvwxyz \$%& /%# 1/2 1/4 3/4 ---+ x&@*

1.5 mm (e= 1.09 mm)



ABCDEFGHIJKLMN OPQRSTUVWXYZ 1234567890
abcdefghijklmnopqrstuvwxyz \$%& /%# 1/2 1/4 3/4 ---+ x&@*

2.0 mm (e= 1.37 mm)



ABCDEFGHIJKLMN OPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
1234567890 \$%& /%# 1/2 1/4 3/4 ---+ x&@*

2.5 mm (e= 1.77 mm)

ABCDEFGHIJKLMN OPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
1234567890 \$%& /%# 1/2 1/4 3/4 ---+ x&@*

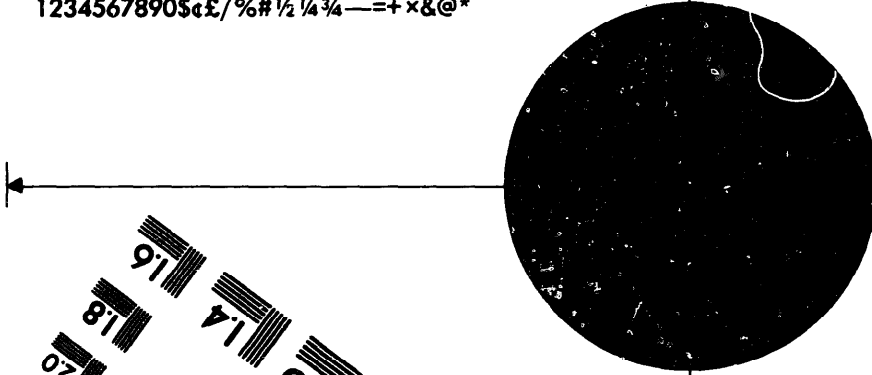

200 MM

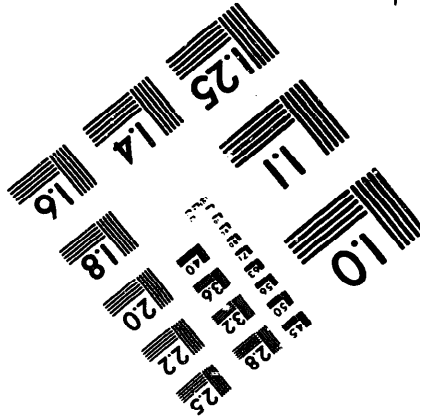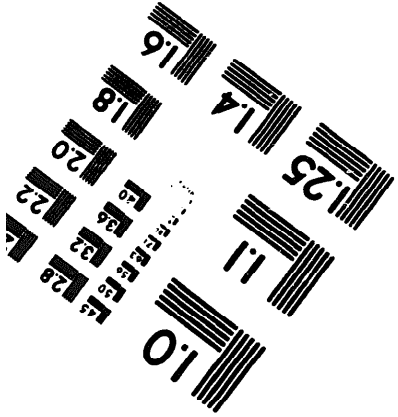

250 MM