


- NOTES:
1. FOR GENERAL ARRANGEMENT SEE DWG. NO.: G-24877-01 THRU 03. PIPING LINES PER IFS SPECIFICATION
 2. CBI: CLASS 300 LBS. SMLS, A-106B Gr.B PER ASME B31.1 SB9: CLASS 300 LBS. SMLS, A-312 Gr.P 304/304L PER ASME B31.1
 3. ONE SKID SHOWN, TWO REQUIRED.
 4. THE INSTRUMENTS AND EQUIPMENTS TAGS FOR ONE SKID WILL BE 400 AND THE OTHER 500.

SKID LIMITS

EV-400A/B
 DUPLEX GAS FUEL FILTER
 DIMENSIONS: 10.75" OD X 96" S/S
 DESIGN: 500 PSIG @ 250 °F
 OPERATION: 400 PSIG @ 140 °F
 MATERIAL: A-106 B
 RATED FLOW: 7 MMSCFD
 2 X 100% (1 ACTIVE, 1 STANDBY)
 ΔP= 10 PSI (DIRTY)

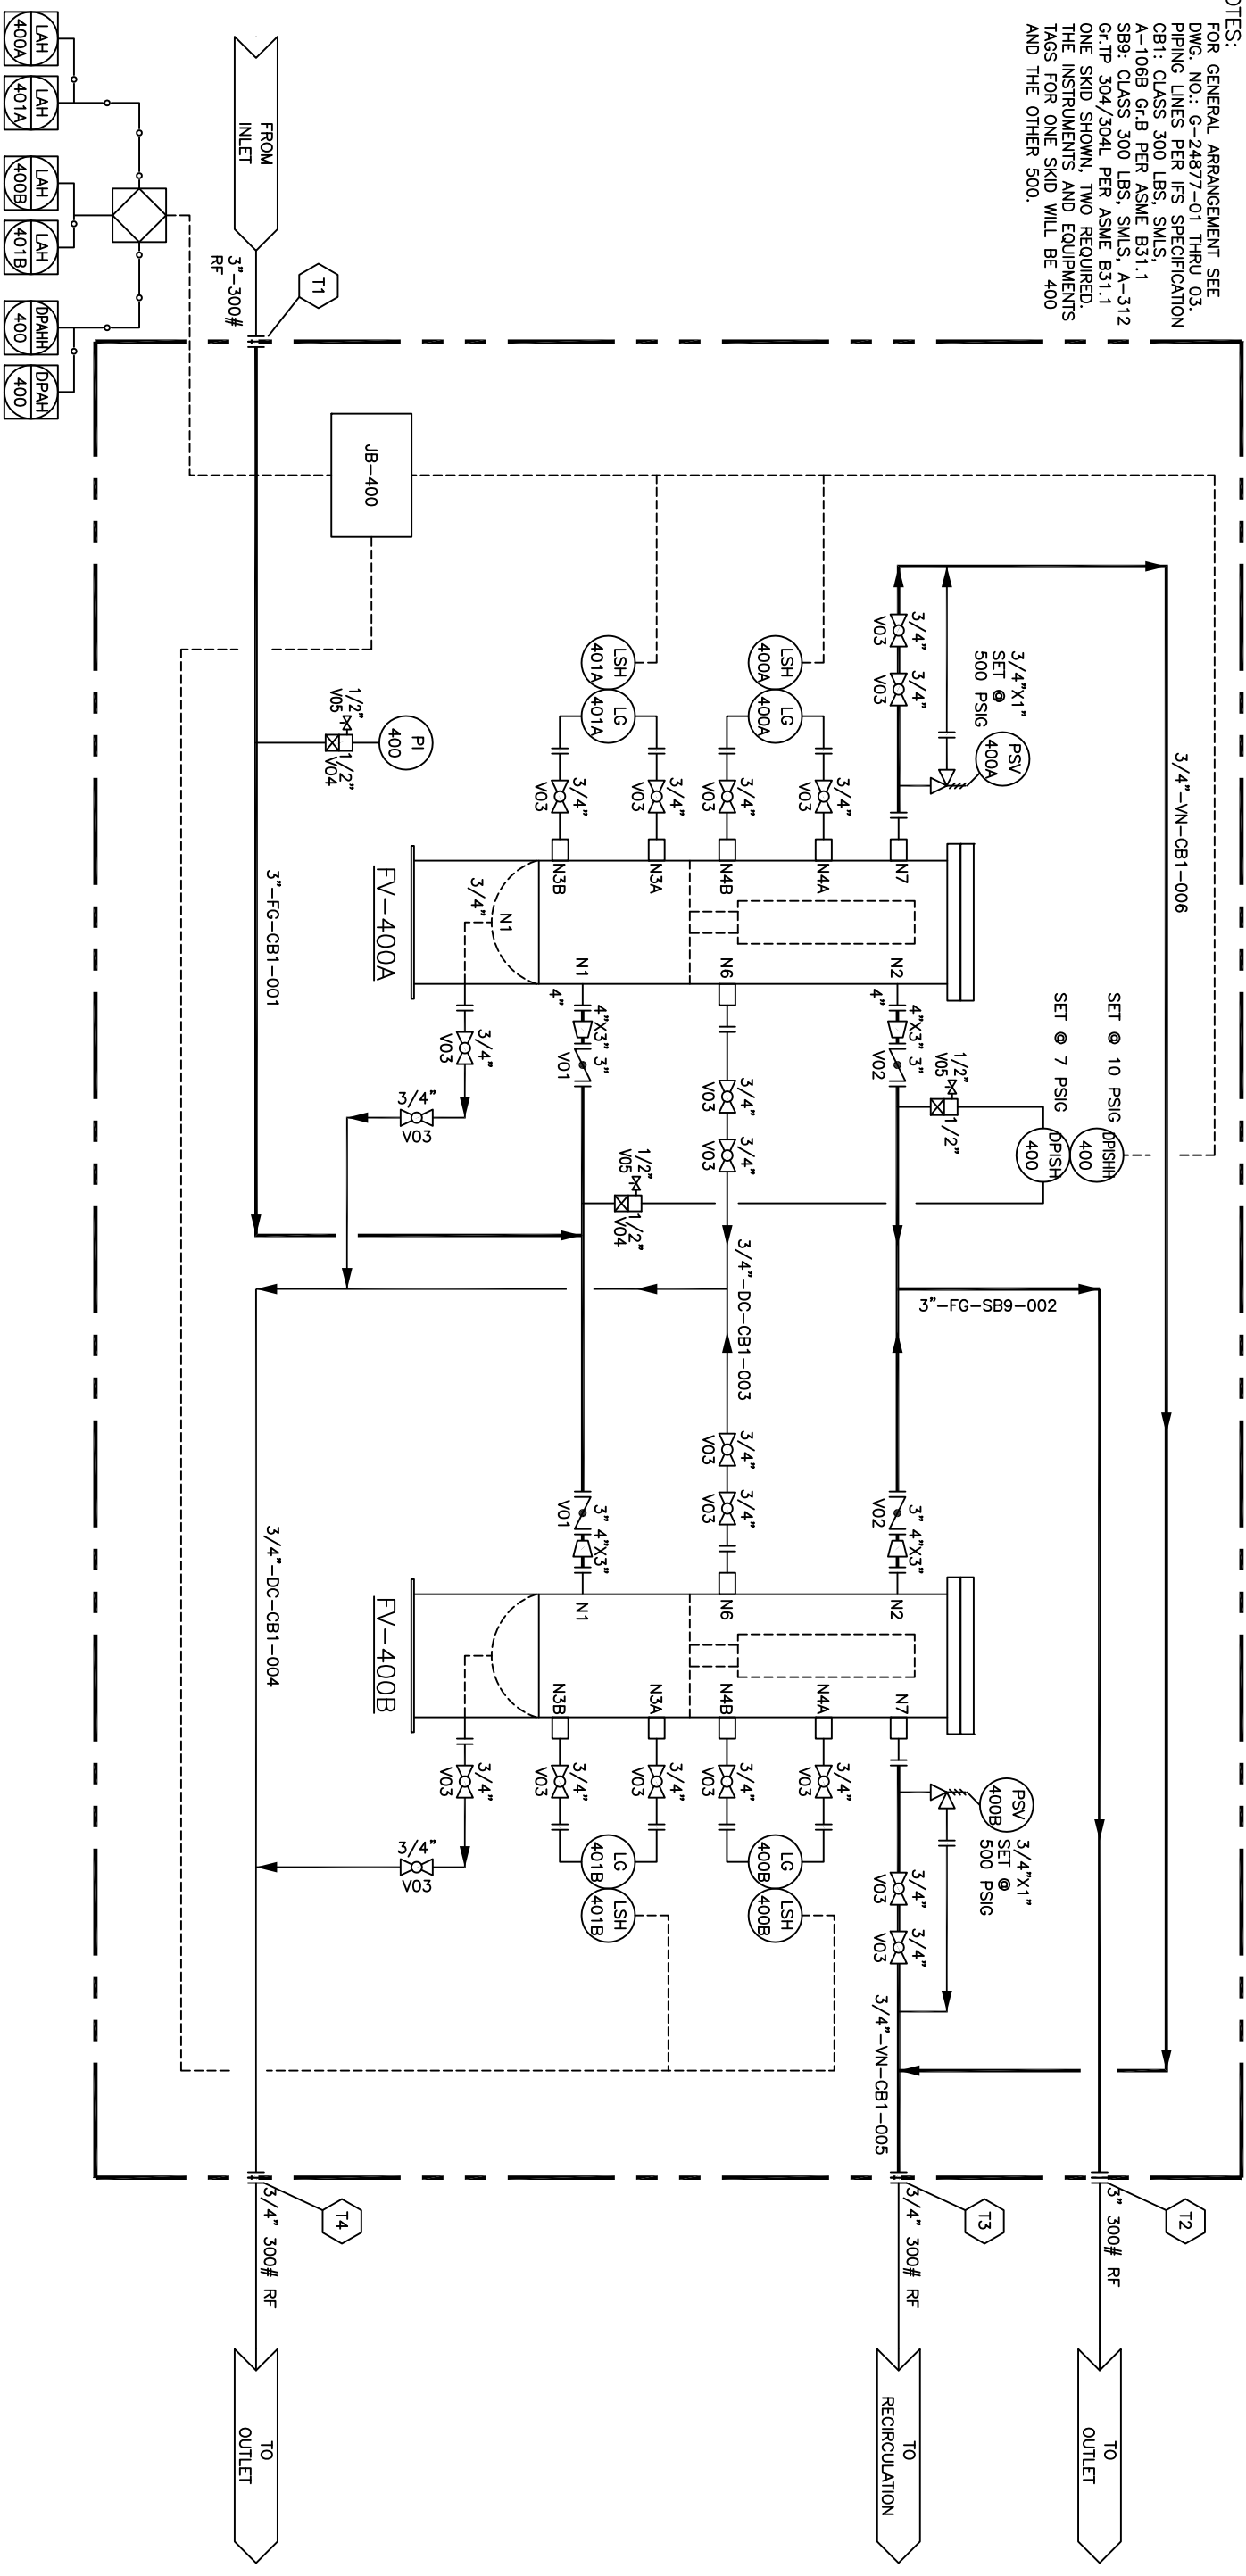

INTEGRATED FLOW SOLUTIONS

6461 REYNOLDS RD, TYLER, TEXAS, USA 75708
PHONE NUMBER: +1 (903) 595-6511
FAX NUMBER: +1 (903) 595-4861

THIS DRAWING IS THE PROPERTY OF INTEGRATED FLOW SOLUTIONS AND SHALL NOT BE REPRODUCED, COPIED, LENT, NOR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT IS FURNISHED EXCEPT BY WRITTEN PERMISSION

A	03SEP09	ISSUED FOR CUSTOMER APPROVAL	JG
REV.	DATE	DESCRIPTION	BY

INITI POWER INC.
DUPLEX GAS FUEL FILTER SKID
TAG NUMBER: TBD
PURCHASE ORDER NUMBER: 20090811-0022
IFS JOB NUMBER: 24877
INTEGRATED FLOW SOLUTIONS, TYLER, TEXAS

ENGINEERED BY: A. PEREZ
APPROVED/DATE:

PIPING & INSTRUMENTATION DIAGRAM DUPLEX GAS FUEL FILTER SKID

CLIENT: INTI POWER INC.

SCALE: NONE	SECTION	JOB	SHEET	TOTAL SHEETS	REV.
DATE: 03SEP09	P - 24877 - 01			1	A