

LA-8989

C-3

Los Alamos National Laboratory is operated by the University of California for the United States Department of Energy under contract W-7405-ENG-36.

CIC-14 REPORT COLLECTION
REPRODUCTION
COPY

*Two- and Three-Dimensional
Detonation Wave Interactions
with a Copper Plate*

LOS ALAMOS NATL. LAB. LIBS.
3 9338 00312 0614

Los Alamos Los Alamos National Laboratory
Los Alamos, New Mexico 87545


Edited by Kyle Thorn
Photocomposition by Pamela H. Mayne

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. References herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Two- and Three-Dimensional Detonation Wave Interactions with a Copper Plate

Charles L. Mader
James D. Kershner



TWO- AND THREE-DIMENSIONAL DETONATION WAVE INTERACTIONS WITH A COPPER PLATE

by

Charles L. Mader and James D. Kershner

ABSTRACT

The effect of multipoint initiation of an explosive on the motion of a thin metal plate is investigated in two- and three-dimensional geometry.

I. INTRODUCTION

The flow resulting from laterally colliding, diverging cylindrical detonation waves in PBX 9404 was studied experimentally and theoretically by Mader and Venable.¹ The experimental observations were reproduced numerically using the Forest Fire heterogeneous shock initiation burn² in the two-dimensional finite-difference Lagrangian hydrodynamic code (2DL).²

The three-dimensional Eulerian reactive hydrodynamic code (3DE), described in Ref. 3, was used to model numerically the interaction of three spherically diverging detonation waves. The formation of regular and Mach shock reflections in three-dimensional geometry was described. The 3DE code was used to model the initiation of a propagating detonation in the insensitive explosive PBX 9502 by triple-shock-wave interaction from three initiators.⁴

In this report we describe the interactions of two cylindrically diverging detonations and four spherically diverging detonations with thin metal plates.

II. CYLINDRICALLY DIVERGING DETONATION WAVES

Reference 1 shows that the radiographic studies of laterally colliding, diverging cylindrical detonation waves

in PBX 9404 could be reproduced numerically using the 2DL code with the heterogeneous shock initiation model called Forest Fire.²

Using the numerical technique, we studied the effect of the resulting wave on the motion of a thin copper plate. The system studied was a 0.4-cm copper plate driven by 6.2 cm of PBX 9404 initiated by two line generators located 5.08 cm apart.

The calculated isobar profiles are shown in Fig. 1. A series of shocks and rarefactions travel back and forth in the metal plate, resulting in a very irregular free-surface profile. The leading free surface of the plate initially is located above the detonators and later changes to above the detonation wave interaction located midway between the detonators. Because the usual system of multipoint initiation of explosives is three dimensional, we extended our study to four detonators.

III. FOUR SPHERICALLY DIVERGING DETONATION WAVES

The geometry studied using the three-dimensional reactive hydrodynamic code 3DE³ consisted of four detonator cubes of 4 by 4 by 4 cells placed in a cube of PBX 9404 with continuum boundaries on its sides. The cells were cubes with 0.1-cm. sides. The initiator cubes were placed in the corners of the PBX 9404 with their

cell centers located 1.8 cm apart. The detonator cubes initially were decomposed PBX 9404 with a 3.0-g/cm^3 initial density and a $0.05\text{-Mbar-cm}^3/\text{g}$ energy.

The cube was 24 by 24 cells wide (x-, y-coordinates) by 34 cells high (z-coordinate). On the z-coordinate, there were layers of 2 cells 9404, 4 cells 9404 initiator, 22 cells 9404, 2 cells copper, and 4 cells air. Figure 2 shows the problem. The time step was $0.02\ \mu\text{s}$ until the detonation wave neared the copper (cycle 144), and then it was decreased to $0.01\ \mu\text{s}$ for the rest of the calculation. The problem required 2 hours of CRAY computer time to run 432 cycles.

The pressure contours are shown in Fig. 3 for a cross section run through cell 13 in the x-direction (through the center between the detonators). Figure 4 shows the pressure contours for a cross section run through cell 30 in the z-direction (located initially at the copper surface).

The quadruple point Mach stem has a pressure about 100 kbar higher than that of the surrounding explosive. It is located behind the leading detonation wave surface (which is above the detonators) when it interacts with the copper plate. The copper plate is shocked and reflects a strong shock wave back into the detonation products. A series of shock and rarefaction waves, similar to the two-dimensional case described in Sec. II, travel back and forth in the metal plate resulting in a very complicated free-surface profile.

Again, the leading free surface of the plate initially is located above the detonators but at later times changes to between detonators.

IV. CONCLUSIONS

The effect of multipoint initiation of an explosive on the motion of a thin metal plate has been numerically investigated. The location of the leading free surface changes from above the detonators to above the detonation wave interaction centers. The relative position of the detonators and the run distance of the detonations after they interact and before they shock the metal plate are important parameters in determining the magnitude of the plate free-surface perturbation.

REFERENCES

1. Charles L. Mader and Douglas Venable, "Mach Stems Formed by Colliding Cylindrical Detonation Waves," Los Alamos Scientific Laboratory report LA-7869 (September 1979).
2. Charles L. Mader, *Numerical Modeling of Detonations* (University of California Press, Berkeley, California, 1979).
3. Charles L. Mader and James D. Kershner, "Three-Dimensional Eulerian Calculations of Triple-Initiated PBX 9404," Los Alamos Scientific Laboratory report LA-8206 (September 1980).
4. Charles L. Mader and James D. Kershner, "Three-Dimensional Modeling of Triple-Wave Initiation of Insensitive Explosives," Los Alamos National Laboratory report LA-8655 (February 1981).

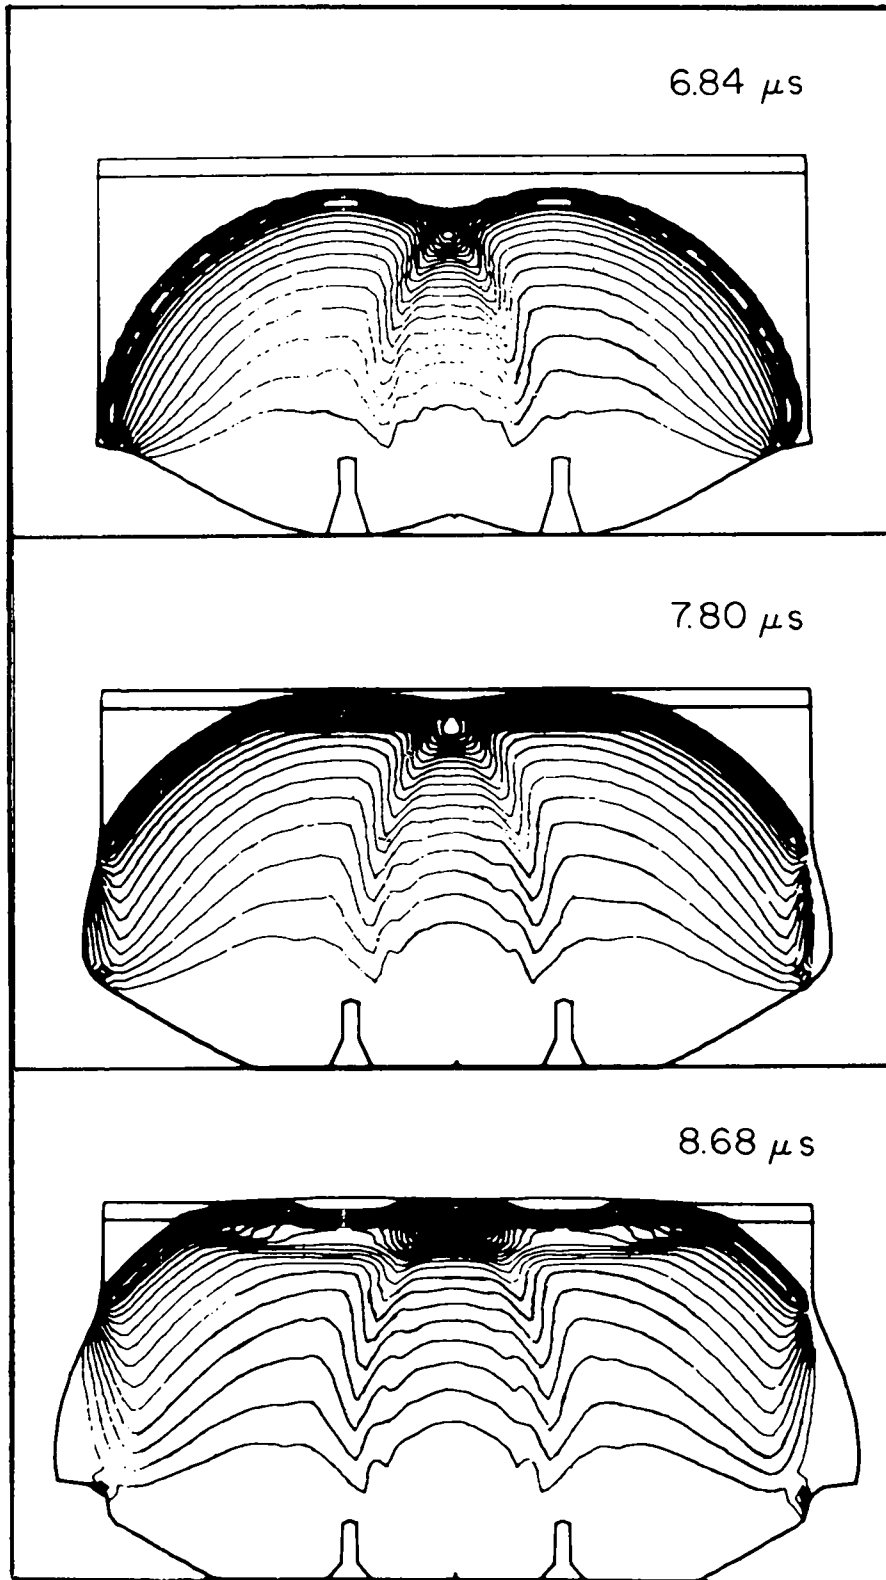


Fig. 1. Calculated isobar contours with a 20-kbar contour interval are shown for two cylindrical diverging detonations initially 5.0 cm apart, interacting with a 0.4-cm copper plate after 6.2 cm of run.

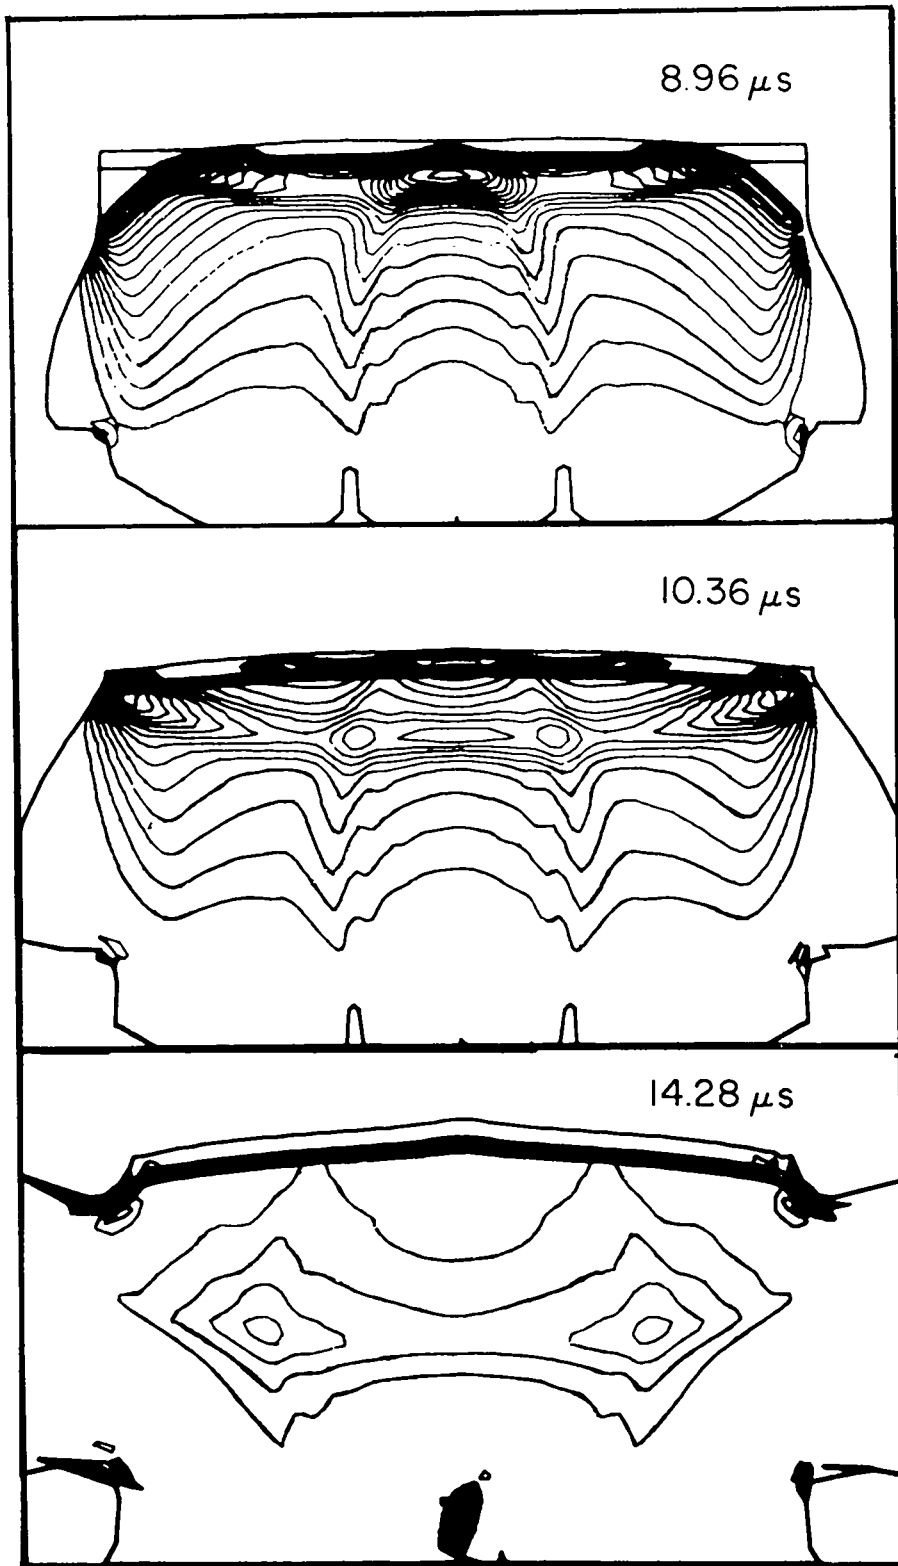


Fig. 1. (cont)

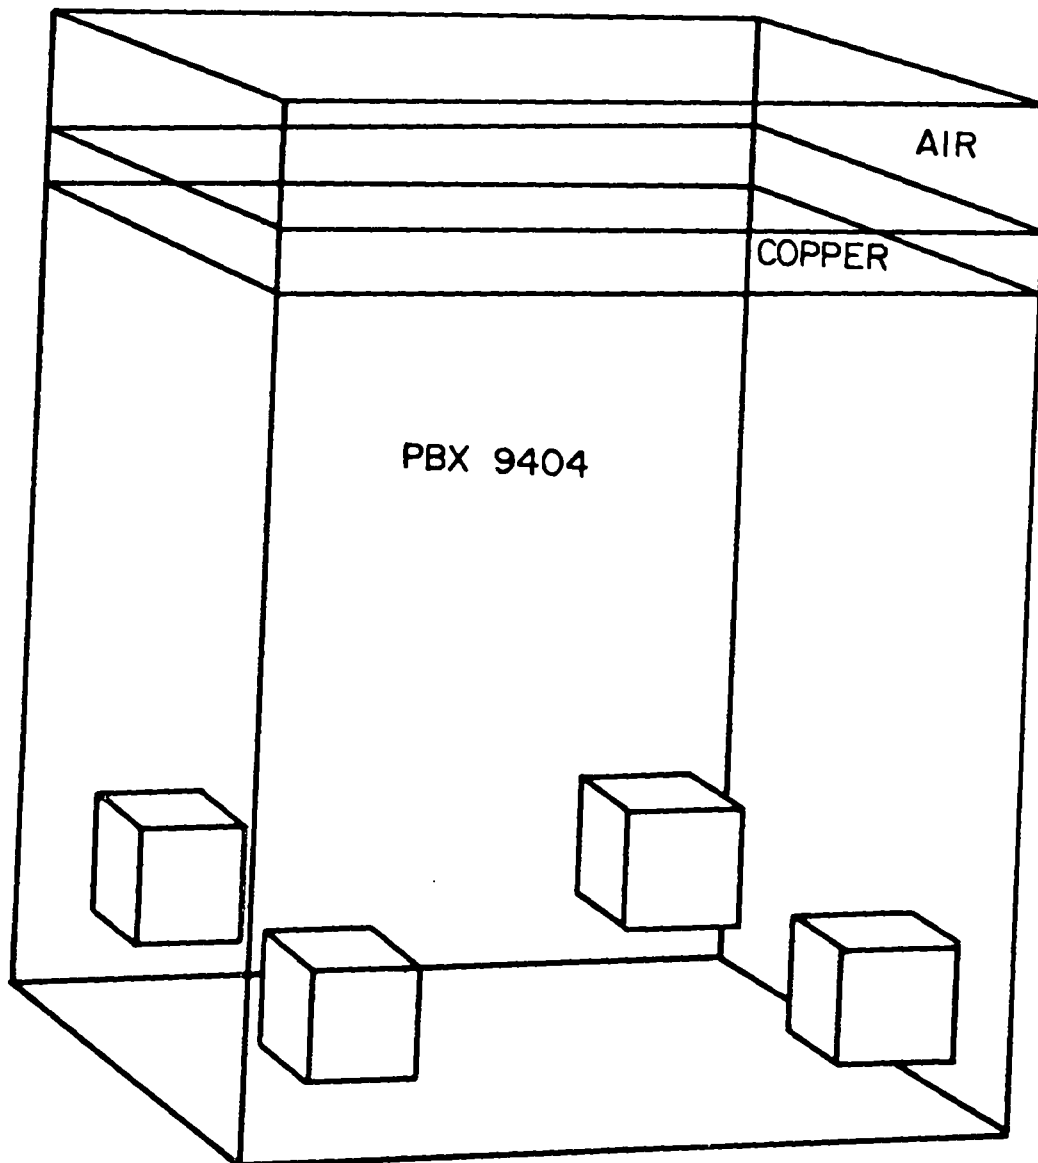


Fig. 2. A sketch of the problem with the four detonators in PBX 9404 and a copper plate.


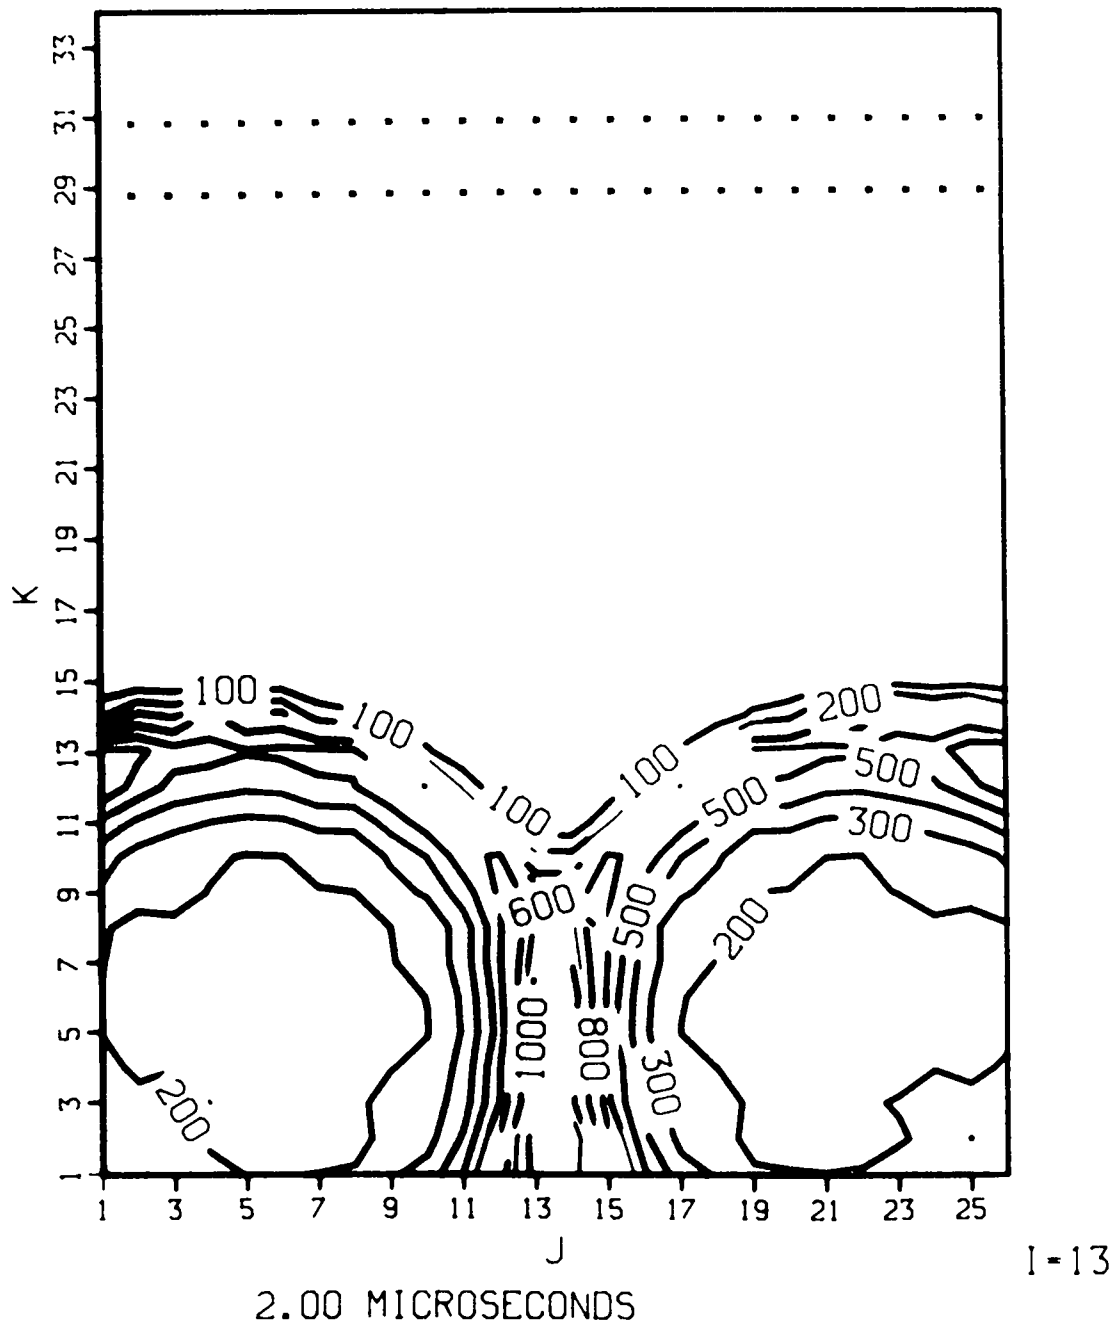



Fig. 3. The isobar cross section for cell layer 13 in the x-direction. The isobar interval is 100 kbar. The copper-explosive and copper-air mixed cells are shown with a heavy dot.

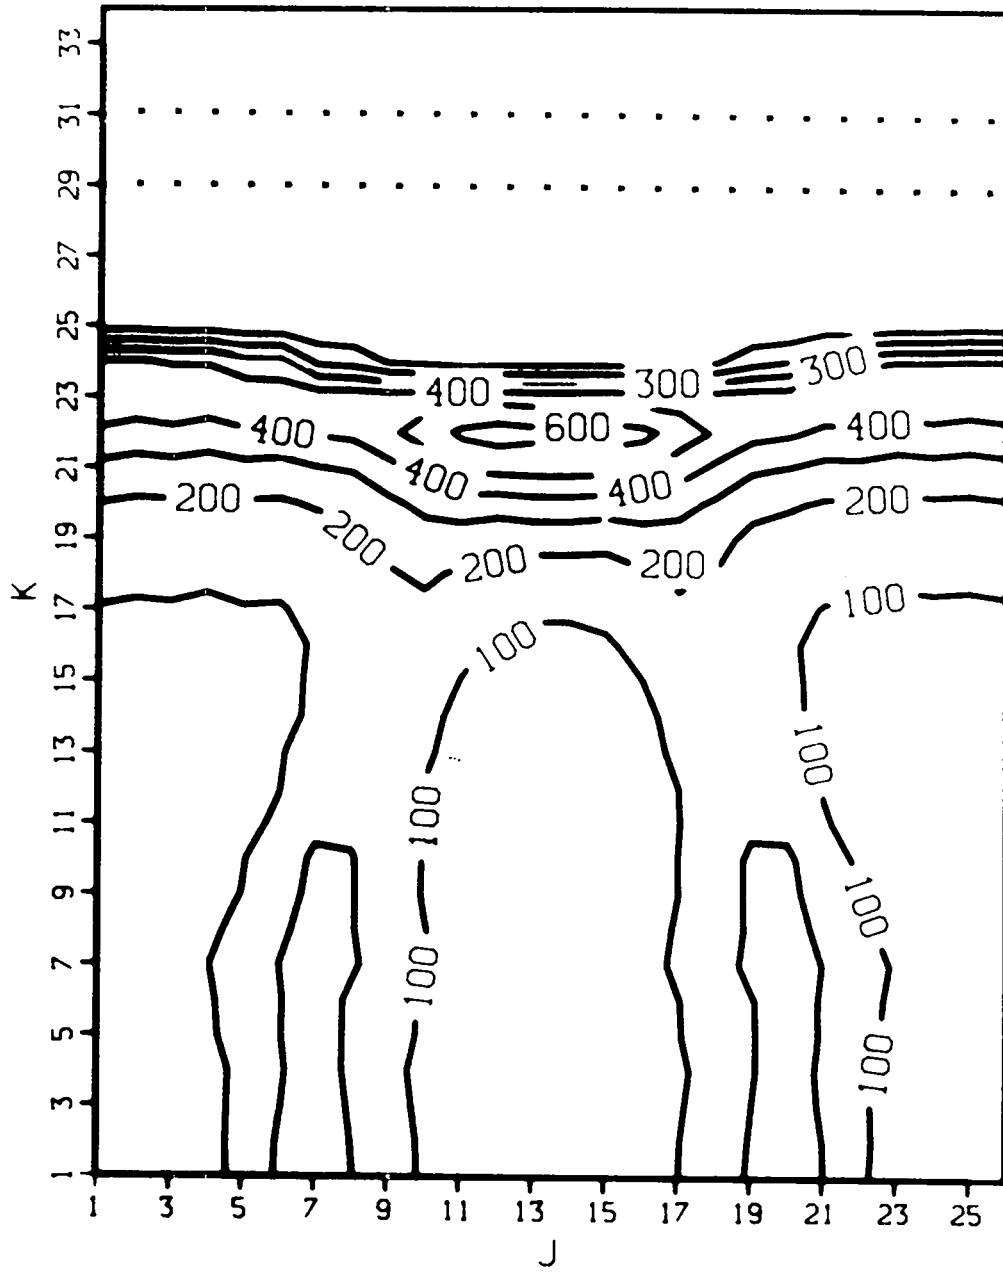

3.20 MICROSECONDS

I-13


Fig. 3. (cont)

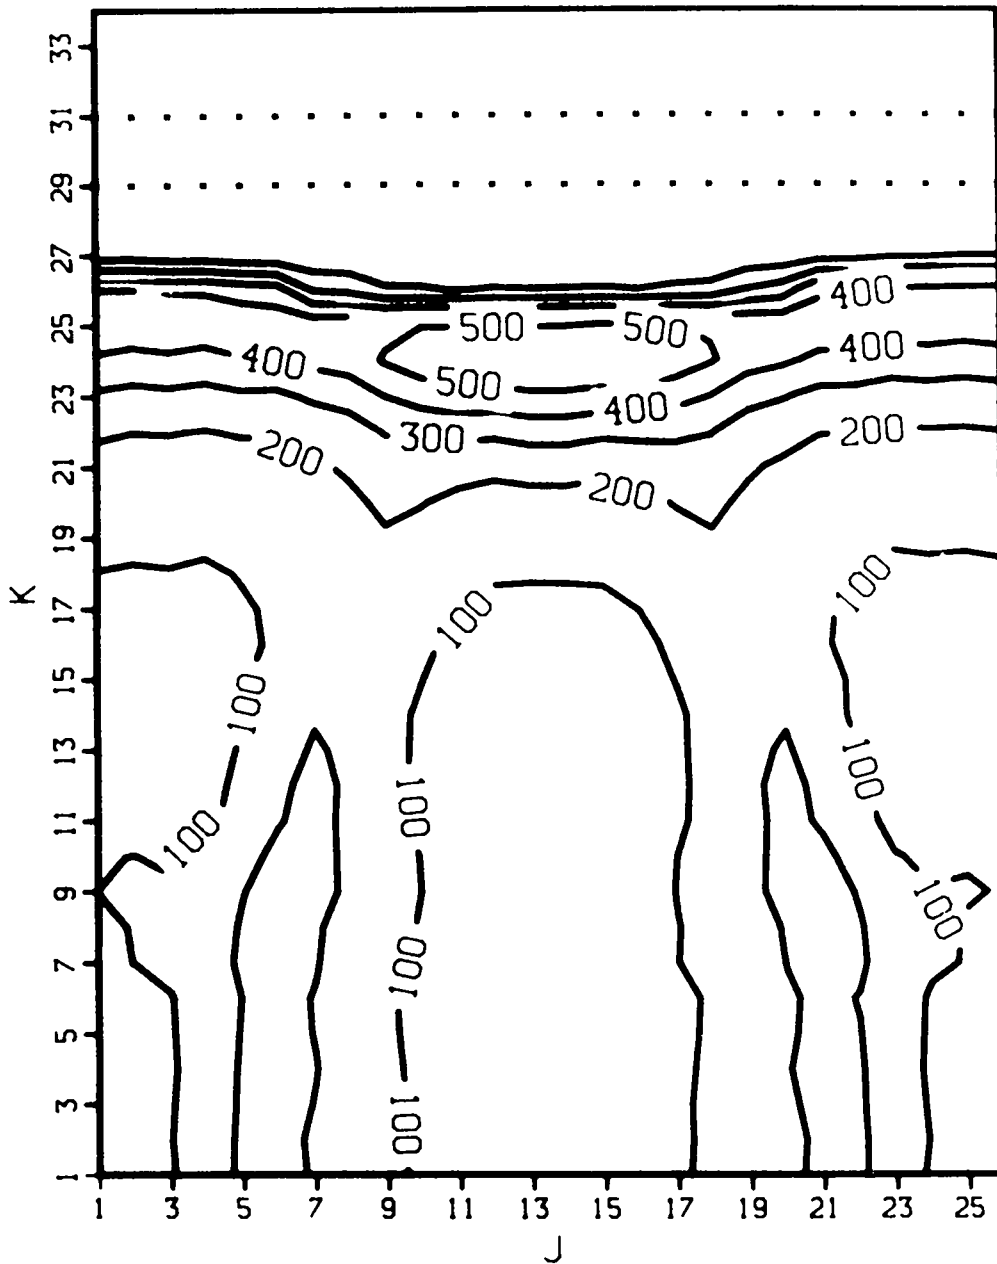

3.45 MICROSECONDS

I-13


Fig. 3. (cont)

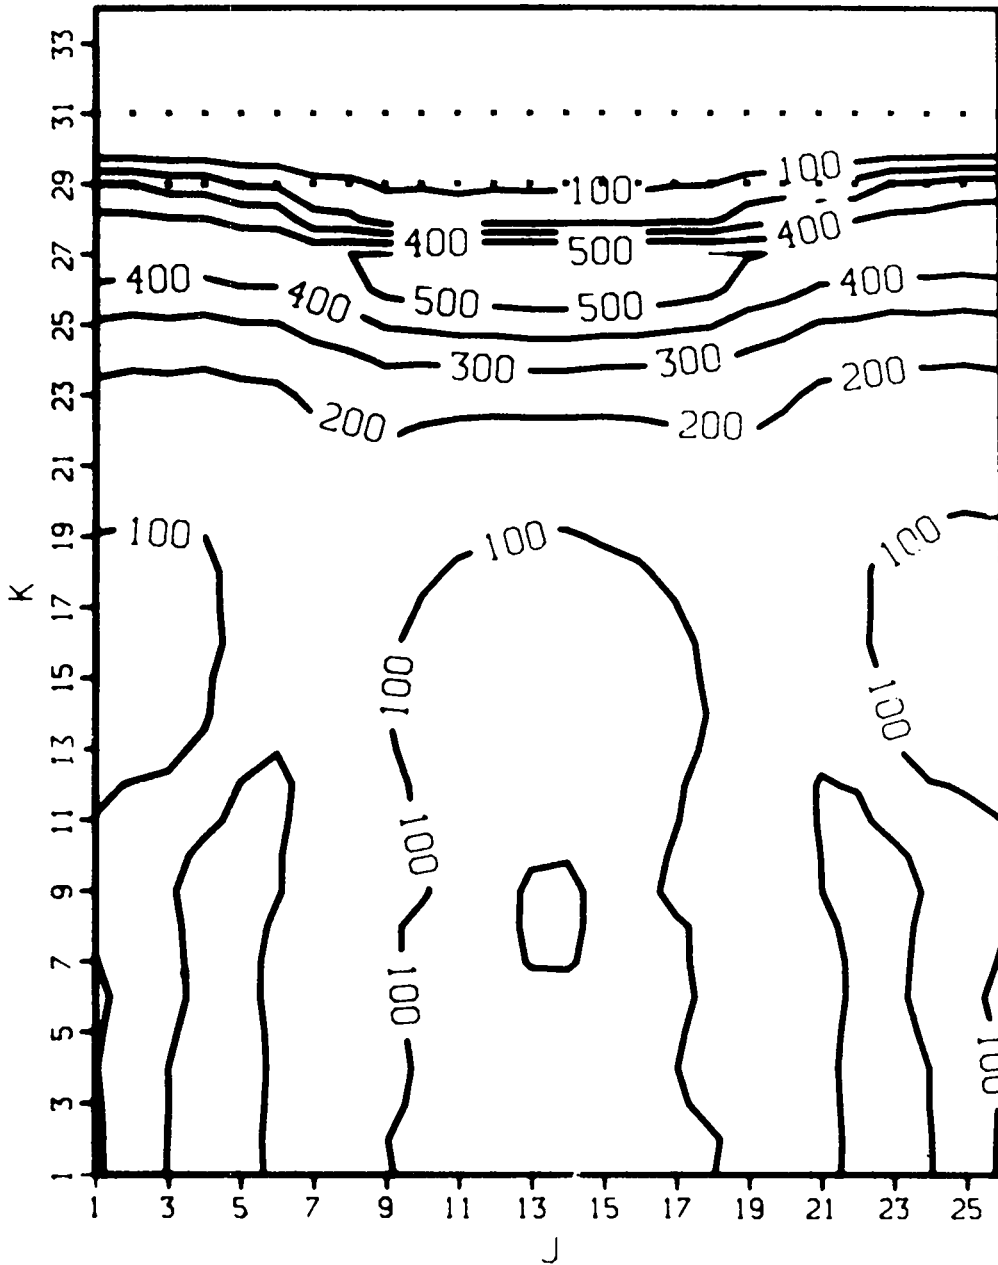

3.70 MICROSECONDS

I-13


Fig. 3. (cont)

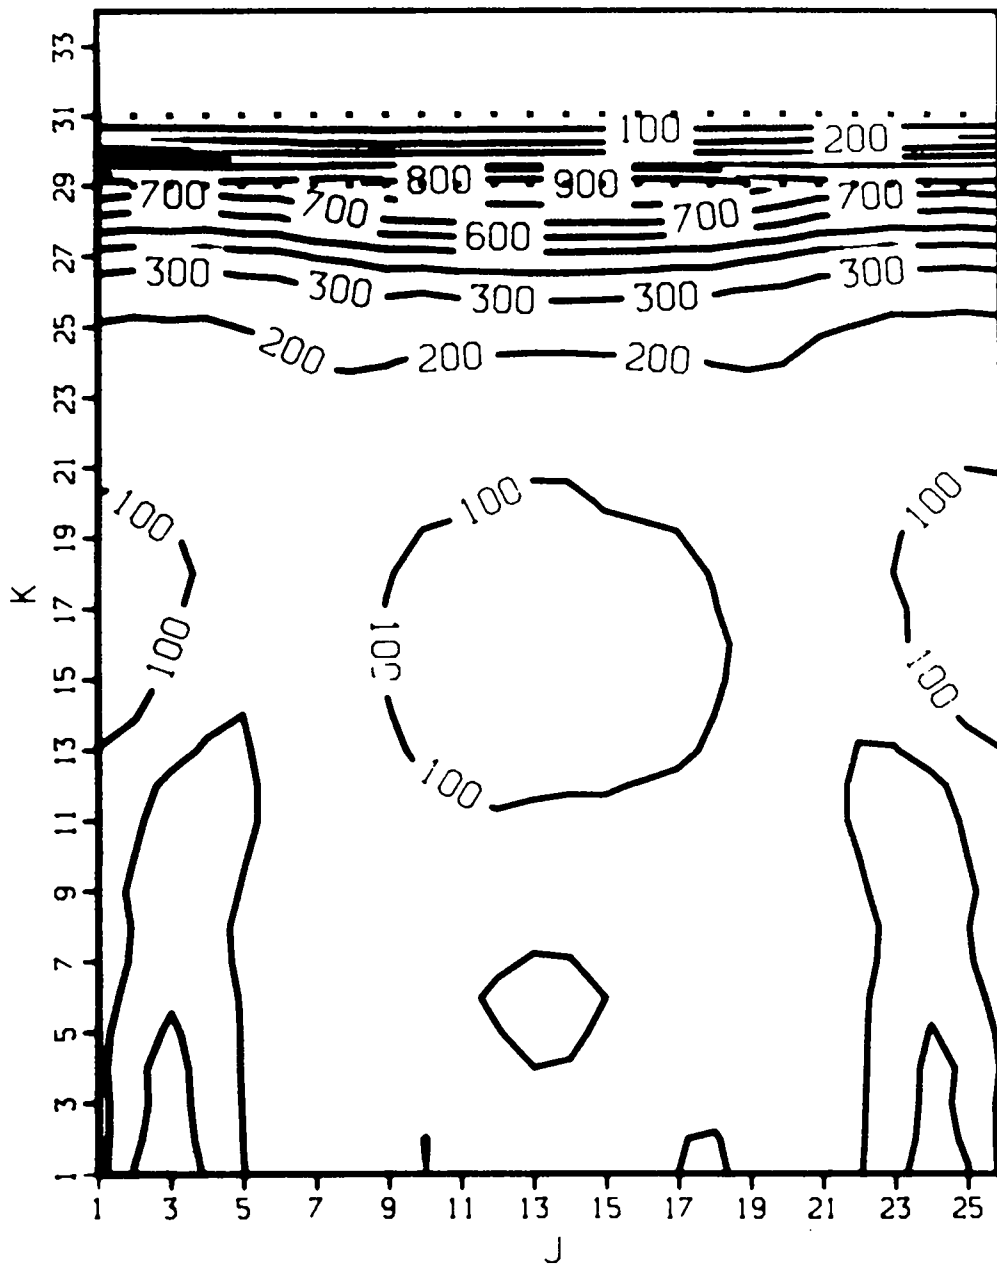

3.95 MICROSECONDS

I-13


Fig. 3. (cont)

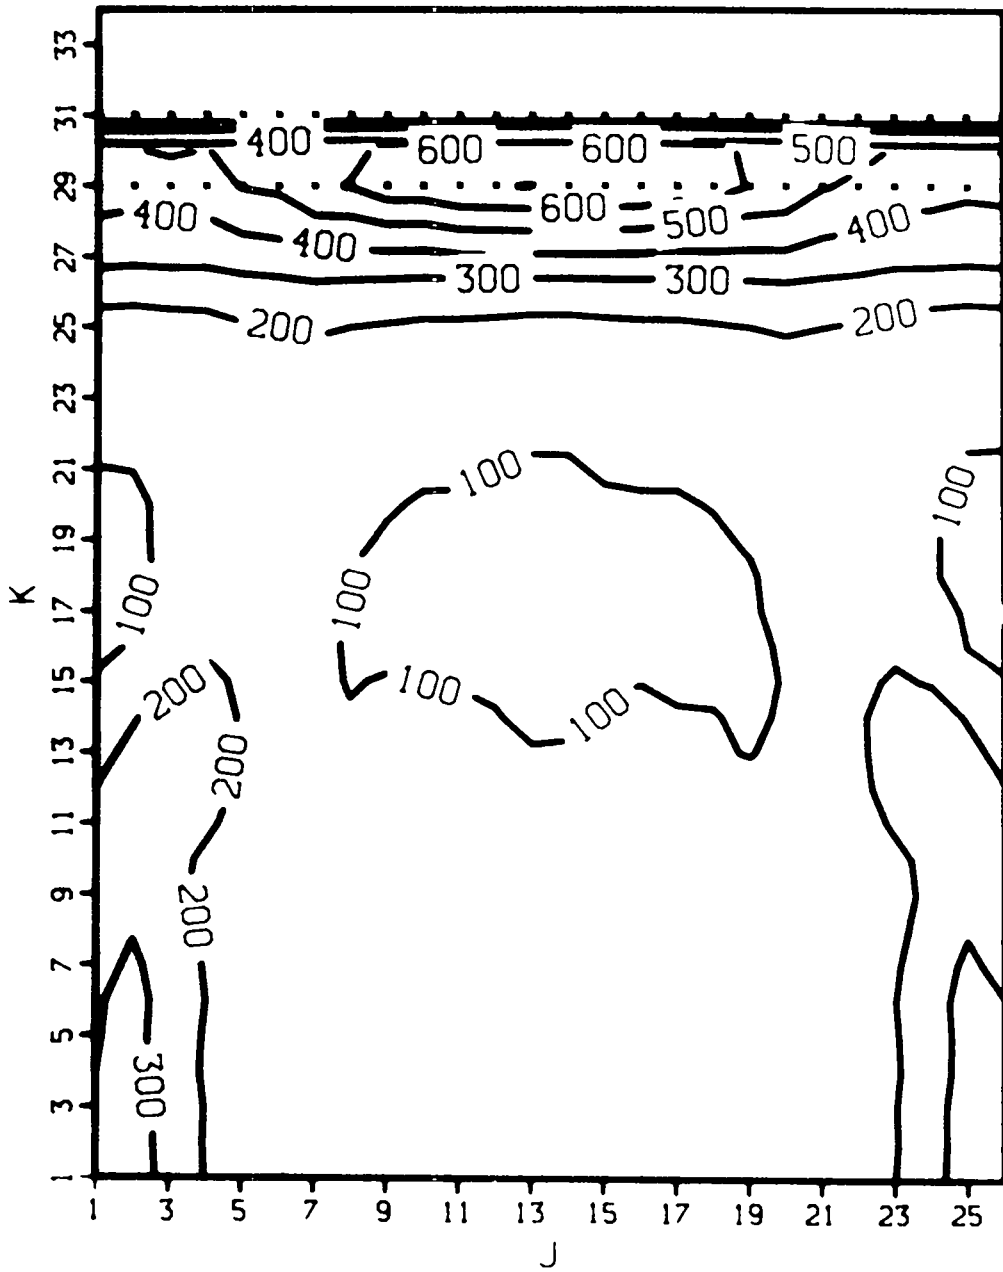

4.20 MICROSECONDS

I-13


Fig. 3. (cont)

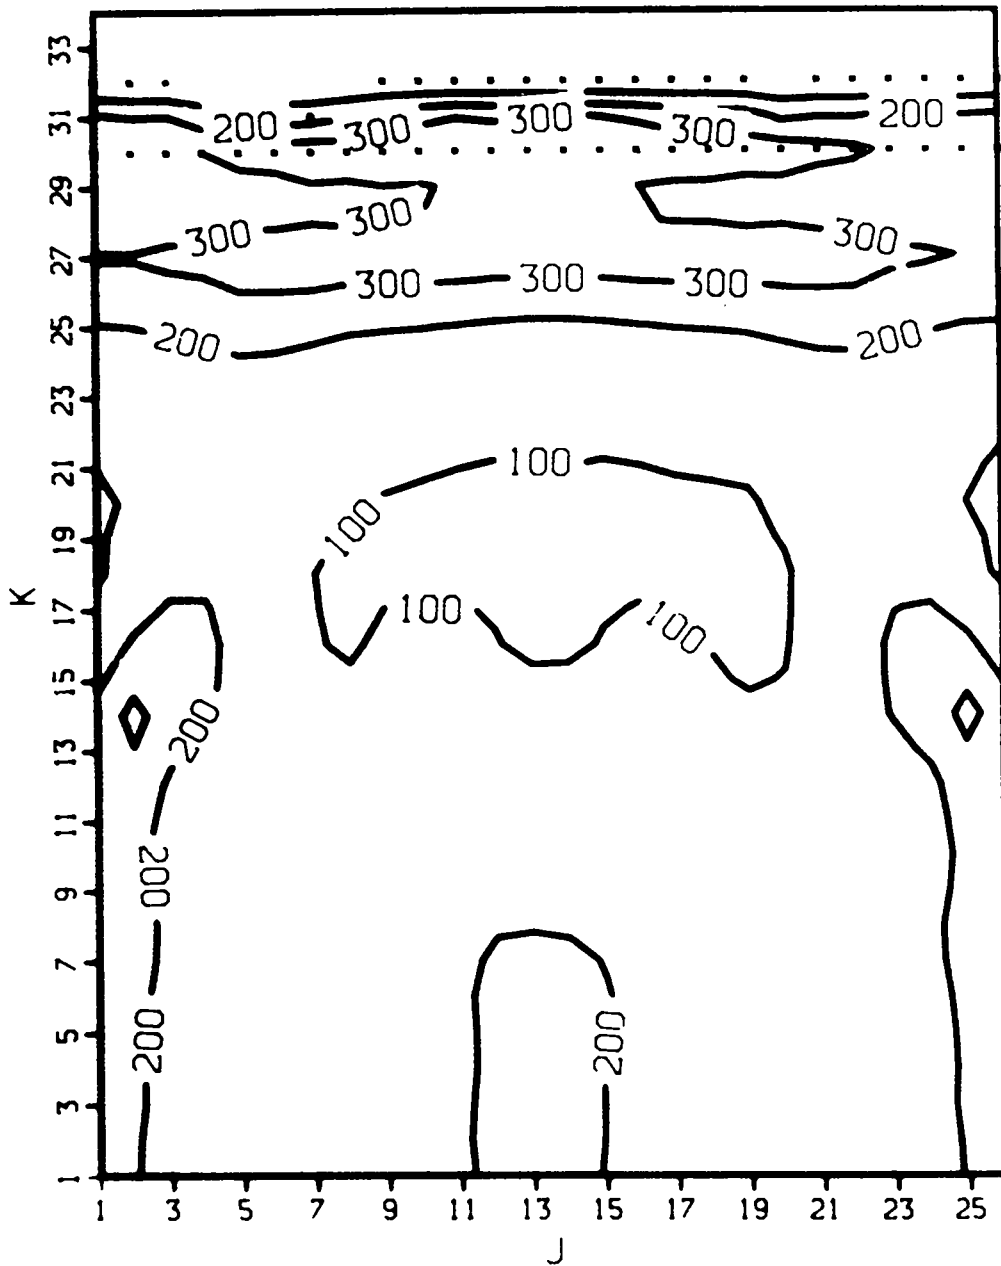

4.45 MICROSECONDS

I-13


Fig. 3. (cont)

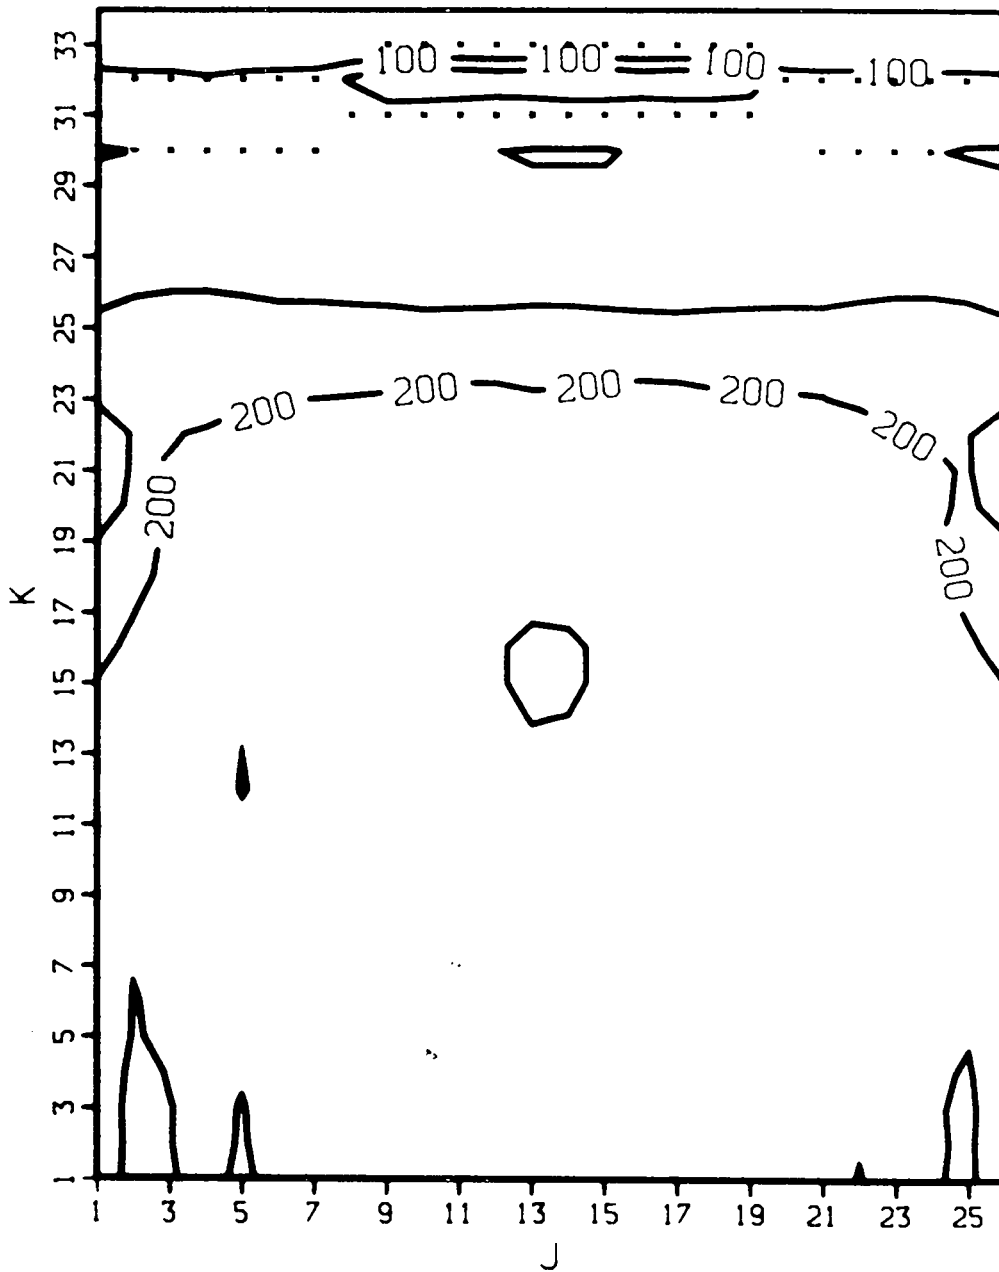

4.95 MICROSECONDS

I-13


Fig. 3. (cont)

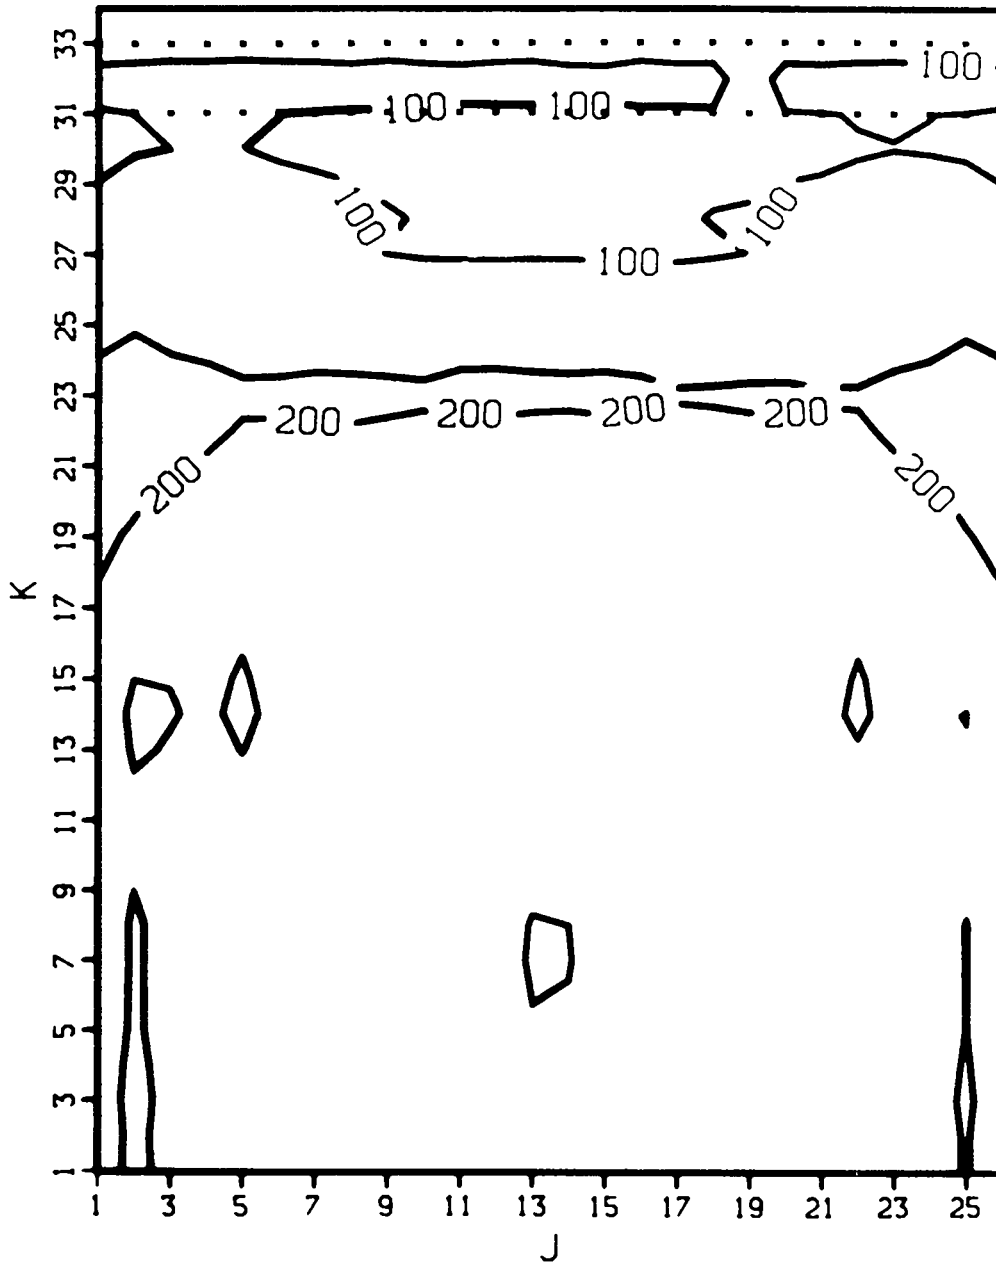

I-13

5.20 MICROSECONDS


Fig. 3. (cont)

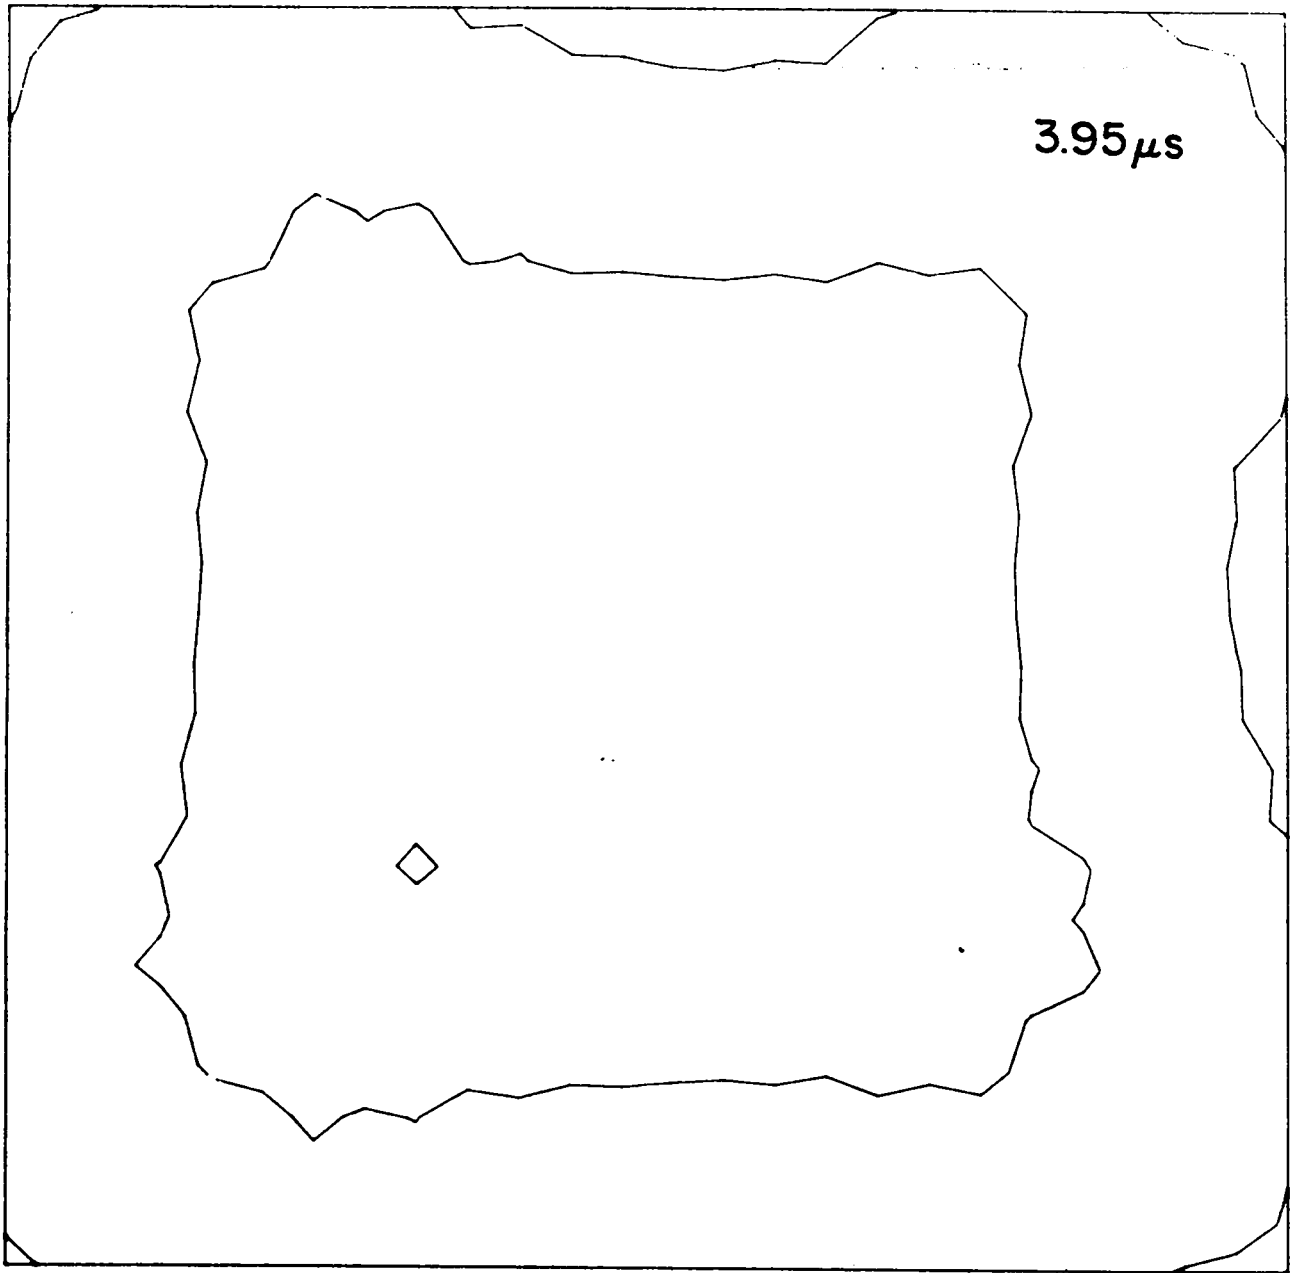

PRESSURE (MEGABARS)

K = 30

Fig. 4. Isobar cross sections for cell layer 30 in the z-direction, initially located at the copper surface. The isobar interval is 50 kbar.

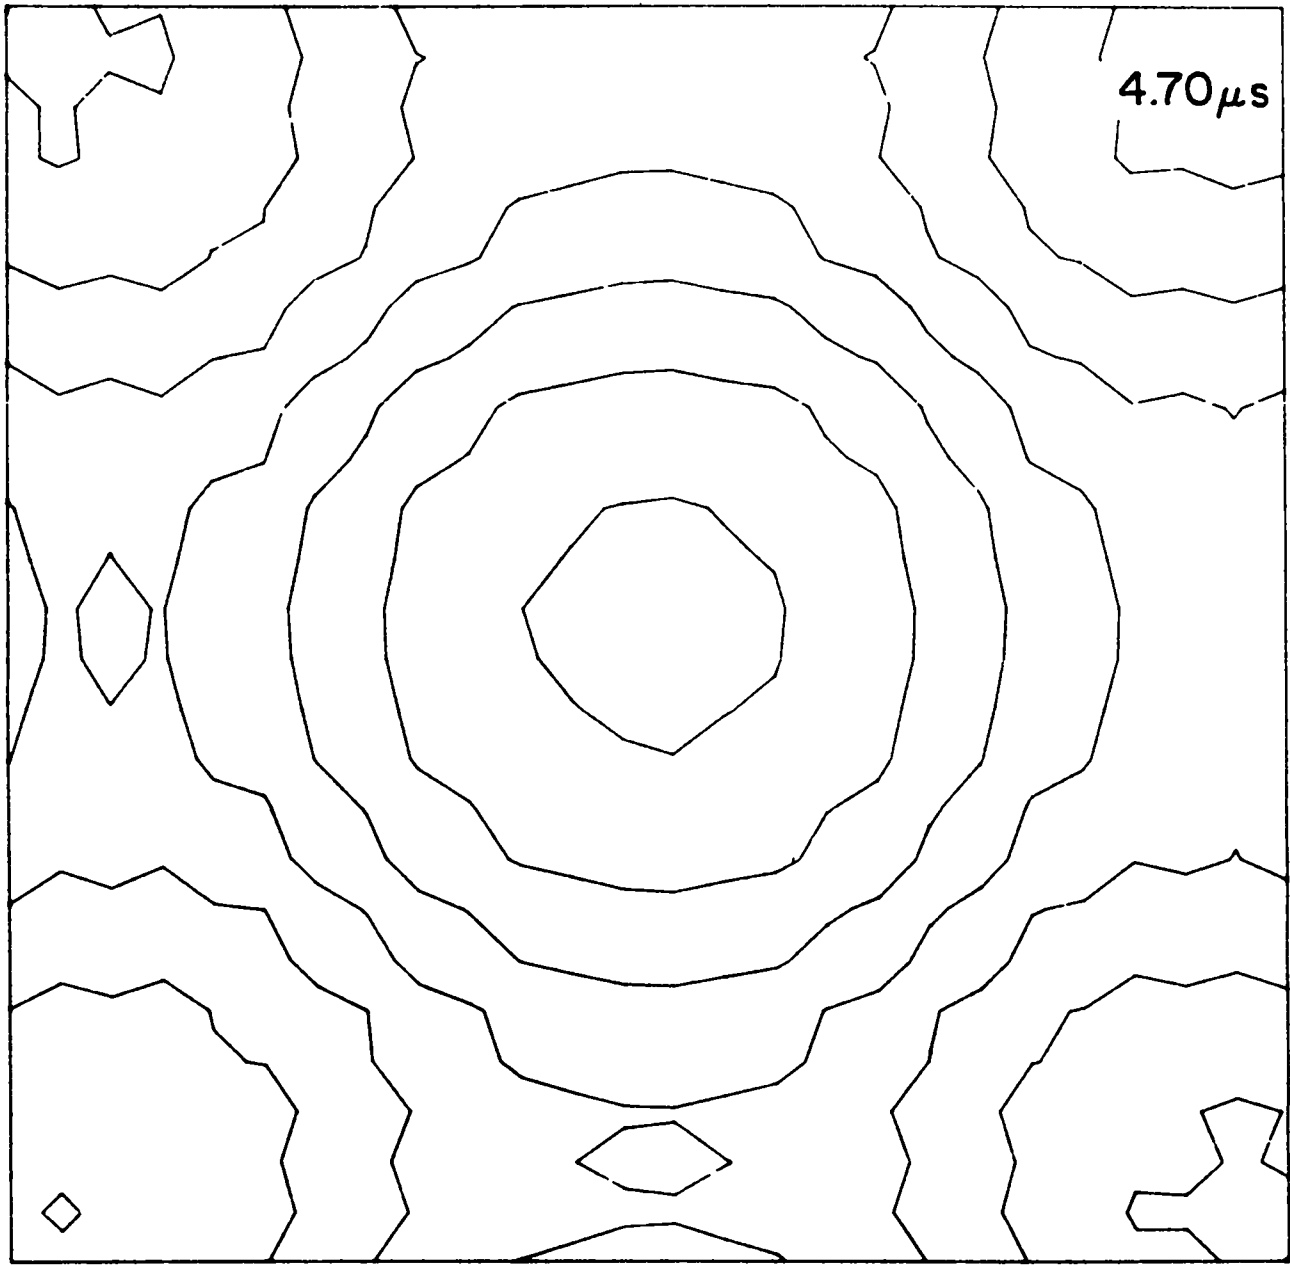

PRESSURE (MEGABARS)

K= 30

Fig. 4. (cont)

Printed in the United States of America
 Available from
 National Technical Information Service
 US Department of Commerce
 5285 Port Royal Road
 Springfield, VA 22161
 Microfiche \$3.50 (A01)

Page Range	Domestic Price	NTIS Price Code	Page Range	Domestic Price	NTIS Price Code	Page Range	Domestic Price	NTIS Price Code	Page Range	Domestic Price	NTIS Price Code
001-025	\$ 5.00	A02	151-175	\$11.00	A08	301-325	\$17.00	A14	451-475	\$23.00	A20
026-050	6.00	A03	176-200	12.00	A09	326-350	18.00	A15	476-500	24.00	A21
051-075	7.00	A04	201-225	13.00	A10	351-375	19.00	A16	501-525	25.00	A22
076-100	8.00	A05	226-250	14.00	A11	376-400	20.00	A17	526-550	26.00	A23
101-125	9.00	A06	251-275	15.00	A12	401-425	21.00	A18	551-575	27.00	A24
126-150	10.00	A07	276-300	16.00	A13	426-450	22.00	A19	576-600	28.00	A25
									601-up	†	A99

†Add \$1.00 for each additional 25-page increment or portion thereof from 601 pages up.