

Fixed-Point Designer™

User's Guide



MATLAB®

R2015a



How to Contact MathWorks



Latest news: www.mathworks.com
Sales and services: www.mathworks.com/sales_and_services
User community: www.mathworks.com/matlabcentral
Technical support: www.mathworks.com/support/contact_us



Phone: 508-647-7000



The MathWorks, Inc.
3 Apple Hill Drive
Natick, MA 01760-2098

Fixed-Point Designer™ User's Guide

© COPYRIGHT 2013–2015 by The MathWorks, Inc.

The software described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from The MathWorks, Inc.

FEDERAL ACQUISITION: This provision applies to all acquisitions of the Program and Documentation by, for, or through the federal government of the United States. By accepting delivery of the Program or Documentation, the government hereby agrees that this software or documentation qualifies as commercial computer software or commercial computer software documentation as such terms are used or defined in FAR 12.212, DFARS Part 227.72, and DFARS 252.227-7014. Accordingly, the terms and conditions of this Agreement and only those rights specified in this Agreement, shall pertain to and govern the use, modification, reproduction, release, performance, display, and disclosure of the Program and Documentation by the federal government (or other entity acquiring for or through the federal government) and shall supersede any conflicting contractual terms or conditions. If this License fails to meet the government's needs or is inconsistent in any respect with federal procurement law, the government agrees to return the Program and Documentation, unused, to The MathWorks, Inc.

Trademarks

MATLAB and Simulink are registered trademarks of The MathWorks, Inc. See www.mathworks.com/trademarks for a list of additional trademarks. Other product or brand names may be trademarks or registered trademarks of their respective holders.

Patents

MathWorks products are protected by one or more U.S. patents. Please see www.mathworks.com/patents for more information.

Revision History

March 2013	Online only	New for Version 4.0 (R2013a)
September 2013	Online only	Revised for Version 4.1 (R2013b)
March 2014	Online only	Revised for Version 4.2 (R2014a)
October 2014	Online Only	Revised for Version 4.3 (R2014b)
March 2015	Online Only	Revised for Version 5.0 (R2015a)

Fixed-Point Designer for MATLAB Code

1	Fixed-Point Concepts
Fixed-Point Data Types	1-2
Scaling	1-4
Compute Slope and Bias	1-5
What Is Slope Bias Scaling?	1-5
Compute Slope and Bias	1-5
Precision and Range	1-8
Range	1-8
Precision	1-9
Arithmetic Operations	1-13
Modulo Arithmetic	1-13
Two's Complement	1-14
Addition and Subtraction	1-15
Multiplication	1-16
Casts	1-22
fi Objects and C Integer Data Types	1-25
Integer Data Types	1-25
Unary Conversions	1-27
Binary Conversions	1-28
Overflow Handling	1-30

2

Ways to Construct fi Objects	2-2
Types of fi Constructors	2-2
Examples of Constructing fi Objects	2-3
Cast fi Objects	2-12
Overwriting by Assignment	2-12
Ways to Cast with MATLAB Software	2-12
fi Object Properties	2-18
Data Properties	2-18
fimath Properties	2-18
numerictype Properties	2-20
Setting fi Object Properties	2-21
fi Object Functions	2-24

Fixed-Point Topics

3

Set Up Fixed-Point Objects	3-2
Create Fixed-Point Data	3-2
View Fixed-Point Number Circles	3-16
Perform Binary-Point Scaling	3-29
Develop Fixed-Point Algorithms	3-34
Calculate Fixed-Point Sine and Cosine	3-46
Calculate Fixed-Point Arctangent	3-69
Compute Sine and Cosine Using CORDIC Rotation Kernel	3-94
Perform QR Factorization Using CORDIC	3-99

Compute Square Root Using CORDIC	3-134
Convert Cartesian to Polar Using CORDIC Vectoring Kernel	3-144
Set Data Types Using Min/Max Instrumentation	3-149
Convert Fast Fourier Transform (FFT) to Fixed Point	3-163
Detect Limit Cycles in Fixed-Point State-Space Systems	3-175
Compute Quantization Error	3-187
Normalize Data for Lookup Tables	3-196
Implement Fixed-Point Log2 Using Lookup Table . .	3-201
Implement Fixed-Point Square Root Using Lookup Table	3-206
Set Fixed-Point Math Attributes	3-211

Working with fimath Objects

4

fimath Object Construction	4-2
fimath Object Syntaxes	4-2
Building fimath Object Constructors in a GUI	4-3
fimath Object Properties	4-5
Math, Rounding, and Overflow Properties	4-5
How Properties are Related	4-9
Setting fimath Object Properties	4-11
fimath Properties Usage for Fixed-Point Arithmetic .	4-13
fimath Rules for Fixed-Point Arithmetic	4-13
Binary-Point Arithmetic	4-15
[Slope Bias] Arithmetic	4-18

fimath for Rounding and Overflow Modes	4-21
fimath for Sharing Arithmetic Rules	4-23
Default fimath Usage to Share Arithmetic Rules	4-23
Local fimath Usage to Share Arithmetic Rules	4-23
fimath ProductMode and SumMode	4-26
Example Setup	4-26
FullPrecision	4-27
KeepLSB	4-28
KeepMSB	4-29
SpecifyPrecision	4-30
How Functions Use fimath	4-32
Functions that use then discard attached fimath	4-32
Functions that ignore and discard attached fimath ...	4-32
Functions that do not perform math	4-33

Working with fipref Objects

5

fipref Object Construction	5-2
fipref Object Properties	5-3
Display, Data Type Override, and Logging Properties ..	5-3
fipref Object Properties Setting	5-3
fi Object Display Preferences Using fipref	5-5
Underflow and Overflow Logging Using fipref	5-7
Logging Overflows and Underflows as Warnings	5-7
Accessing Logged Information with Functions	5-9
Data Type Override Preferences Using fipref	5-12
Overriding the Data Type of fi Objects	5-12
Data Type Override for Fixed-Point Scaling	5-13

Working with numerictype Objects

6

numerictype Object Construction	6-2
numerictype Object Syntaxes	6-2
Example: Construct a numerictype Object with Property Name and Property Value Pairs	6-3
Example: Copy a numerictype Object	6-4
Example: Build numerictype Object Constructors in a GUI	6-4
numerictype Object Properties	6-6
Data Type and Scaling Properties	6-6
How Properties are Related	6-9
Set numerictype Object Properties	6-10
numerictype of Fixed-Point Objects	6-12
Valid Values for numerictype Object Properties	6-12
Properties That Affect the Slope	6-14
Stored Integer Value and Real World Value	6-14
numerictype Objects Usage to Share Data Type and Scaling Settings of fi objects	6-15
Example 1	6-15
Example 2	6-16

Working with quantizer Objects

7

Constructing quantizer Objects	7-2
quantizer Object Properties	7-3
Quantizing Data with quantizer Objects	7-4
Transformations for Quantized Data	7-6

Fixed-Point Conversion Workflows	8-2
Choosing a Conversion Workflow	8-2
Automated Workflow	8-2
Manual Workflow	8-3
Automated Fixed-Point Conversion	8-4
Automated Fixed-Point Conversion Capabilities	8-4
Code Coverage	8-5
Proposing Data Types	8-8
Locking Proposed Data Types	8-10
Viewing Functions	8-11
Viewing Variables	8-18
Log Data for Histogram	8-20
Function Replacements	8-22
Validating Types	8-23
Testing Numerics	8-23
Detecting Overflows	8-23
Best Practices for Debugging Out-of-the-Box Conversion by the Fixed-Point Converter	8-25
Prerequisites	8-27
Convert to Fixed Point Using Default Configuration ..	8-31
Determine Where Numerical Issues Originated	8-34
Adjust <code>fimath</code> Settings	8-38
Convert <code>kalman_filter</code> Function Using New <code>fimath</code> Settings	8-41
Adjust Word Length Settings	8-42
Replace Constant Functions	8-44
MATLAB Language Features Supported for Automated Fixed-Point Conversion	8-47
MATLAB Language Features Supported for Automated Fixed-Point Conversion	8-47
MATLAB Language Features Not Supported for Automated Fixed-Point Conversion	8-49
Generated Fixed-Point Code	8-50
Location of Generated Fixed-Point Files	8-50
Minimizing <code>fi</code> -casts to Improve Code Readability	8-51
Avoiding Overflows in the Generated Fixed-Point Code	8-51

Controlling Bit Growth	8-52
Avoiding Loss of Range or Precision	8-52
Handling Non-Constant mpower Exponents	8-54
Fixed-Point Code for MATLAB Classes	8-56
Automated Conversion Support for MATLAB Classes	8-56
Unsupported Constructs	8-56
Coding Style Best Practices	8-57
Automated Fixed-Point Conversion Best Practices	8-59
Create a Test File	8-59
Prepare Your Algorithm for Code Acceleration or Code Generation	8-60
Check for Fixed-Point Support for Functions Used in Your Algorithm	8-61
Manage Data Types and Control Bit Growth	8-61
Convert to Fixed Point	8-62
Use the Histogram to Fine-Tune Data Type Settings	8-63
Optimize Your Algorithm	8-64
Avoid Explicit Double and Single Casts	8-66
Replacing Functions Using Lookup Table Approximations	8-67
Custom Plot Functions	8-68
Generate Fixed-Point MATLAB Code for Multiple Entry- Point Functions	8-70
Convert Code Containing Global Data to Fixed Point	8-74
Workflow	8-74
Declare Global Variables	8-74
Define Global Data	8-75
Define Constant Global Data	8-76
Limitations of Using Global Data	8-78
Convert Code Containing Global Variables to Fixed- Point	8-79
Data Type Issues in Generated Code	8-82
Enable the Highlight Option in the Fixed-Point Converter App	8-82
Enable the Highlight Option at the Command Line	8-82

Stowaway Doubles	8-82
Stowaway Singles	8-82
Expensive Fixed-Point Operations	8-83
Using the Fixed-Point Converter App with System Objects	8-84
Use the Fixed-Point Converter App with a System object	8-85
Create DSP Filter Function and Test Bench	8-85
Convert the Function to Fixed-Point	8-86

Automated Conversion Using Fixed-Point Converter App

9

Specify Type Proposal Options	9-2
Detect Overflows	9-6
Propose Data Types Based on Simulation Ranges	9-17
Propose Data Types Based on Derived Ranges	9-32
View and Modify Variable Information	9-48
View Variable Information	9-48
Modify Variable Information	9-48
Revert Changes	9-50
Promote Sim Min and Sim Max Values	9-51
Replace the exp Function with a Lookup Table	9-52
Convert Fixed-Point Conversion Project to MATLAB Scripts	9-62
Replace a Custom Function with a Lookup Table	9-64
Visualize Differences Between Floating-Point and Fixed- Point Results	9-73

Enable Plotting Using the Simulation Data Inspector	9-84
Add Global Variables Using the App	9-85
Automatically Define Input Types Using the App	9-86
Define Constant Input Parameters Using the App	9-87
Define or Edit Input Parameter Type Using the App	9-88
Define or Edit an Input Parameter Type	9-88
Specify an Enumerated Type Input Parameter by Type	9-89
Specify a Fixed-Point Input Parameter by Type	9-90
Specify Structures	9-90
Define Input Parameters by Example Using the App	9-92
Define an Input Parameter by Example	9-92
Specify Input Parameters by Example	9-93
Specify an Enumerated Type Input Parameter by Example	9-94
Example	9-94
Specify a Fixed-Point Input Parameter by Example	9-95
Specify Global Variable Type and Initial Value Using the App	9-97
Why Specify a Type Definition for Global Variables?	9-97
Specify a Global Variable Type	9-97
Define a Global Variable by Example	9-97
Define or Edit Global Variable Type	9-98
Define Global Variable Initial Value	9-99
Define Global Variable Constant Value	9-100
Remove Global Variables	9-100
Specify Properties of Entry-Point Function Inputs Using the App	9-101
Why Specify Input Properties?	9-101
Specify an Input Definition Using the App	9-101
Detect Dead and Constant-Folded Code	9-102
What Is Dead Code?	9-102
Detect Dead Code	9-102
Fix Dead Code	9-105

Automated Conversion Using Programmatic Workflow

10

Propose Data Types Based on Simulation Ranges	10-2
Propose Data Types Based on Derived Ranges	10-7
Detect Overflows	10-14
Replace the exp Function with a Lookup Table	10-19
Replace a Custom Function with a Lookup Table	10-22
Visualize Differences Between Floating-Point and Fixed-Point Results	10-24
Enable Plotting Using the Simulation Data Inspector	10-31

Fixed-Point Conversion — Manual Conversion

11

Manual Fixed-Point Conversion Workflow	11-2
Manual Fixed-Point Conversion Best Practices	11-4
Create a Test File	11-4
Prepare Your Algorithm for Code Acceleration or Code Generation	11-5
Check for Fixed-Point Support for Functions Used in Your Algorithm	11-6
Manage Data Types and Control Bit Growth	11-7
Separate Data Type Definitions from Algorithm	11-8
Convert to Fixed Point	11-10
Optimize Data Types	11-12
Optimize Your Algorithm	11-15
Implement FIR Filter Algorithm for Floating-Point and Fixed-Point Types using cast and zeros	11-19

Viewing Test Results With Simulation Data Inspector

12

Inspecting Data Using the Simulation Data Inspector	12-2
What Is the Simulation Data Inspector?	12-2
Import Logged Data	12-2
Export Logged Data	12-2
Group Signals	12-3
Run Options	12-3
Create Report	12-3
Comparison Options	12-3
Enabling Plotting Using the Simulation Data Inspector	12-3
Save and Load Simulation Data Inspector Sessions	12-4

Code Acceleration and Code Generation from MATLAB for Fixed-Point Algorithms

13

Code Acceleration and Code Generation from MATLAB	13-3
Requirements for Generating Compiled C Code Files	13-4
Functions Supported for Code Acceleration or C Code Generation	13-5
Workflow for Fixed-Point Code Acceleration and Generation	13-16
Set Up C Compiler	13-17
Accelerate Code Using fiaccel	13-18
Speeding Up Fixed-Point Execution with fiaccel	13-18
Running fiaccel	13-18
Generated Files and Locations	13-19
Data Type Override Using fiaccel	13-21
Specifying Default fimath Values for MEX Functions	13-22

File Infrastructure and Paths Setup	13-24
Compile Path Search Order	13-24
Naming Conventions	13-24
Detect and Debug Code Generation Errors	13-27
Debugging Strategies	13-27
Error Detection at Design Time	13-28
Error Detection at Compile Time	13-28
Set Up C Code Compilation Options	13-29
C Code Compiler Configuration Object	13-29
Compilation Options Modification at the Command Line	
Using Dot Notation	13-29
How fiaccel Resolves Conflicting Options	13-30
MEX Configuration Dialog Box Options	13-31
See Also	13-35
Best Practices for Accelerating Fixed-Point Code ...	13-36
Recommended Compilation Options for fiaccel	13-36
Build Scripts	13-37
Check Code Interactively Using MATLAB Code	
Analyzer	13-38
Separating Your Test Bench from Your Function Code	13-38
Preserving Your Code	13-38
File Naming Conventions	13-39
Use Fixed-Point Code Generation Reports	13-40
Code Generation Report Creation	13-40
Code Generation Report Opening	13-41
Viewing Your MATLAB Code	13-41
Viewing Variables in the Variables Tab	13-43
See Also	13-44
Generate C Code from Code Containing Global Data	13-45
Workflow Overview	13-45
Declaring Global Variables	13-45
Defining Global Data	13-46
Synchronizing Global Data with MATLAB	13-47
Limitations of Using Global Data	13-49

Define Input Properties Programmatically in MATLAB	
File	13-50
How to Use <code>assert</code>	13-50
Rules for Using <code>assert</code> Function	13-54
Specifying Properties of Primary Fixed-Point Inputs .	13-54
Specifying Class and Size of Scalar Structure	13-55
Specifying Class and Size of Structure Array	13-56
Control Run-Time Checks	13-57
Types of Run-Time Checks	13-57
When to Disable Run-Time Checks	13-57
How to Disable Run-Time Checks	13-58
Fix Run-Time Stack Overflows	13-59
Code Generation with MATLAB Coder	13-60
Code Generation with MATLAB Function Block	13-61
Composing a MATLAB Language Function in a Simulink	
Model	13-61
MATLAB Function Block with Data Type Override ..	13-61
Fixed-Point Data Types with MATLAB Function	
Block	13-63
Generate Fixed-Point FIR Code Using MATLAB	
Function Block	13-70
Program the MATLAB Function Block	13-70
Prepare the Inputs	13-71
Create the Model	13-71
Define the <code>fimath</code> Object Using the Model Explorer ..	13-73
Run the Simulation	13-73
Fixed-Point FIR Code Example Parameter Values ..	13-74
Accelerate Code for Variable-Size Data	13-76
Disable Support for Variable-Size Data	13-76
Control Dynamic Memory Allocation	13-76
Accelerate Code for MATLAB Functions with Variable-	
Size Data	13-77
Accelerate Code for a MATLAB Function That Expands a	
Vector in a Loop	13-79
Accelerate Fixed-Point Simulation	13-86

Code Generation Readiness Tool	13-89
What Information Does the Code Generation Readiness Tool Provide?	13-89
Summary Tab	13-90
Code Structure Tab	13-92
See Also	13-95
Check Code Using the Code Generation Readiness Tool	13-96
Run Code Generation Readiness Tool at the Command Line	13-96
Run the Code Generation Readiness Tool From the Current Folder Browser	13-96
See Also	13-96
Check Code Using the MATLAB Code Analyzer	13-97
Fix Errors Detected at Code Generation Time	13-98
See Also	13-98
Avoid Multiword Operations in Generated Code	13-99
Find Potential Data Type Issues in Generated Code	13-102
Data Type Issues Overview	13-102
Enable Highlighting of Potential Data Type Issues .	13-102
Find and Address Cumbersome Operations	13-103
Find and Address Expensive Rounding	13-105
Find and Address Expensive Comparison Operations	13-106

Interoperability with Other Products

14

fi Objects with Simulink	14-2
Reading Fixed-Point Data from the Workspace	14-2
Writing Fixed-Point Data to the Workspace	14-2
Setting the Value and Data Type of Block Parameters .	14-6
Logging Fixed-Point Signals	14-6
Accessing Fixed-Point Block Data During Simulation .	14-6

fi Objects with DSP System Toolbox	14-8
Reading Fixed-Point Signals from the Workspace	14-8
Writing Fixed-Point Signals to the Workspace	14-8
fi Objects with dfilt Objects	14-12
Ways to Generate Code	14-13

Calling Functions for Code Generation

15

Resolution of Function Calls for Code Generation ...	15-2
Key Points About Resolving Function Calls	15-4
Compile Path Search Order	15-4
When to Use the Code Generation Path	15-5
Resolution of File Types on Code Generation Path ...	15-6
Compilation Directive %#codegen	15-8
Call Local Functions	15-9
Call Supported Toolbox Functions	15-10
Call MATLAB Functions	15-11
Declaring MATLAB Functions as Extrinsic Functions	15-12
Calling MATLAB Functions Using feval	15-16
How MATLAB Resolves Extrinsic Functions During Simulation	15-16
Working with mxArray Arrays	15-17
Restrictions on Extrinsic Functions for Code Generation	15-19
Limit on Function Arguments	15-19

Code Generation for MATLAB Classes

16

MATLAB Classes Definition for Code Generation	16-2
Language Limitations	16-2
Code Generation Features Not Compatible with Classes	16-3
Defining Class Properties for Code Generation	16-4
Calls to Base Class Constructor	16-5
Inheritance from Built-In MATLAB Classes Not Supported	16-6
Classes That Support Code Generation	16-7
Generate Code for MATLAB Value Classes	16-8
Generate Code for MATLAB Handle Classes and System Objects	16-13
MATLAB Classes in Code Generation Reports	16-15
What Reports Tell You About Classes	16-15
How Classes Appear in Code Generation Reports	16-15
How to Generate a Code Generation Report	16-17
Troubleshooting Issues with MATLAB Classes	16-18
Class class does not have a property with name name	16-18

Defining Data for Code Generation

17

Data Definition for Code Generation	17-2
Code Generation for Complex Data	17-4
Restrictions When Defining Complex Variables	17-4
Code Generation for Complex Data with Zero-Valued Imaginary Parts	17-4
Results of Expressions That Have Complex Operands	17-8
Code Generation for Characters	17-9

Array Size Restrictions for Code Generation	17-10
See Also	17-10
Code Generation for Constants in Structures and Arrays	17-11

Defining Functions for Code Generation

18

Specify Variable Numbers of Arguments	18-2
Supported Index Expressions	18-3
Apply Operations to a Variable Number of Arguments	18-4
When to Force Loop Unrolling	18-4
Using Variable Numbers of Arguments in a for-Loop	18-5
Implement Wrapper Functions	18-6
Passing Variable Numbers of Arguments from One Function to Another	18-6
Pass Property/Value Pairs	18-7
Variable Length Argument Lists for Code Generation	18-9

Defining MATLAB Variables for C/C++ Code Generation

19

Variables Definition for Code Generation	19-2
Best Practices for Defining Variables for C/C++ Code Generation	19-3
Define Variables By Assignment Before Using Them	19-3
Use Caution When Reassigning Variables	19-5
Use Type Cast Operators in Variable Definitions	19-5

Define Matrices Before Assigning Indexed Variables . . .	19-6
Eliminate Redundant Copies of Variables in Generated Code	19-7
When Redundant Copies Occur	19-7
How to Eliminate Redundant Copies by Defining Uninitialized Variables	19-7
Defining Uninitialized Variables	19-8
Reassignment of Variable Properties	19-9
Define and Initialize Persistent Variables	19-10
Reuse the Same Variable with Different Properties	19-11
When You Can Reuse the Same Variable with Different Properties	19-11
When You Cannot Reuse Variables	19-11
Limitations of Variable Reuse	19-14
Avoid Overflows in for-Loops	19-15
Supported Variable Types	19-17

Design Considerations for C/C++ Code Generation

20

When to Generate Code from MATLAB Algorithms	20-2
When Not to Generate Code from MATLAB Algorithms	20-2
Which Code Generation Feature to Use	20-4
Prerequisites for C/C++ Code Generation from MATLAB	20-5
MATLAB Code Design Considerations for Code Generation	20-6
See Also	20-7

Differences in Behavior After Compiling MATLAB	
Code	20-8
Why Are There Differences?	20-8
Character Size	20-8
Order of Evaluation in Expressions	20-8
Termination Behavior	20-9
Size of Variable-Size N-D Arrays	20-9
Size of Empty Arrays	20-10
Floating-Point Numerical Results	20-10
NaN and Infinity Patterns	20-10
Code Generation Target	20-11
MATLAB Class Initial Values	20-11
Variable-Size Support for Code Generation	20-11
Complex Numbers	20-11
MATLAB Language Features Supported for C/C++ Code	
Generation	20-12
MATLAB Language Features Not Supported for C/C++	
Code Generation	20-13

Code Generation for Enumerated Data

21

Enumerated Data Definition for Code Generation . . .	21-2
Enumerated Types Supported for Code Generation . .	21-3
Enumeration Class Base Types for Code Generation . .	21-3
C Code Representation for Base Type <code>int32</code>	21-4
C Code Representation for Base Type Other Than	
<code>int32</code>	21-4
When to Use Enumerated Data for Code Generation .	21-6
Generate Code for Enumerated Data from MATLAB	
Algorithms	21-7
See Also	21-7
Define Enumerated Data for Code Generation	21-8
Naming Enumerated Types for Code Generation	21-9

Operations on Enumerated Data for Code Generation	21-10
Assignment Operator, =	21-10
Relational Operators, < > <= >= == ~=	21-10
Cast Operation	21-10
Indexing Operation	21-11
Control Flow Statements: if, switch, while	21-11
Include Enumerated Data in Control Flow Statements	21-13
if Statement with Enumerated Data Types	21-13
switch Statement with Enumerated Data Types	21-14
while Statement with Enumerated Data Types	21-16
Customize Enumerated Types for Code Generation	21-19
Customizing Enumerated Types	21-19
Specify a Default Enumerated Value	21-21
Specify a Header File	21-22
Control Names of Enumerated Type Values in Generated Code	21-24
Change and Reload Enumerated Data Types	21-27
Restrictions on Use of Enumerated Data in for-Loops	21-28
Toolbox Functions That Support Enumerated Types for Code Generation	21-29

Code Generation for Function Handles

22

Function Handle Definition for Code Generation	22-2
Define and Pass Function Handles for Code Acceleration	22-3
Function Handle Limitations for Code Generation	22-5

Optimization Strategies	23-2
Modularize MATLAB Code	23-5
Eliminate Redundant Copies of Function Inputs	23-6
Inline Code	23-8
Prevent Function Inlining	23-8
Use Inlining in Control Flow Statements	23-8
Control Inlining	23-10
Control Size of Functions Inlined	23-10
Control Size of Functions After Inlining	23-11
Control Stack Size Limit on Inlined Functions	23-11
Fold Function Calls into Constants	23-13
Control Stack Space Usage	23-15
Stack Allocation and Performance	23-16
Dynamic Memory Allocation and Performance	23-17
When Dynamic Memory Allocation Occurs	23-17
Minimize Dynamic Memory Allocation	23-18
Provide Maximum Size for Variable-Size Arrays	23-19
Disable Dynamic Memory Allocation During Code Generation	23-25
Set Dynamic Memory Allocation Threshold	23-26
Set Dynamic Memory Allocation Threshold Using the MATLAB Coder App	23-26
Set Dynamic Memory Allocation Threshold at the Command Line	23-27
Excluding Unused Paths from Generated Code	23-28

Prevent Code Generation for Unused Execution	
Paths	23-29
Prevent Code Generation When Local Variable Controls Flow	23-29
Prevent Code Generation When Input Variable Controls Flow	23-30
Generate Code with Parallel for-Loops (parfor)	23-31
Minimize Redundant Operations in Loops	23-33
Unroll for-Loops	23-35
Limit Copying the for-loop Body in Generated Code	23-35
Support for Integer Overflow and Non-Finites	23-38
Disable Support for Integer Overflow	23-38
Disable Support for Non-Finite Numbers	23-39
Integrate Custom Code	23-40
MATLAB Coder Optimizations in Generated Code	23-46
Constant Folding	23-46
Loop Fusion	23-47
Successive Matrix Operations Combined	23-47
Unreachable Code Elimination	23-48
Generate Reusable Code	23-49

Code Generation for MATLAB Structures

24

Structure Definition for Code Generation	24-2
Structure Operations Allowed for Code Generation	24-3
Define Scalar Structures for Code Generation	24-4
Restriction When Using struct	24-4
Restrictions When Defining Scalar Structures by Assignment	24-4

Adding Fields in Consistent Order on Each Control Flow Path	24-4
Restriction on Adding New Fields After First Use	24-5
Define Arrays of Structures for Code Generation	24-7
Ensuring Consistency of Fields	24-7
Using repmat to Define an Array of Structures with Consistent Field Properties	24-7
Defining an Array of Structures Using Concatenation	24-8
Make Structures Persistent	24-9
Index Substructures and Fields	24-10
Assign Values to Structures and Fields	24-12
Pass Large Structures as Input Parameters	24-14

Functions, Classes, and System Objects Supported for Code Generation

25

Functions and Objects Supported for C and C++ Code Generation — Alphabetical List	25-2
Functions and Objects Supported for C and C++ Code Generation — Category List	25-147
Aerospace Toolbox	25-149
Arithmetic Operations in MATLAB	25-149
Bit-Wise Operations MATLAB	25-150
Casting in MATLAB	25-151
Communications System Toolbox	25-151
Complex Numbers in MATLAB	25-157
Computer Vision System Toolbox	25-157
Control Flow in MATLAB	25-166
Data and File Management in MATLAB	25-167
Data Types in MATLAB	25-171
Desktop Environment in MATLAB	25-172
Discrete Math in MATLAB	25-172
DSP System Toolbox	25-173

Error Handling in MATLAB	25-180
Exponents in MATLAB	25-181
Filtering and Convolution in MATLAB	25-181
Fixed-Point Designer	25-182
HDL Coder	25-192
Histograms in MATLAB	25-192
Image Acquisition Toolbox	25-193
Image Processing in MATLAB	25-193
Image Processing Toolbox	25-193
Input and Output Arguments in MATLAB	25-202
Interpolation and Computational Geometry in MATLAB	25-202
Linear Algebra in MATLAB	25-206
Logical and Bit-Wise Operations in MATLAB	25-207
MATLAB Compiler	25-208
Matrices and Arrays in MATLAB	25-208
Neural Network Toolbox	25-216
Nonlinear Numerical Methods in MATLAB	25-217
Numerical Integration and Differentiation in MATLAB	25-217
Optimization Functions in MATLAB	25-218
Phased Array System Toolbox	25-218
Polynomials in MATLAB	25-228
Programming Utilities in MATLAB	25-229
Relational Operators in MATLAB	25-229
Rounding and Remainder Functions in MATLAB ..	25-229
Set Operations in MATLAB	25-230
Signal Processing in MATLAB	25-235
Signal Processing Toolbox	25-236
Special Values in MATLAB	25-241
Specialized Math in MATLAB	25-241
Statistics in MATLAB	25-242
Statistics and Machine Learning Toolbox	25-243
String Functions in MATLAB	25-252
Structures in MATLAB	25-253
Trigonometry in MATLAB	25-254

Code Generation for Variable-Size Data

26

What Is Variable-Size Data?	26-2
-----------------------------------	------

Variable-Size Data Definition for Code Generation . . .	26-3
Bounded Versus Unbounded Variable-Size Data	26-4
Control Memory Allocation of Variable-Size Data	26-5
Specify Variable-Size Data Without Dynamic Memory Allocation	26-6
Fixing Upper Bounds Errors	26-6
Specifying Upper Bounds for Variable-Size Data	26-6
Variable-Size Data in Code Generation Reports	26-9
What Reports Tell You About Size	26-9
How Size Appears in Code Generation Reports	26-10
How to Generate a Code Generation Report	26-10
Define Variable-Size Data for Code Generation	26-11
When to Define Variable-Size Data Explicitly	26-11
Using a Matrix Constructor with Nonconstant Dimensions	26-11
Inferring Variable Size from Multiple Assignments	26-12
Defining Variable-Size Data Explicitly Using <code>coder.varsize</code>	26-13
C Code Interface for Arrays	26-17
C Code Interface for Statically Allocated Arrays	26-17
C Code Interface for Dynamically Allocated Arrays	26-18
Utility Functions for Creating <code>emxArray</code> Data Structures	26-19
Diagnose and Fix Variable-Size Data Errors	26-22
Diagnosing and Fixing Size Mismatch Errors	26-22
Diagnosing and Fixing Errors in Detecting Upper Bounds	26-24
Incompatibilities with MATLAB in Variable-Size Support for Code Generation	26-26
Incompatibility with MATLAB for Scalar Expansion	26-26
Incompatibility with MATLAB in Determining Size of Variable-Size N-D Arrays	26-28
Incompatibility with MATLAB in Determining Size of Empty Arrays	26-29

Incompatibility with MATLAB in Determining Class of Empty Arrays	26-30
Incompatibility with MATLAB in Vector-Vector Indexing	26-31
Incompatibility with MATLAB in Matrix Indexing Operations for Code Generation	26-31
Incompatibility with MATLAB in Concatenating Variable-Size Matrices	26-32
Dynamic Memory Allocation Not Supported for MATLAB Function Blocks	26-33

Variable-Sizing Restrictions for Code Generation of Toolbox Functions	26-34
Common Restrictions	26-34
Toolbox Functions with Variable Sizing Restrictions	26-35

Primary Functions

27

Primary Function Input Specification	27-2
Why You Must Specify Input Properties	27-2
Properties to Specify	27-2
Rules for Specifying Properties of Primary Inputs	27-4
Methods for Defining Properties of Primary Inputs	27-4
Define Input Properties by Example at the Command Line	27-5
Specify Constant Inputs at the Command Line	27-7
Specify Variable-Size Inputs at the Command Line	27-9
 Define Input Properties Programmatically in the MATLAB File	 27-11
How to Use assert with MATLAB Coder	27-11
Rules for Using assert Function	27-17
Specifying General Properties of Primary Inputs	27-17
Specifying Properties of Primary Fixed-Point Inputs	27-18
Specifying Class and Size of Scalar Structure	27-19
Specifying Class and Size of Structure Array	27-20

28 System Objects Supported for Code Generation

Code Generation for System Objects	28-2
--	------

System Objects

29

What Are System Objects?	29-2
System Objects in MATLAB Code Generation	29-3
System Objects in Generated Code	29-3
System Objects in codegen	29-8
System Objects in the MATLAB Function Block	29-8
System Objects in the MATLAB System Block	29-8
System Objects and MATLAB Compiler Software	29-9
System Objects in Simulink	29-10
System Objects in the MATLAB Function Block	29-10
System Object Methods	29-11
What Are System Object Methods?	29-11
The Step Method	29-11
Common Methods	29-12

Fixed-Point Designer for Simulink Models

Getting Started

30

Product Description	30-2
Key Features	30-2

What You Need to Get Started	30-3
Installation	30-3
Sharing Fixed-Point Models	30-3
Physical Quantities and Measurement Scales	30-5
Introduction	30-5
Selecting a Measurement Scale	30-6
Select a Measurement Scale for Temperature	30-7
Why Use Fixed-Point Hardware?	30-13
Why Use the Fixed-Point Designer Software?	30-14
Developing and Testing Fixed-Point Systems	30-15
Supported Data Types	30-18
Configure Blocks with Fixed-Point Output	30-19
Specify the Output Data Type and Scaling	30-20
Specify Fixed-Point Data Types with the Data Type Assistant	30-22
Rounding	30-25
Overflow Handling	30-25
Lock the Output Data Type Setting	30-26
Real-World Values Versus Stored Integer Values ...	30-26
Configure Blocks with Fixed-Point Parameters	30-29
Specify Fixed-Point Values Directly	30-29
Specify Fixed-Point Values Via Parameter Objects ...	30-30
Pass Fixed-Point Data Between Simulink Models and MATLAB	30-32
Read Fixed-Point Data from the Workspace	30-32
Write Fixed-Point Data to the Workspace	30-32
Log Fixed-Point Signals	30-35
Access Fixed-Point Block Data During Simulation ...	30-35
Cast from Doubles to Fixed Point	30-36
About This Example	30-36
Block Descriptions	30-37
Simulations	30-38

Data Types and Scaling in Digital Hardware	31-2
Fixed-Point Numbers	31-3
Signed Fixed-Point Numbers	31-4
Binary Point Interpretation	31-5
Scaling	31-7
Binary-Point-Only Scaling	31-8
Slope and Bias Scaling	31-8
Unspecified Scaling	31-8
Quantization	31-10
Fixed-Point Format	31-10
Range and Precision	31-12
Range	31-12
Precision	31-13
Fixed-Point Data Type Parameters	31-13
Range of an 8-Bit Fixed-Point Data Type — Binary-Point-Only Scaling	31-13
Range of an 8-Bit Fixed-Point Data Type — Slope and Bias Scaling	31-14
Fixed-Point Numbers in Simulink	31-15
Constant Scaling for Best Precision	31-15
Fixed-Point Data Type and Scaling Notation	31-17
Display Port Data Types	31-20
Scaled Doubles	31-22
What Are Scaled Doubles?	31-22
When to Use Scaled Doubles	31-23
Use Scaled Doubles to Avoid Precision Loss	31-24
About the Model	31-24
Running the Example	31-25

Floating-Point Numbers	31-26
Floating-Point Numbers	31-26
Scientific Notation	31-26
The IEEE Format	31-27
Range and Precision	31-29
Exceptional Arithmetic	31-31

Arithmetic Operations

32

Fixed-Point Arithmetic Operations	32-3
Limitations on Precision	32-4
Rounding	32-5
Choose a Rounding Mode	32-5
Rounding Modes for Fixed-Point Simulink Blocks ...	32-6
Rounding Mode: Ceiling	32-8
Rounding Mode: Convergent	32-9
Rounding Mode: Floor	32-11
Rounding Mode: Nearest	32-12
Rounding Mode: Round	32-14
Rounding Mode: Simplest	32-16
Optimize Rounding for Casts	32-16
Optimize Rounding for High-Level Arithmetic Operations	32-16
Optimize Rounding for Intermediate Arithmetic Operations	32-18
Rounding Mode: Zero	32-20
Rounding to Zero Versus Truncation	32-22
Pad with Trailing Zeros	32-23

Limitations on Precision and Errors	32-24
Maximize Precision	32-25
Net Slope and Net Bias Precision	32-26
What are Net Slope and Net Bias?	32-26
Detecting Net Slope and Net Bias Precision Issues ..	32-27
Fixed-Point Constant Underflow	32-27
Fixed-Point Constant Overflow	32-27
Fixed-Point Constant Precision Loss	32-28
Detect Net Slope and Bias Precision Issues	32-29
Detect Fixed-Point Constant Precision Loss	32-30
Limitations on Range	32-31
Saturation and Wrapping	32-33
What Are Saturation and Wrapping?	32-33
Saturation and Wrapping	32-33
Guard Bits	32-36
Determine the Range of Fixed-Point Numbers	32-37
Handle Overflows in Simulink Models	32-38
Recommendations for Arithmetic and Scaling	32-40
Arithmetic Operations and Fixed-Point Scaling	32-40
Addition	32-41
Accumulation	32-44
Multiplication	32-44
Gain	32-47
Division	32-49
Summary	32-51
Parameter and Signal Conversions	32-52
Introduction	32-52
Parameter Conversions	32-53
Signal Conversions	32-53
Rules for Arithmetic Operations	32-56
Computational Units	32-56

Addition and Subtraction	32-56
Multiplication	32-58
Division	32-63
Shifts	32-64
The Summation Process	32-66
The Multiplication Process	32-69
The Division Process	32-71
Shifts	32-72
Shifting Bits to the Right	32-72
Conversions and Arithmetic Operations	32-74

Realization Structures

33

Realizing Fixed-Point Digital Filters	33-2
Introduction	33-2
Realizations and Data Types	33-2
Targeting an Embedded Processor	33-4
Introduction	33-4
Size Assumptions	33-4
Operation Assumptions	33-4
Design Rules	33-5
Canonical Forms	33-7
Direct Form II	33-9
Series Cascade Form	33-13
Parallel Form	33-16

Preparation for Fixed-Point Conversion	34-2
Introduction	34-2
Best Practices	34-2
Run the Fixed-Point Advisor	34-4
Fix a Task Failure	34-5
Manually Fixing Failures	34-5
Automatically Fixing Failures	34-6
Batch Fixing Failures	34-6
Restore Points	34-7
Save a Restore Point	34-7
Load a Restore Point	34-8

Fixed-Point Tool	35-2
Introduction to the Fixed-Point Tool	35-2
Using the Fixed-Point Tool	35-2
Run Management	35-5
Run Management	35-5
Run Management with the Shortcut Editor	35-5
Manual Run Management	35-6
Use Shortcuts to Manage Runs	35-7
Why Use Shortcuts to Manage Runs	35-7
When to Use Shortcuts to Manage Runs	35-7
Add Shortcuts	35-8
Edit Shortcuts	35-8
Delete Shortcuts	35-9
Capture Model Settings Using the Shortcut Editor	35-10
Debug a Fixed-Point Model	35-11
Simulating the Model to See the Initial Behavior	35-11
Debugging the Model	35-13

Simulating the Model Using a Different Input	
Stimulus	35-15
Debugging the Model with the New Input	35-15
Proposing Fraction Lengths for Math2 Based on	
Simulation Results	35-16
Verifying the New Settings	35-17
Logging Simulation Ranges for Referenced Models .	35-18
Viewing Simulation Ranges for Referenced Models . .	35-18
Fixed-Point Instrumentation and Data Type Override	
Settings	35-20
See Also	35-21
Log Simulation Ranges for Referenced Models	35-22
Propose Data Types for a Referenced Model	35-28
Logging Simulation Ranges for MATLAB Function	
Block	35-31
See Also	35-31
Log Simulation Ranges for MATLAB Function Block	35-32
View Signal Names in Fixed-Point Tool	35-35
Model Multiple Data Type Behaviors Using a Data	
Dictionary	35-37
Change Data Types of Model Parameters	35-41

Convert Floating-Point Model to Fixed Point

36

Learning Objectives	36-2
Model Description	36-4
Model Overview	36-4
Model Set Up	36-5
Before You Begin	36-7

Convert Floating-Point Model to Fixed Point	36-8
Open the Model	36-8
Prepare Floating-Point Model for Conversion to Fixed Point	36-8
Propose Data Types	36-15
Apply Fixed-Point Data Types	36-16
Verify Fixed-Point Settings	36-17
Test Fixed-Point Settings With New Input Data	36-18
Gather a Floating-Point Benchmark	36-20
Propose Data Types for the New Input	36-20
Apply the New Fixed-Point Data Types	36-21
Verify New Fixed-Point Settings	36-21
Prepare for Code Generation	36-22
Key Points to Remember	36-24
Where to Learn More	36-25

Producing Lookup Table Data

37

Producing Lookup Table Data	37-2
What Is the Worst-Case Error for a Lookup Table?	37-3
Approximate the Square Root Function	37-4
Create Lookup Tables for a Sine Function	37-6
Introduction	37-6
Parameters for <code>fixpt_look1_func_approx</code>	37-6
Setting Function Parameters for the Lookup Table	37-8
Using <code>errmax</code> with Unrestricted Spacing	37-8
Using <code>nptsmx</code> with Unrestricted Spacing	37-11
Using <code>errmax</code> with Even Spacing	37-13
Using <code>nptsmx</code> with Even Spacing	37-14
Using <code>errmax</code> with Power of Two Spacing	37-15
Using <code>nptsmx</code> with Power of Two Spacing	37-17
Specifying Both <code>errmax</code> and <code>nptsmx</code>	37-18
Comparison of Example Results	37-19

Use Lookup Table Approximation Functions	37-21
Effects of Spacing on Speed, Error, and Memory	
Usage	37-22
Criteria for Comparing Types of Breakpoint Spacing .	37-22
Model That Illustrates Effects of Breakpoint Spacing	37-22
Data ROM Required for Each Lookup Table	37-23
Determination of Out-of-Range Inputs	37-23
How the Lookup Tables Determine Input Location . .	37-24
Interpolation for Each Lookup Table	37-26
Summary of the Effects of Breakpoint Spacing	37-28

Automatic Data Typing

38

About Automatic Data Typing	38-2
Before Proposing Data Types for Your Model	38-3
Best Practices for Fixed-Point Workflow	38-5
Use a Known Working Simulink Model	38-5
Back Up Your Simulink Model	38-5
Capture the Current Data Type Override Settings . . .	38-5
Convert Individual Subsystems	38-5
Isolate the System Under Conversion	38-5
Do Not Use “Save as” on Referenced Models and MATLAB Function blocks	38-6
Use Lock Output Data Type Setting	38-6
Save Simulink Signal Objects	38-6
Test Update Diagram Failure	38-6
Disable Fast Restart	38-7
Models That Might Cause Data Type Propagation Errors	38-8
Automatic Data Typing Using Simulation Data	38-10
Workflow for Automatic Data Typing Using Simulation Data	38-10
Set Up the Model	38-10
Prepare the Model for Fixed-Point Conversion	38-11

Gather a Floating-Point Benchmark	38-12
Proposing Data Types	38-13
Propose Data Types	38-15
Examine Results to Resolve Conflicts	38-15
Apply Proposed Data Types	38-18
Verify New Settings	38-19
Automatic Data Typing of Simulink Signal Objects . .	38-20
Automatic Data Typing Using Derived Ranges	38-21
Prerequisites for Autoscaling Using Derived Ranges .	38-21
Workflow for Autoscaling Using Derived Data	38-21
Set Up the Model	38-22
Prepare Model for Autoscaling Using Derived Data . .	38-23
Derive Minimum and Maximum Values	38-24
Resolve Range Analysis Issues	38-25
Proposing Data Types	38-25
Propose Data Types	38-27
Examine Results to Resolve Conflicts	38-27
Apply Proposed Data Types	38-31
Update Diagram	38-32
Propose Fraction Lengths	38-33
Propose Fraction Lengths	38-33
About the Feedback Controller Example Model	38-33
Propose Fraction Lengths Using Simulation Range Data	38-40
How the Fixed-Point Tool Proposes Word Lengths . .	38-48
How the Fixed-Point Tool Uses Range Information . .	38-48
How the Fixed-Point Tool Uses Target Hardware Information	38-49
Propose Word Lengths	38-51
Propose Word Lengths Based on Simulation Data . .	38-52
Propose Data Types Using Multiple Simulations	38-58
About This Example	38-58
Running the Simulation	38-60
View Simulation Results	38-63
Compare Runs	38-63
Compare Signals	38-64

Inspect Signals	38-65
Histogram Plot of Signal	38-66
See Also	38-67
Viewing Results With the Simulation Data Inspector	38-68
Why Use the Simulation Data Inspector	38-68
When to Use the Simulation Data Inspector	38-68
What You Can Inspect in the Simulation Data Inspector	38-68
See Also	38-69

Range Analysis

39

How Range Analysis Works	39-2
Analyzing a Model with Range Analysis	39-2
Automatic Stubbing	39-5
Model Compatibility with Range Analysis	39-6
Derive Ranges	39-7
Derive Ranges at the Subsystem Level	39-9
Deriving Ranges at the Subsystem Level	39-9
Derive Ranges at the Subsystem Level	39-10
View Derived Ranges in the Fixed-Point Tool	39-11
Derive Ranges Using Design Ranges	39-13
Derive Ranges Using Block Initial Conditions	39-15
Derive Ranges Using Design Ranges for Simulink.Parameter Objects	39-17
Insufficient Design Range Information	39-20
Providing More Design Range Information	39-23
Fixing Design Range Conflicts	39-26

Derive Ranges for a Referenced Model	39-28
Propose Data Types for a Referenced Model	39-34
Deriving Ranges for a Referenced Model	39-36
Viewing Derived Minimum and Maximum Values for Referenced Models	39-36
Data Type Override Settings	39-37
See Also	39-37
Intermediate Range Results	39-38
Unsupported Simulink Software Features	39-41
Supported and Unsupported Simulink Blocks	39-43
Overview of Simulink Block Support	39-43
Limitations of Support for Model Blocks	39-53

Working with the MATLAB Function Block

40

Convert Model Containing MATLAB Function Block to Fixed Point	40-2
Open Model	40-2
Decouple the MATLAB Function Block	40-4
Collect Range Information	40-5
Propose Data Types	40-5
Examine Data Type Proposals	40-6
Apply Proposed Data Types	40-8
Verify Results	40-13
Working with the MATLAB Function Block in the Fixed- Point Tool	40-16
Best Practices for Working with a MATLAB Function Block in the Fixed-Point Tool	40-16
Limitations of Working with the MATLAB Function Block in the Fixed-Point Tool	40-16
Detect Overflows in a MATLAB Function Block	40-17
Set Data Type Override to Scaled Doubles	40-17

Propose New Data Types	40-18
Apply New Data Types	40-19
Derive Ranges of MATLAB Function Block Variables	40-20
Explore the Model	40-20
Derive Ranges	40-21
Propose Data Types	40-21
Apply Proposed Data Types	40-22

Working with Bus Objects in the Fixed-Point Workflow

41

Refine Data Types of a Model with Buses Using Simulation Data	41-2
Open and Simulate the Model	41-2
Use Data Type Override to Resolve Overflows	41-3
Propose New Fraction Lengths	41-5
Examine and Apply Proposed Types	41-5
Verify New Fixed-Point Settings	41-8
Save the Model and New Bus Data Types	41-9
Convert a Model with Buses to Fixed-Point Using Range Analysis	41-11
Open and Simulate the Model	41-11
Set Design Minimums and Maximums	41-12
Open the Fixed-Point Tool and Run the Fixed-Point Advisor	41-14
Derive Minimum and Maximum Values	41-15
Propose Fraction Lengths	41-15
Examine and Apply Proposed Types	41-15
Verify New Fixed-Point Types	41-18
Save the Model and the New Bus Data Types	41-19
Bus Objects in the Fixed-Point Workflow	41-20
How Data Type Proposals Are Determined for Bus Objects	41-20
Bus Naming Conventions with Data Type Override	41-22
Limitations of Bus Objects in the Fixed-Point Workflow	41-23

Convert Model with Bus Object with Structure Initial Conditions to Fixed-Point	41-24
---	--------------

Command Line Interface for the Fixed-Point Tool

42

The Command-Line Interface for the Fixed-Point Tool	42-2
Convert a Model to Fixed Point Using the Command-Line	42-4

Code Generation

43

Generating and Deploying Production Code	43-2
Code Generation Support	43-3
Introduction	43-3
Languages	43-3
Data Types	43-3
Rounding Modes	43-3
Overflow Handling	43-3
Blocks	43-4
Scaling	43-4
Accelerating Fixed-Point Models	43-5
Using External Mode or Rapid Simulation Target ...	43-7
Introduction	43-7
External Mode	43-7
Rapid Simulation Target	43-8
Optimize Your Generated Code	43-9
Reducing ROM Consumption or Model Execution Time	43-9

Restrict Data Type Word Lengths	43-10
Avoid Fixed-Point Scalings with Bias	43-10
Wrap and Round to Floor or Simplest	43-11
Limit the Use of Custom Storage Classes	43-12
Limit the Use of Unevenly Spaced Lookup Tables . . .	43-12
Minimize the Variety of Similar Fixed-Point Utility Functions	43-13
Handle Net Slope Computation	43-13
Use Division to Handle Net Slope Computation	43-14
Improve Numerical Accuracy of Simulation Results with Rational Approximations to Handle Net Slope	43-15
Improve Efficiency of Generated Code with Rational Approximations to Handle Net Slope	43-20
Use Integer Division to Handle Net Slope Computation	43-26
Optimize Generated Code Using Specified Minimum and Maximum Values	43-26
Eliminate Unnecessary Utility Functions Using Specified Minimum and Maximum Values	43-29

Optimizing Your Generated Code with the Model

Advisor	43-32
Optimize Generated Code with Model Advisor	43-32
Identify Blocks that Generate Expensive Fixed-Point and Saturation Code	43-33
Identify Questionable Fixed-Point Operations	43-36
Identify Blocks that Generate Expensive Rounding Code	43-38

Use the Model Advisor to Optimize Fixed-Point

Operations in Generated Code	43-40
---	-------

Fixed-Point Advisor Reference

44

Fixed-Point Advisor	44-2
Fixed-Point Advisor Overview	44-3
Preparing Model for Conversion	44-6
Prepare Model for Conversion Overview	44-7

Verify model simulation settings	44-8
Verify update diagram status	44-11
Address unsupported blocks	44-12
Set up signal logging	44-14
Create simulation reference data	44-15
Verify Fixed-Point Conversion Guidelines Overview	44-17
Check model configuration data validity diagnostic parameters settings	44-18
Implement logic signals as Boolean data	44-19
Check bus usage	44-20
Simulation range checking	44-21
Check for implicit signal resolution	44-22
Preparing for Data Typing and Scaling	44-24
Prepare for Data Typing and Scaling Overview	44-25
Review locked data type settings	44-26
Remove output data type inheritance	44-27
Relax input data type settings	44-30
Verify Stateflow charts have strong data typing with Simulink	44-31
Remove redundant specification between signal objects and blocks	44-32
Verify hardware selection	44-34
Specify block minimum and maximum values	44-36
Return to the Fixed-Point Tool to Perform Data Typing and Scaling	44-37
See Also	44-37

Troubleshooting

45

Frequently Asked Questions About Fixed-Point Numbers	45-2
What Is the Difference Between Fixed-Point and Built-In Integer Types?	45-2
Negative Fraction Length	45-2
Fraction Length Greater Than Word Length	45-3
fi Constructor Does Not Follow globalfimath Rules	45-5

Decide Which Workflow Is Right For Your Application	45-6
Tips for Making Generated Code More Efficient	45-7
fimath Settings for Efficient Code	45-7
Replace Functions With More Efficient Fixed-Point Implementations	45-7
Know When a Function is Supported for Instrumentation and Acceleration	45-9
What to Do If a Function Is Not Supported for Fixed-Point Conversion	45-10
Isolate the Unsupported Functions	45-10
Create a Replacement Function	45-10
Common Errors and Warnings	45-12
fi*non-fi Errors	45-12
Data Type Mismatch Errors	45-12
Mismatched fimath Errors	45-13
Why Does the Fixed-Point Converter App Not Propose Data Types for System Objects?	45-14
Prevent The Fixed-Point Tool From Overriding Integer Data Types	45-15
Why Did The Fixed-Point Tool Not Propose Data Types?	45-16
Inherited Output Data Types	45-16
Inadequate Range Information	45-16
Frequently Asked Questions About Fixed-Point Numbers	45-17
Fraction Length Greater Than Word Length	45-17
Negative Fraction Length	45-17
What to Do When a Block Is Not Supported For Fixed-Point Conversion	45-18
Isolate the Block	45-18
Lookup Table Block Implementation	45-18
User-Authored Blocks	45-19

Why am I missing data type proposals for MATLAB Function block variables?	45-20
Data Type Mismatch and Structure Initial Conditions	45-21
Enable Inline Parameters	45-21
Specify Bus Signal Initial Conditions Using Simulink.Parameter Objects	45-24
Data Type Mismatch and Masked Atomic Subsystems	45-25

Writing Fixed-Point S-Functions

A

Data Type Support	A-2
Supported Data Types	A-2
The Treatment of Integers	A-3
Data Type Override	A-3
 Structure of the S-Function	 A-5
 Storage Containers	 A-7
Introduction	A-7
Storage Containers in Simulation	A-7
Storage Containers in Code Generation	A-10
 Data Type IDs	 A-12
The Assignment of Data Type IDs	A-12
Registering Data Types	A-13
Setting and Getting Data Types	A-15
Getting Information About Data Types	A-15
Converting Data Types	A-17
 Overflow Handling and Rounding Methods	 A-18
Tokens for Overflow Handling and Rounding Methods	A-18
Overflow Logging Structure	A-19
 Create MEX-Files	 A-20
 Fixed-Point S-Function Examples	 A-21

Get the Input Port Data Type	A-23
Set the Output Port Data Type	A-25
Interpret an Input Value	A-26
Write an Output Value	A-28
Determine Output Type Using the Input Type	A-30
API Function Reference	A-31

Fixed-Point Designer for MATLAB Code

Fixed-Point Concepts

- “Fixed-Point Data Types” on page 1-2
- “Scaling” on page 1-4
- “Compute Slope and Bias” on page 1-5
- “Precision and Range” on page 1-8
- “Arithmetic Operations” on page 1-13
- “fi Objects and C Integer Data Types” on page 1-25


Fixed-Point Data Types

In digital hardware, numbers are stored in binary words. A binary word is a fixed-length sequence of bits (1's and 0's). How hardware components or software functions interpret this sequence of 1's and 0's is defined by the data type.

Binary numbers are represented as either fixed-point or floating-point data types. This chapter discusses many terms and concepts relating to fixed-point numbers, data types, and mathematics.

A fixed-point data type is characterized by the word length in bits, the position of the binary point, and whether it is signed or unsigned. The position of the binary point is the means by which fixed-point values are scaled and interpreted.

For example, a binary representation of a generalized fixed-point number (either signed or unsigned) is shown below:

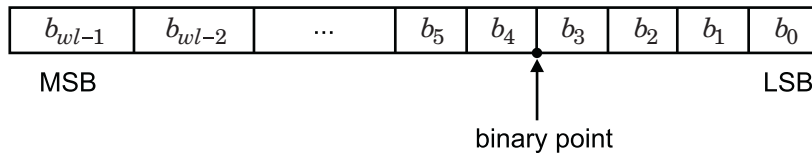

where

- b_i is the i^{th} binary digit.
- wl is the word length in bits.
- b_{wl-1} is the location of the most significant, or highest, bit (MSB).
- b_0 is the location of the least significant, or lowest, bit (LSB).
- The binary point is shown four places to the left of the LSB. In this example, therefore, the number is said to have four fractional bits, or a fraction length of four.

Fixed-point data types can be either signed or unsigned. Signed binary fixed-point numbers are typically represented in one of three ways:

- Sign/magnitude
- One's complement
- Two's complement

Two's complement is the most common representation of signed fixed-point numbers and is the only representation used by Fixed-Point Designer™ documentation.

Scaling

Fixed-point numbers can be encoded according to the scheme

$$\text{real-world value} = (\text{slope} \times \text{integer}) + \text{bias}$$

where the slope can be expressed as

$$\text{slope} = \text{slope adjustment factor} \times 2^{\text{fixed exponent}}$$

The integer is sometimes called the *stored integer*. This is the raw binary number, in which the binary point assumed to be at the far right of the word. In Fixed-Point Designer documentation, the negative of the fixed exponent is often referred to as the *fraction length*.

The slope and bias together represent the scaling of the fixed-point number. In a number with zero bias, only the slope affects the scaling. A fixed-point number that is only scaled by binary point position is equivalent to a number in [Slope Bias] representation that has a bias equal to zero and a slope adjustment factor equal to one. This is referred to as binary point-only scaling or power-of-two scaling:

$$\text{real-world value} = 2^{\text{fixed exponent}} \times \text{integer}$$

or

$$\text{real-world value} = 2^{-\text{fixed exponent}} \times \text{integer}$$

Fixed-Point Designer software supports both binary point-only scaling and [Slope Bias] scaling.

Note For examples of binary point-only scaling, see the Fixed-Point Designer Binary-Point Scaling example.

For an example of how to compute slope and bias in MATLAB[®], see “Compute Slope and Bias” on page 1-5

Compute Slope and Bias

In this section...

“What Is Slope Bias Scaling?” on page 1-5

“Compute Slope and Bias” on page 1-5

What Is Slope Bias Scaling?

With slope bias scaling, you must specify the slope and bias of a number. The real-world value of a slope bias scaled number can be represented by:

$$\text{real-world value} = (\text{slope} \times \text{integer}) + \text{bias}$$

$$\text{slope} = \text{slope adjustment factor} \times 2^{\text{fixed exponent}}$$

Compute Slope and Bias

Start with the endpoints that you want, signedness, and word length.

```
lower_bound = 999;
upper_bound = 1000;
is_signed = true;
word_length = 16;
```

To find the range of a `fi` object with a specified word length and signedness, use the `range` function.

```
[Q_min, Q_max] = range(fi([], is_signed, word_length, 0));
```

To find the slope and bias, solve the system of equations:

$$\text{lower_bound} = \text{slope} * \text{Q_min} + \text{bias}$$

$$\text{upper_bound} = \text{slope} * \text{Q_max} + \text{bias}$$

Rewrite these equations in matrix form.

$$\begin{bmatrix} \text{lower_bound} \\ \text{upper_bound} \end{bmatrix} = \begin{bmatrix} \text{Q_min} & 1 \\ \text{Q_max} & 1 \end{bmatrix} \begin{bmatrix} \text{slope} \\ \text{bias} \end{bmatrix}$$

Solve for the slope and bias.

```
A = double ([Q_min, 1; Q_max, 1]);  
b = double ([lower_bound; upper_bound]);  
x = A\b;  
format long g
```

To find the slope, or precision, call the first element of the slope-bias vector, *x*.

```
slope = x(1)  
  
slope =  
  
1.52590218966964e-05
```

To find the bias, call the second element of vector *x*.

```
bias = x(2)  
  
bias =  
  
999.500007629511
```

Create a `numeric_type` object with slope bias scaling.

```
T = numeric_type(is_signed, word_length, slope, bias)  
  
T =
```

```
DataTypeMode: Fixed-point: slope and bias scaling  
Signedness: Signed  
WordLength: 16  
Slope: 1.5259021896696368e-5  
Bias: 999.500007629511
```

Create a `fi` object with `numeric_type` *T*.

```
a = fi(999.255, T)  
  
a =  
  
999.254993514916
```

```
DataTypeMode: Fixed-point: slope and bias scaling  
Signedness: Signed
```



```
WordLength: 16
Slope: 1.5259021896696368e-5
Bias: 999.500007629511
```

Verify that the `fi` object that you created has the correct specifications by finding the range of `a`.

```
range(a)
```

```
ans =
```

```
999          1000
```

```
DataTypeMode: Fixed-point: slope and bias scaling
Signedness: Signed
WordLength: 16
Slope: 1.5259021896696368e-5
Bias: 999.500007629511
```

Precision and Range

In this section...


“Range” on page 1-8

“Precision” on page 1-9

Note: You must pay attention to the precision and range of the fixed-point data types and scalings you choose in order to know whether rounding methods will be invoked or if overflows or underflows will occur.

Range


The range is the span of numbers that a fixed-point data type and scaling can represent. The range of representable numbers for a two's complement fixed-point number of word length wl , scaling S and bias B is illustrated below:

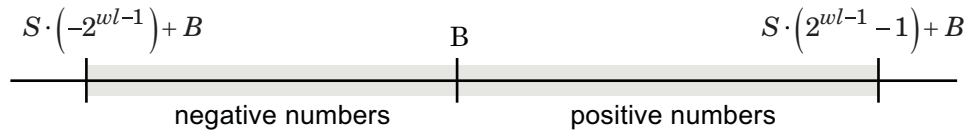

For both signed and unsigned fixed-point numbers of any data type, the number of different bit patterns is 2^{wl} .

For example, in two's complement, negative numbers must be represented as well as zero, so the maximum value is $2^{wl-1} - 1$. Because there is only one representation for zero, there are an unequal number of positive and negative numbers. This means there is a representation for -2^{wl-1} but not for 2^{wl-1} :

For slope = 1 and bias = 0:

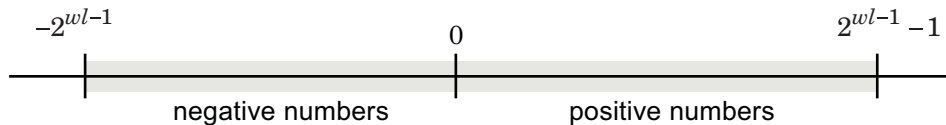

Overflow Handling

Because a fixed-point data type represents numbers within a finite range, overflows and underflows can occur if the result of an operation is larger or smaller than the numbers in that range.

Fixed-Point Designer software allows you to either *saturate* or *wrap* overflows. Saturation represents positive overflows as the largest positive number in the range being used, and negative overflows as the largest negative number in the range being used. Wrapping uses modulo arithmetic to cast an overflow back into the representable range of the data type.

When you create a `fi` object, any overflows are saturated. The `OverflowAction` property of the default `fi` object is `saturate`. You can log overflows and underflows by setting the `LoggingMode` property of the `fi` object to `on`. Refer to “LoggingMode” for more information.

Precision

The precision of a fixed-point number is the difference between successive values representable by its data type and scaling, which is equal to the value of its least significant bit. The value of the least significant bit, and therefore the precision of the number, is determined by the number of fractional bits. A fixed-point value can be represented to within half of the precision of its data type and scaling.

For example, a fixed-point representation with four bits to the right of the binary point has a precision of 2^{-4} or 0.0625, which is the value of its least significant bit. Any number within the range of this data type and scaling can be represented to within $(2^{-4})/2$ or 0.03125, which is half the precision. This is an example of representing a number with finite precision.

Rounding Methods

When you represent numbers with finite precision, not every number in the available range can be represented exactly. If a number cannot be represented exactly by the specified data type and scaling, a rounding method is used to cast the value to a representable number. Although precision is always lost in the rounding operation, the cost of the operation and the amount of bias that is introduced depends on the rounding method itself. To provide you with greater flexibility in the trade-off between cost and bias, Fixed-Point Designer software currently supports the following rounding methods:

- **Ceiling** rounds to the closest representable number in the direction of positive infinity.
- **Convergent** rounds to the closest representable number. In the case of a tie, **convergent** rounds to the nearest even number. This is the least biased rounding method provided by the toolbox.
- **fix** rounds to the closest representable number in the direction of zero.
- **Floor**, which is equivalent to two's complement truncation, rounds to the closest representable number in the direction of negative infinity.
- **Nearest** rounds to the closest representable number. In the case of a tie, **nearest** rounds to the closest representable number in the direction of positive infinity. This rounding method is the default for **fi** object creation and **fi** arithmetic.
- **Round** rounds to the closest representable number. In the case of a tie, the **round** method rounds:
 - Positive numbers to the closest representable number in the direction of positive infinity.
 - Negative numbers to the closest representable number in the direction of negative infinity.

Choosing a Rounding Method

Each rounding method has a set of inherent properties. Depending on the requirements of your design, these properties could make the rounding method more or less desirable to you. By knowing the requirements of your design and understanding the properties of each rounding method, you can determine which is the best fit for your needs. The most important properties to consider are:

- **Cost** — Independent of the hardware being used, how much processing expense does the rounding method require?
 - **Low** — The method requires few processing cycles.
 - **Moderate** — The method requires a moderate number of processing cycles.
 - **High** — The method requires more processing cycles.

Note: The cost estimates provided here are hardware independent. Some processors have rounding modes built-in, so consider carefully the hardware you are using before calculating the true cost of each rounding mode.

- Bias — What is the expected value of the rounded values minus the original values: $E(\hat{\theta} - \theta)$?
 - $E(\hat{\theta} - \theta) < 0$ — The rounding method introduces a negative bias.
 - $E(\hat{\theta} - \theta) = 0$ — The rounding method is unbiased.
 - $E(\hat{\theta} - \theta) > 0$ — The rounding method introduces a positive bias.
- Possibility of Overflow — Does the rounding method introduce the possibility of overflow?
 - Yes — The rounded values may exceed the minimum or maximum representable value.
 - No — The rounded values will never exceed the minimum or maximum representable value.

The following table shows a comparison of the different rounding methods available in the Fixed-Point Designer product.

Fixed-Point Designer Rounding Mode	Cost	Bias	Possibility of Overflow
Ceiling	Low	Large positive	Yes
Convergent	High	Unbiased	Yes
Zero	Low	<ul style="list-style-type: none"> • Large positive for negative samples • Unbiased for samples with evenly distributed positive and negative values • Large negative for positive samples 	No
Floor	Low	Large negative	No
Nearest	Moderate	Small positive	Yes
Round	High	<ul style="list-style-type: none"> • Small negative for negative samples • Unbiased for samples with evenly distributed positive and negative values • Small positive for positive samples 	Yes
Simplest (Simulink® only)	Low	Depends on the operation	No

Arithmetic Operations

In this section...

“Modulo Arithmetic” on page 1-13

“Two's Complement” on page 1-14

“Addition and Subtraction” on page 1-15

“Multiplication” on page 1-16


“Casts” on page 1-22

Note: These sections will help you understand what data type and scaling choices result in overflows or a loss of precision.

Modulo Arithmetic

Binary math is based on modulo arithmetic. Modulo arithmetic uses only a finite set of numbers, wrapping the results of any calculations that fall outside the given set back into the set.

For example, the common everyday clock uses modulo 12 arithmetic. Numbers in this system can only be 1 through 12. Therefore, in the “clock” system, 9 plus 9 equals 6. This can be more easily visualized as a number circle:

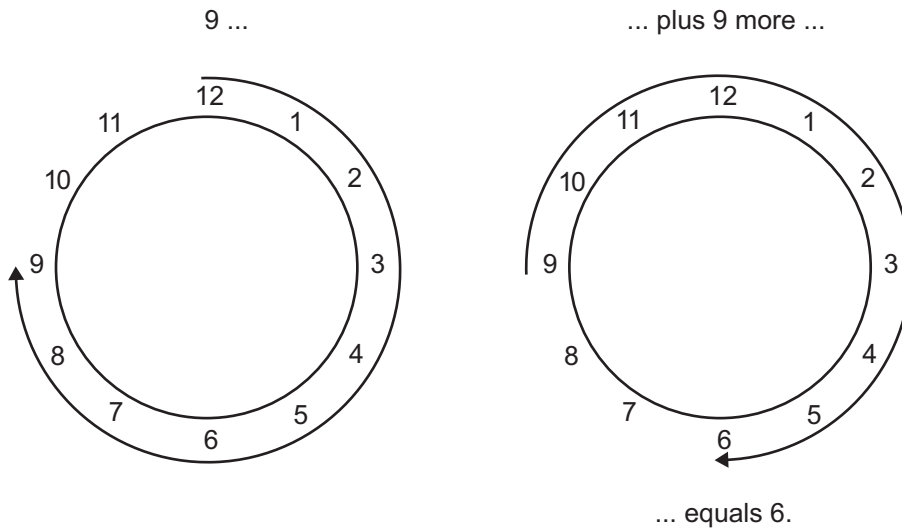

Similarly, binary math can only use the numbers 0 and 1, and any arithmetic results that fall outside this range are wrapped “around the circle” to either 0 or 1.

Two's Complement

Two's complement is a way to interpret a binary number. In two's complement, positive numbers always start with a 0 and negative numbers always start with a 1. If the leading bit of a two's complement number is 0, the value is obtained by calculating the standard binary value of the number. If the leading bit of a two's complement number is 1, the value is obtained by assuming that the leftmost bit is negative, and then calculating the binary value of the number. For example,

$$01 = (0 + 2^0) = 1$$

$$11 = \left((-2^1) + (2^0) \right) = (-2 + 1) = -1$$

To compute the negative of a binary number using two's complement,

- 1 Take the one's complement, or “flip the bits.”
- 2 Add a $2^{(-FL)}$ using binary math, where FL is the fraction length.
- 3 Discard any bits carried beyond the original word length.

For example, consider taking the negative of 11010 (-6). First, take the one's complement of the number, or flip the bits:

$$11010 \rightarrow 00101$$

Next, add a 1, wrapping all numbers to 0 or 1:

$$\begin{array}{r} 00101 \\ +1 \\ \hline 00110 \end{array} \quad (6)$$

Addition and Subtraction

The addition of fixed-point numbers requires that the binary points of the addends be aligned. The addition is then performed using binary arithmetic so that no number other than 0 or 1 is used.

For example, consider the addition of 010010.1 (18.5) with 0110.110 (6.75):

$$\begin{array}{r} 010010.1 \quad (18.5) \\ +0110.110 \quad (6.75) \\ \hline 011001.010 \quad (25.25) \end{array}$$

Fixed-point subtraction is equivalent to adding while using the two's complement value for any negative values. In subtraction, the addends must be sign-extended to match each other's length. For example, consider subtracting 0110.110 (6.75) from 010010.1 (18.5):

$$\begin{array}{r} 010010.100 \quad (18.5) \\ -0110.110 \quad (6.75) \\ \hline \end{array}$$


The default `fimath` has a value of 1 (true) for the `CastBeforeSum` property. This casts addends to the sum data type before addition. Therefore, no further shifting is necessary during the addition to line up the binary points.

If `CastBeforeSum` has a value of 0 (false), the addends are added with full precision maintained. After the addition the sum is then quantized.

Multiplication

The multiplication of two's complement fixed-point numbers is directly analogous to regular decimal multiplication, with the exception that the intermediate results must be sign-extended so that their left sides align before you add them together.

For example, consider the multiplication of 10.11 (-1.25) with 011 (3):

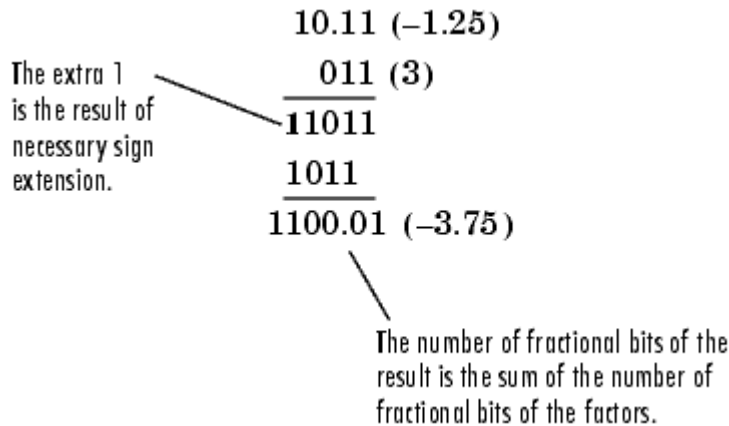


Multiplication Data Types

The following diagrams show the data types used for fixed-point multiplication using Fixed-Point Designer software. The diagrams illustrate the differences between the data types used for real-real, complex-real, and complex-complex multiplication.


Real-Real Multiplication

The following diagram shows the data types used by the toolbox in the multiplication of two real numbers. The software returns the output of this operation in the product data type, which is governed by the `fimath` object `ProductMode` property.

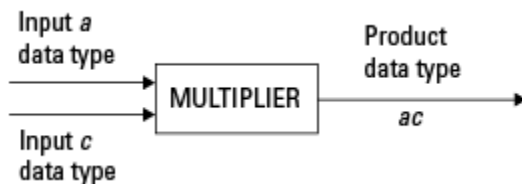


Real-Complex Multiplication

The following diagram shows the data types used by the toolbox in the multiplication of a real and a complex fixed-point number. Real-complex and complex-real multiplication are equivalent. The software returns the output of this operation in the product data type, which is governed by the `fimath` object `ProductMode` property:

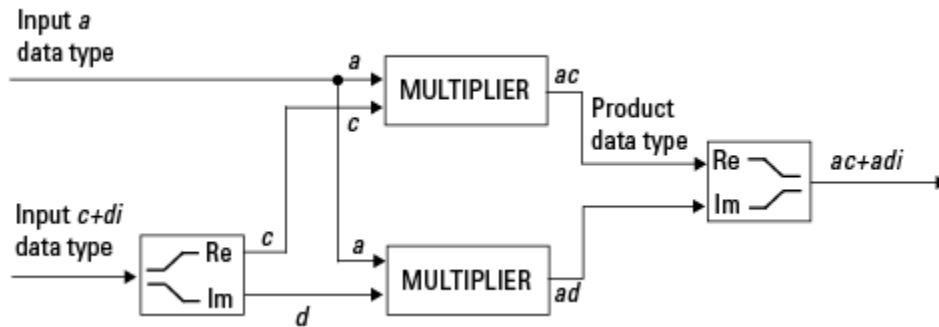

Complex-Complex Multiplication

The following diagram shows the multiplication of two complex fixed-point numbers. The software returns the output of this operation in the sum data type, which is governed by the `fimath` object `SumMode` property. The intermediate product data type is determined by the `fimath` object `ProductMode` property.

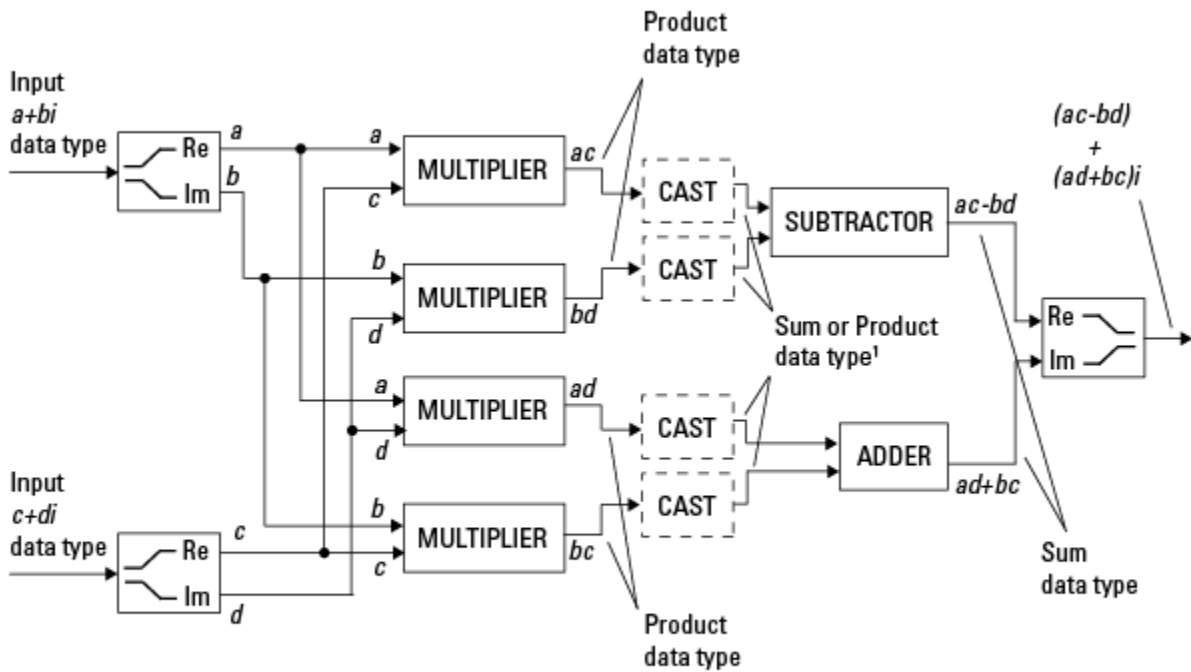

¹ Sum data type if CastBeforeSum is true,
Product data type if CastBeforeSum is false

When the `fimath` object `CastBeforeSum` property is `true`, the casts to the sum data type are present after the multipliers in the preceding diagram. In C code, this is equivalent to

```
acc=ac;
acc-=bd;
```

for the subtractor, and

```
acc=ad;
acc+=bc;
```

for the adder, where `acc` is the accumulator. When the `CastBeforeSum` property is `false`, the casts are not present, and the data remains in the product data type before the subtraction and addition operations.

Multiplication with fimath

In the following examples, let

```
F = fimath('ProductMode','FullPrecision',...
'SumMode','FullPrecision');
T1 = numerictype('WordLength',24,'FractionLength',20);
T2 = numerictype('WordLength',16,'FractionLength',10);
```

Real*Real

Notice that the word length and fraction length of the result z are equal to the sum of the word lengths and fraction lengths, respectively, of the multiplicands. This is because the `fimath` `SumMode` and `ProductMode` properties are set to `FullPrecision`:

```
P = fipref;
P.FimathDisplay = 'none';
x = fi(5, T1, F)
```

x =

5

```
      DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
      WordLength: 24
      FractionLength: 20
```

```
y = fi(10, T2, F)
```

y =

10

```
      DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
      WordLength: 16
      FractionLength: 10
```

```
z = x*y
```

z =

50

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 40
FractionLength: 30
```

Real*Complex

Notice that the word length and fraction length of the result z are equal to the sum of the word lengths and fraction lengths, respectively, of the multiplicands. This is because the `fimath SumMode` and `ProductMode` properties are set to `FullPrecision`:

```
x = fi(5,T1,F)
```

```
x =
```

```
5
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 24
FractionLength: 20
```

```
y = fi(10+2i,T2,F)
```

```
y =
```

```
10.0000 + 2.0000i
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 16
FractionLength: 10
```

```
z = x*y
```

```
z =
```

```
50.0000 +10.0000i
```

```

        DataTypeMode: Fixed-point: binary point scaling
          Signedness: Signed
          WordLength: 40
        FractionLength: 30

```

Complex*Complex

Complex-complex multiplication involves an addition as well as multiplication. As a result, the word length of the full-precision result has one more bit than the sum of the word lengths of the multiplicands:

```
x = fi(5+6i,T1,F)
```

```
x =
```

```
5.0000 + 6.0000i
```

```

        DataTypeMode: Fixed-point: binary point scaling
          Signedness: Signed
          WordLength: 24
        FractionLength: 20

```

```
y = fi(10+2i,T2,F)
```

```
y =
```

```
10.0000 + 2.0000i
```

```

        DataTypeMode: Fixed-point: binary point scaling
          Signedness: Signed
          WordLength: 16
        FractionLength: 10

```

```
z = x*y
```

```
z =
```

```
38.0000 +70.0000i
```

```

        DataTypeMode: Fixed-point: binary point scaling
          Signedness: Signed
          WordLength: 41

```

FractionLength: 30


Casts

The `fi` object allows you to specify the data type and scaling of intermediate sums and products with the `SumMode` and `ProductMode` properties. It is important to keep in mind the ramifications of each cast when you set the `SumMode` and `ProductMode` properties. Depending upon the data types you select, overflow and/or rounding might occur. The following two examples demonstrate cases where overflow and rounding can occur.

Note For more examples of casting, see “Cast `fi` Objects”.

Casting from a Shorter Data Type to a Longer Data Type

Consider the cast of a nonzero number, represented by a 4-bit data type with two fractional bits, to an 8-bit data type with seven fractional bits:

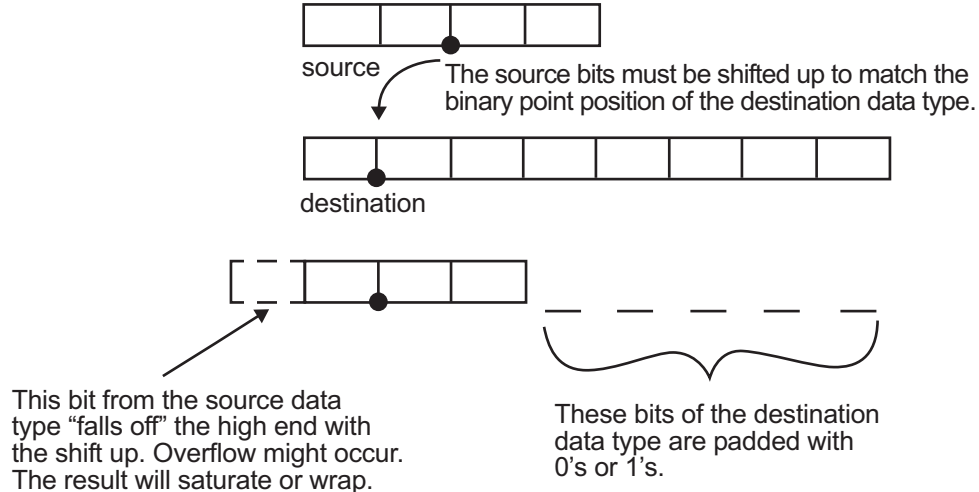


As the diagram shows, the source bits are shifted up so that the binary point matches the destination binary point position. The highest source bit does not fit, so overflow might occur and the result can saturate or wrap. The empty bits at the low end of the destination data type are padded with either 0's or 1's:

- If overflow does not occur, the empty bits are padded with 0's.
- If wrapping occurs, the empty bits are padded with 0's.
- If saturation occurs,
 - The empty bits of a positive number are padded with 1's.
 - The empty bits of a negative number are padded with 0's.

You can see that even with a cast from a shorter data type to a longer data type, overflow can still occur. This can happen when the integer length of the source data type (in this case two) is longer than the integer length of the destination data type (in this case one). Similarly, rounding might be necessary even when casting from a shorter data type to a longer data type, if the destination data type and scaling has fewer fractional bits than the source.

Casting from a Longer Data Type to a Shorter Data Type

Consider the cast of a nonzero number, represented by an 8-bit data type with seven fractional bits, to a 4-bit data type with two fractional bits:

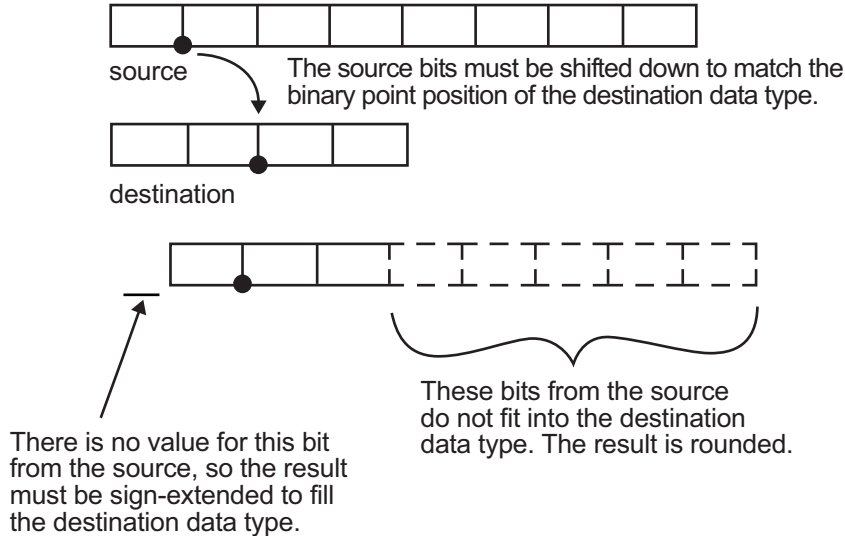

As the diagram shows, the source bits are shifted down so that the binary point matches the destination binary point position. There is no value for the highest bit from the source, so sign extension is used to fill the integer portion of the destination data type.

The bottom five bits of the source do not fit into the fraction length of the destination. Therefore, precision can be lost as the result is rounded.

In this case, even though the cast is from a longer data type to a shorter data type, all the integer bits are maintained. Conversely, full precision can be maintained even if you cast to a shorter data type, as long as the fraction length of the destination data type is the same length or longer than the fraction length of the source data type. In that case, however, bits are lost from the high end of the result and overflow can occur.

The worst case occurs when both the integer length and the fraction length of the destination data type are shorter than those of the source data type and scaling. In that case, both overflow and a loss of precision can occur.

fi Objects and C Integer Data Types

In this section...

“Integer Data Types” on page 1-25

“Unary Conversions” on page 1-27

“Binary Conversions” on page 1-28

“Overflow Handling” on page 1-30

Note: The sections in this topic compare the `fi` object with fixed-point data types and operations in C. In these sections, the information on ANSI[®] C is adapted from Samuel P. Harbison and Guy L. Steele Jr., *C: A Reference Manual*, 3rd ed., Prentice Hall, 1991.

Integer Data Types

This section compares the numerical range of `fi` integer data types to the minimum numerical range of C integer data types, assuming a “Two's Complement” on page 1-14 representation.

C Integer Data Types

Many C compilers support a two's complement representation of signed integer data types. The following table shows the minimum ranges of C integer data types using a two's complement representation. The integer ranges can be larger than or equal to the ranges shown, but cannot be smaller. The range of a `long` must be larger than or equal to the range of an `int`, which must be larger than or equal to the range of a `short`.

In the two's complement representation, a signed integer with n bits has a range from -2^{n-1} to $2^{n-1} - 1$, inclusive. An unsigned integer with n bits has a range from 0 to $2^n - 1$, inclusive. The negative side of the range has one more value than the positive side, and zero is represented uniquely.

Integer Type	Minimum	Maximum
signed char	-128	127
unsigned char	0	255
short int	-32,768	32,767
unsigned short	0	65,535
int	-32,768	32,767
unsigned int	0	65,535
long int	-2,147,483,648	2,147,483,647
unsigned long	0	4,294,967,295

fi Integer Data Types

The following table lists the numerical ranges of the integer data types of the `fi` object, in particular those equivalent to the C integer data types. The ranges are large enough to accommodate the two's complement representation, which is the only signed binary encoding technique supported by Fixed-Point Designer software.

Constructor	Signed	Word Length	Fraction Length	Minimum	Maximum	Closest ANSI C Equivalent
<code>fi(x,1,n,0)</code>	Yes	n (2 to 65,535)	0	-2^{n-1}	$2^{n-1} - 1$	Not applicable
<code>fi(x,0,n,0)</code>	No	n (2 to 65,535)	0	0	$2^n - 1$	Not applicable
<code>fi(x,1,8,0)</code>	Yes	8	0	-128	127	signed char
<code>fi(x,0,8,0)</code>	No	8	0	0	255	unsigned char
<code>fi(x,1,16,0)</code>	Yes	16	0	-32,768	32,767	short int
<code>fi(x,0,16,0)</code>	No	16	0	0	65,535	unsigned short
<code>fi(x,1,32,0)</code>	Yes	32	0	-2,147,483,648	2,147,483,647	long int
<code>fi(x,0,32,0)</code>	No	32	0	0	4,294,967,295	unsigned long

Unary Conversions

Unary conversions dictate whether and how a single operand is converted before an operation is performed. This section discusses unary conversions in ANSI C and of `fi` objects.

ANSI C Usual Unary Conversions

Unary conversions in ANSI C are automatically applied to the operands of the unary `!`, `-`, `~`, and `*` operators, and of the binary `<<` and `>>` operators, according to the following table:

Original Operand Type	ANSI C Conversion
<code>char</code> or <code>short</code>	<code>int</code>
<code>unsigned char</code> or <code>unsigned short</code>	<code>int</code> or <code>unsigned int</code> ¹
<code>float</code>	<code>float</code>
Array of <code>T</code>	Pointer to <code>T</code>
Function returning <code>T</code>	Pointer to function returning <code>T</code>

¹If type `int` cannot represent all the values of the original data type without overflow, the converted type is `unsigned int`.

fi Usual Unary Conversions

The following table shows the `fi` unary conversions:

C Operator	fi Equivalent	fi Conversion
<code>!x</code>	<code>~x = not(x)</code>	Result is <code>logical</code> .
<code>~x</code>	<code>bitcmp(x)</code>	Result is same numeric type as operand.
<code>*x</code>	No equivalent	Not applicable
<code>x<<n</code>	<code>bitshift(x,n)</code> positive <code>n</code>	Result is same numeric type as operand. Round mode is always <code>floor</code> . Overflow mode is obeyed. 0-valued bits are shifted in on the right.
<code>x>>n</code>	<code>bitshift(x,-n)</code>	Result is same numeric type as operand. Round mode is always <code>floor</code> . Overflow mode is obeyed. 0-valued bits are shifted in on the left if the operand is unsigned or signed and positive. 1-valued bits are shifted in on the left if the operand is signed and negative.
<code>+x</code>	<code>+x</code>	Result is same numeric type as operand.
<code>-x</code>	<code>-x</code>	Result is same numeric type as operand. Overflow mode is obeyed. For example, overflow might occur when you negate an unsigned <code>fi</code> or the most negative value of a signed <code>fi</code> .

Binary Conversions

This section describes the conversions that occur when the operands of a binary operator are different data types.

ANSI C Usual Binary Conversions

In ANSI C, operands of a binary operator must be of the same type. If they are different, one is converted to the type of the other according to the first applicable conversion in the following table:

Type of One Operand	Type of Other Operand	ANSI C Conversion
<code>long double</code>	Any	<code>long double</code>
<code>double</code>	Any	<code>double</code>
<code>float</code>	Any	<code>float</code>

Type of One Operand	Type of Other Operand	ANSI C Conversion
unsigned long	Any	unsigned long
long	unsigned	long or unsigned long ¹
long	int	long
unsigned	int or unsigned	unsigned
int	int	int

¹Type long is only used if it can represent all values of type unsigned.

fi Usual Binary Conversions

When one of the operands of a binary operator (+, −, *, .*) is a `fi` object and the other is a MATLAB built-in numeric type, then the non-`fi` operand is converted to a `fi` object before the operation is performed, according to the following table:

Type of One Operand	Type of Other Operand	Properties of Other Operand After Conversion to a fi Object
<code>fi</code>	double or single	<ul style="list-style-type: none"> • Signed = same as the original <code>fi</code> operand • WordLength = same as the original <code>fi</code> operand • FractionLength = set to best precision possible
<code>fi</code>	<code>int8</code>	<ul style="list-style-type: none"> • Signed = 1 • WordLength = 8 • FractionLength = 0
<code>fi</code>	<code>uint8</code>	<ul style="list-style-type: none"> • Signed = 0 • WordLength = 8 • FractionLength = 0
<code>fi</code>	<code>int16</code>	<ul style="list-style-type: none"> • Signed = 1 • WordLength = 16 • FractionLength = 0
<code>fi</code>	<code>uint16</code>	<ul style="list-style-type: none"> • Signed = 0 • WordLength = 16 • FractionLength = 0
<code>fi</code>	<code>int32</code>	<ul style="list-style-type: none"> • Signed = 1

Type of One Operand	Type of Other Operand	Properties of Other Operand After Conversion to a fi Object
		<ul style="list-style-type: none"> • WordLength = 32 • FractionLength = 0
fi	uint32	<ul style="list-style-type: none"> • Signed = 0 • WordLength = 32 • FractionLength = 0
fi	int64	<ul style="list-style-type: none"> • Signed = 1 • WordLength = 64 • FractionLength = 0
fi	uint64	<ul style="list-style-type: none"> • Signed = 0 • WordLength = 64 • FractionLength = 0

Overflow Handling

The following sections compare how ANSI C and Fixed-Point Designer software handle overflows.

ANSI C Overflow Handling

In ANSI C, the result of signed integer operations is whatever value is produced by the machine instruction used to implement the operation. Therefore, ANSI C has no rules for handling signed integer overflow.

The results of unsigned integer overflows wrap in ANSI C.

fi Overflow Handling

Addition and multiplication with `fi` objects yield results that can be exactly represented by a `fi` object, up to word lengths of 65,535 bits or the available memory on your machine. This is not true of division, however, because many ratios result in infinite binary expressions. You can perform division with `fi` objects using the `divide` function, which requires you to explicitly specify the numeric type of the result.

The conditions under which a `fi` object overflows and the results then produced are determined by the associated `fimath` object. You can specify certain overflow

characteristics separately for sums (including differences) and products. Refer to the following table:

fimath Object Properties Related to Overflow Handling	Property Value	Description
OverflowAction	'saturate'	Overflows are saturated to the maximum or minimum value in the range.
	'wrap'	Overflows wrap using modulo arithmetic if unsigned, two's complement wrap if signed.
ProductMode	'FullPrecision'	<p>Full-precision results are kept. Overflow does not occur. An error is thrown if the resulting word length is greater than <code>MaxProductWordLength</code>.</p> <p>The rules for computing the resulting product word and fraction lengths are given in “fimath Object Properties” in the Property Reference.</p>
	'KeepLSB'	<p>The least significant bits of the product are kept. Full precision is kept, but overflow is possible. This behavior models the C language integer operations.</p> <p>The <code>ProductWordLength</code> property determines the resulting word length. If <code>ProductWordLength</code> is greater than is necessary for the full-precision product, then the result is stored in the least significant bits. If <code>ProductWordLength</code> is less than is necessary for the full-precision product, then overflow occurs.</p> <p>The rule for computing the resulting product fraction length is given in “fimath Object Properties” in the Property Reference.</p>
	'KeepMSB'	The most significant bits of the product are kept. Overflow is prevented, but precision may be lost.

fimath Object Properties Related to Overflow Handling	Property Value	Description
		<p>The ProductWordLength property determines the resulting word length. If ProductWordLength is greater than is necessary for the full-precision product, then the result is stored in the most significant bits. If ProductWordLength is less than is necessary for the full-precision product, then rounding occurs.</p> <p>The rule for computing the resulting product fraction length is given in “fimath Object Properties” in the Property Reference.</p>
	'SpecifyPrecision'	You can specify both the word length and the fraction length of the resulting product.
ProductWordLength	Positive integer	The word length of product results when ProductMode is 'KeepLSB', 'KeepMSB', or 'SpecifyPrecision'.
MaxProductWordLength	Positive integer	The maximum product word length allowed when ProductMode is 'FullPrecision'. The default is 65,535 bits. This property can help ensure that your simulation does not exceed your hardware requirements.
ProductFractionLength	Integer	The fraction length of product results when ProductMode is 'Specify Precision'.
SumMode	'FullPrecision'	<p>Full-precision results are kept. Overflow does not occur. An error is thrown if the resulting word length is greater than MaxSumWordLength.</p> <p>The rules for computing the resulting sum word and fraction lengths are given in “fimath Object Properties” in the Property Reference.</p>

fimath Object Properties Related to Overflow Handling	Property Value	Description
	'KeepLSB'	<p>The least significant bits of the sum are kept. Full precision is kept, but overflow is possible. This behavior models the C language integer operations.</p> <p>The <code>SumWordLength</code> property determines the resulting word length. If <code>SumWordLength</code> is greater than is necessary for the full-precision sum, then the result is stored in the least significant bits. If <code>SumWordLength</code> is less than is necessary for the full-precision sum, then overflow occurs.</p> <p>The rule for computing the resulting sum fraction length is given in “fimath Object Properties” in the Property Reference.</p>
	'KeepMSB'	<p>The most significant bits of the sum are kept. Overflow is prevented, but precision may be lost.</p> <p>The <code>SumWordLength</code> property determines the resulting word length. If <code>SumWordLength</code> is greater than is necessary for the full-precision sum, then the result is stored in the most significant bits. If <code>SumWordLength</code> is less than is necessary for the full-precision sum, then rounding occurs.</p> <p>The rule for computing the resulting sum fraction length is given in “fimath Object Properties” in the Property Reference.</p>
	'SpecifyPrecision'	You can specify both the word length and the fraction length of the resulting sum.
SumWordLength	Positive integer	The word length of sum results when <code>SumMode</code> is 'KeepLSB', 'KeepMSB', or 'SpecifyPrecision'.

fimath Object Properties Related to Overflow Handling	Property Value	Description
MaxSumWordLength	Positive integer	The maximum sum word length allowed when <code>SumMode</code> is 'FullPrecision'. The default is 65,535 bits. This property can help ensure that your simulation does not exceed your hardware requirements.
SumFractionLength	Integer	The fraction length of sum results when <code>SumMode</code> is 'SpecifyPrecision'.

Working with fi Objects

- “Ways to Construct fi Objects” on page 2-2
- “Cast fi Objects” on page 2-12
- “fi Object Properties” on page 2-18
- “fi Object Functions” on page 2-24

Ways to Construct fi Objects

In this section...
“Types of fi Constructors” on page 2-2
“Examples of Constructing fi Objects” on page 2-3

Types of fi Constructors

You can create `fi` objects using Fixed-Point Designer software in any of the following ways:

- You can use the `fi` constructor function to create a `fi` object.
- You can use the `sfi` constructor function to create a new signed `fi` object.
- You can use the `ufi` constructor function to create a new unsigned `fi` object.
- You can use any of the `fi` constructor functions to copy an existing `fi` object.

To get started, to create a `fi` object with the default data type and a value of 0:

```
a = fi(0)
```

```
a =
```

```
0
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 16
FractionLength: 15
```

This constructor syntax creates a signed `fi` object with a value of 0, word length of 16 bits, and fraction length of 15 bits. Because you did not specify any `fimath` object properties in the `fi` constructor, the resulting `fi` object `a` has no local `fimath`.

To see all of the `fi`, `sfi`, and `ufi` constructor syntaxes, refer to the respective reference pages.

For information on the display format of `fi` objects, refer to “View Fixed-Point Data”.

Examples of Constructing fi Objects

The following examples show you several different ways to construct `fi` objects. For other, more basic examples of constructing `fi` objects, see the Examples section of the following constructor function reference pages:

- `fi`
- `sfi`
- `ufi`

Note: The `fi` constructor creates the `fi` object using a `RoundingMethod` of `Nearest` and an `OverflowAction` of `Saturate`. If you construct a `fi` from floating-point values, the default `RoundingMethod` and `OverflowAction` property settings are not used.

Constructing a fi Object with Property Name/Property Value Pairs

You can use property name/property value pairs to set `fi` and `fimath` object properties when you create the `fi` object:

```
a = fi(pi, 'RoundingMethod', 'Floor', 'OverflowAction', 'Wrap')
```

```
a =
```

```
3.1415
```

```

    DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
        WordLength: 16
    FractionLength: 13

    RoundingMethod: Floor
    OverflowAction: Wrap
      ProductMode: FullPrecision
        SumMode: FullPrecision

```

You do not have to specify every `fimath` object property in the `fi` constructor. The `fi` object uses default values for all unspecified `fimath` object properties.

- If you specify at least one `fimath` object property in the `fi` constructor, the `fi` object has a local `fimath` object. The `fi` object uses default values for the remaining unspecified `fimath` object properties.

- If you do not specify any `fi` object properties in the `fi` object constructor, the `fi` object uses default `fi` values.

Constructing a fi Object Using a numericType Object

You can use a `numericType` object to define a `fi` object:

```
T = numericType
```

```
T =
```

```
        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 16
        FractionLength: 15
```

```
a = fi(pi, T)
```

```
a =
```

```
1.0000
```

```
        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 16
        FractionLength: 15
```

You can also use a `fi` object with a `fi` object to define a `fi` object:

```
F = fimath('RoundingMethod', 'Nearest', ...
'OverflowAction', 'Saturate', ...
'ProductMode', 'FullPrecision', ...
'SumMode', 'FullPrecision')
```

```
F =
```

```
        RoundingMethod: Nearest
        OverflowAction: Saturate
        ProductMode: FullPrecision
        SumMode: FullPrecision
```

```
a = fi(pi, T, F)
```

```
a =
```



```
1.0000
```

```

    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 16
    FractionLength: 15

    RoundingMethod: Nearest
    OverflowAction: Saturate
    ProductMode: FullPrecision
    SumMode: FullPrecision

```

Note The syntax `a = fi(pi,T,F)` is equivalent to `a = fi(pi,F,T)`. You can use both statements to define a `fi` object using a `fimath` object and a `numericType` object.

Constructing a fi Object Using a fimath Object

You can create a `fi` object using a specific `fimath` object. When you do so, a local `fimath` object is assigned to the `fi` object you create. If you do not specify any `numericType` object properties, the word length of the `fi` object defaults to 16 bits. The fraction length is determined by best precision scaling:

```
F = fimath('RoundingMethod', 'Nearest', ...
'OverflowAction', 'Saturate', ...
'ProductMode', 'FullPrecision', ...
'SumMode', 'FullPrecision')
```

```
F =
```

```

    RoundingMethod: Nearest
    OverflowAction: Saturate
    ProductMode: FullPrecision
    SumMode: FullPrecision

```

```
F.OverflowAction = 'Wrap'
```

```
F =
```

```

    RoundingMethod: Nearest

```

```
        OverflowAction: Wrap
        ProductMode: FullPrecision
        SumMode: FullPrecision

a = fi(pi, F)

a =

    3.1416

        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 16
        FractionLength: 13

        RoundingMethod: Nearest
        OverflowAction: Wrap
        ProductMode: FullPrecision
        SumMode: FullPrecision
```

You can also create **fi** objects using a **fimath** object while specifying various numeric type properties at creation time:

```
b = fi(pi, 0, F)

b =

    3.1416

        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Unsigned
        WordLength: 16
        FractionLength: 14

        RoundingMethod: Nearest
        OverflowAction: Wrap
        ProductMode: FullPrecision
        SumMode: FullPrecision

c = fi(pi, 0, 8, F)

c =

    3.1406
```

```

        DataTypeMode: Fixed-point: binary point scaling
          Signedness: Unsigned
            WordLength: 8
      FractionLength: 6

        RoundingMethod: Nearest
      OverflowAction: Wrap
        ProductMode: FullPrecision
          SumMode: FullPrecision

d = fi(pi, 0, 8, 6, F)

d =

    3.1406

        DataTypeMode: Fixed-point: binary point scaling
          Signedness: Unsigned
            WordLength: 8
      FractionLength: 6


        RoundingMethod: Nearest
      OverflowAction: wrap
        ProductMode: FullPrecision
          SumMode: FullPrecision

```


Building fi Object Constructors in a GUI

When you are working with files in MATLAB, you can build your `fi` object constructors using the **Insert fi Constructor** dialog box. After specifying the value and properties of the `fi` object in the dialog box, you can insert the prepopulated `fi` object constructor string at a specific location in your file.

For example, to create a signed `fi` object with a value of `pi`, a word length of 16 bits and a fraction length of 13 bits:

- 1 On the **Home** tab, in the **File** section, click **New > Script** to open the MATLAB Editor.
- 2 On the **Editor** tab, in the **Edit** section, click  in the **Insert** button group. Click **Insert fi...** to open the **Insert fi Constructor** dialog box.
- 3 Use the edit boxes and drop-down menus to specify the following properties of the `fi` object:

- **Value** = pi
- **Data type mode** = Fixed-point: binary point scaling
- **Signedness** = Signed
- **Word length** = 16
- **Fraction length** = 13

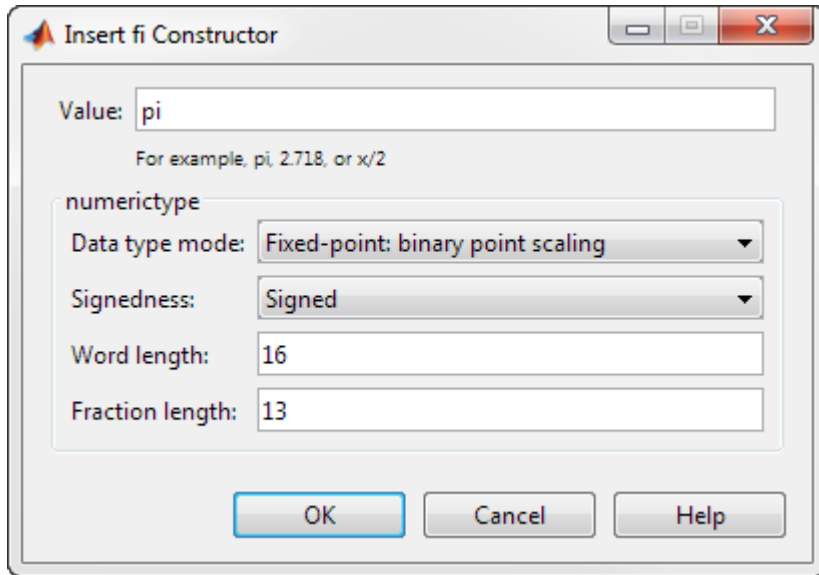

- 4 To insert the `fi` object constructor string in your file, place your cursor at the desired location in the file, and click **OK** on the **Insert fi Constructor** dialog box. Clicking **OK** closes the **Insert fi Constructor** dialog box and automatically populates the `fi` object constructor string in your file:

```
7 fi(pi, 1, 16, 13)
```

Determining Property Precedence

The value of a property is taken from the last time it is set. For example, create a `numerictype` object with a value of `true` for the `Signed` property and a fraction length of 14:

```
T = numerictype('Signed', true, 'FractionLength', 14)
```

```
T =
```

```
    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 16
    FractionLength: 14
```

Now, create the following `fi` object in which you specify the `numerictype` property *after* the `Signed` property, so that the resulting `fi` object is signed:

```
a = fi(pi, 'Signed', false, 'numerictype', T)
```

```
a =
```

```
1.9999
```

```
    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 16
    FractionLength: 14
```

Contrast the `fi` object in this code sample with the `fi` object in the following code sample. The `numerictype` property in the following code sample is specified *before* the `Signed` property, so the resulting `fi` object is unsigned:

```
b = fi(pi, 'numerictype', T, 'Signed', false)
```

```
b =
```

```
3.1416
```

```
    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Unsigned
    WordLength: 16
    FractionLength: 14
```

Copying a fi Object

To copy a `fi` object, simply use assignment:

```
a = fi(pi)
```

```
a =
```

3.1416

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 16
FractionLength: 13
```

b = a

b =

3.1416

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 16
FractionLength: 13
```

Creating fi Objects For Use in a Types Table

You can write a reusable MATLAB algorithm by keeping the data types of the algorithmic variables in a separate types table. For example,

```
function T = mytypes(dt)
    switch dt
        case 'double'
            T.b = double([]);
            T.x = double([]);
            T.y = double([]);

        case 'fixed16'
            T.b = fi([],1,16,15);
            T.x = fi([],1,16,15);
            T.y = fi([],1,16,14);
    end
end
```

Cast the variables in the algorithm to the data types in the types table as described in “Manual Fixed-Point Conversion Best Practices”.

```
function [y,z]=myfilter(b,x,z,T)
    y = zeros(size(x),'like',T.y);
    for n=1:length(x)
        z(:) = [x(n); z(1:end-1)];
        y(n) = b * z;
```

```
end  
end
```

In a separate test file, set up input data to feed into your algorithm, and specify the data types of the inputs.

```
% Test inputs  
b = fir1(11,0.25);  
t = linspace(0,10*pi,256)';  
x = sin((pi/16)*t.^2);  
% Linear chirp  
  
% Cast inputs  
T=mytypes('fixed16');  
b=cast(b,'like',T.b);  
x=cast(x,'like',T.x);  
z=zeros(size(b),'like',T.x);  
  
% Run  
[y,z] = myfilter(b,x,z,T);
```

Cast fi Objects

In this section...

“Overwriting by Assignment” on page 2-12
--

“Ways to Cast with MATLAB Software” on page 2-12
--

Overwriting by Assignment

Because MATLAB software does not have type declarations, an assignment like `A = B` replaces the type and content of `A` with the type and content of `B`. If `A` does not exist at the time of the assignment, MATLAB creates the variable `A` and assigns it the same type and value as `B`. Such assignment happens with all types in MATLAB—objects and built-in types alike—including `fi`, `double`, `single`, `int8`, `uint8`, `int16`, etc.

For example, the following code overwrites the value and `int8` type of `A` with the value and `int16` type of `B`:

```
A = int8(0);  
B = int16(32767);  
A = B
```

```
A =  
  
    32767
```

```
class(A)
```

```
ans =
```

```
int16
```

Ways to Cast with MATLAB Software

You may find it useful to cast data into another type—for example, when you are casting data from an accumulator to memory. There are several ways to cast data in MATLAB. The following sections provide examples of three different methods:

- Casting by Subscripted Assignment
- Casting by Conversion Function

- Casting with the Fixed-Point Designer `reinterpretpcast` Function
- Casting with the `cast` Function

Casting by Subscripted Assignment

The following subscripted assignment statement retains the type of A and saturates the value of B to an `int8`:

```
A = int8(0);
B = int16(32767);
A(:) = B
```

```
A =
```

```
    127
```

```
class(A)
```

```
ans =
```

```
int8
```

The same is true for `fi` objects:

```
fipref('NumericTypeDisplay', 'short');
A = fi(0, 1, 8, 0);
B = fi(32767, 1, 16, 0);
A(:) = B
```

```
A =
```

```
    127
      s8,0
```

Note For more information on subscripted assignments, see the `subsasgn` function.

Casting by Conversion Function

You can convert from one data type to another by using a conversion function. In this example, A does not have to be predefined because it is overwritten.

```
B = int16(32767);
```

```
A = int8(B)
```

```
A =
```

```
    127
```

```
class(A)
```

```
ans =
```

```
int8
```

The same is true for `fi` objects:

```
B = fi(32767, 1, 16, 0)
```

```
A = fi(B, 1, 8, 0)
```

```
B =
```

```
    32767  
    s16,0
```

```
A =
```

```
    127  
    s8,0
```

Using a `numericType` Object in the `fi` Conversion Function

Often a specific `numericType` is used in many places, and it is convenient to predefine `numericType` objects for use in the conversion functions. Predefining these objects is a good practice because it also puts the data type specification in one place.

```
T8 = numericType(1,8,0)
```

```
T8 =
```

```
    DataTypeMode: Fixed-point: binary point scaling  
    Signedness: Signed  
    WordLength: 8  
    FractionLength: 0
```

```
T16 = numericType(1,16,0)
```

```
T16 =
```

```
    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 16
    FractionLength: 0
```

```
B = fi(32767,T16)
```

```
B =
```

```
    32767
    s16,0
```

```
A = fi(B, T8)
```

```
A =
```

```
    127
    s8,0
```

Casting with the reinterpretcast Function

You can convert fixed-point and built-in data types without changing the underlying data. The Fixed-Point Designer `reinterpretcast` function performs this type of conversion.

In the following example, `B` is an unsigned `fi` object with a word length of 8 bits and a fraction length of 5 bits. The `reinterpretcast` function converts `B` into a signed `fi` object `A` with a word length of 8 bits and a fraction length of 1 bit. The real-world values of `A` and `B` differ, but their binary representations are the same.

```
B = fi([pi/4 1 pi/2 4], 0, 8, 5)
T = numerictype(1, 8, 1);
A = reinterpretcast(B, T)
```

```
B =
```

```
    0.7813    1.0000    1.5625    4.0000
```

```
    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Unsigned
    WordLength: 8
```

```
        FractionLength: 5
A =
    12.5000    16.0000    25.0000   -64.0000
        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 8
        FractionLength: 1
```

To verify that the underlying data has not changed, compare the binary representations of A and B:

```
binary_B = bin(B)
binary_A = bin(A)

binary_A =
00011001    00100000    00110010    10000000

binary_B =
00011001    00100000    00110010    10000000
```

Casting with the cast Function

Using the `cast` function, you can convert the value of a variable to the same numeric type, complexity, and `fimath` as another variable.

In the following example, `a` is cast to the data type of `b`. The output, `c`, has the same numeric type and `fimath` properties as `b`, and the value of `a`.

```
a = pi;
b = fi([],1,16,13,'RoundingMethod',Floor);
c = cast(a,'like',b)

c =
    3.1415
        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 16
```

```
FractionLength: 13  
RoundingMethod: Floor  
OverflowAction: Saturate  
ProductMode: FullPrecision  
SumMode: FullPrecision
```

Using this syntax allows you to specify data types separately from your algorithmic code as described in “Manual Fixed-Point Conversion Best Practices”.

`fi` Object Properties

In this section...
“Data Properties” on page 2-18
“ <code>fimath</code> Properties” on page 2-18
“ <code>numerictype</code> Properties” on page 2-20
“Setting <code>fi</code> Object Properties” on page 2-21

Data Properties

The data properties of a `fi` object are always writable.

- `bin` — Stored integer value of a `fi` object in binary
- `data` — Numerical real-world value of a `fi` object
- `dec` — Stored integer value of a `fi` object in decimal
- `double` — Real-world value of a `fi` object, stored as a MATLAB `double` data type
- `hex` — Stored integer value of a `fi` object in hexadecimal
- `int` — Stored integer value of a `fi` object, stored in a built-in MATLAB integer data type
- `oct` — Stored integer value of a `fi` object in octal

To learn more about these properties, see “`fi` Object Properties” in the Fixed-Point Designer Reference.

`fimath` Properties

In general, the `fimath` properties associated with `fi` objects depend on how you create the `fi` object:

- When you specify one or more `fimath` object properties in the `fi` constructor, the resulting `fi` object has a local `fimath` object.
- When you do not specify any `fimath` object properties in the `fi` constructor, the resulting `fi` object has no local `fimath`.

To determine whether a `fi` object has a local `fimath` object, use the `isfimathlocal` function.

The `fi` properties associated with `fi` objects determine how fixed-point arithmetic is performed. These `fi` properties can come from a local `fi` object or from default `fi` property values. To learn more about `fi` objects in fixed-point arithmetic, see “`fi` Rules for Fixed-Point Arithmetic”.

The following `fi` properties are, by transitivity, also properties of the `fi` object. You can set these properties for individual `fi` objects. The following `fi` properties are always writable.

- `CastBeforeSum` — Whether both operands are cast to the sum data type before addition

Note: This property is hidden when the `SumMode` is set to `FullPrecision`.

- `MaxProductWordLength` — Maximum allowable word length for the product data type
- `MaxSumWordLength` — Maximum allowable word length for the sum data type
- `OverflowAction` — Action to take on overflow
- `ProductBias` — Bias of the product data type
- `ProductFixedExponent` — Fixed exponent of the product data type
- `ProductFractionLength` — Fraction length, in bits, of the product data type
- `ProductMode` — Defines how the product data type is determined
- `ProductSlope` — Slope of the product data type
- `ProductSlopeAdjustmentFactor` — Slope adjustment factor of the product data type
- `ProductWordLength` — Word length, in bits, of the product data type
- `RoundingMethod` — Rounding method
- `SumBias` — Bias of the sum data type
- `SumFixedExponent` — Fixed exponent of the sum data type
- `SumFractionLength` — Fraction length, in bits, of the sum data type
- `SumMode` — Defines how the sum data type is determined
- `SumSlope` — Slope of the sum data type
- `SumSlopeAdjustmentFactor` — Slope adjustment factor of the sum data type
- `SumWordLength` — The word length, in bits, of the sum data type

For more information, see “fimath Object Properties”.

numerictype Properties

When you create a `fi` object, a `numerictype` object is also automatically created as a property of the `fi` object:

`numerictype` — Object containing all the data type information of a `fi` object, Simulink signal, or model parameter

The following `numerictype` properties are, by transitivity, also properties of a `fi` object. The following properties of the `numerictype` object become read only after you create the `fi` object. However, you can create a copy of a `fi` object with new values specified for the `numerictype` properties:

- `Bias` — Bias of a `fi` object
- `DataType` — Data type category associated with a `fi` object
- `DataTypeMode` — Data type and scaling mode of a `fi` object
- `FixedExponent` — Fixed-point exponent associated with a `fi` object
- `FractionLength` — Fraction length of the stored integer value of a `fi` object in bits
- `Scaling` — Fixed-point scaling mode of a `fi` object
- `Signed` — Whether a `fi` object is signed or unsigned
- `Signedness` — Whether a `fi` object is signed or unsigned

Note: `numerictype` objects can have a `Signedness` of `Auto`, but all `fi` objects must be `Signed` or `Unsigned`. If a `numerictype` object with `Auto Signedness` is used to create a `fi` object, the `Signedness` property of the `fi` object automatically defaults to `Signed`.

- `Slope` — Slope associated with a `fi` object
- `SlopeAdjustmentFactor` — Slope adjustment associated with a `fi` object
- `WordLength` — Word length of the stored integer value of a `fi` object in bits

For more information, see “numerictype Object Properties”.

There are two ways to specify properties for `fi` objects in Fixed-Point Designer software. Refer to the following sections:

- “Setting Fixed-Point Properties at Object Creation” on page 2-21
- “Using Direct Property Referencing with fi” on page 2-22

Setting fi Object Properties

You can set `fi` object properties in two ways:

- Setting the properties when you create the object
- Using direct property referencing

Setting Fixed-Point Properties at Object Creation

You can set properties of `fi` objects at the time of object creation by including properties after the arguments of the `fi` constructor function. For example, to set the overflow action to `Wrap` and the rounding method to `Convergent`,

```
a = fi(pi, 'OverflowAction', 'Wrap', ...
        'RoundingMethod', 'Convergent')
```

```
a =
```

```
3.1416
```

```

        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 16
        FractionLength: 13

        RoundingMethod: Convergent
        OverflowAction: Wrap
        ProductMode: FullPrecision
        SumMode: FullPrecision
```

To set the stored integer value of a `fi` object, use the parameter/value pair for the `'int'` property when you create the object. For example, create a signed `fi` object with a stored integer value of 4, 16-bit word length, and 15-bit fraction length.

```
x = fi(0,1,16,15,'int',4);
```

Verify that the `fi` object has the expected integer setting.

```
x.int
```

```
ans =
```

```
4
```

Using Direct Property Referencing with fi

You can reference directly into a property for setting or retrieving `fi` object property values using MATLAB structure-like referencing. You do so by using a period to index into a property by name.

For example, to get the `WordLength` of `a`,

```
a.WordLength
```

```
ans =
```

```
16
```

To set the `OverflowAction` of `a`,

```
a.OverflowAction = 'Wrap'
```

```
a =
```

```
3.1416
```

```
        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 16
        FractionLength: 13

        RoundingMethod: Convergent
        OverflowAction: wrap
        ProductMode: FullPrecision
        SumMode: FullPrecision
```

If you have a `fi` object `b` with a local `fimath` object, you can remove the local `fimath` object and force `b` to use default `fimath` values:

```
b = fi(pi, 1, 'RoundingMethod', 'Floor')
```

```
b =
```

```
3.1415
```

```
    DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
      WordLength: 16
    FractionLength: 13

    RoundingMethod: Floor
    OverflowAction: Saturate
      ProductMode: FullPrecision
      SumMode: FullPrecision
```

```
b.fimath = []
```

```
b =
    3.1415
```

```
    DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
      WordLength: 16
    FractionLength: 13
```

```
isfimathlocal(b)
```

```
ans =
    0
```

fi Object Functions

In addition to functions that operate on `fi` objects, you can use the following functions to access data in a `fi` object using dot notation.

- `bin`
- `data`
- `dec`
- `double`
- `hex`
- `storedInteger`
- `storedIntegerToDouble`
- `oct`

For example,

```
a = fi(pi);  
n = storedInteger(a)
```

```
n =
```

```
25736
```

```
h = hex(a)
```

```
h =
```

```
6488
```

```
a.hex
```

```
ans =
```

```
6488
```

Fixed-Point Topics

- “Set Up Fixed-Point Objects” on page 3-2
- “View Fixed-Point Number Circles” on page 3-16
- “Perform Binary-Point Scaling” on page 3-29
- “Develop Fixed-Point Algorithms” on page 3-34
- “Calculate Fixed-Point Sine and Cosine” on page 3-46
- “Calculate Fixed-Point Arctangent” on page 3-69
- “Compute Sine and Cosine Using CORDIC Rotation Kernel” on page 3-94
- “Perform QR Factorization Using CORDIC” on page 3-99
- “Compute Square Root Using CORDIC” on page 3-134
- “Convert Cartesian to Polar Using CORDIC Vectoring Kernel” on page 3-144
- “Set Data Types Using Min/Max Instrumentation” on page 3-149
- “Convert Fast Fourier Transform (FFT) to Fixed Point” on page 3-163
- “Detect Limit Cycles in Fixed-Point State-Space Systems” on page 3-175
- “Compute Quantization Error” on page 3-187
- “Normalize Data for Lookup Tables” on page 3-196
- “Implement Fixed-Point Log2 Using Lookup Table” on page 3-201
- “Implement Fixed-Point Square Root Using Lookup Table” on page 3-206
- “Set Fixed-Point Math Attributes” on page 3-211

Set Up Fixed-Point Objects

Create Fixed-Point Data

This example shows the basics of how to use the fixed-point numeric object `fi`.

Notation

The fixed-point numeric object is called `fi` because J.H. Wilkinson used `fi` to denote fixed-point computations in his classic texts *Rounding Errors in Algebraic Processes* (1963), and *The Algebraic Eigenvalue Problem* (1965).

Setup

This example may use display settings or preferences that are different from what you are currently using. To ensure that your current display settings and preferences are not changed by running this example, the example automatically saves and restores them. The following code captures the current states for any display settings or properties that the example changes.

```
originalFormat = get(0, 'format');
format loose
format long g
% Capture the current state of and reset the fi display and logging
% preferences to the factory settings.
fiprefAtStartOfThisExample = get(fipref);
reset(fipref);
```

Default Fixed-Point Attributes

To assign a fixed-point data type to a number or variable with the default fixed-point parameters, use the `fi` constructor. The resulting fixed-point value is called a `fi` object.

For example, the following creates `fi` objects `a` and `b` with attributes shown in the display, all of which we can specify when the variables are constructed. Note that when the `FractionLength` property is not specified, it is set automatically to "best precision" for the given word length, keeping the most-significant bits of the value. When the `WordLength` property is not specified it defaults to 16 bits.

```
a = fi(pi)
```

```
a =
```

```

3.1416015625

DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 16
FractionLength: 13

b = fi(0.1)

b =

0.0999984741210938

DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 16
FractionLength: 18

```

Specifying Signed and WordLength Properties

The second and third numeric arguments specify **Signed** (true or 1 = signed, false or 0 = unsigned), and **WordLength** in bits, respectively.

```

% Signed 8-bit
a = fi(pi, 1, 8)

```

```

a =

3.15625

DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 8
FractionLength: 5

```

The **sfi** constructor may also be used to construct a signed **fi** object

```

a1 = sfi(pi,8)

```

```

a1 =

3.15625

```

```
        DataTypeMode: Fixed-point: binary point scaling
          Signedness: Signed
          WordLength: 8
        FractionLength: 5
```

```
% Unsigned 20-bit
b = fi(exp(1), 0, 20)
```

```
b =
```

```
2.71828079223633
```

```
        DataTypeMode: Fixed-point: binary point scaling
          Signedness: Unsigned
          WordLength: 20
        FractionLength: 18
```

The `ufi` constructor may be used to construct an unsigned `fi` object

```
b1 = ufi(exp(1), 20)
```

```
b1 =
```

```
2.71828079223633
```

```
        DataTypeMode: Fixed-point: binary point scaling
          Signedness: Unsigned
          WordLength: 20
        FractionLength: 18
```

Precision

The data is stored internally with as much precision as is specified. However, it is important to be aware that initializing high precision fixed-point variables with double-precision floating-point variables may not give you the resolution that you might expect at first glance. For example, let's initialize an unsigned 100-bit fixed-point variable with 0.1, and then examine its binary expansion:

```
a = ufi(0.1, 100);
```

```
bin(a)
```


ans =

```
10100011110101110000101000111101011100001111010111000010100011110101110000101001
```

Access to Data

The data can be accessed in a number of ways which map to built-in data types and binary strings. For example,

DOUBLE(A)

```
a = fi(pi);  
double(a)
```

ans =

```
3.1416015625
```

returns the double-precision floating-point "real-world" value of **a**, quantized to the precision of **a**.

A.DOUBLE = ...

We can also set the real-world value in a double.

```
a.double = exp(1)
```

a =

```
2.71826171875
```

```
DataTypeMode: Fixed-point: binary point scaling  
Signedness: Signed  
WordLength: 16  
FractionLength: 13
```

sets the real-world value of **a** to **e**, quantized to **a**'s numeric type.

STOREDINTEGER(A)

```
storedInteger(a)
```

```
ans =
```

```
22268
```

returns the "stored integer" in the smallest built-in integer type available, up to 64 bits.

Relationship Between Stored Integer Value and Real-World Value

In `BinaryPoint` scaling, the relationship between the stored integer value and the real-world value is

$$\text{Real-world value} = (\text{Stored integer}) \cdot 2^{-\text{Fraction length}}$$

There is also `SlopeBias` scaling, which has the relationship

$$\text{Real-world value} = (\text{Stored integer}) \cdot \text{Slope} + \text{Bias}$$

where

$$\text{Slope} = (\text{Slope adjustment factor}) \cdot 2^{\text{Fixed exponent}}$$

and

$$\text{Fixed exponent} = -\text{Fraction length}.$$

The math operators of `fi` work with `BinaryPoint` scaling and real-valued `SlopeBias` scaled `fi` objects.

`BIN(A)`, `OCT(A)`, `DEC(A)`, `HEX(A)`

return the stored integer in binary, octal, unsigned decimal, and hexadecimal strings, respectively.

```
bin(a)
```

```
ans =
```

```
0101011011111100
```

`oct(a)`

`ans =`

`053374`

`dec(a)`

`ans =`

`22268`

`hex(a)`

`ans =`

`56fc`

A.BIN = ..., A.OCT = ..., A.DEC = ..., A.HEX = ...

set the stored integer from binary, octal, unsigned decimal, and hexadecimal strings, respectively.

`fi(π)`

`a.bin = '0110010010001000'`

`a =`

`3.1416015625`

`DataTypeMode: Fixed-point: binary point scaling`
`Signedness: Signed`
`WordLength: 16`
`FractionLength: 13`

`fi(ϕ)`

```
a.oct = '031707'
```

```
a =
```

```
1.6180419921875
```

```
    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 16
    FractionLength: 13
```

```
fi(e)
```

```
a.dec = '22268'
```

```
a =
```

```
2.71826171875
```

```
    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 16
    FractionLength: 13
```

```
fi(0.1)
```

```
a.hex = '0333'
```

```
a =
```

```
0.0999755859375
```

```
    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 16
    FractionLength: 13
```

Specifying FractionLength

When the `FractionLength` property is not specified, it is computed to be the best precision for the magnitude of the value and given word length. You may also specify the fraction length directly as the fourth numeric argument in the `fi` constructor or the third

numeric argument in the `sfi` or `ufi` constructor. In the following, compare the fraction length of `a`, which was explicitly set to 0, to the fraction length of `b`, which was set to best precision for the magnitude of the value.

```
a = sfi(10,16,0)
```

```
a =
```

```
10
```

```
    DataTypeMode: Fixed-point: binary point scaling  
    Signedness: Signed  
    WordLength: 16  
    FractionLength: 0
```

```
b = sfi(10,16)
```

```
b =
```

```
10
```

```
    DataTypeMode: Fixed-point: binary point scaling  
    Signedness: Signed  
    WordLength: 16  
    FractionLength: 11
```

Note that the stored integer values of `a` and `b` are different, even though their real-world values are the same. This is because the real-world value of `a` is the stored integer scaled by $2^0 = 1$, while the real-world value of `b` is the stored integer scaled by $2^{-11} = 0.00048828125$.

```
storedInteger(a)
```

```
ans =
```

```
10
```

```
storedInteger(b)
```

```
ans =
```

20480

Specifying Properties with Parameter/Value Pairs

Thus far, we have been specifying the numeric type properties by passing numeric arguments to the `fi` constructor. We can also specify properties by giving the name of the property as a string followed by the value of the property:

```
a = fi(pi, 'WordLength', 20)
```

```
a =
```

```
3.14159393310547
```

```
    DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
      WordLength: 20
    FractionLength: 17
```

For more information on `fi` properties, type

```
help fi
```

or

```
doc fi
```

at the MATLAB command line.

Numeric Type Properties

All of the numeric type properties of `fi` are encapsulated in an object named `numerictype`:

```
T = numerictype
```

```
T =
```

```
    DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
```

```
        WordLength: 16
        FractionLength: 15
```

The numeric type properties can be modified either when the object is created by passing in parameter/value arguments

```
T = numerictype('WordLength',40,'FractionLength',37)
```

```
T =
```

```
        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 40
        FractionLength: 37
```

or they may be assigned by using the dot notation

```
T.Signed = false
```

```
T =
```

```
        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Unsigned
        WordLength: 40
        FractionLength: 37
```

All of the numeric type properties of a `fi` may be set at once by passing in the `numerictype` object. This is handy, for example, when creating more than one `fi` object that share the same numeric type.

```
a = fi(pi,'numerictype',T)
```

```
a =
```

```
3.14159265359194
        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Unsigned
        WordLength: 40
        FractionLength: 37
```



```
b = fi(exp(1), 'numerictype', T)
```

```
b =
```

```
2.71828182845638
```

```
    DataTypeMode: Fixed-point: binary point scaling
    Signedness:   Unsigned
    WordLength:   40
    FractionLength: 37
```

The `numerictype` object may also be passed directly to the `fi` constructor

```
a1 = fi(pi, T)
```

```
a1 =
```

```
3.14159265359194
```

```
    DataTypeMode: Fixed-point: binary point scaling
    Signedness:   Unsigned
    WordLength:   40
    FractionLength: 37
```

For more information on `numerictype` properties, type

```
help numerictype
```

```
or
```

```
doc numerictype
```

at the MATLAB command line.

Display Preferences

The display preferences for `fi` can be set with the `fipref` object. They can be saved between MATLAB sessions with the `savefipref` command.

Display of Real-World Values

When displaying real-world values, the closest double-precision floating-point value is displayed. As we have seen, double-precision floating-point may not always be able to

The display of the `fi` object is also affected by MATLAB's `format` command. In particular, when displaying real-world values, it is handy to use

```
format long g
```

so that as much precision as is possible will be displayed.

There are also other display options to make a more shorthand display of the numeric type properties, and options to control the display of the value (as real-world value, binary, octal, decimal integer, or hex).

For more information on display preferences, type

```
help fipref
help savefipref
help format
```

or

```
doc fipref
doc savefipref
doc format
```

at the MATLAB command line.

Cleanup

The following code sets any display settings or preferences that the example changed back to their original states.

```
% Reset the fi display and logging preferences
fipref(fiprefAtStartOfThisExample);
set(0, 'format', originalFormat);
```

View Fixed-Point Number Circles

This example shows how to define unsigned and signed two's complement integer and fixed-point numbers.

Fixed-Point Number Definitions

This example illustrates the definitions of unsigned and signed-two's-complement integer and fixed-point numbers.

Unsigned Integers.

Unsigned integers are represented in the binary number system in the following way. Let

$$b = [b(n) \ b(n-1) \ \dots \ b(2) \ b(1)]$$

be the binary digits of an n-bit unsigned integer, where each $b(i)$ is either one or zero. Then the value of b is

$$u = b(n)*2^{(n-1)} + b(n-1)*2^{(n-2)} + \dots + b(2)*2^{(1)} + b(1)*2^{(0)}$$

For example, let's define a 3-bit unsigned integer quantizer, and enumerate its range.

```
originalFormat = get(0, 'format'); format
```

```
q = quantizer('ufixed',[3 0]);  
[a,b] = range(q);  
u = (a:eps(q):b)'
```

```
% Now, let's display those values in binary.
```

```
b = num2bin(q,u)
```

```
u =
```

```
0  
1  
2  
3  
4  
5  
6  
7
```

b =

000

001

010

011

100

101


110

111

Unsigned Integer Number Circle.

Let's array them around a clock face with their corresponding binary and decimal values.

```
fidemo.numbercircle(q);
```

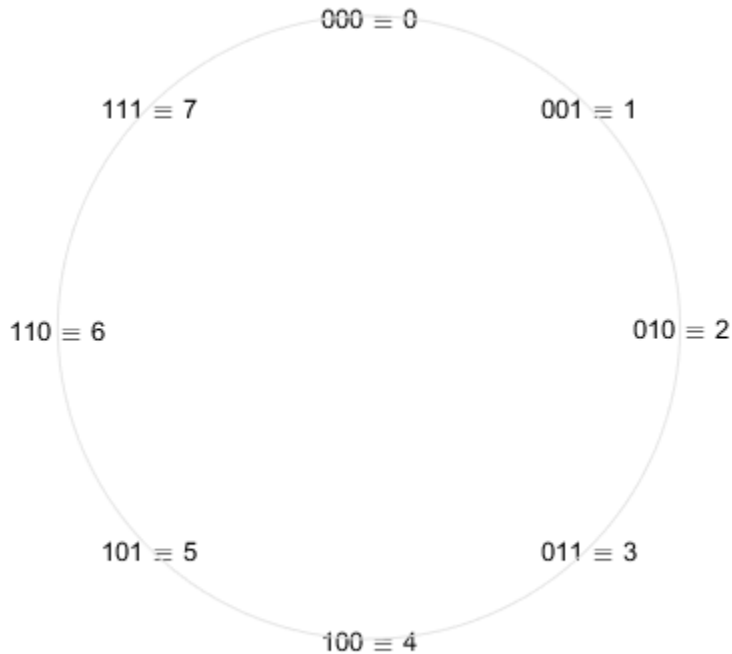

Unsigned Fixed-Point.

Unsigned fixed-point values are unsigned integers that are scaled by a power of two. We call the negative exponent of the power of two the "fractionlength".

If the unsigned integer u is defined as before, and the fractionlength is f , then the value of the unsigned fixed-point number is

$$uf = u \cdot 2^{-f}$$

For example, let's define a 3-bit unsigned fixed-point quantizer with a fractionlength of 1, and enumerate its range.

```
q = quantizer('ufixed',[3 1]);
```

```
[a,b] = range(q);  
uf = (a:eps(q):b)'  
  
% Now, let's display those values in binary.  
b = num2bin(q,uf)
```


```
uf =  
  
      0  
    0.5000  
    1.0000  
    1.5000  
    2.0000  
    2.5000  
    3.0000  
    3.5000
```

```
b =  
  
000  
001  
010  
011  
100  
101  
110  
111
```

Unsigned Fixed-Point Number Circle.

Let's array them around a clock face with their corresponding binary and decimal values.

```
fidemo.numbercircle(q);
```

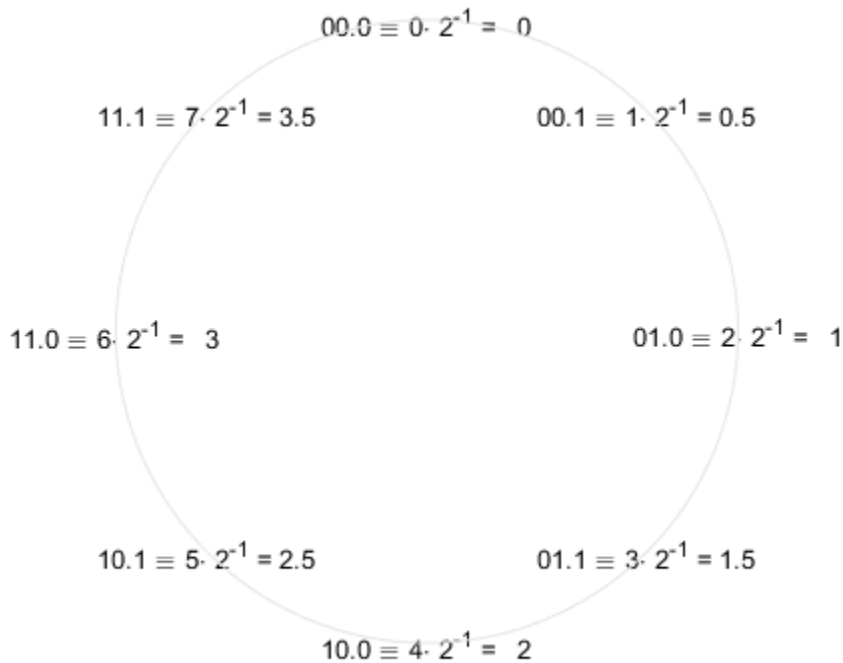

Unsigned Fractional Fixed-Point.

Unsigned fractional fixed-point numbers are fixed-point numbers whose fractionlength f is equal to the wordlength n , which produces a scaling such that the range of numbers is between 0 and $1 \cdot 2^{-f}$, inclusive. This is the most common form of fixed-point numbers because it has the nice property that all of the numbers are less than one, and the product of two numbers less than one is a number less than one, and so multiplication does not overflow.

Thus, the definition of unsigned fractional fixed-point is the same as unsigned fixed-point, with the restriction that $f=n$, where n is the wordlength in bits.

$$u_f = u \cdot 2^{-f}$$

For example, let's define a 3-bit unsigned fractional fixed-point quantizer, which implies a fractionlength of 3.

```
q = quantizer('ufixed',[3 3]);  
[a,b] = range(q);  
uf = (a:eps(q):b)'  
  
% Now, let's display those values in binary.  
b = num2bin(q,uf)
```

```
uf =
```

```
      0  
    0.1250  
    0.2500  
    0.3750  
    0.5000  
    0.6250  
    0.7500  
    0.8750
```


```
b =
```

```
000  
001  
010  
011  
100  
101  
110  
111
```

Unsigned Fractional Fixed-Point Number Circle.

Let's array them around a clock face with their corresponding binary and decimal values.

```
fidemo.numbercircle(q);
```

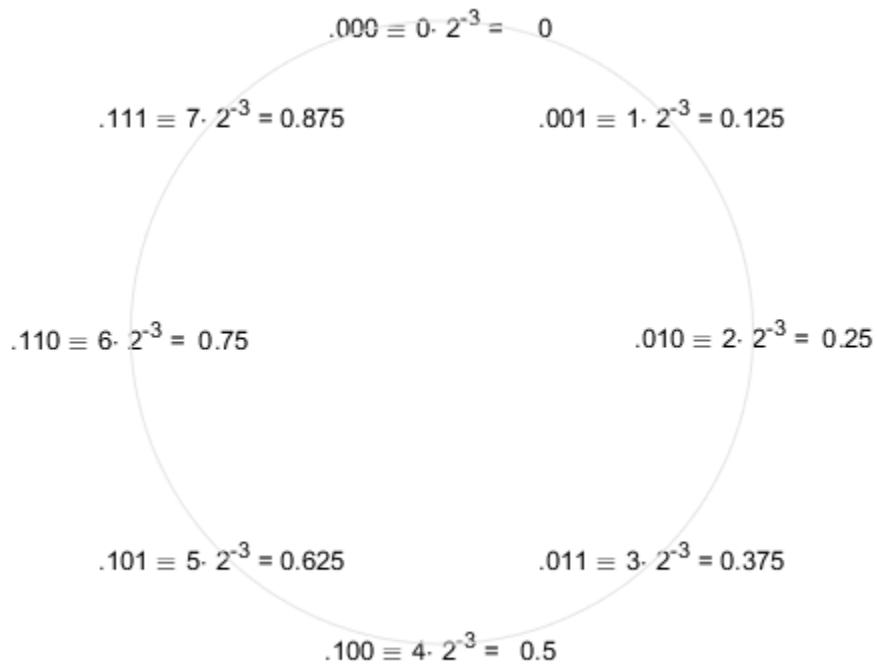

Signed Two's-Complement Integers.

Signed integers are represented in two's-complement in the binary number system in the following way. Let

$$b = [b(n) \ b(n-1) \ \dots \ b(2) \ b(1)]$$

be the binary digits of an n-bit signed integer, where each $b(i)$ is either one or zero. Then the value of b is

$$s = -b(n) \cdot 2^{(n-1)} + b(n-1) \cdot 2^{(n-2)} + \dots + b(2) \cdot 2^{(1)} + b(1) \cdot 2^{(0)}$$

Note that the difference between this and the unsigned number is the negative weight on the most-significant-bit (MSB).

For example, let's define a 3-bit signed integer quantizer, and enumerate its range.

```
q = quantizer('fixed',[3 0]);
[a,b] = range(q);
s = (a:eps(q):b)'
```

```
% Now, let's display those values in binary.
```

```
b = num2bin(q,s)
```

```
% Note that the most-significant-bit of negative numbers is 1, and positive
% numbers is 0.
```

```
s =
```

```
-4
-3
-2
-1
 0
 1
 2
 3
```

```
b =
```


```
100
101
110
111
000
001
010
011
```

Signed Two's-Complement Integer Number Circle.

Let's array them around a clock face with their corresponding binary and decimal values.

The reason for this ungainly looking definition of negative numbers is that addition of all numbers, both positive and negative, is carried out as if they were all positive, and then the $n+1$ carry bit is discarded. The result will be correct if there is no overflow.

```
fidemo.numbercircle(q);
```

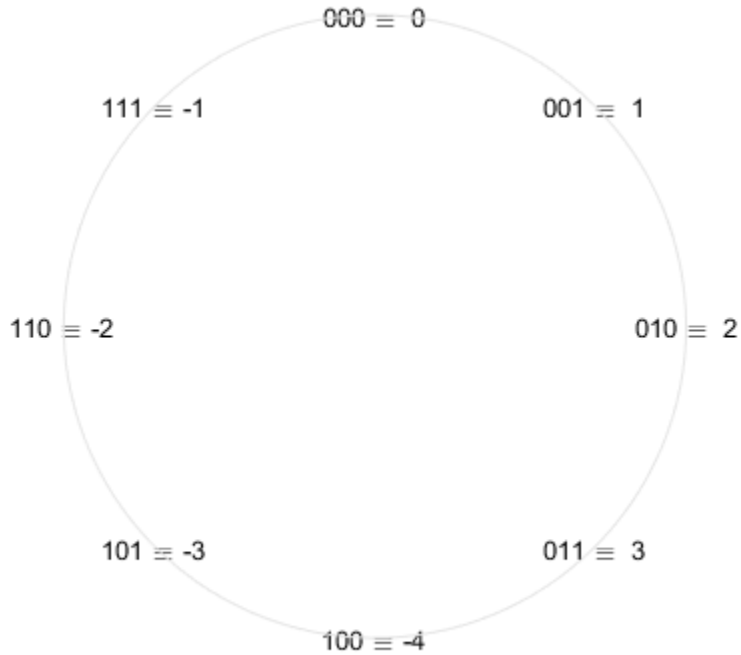

Signed Fixed-Point.

Signed fixed-point values are signed integers that are scaled by a power of two. We call the negative exponent of the power of two the "fractionlength".

If the signed integer s is defined as before, and the fractionlength is f , then the value of the signed fixed-point number is

$$sf = s \cdot 2^{-f}$$

For example, let's define a 3-bit signed fixed-point quantizer with a fractionlength of 1, and enumerate its range.

```
q = quantizer('fixed',[3 1]);
[a,b] = range(q);
sf = (a:eps(q):b)'
```

% Now, let's display those values in binary.

```
b = num2bin(q,sf)
```


```
sf =
-2.0000
-1.5000
-1.0000
-0.5000
  0
  0.5000
  1.0000
  1.5000
```

```
b =
100
101
110
111
000
001
010
011
```

Signed Fixed-Point Number Circle.

Let's array them around a clock face with their corresponding binary and decimal values.

```
fidemo.numbercircle(q);
```

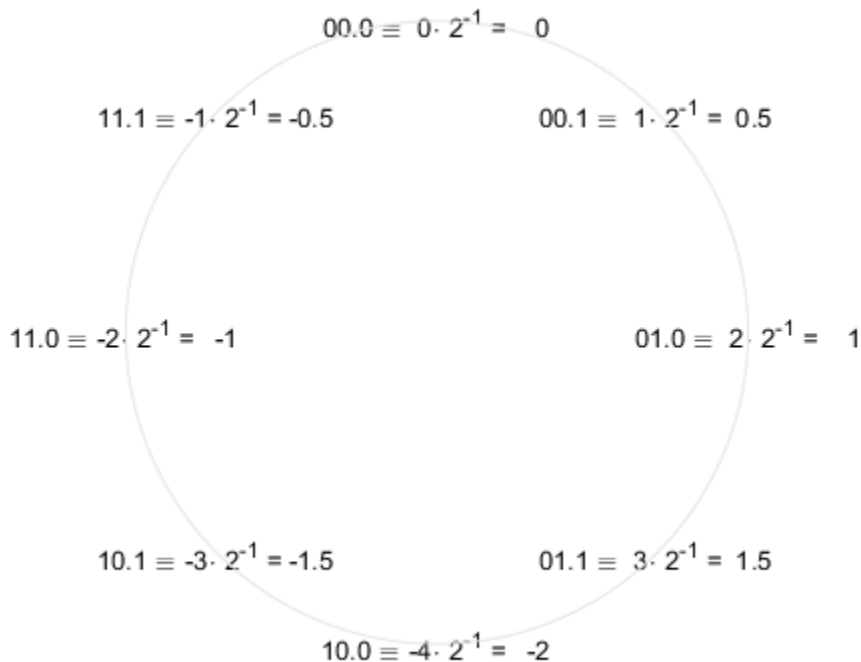

Signed Fractional Fixed-Point.

Signed fractional fixed-point numbers are fixed-point numbers whose fraction length f is one less than the wordlength n , which produces a scaling such that the range of numbers is between -1 and $1-2^{-f}$, inclusive. This is the most common form of fixed-point numbers because it has the nice property that the product of two numbers less than one is a number less than one, and so multiplication does not overflow. The only exception is the case when we are multiplying -1 by -1 , because $+1$ is not an element of this number system. Some processors have a special multiplication instruction for this situation, and some add an extra bit in the product to guard against this overflow.

Thus, the definition of signed fractional fixed-point is the same as signed fixed-point, with the restriction that $f=n-1$, where n is the wordlength in bits.

```
sf = s*2^-f
```

For example, let's define a 3-bit signed fractional fixed-point quantizer, which implies a fractionlength of 2.

```
q = quantizer('fixed',[3 2]);
[a,b] = range(q);
sf = (a:eps(q):b)'
```

```
% Now, let's display those values in binary.
b = num2bin(q,sf)
```

```
sf =
```

```
-1.0000
-0.7500
-0.5000
-0.2500
  0
  0.2500
  0.5000
  0.7500
```


```
b =
```

```
100
101
110
111
000
001
010
011
```

Signed Fractional Fixed-Point Number Circle.

Let's array them around a clock face with their corresponding binary and decimal values.

```
fidemo.numbercircle(q);
set(0, 'format', originalFormat);
```

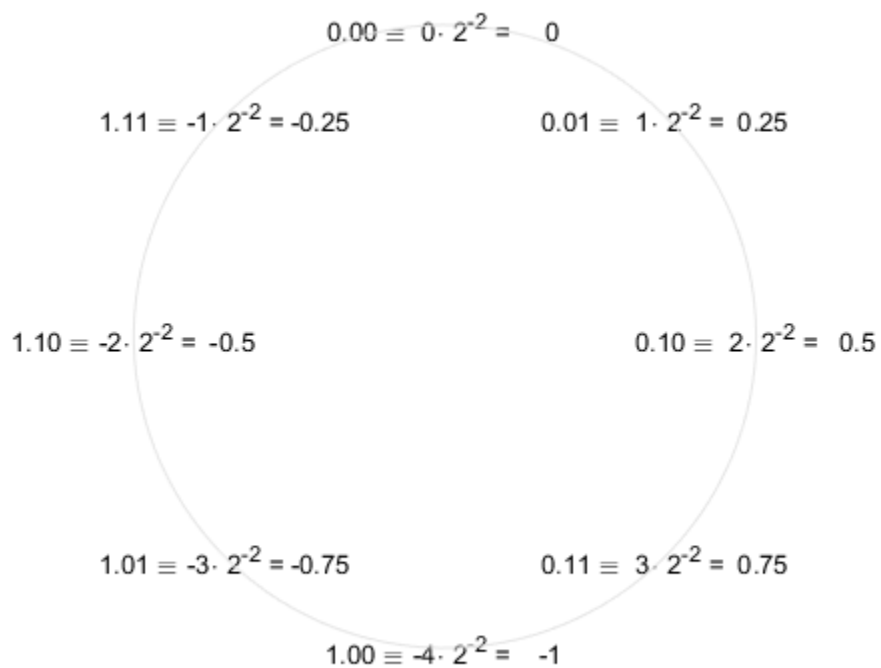

Perform Binary-Point Scaling

This example shows how to perform binary point scaling in `fi`.

fi Construction

`a = fi(v, s, w, f)` returns a `fi` with value `v`, signedness `s`, word length `w`, and fraction length `f`.

If `s` is true (signed) the leading or most significant bit (MSB) in the resulting `fi` is always the sign bit.

Fraction length `f` is the scaling $2^{(-f)}$.

For example, create a signed 8-bit long `fi` with a value of 0.5 and a scaling of $2^{(-7)}$:

```
a = fi(0.5,true,8,7)
```

```
a =
```

```
0.5000
```

```

    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 8
    FractionLength: 7

```

Fraction Length and the Position of the Binary Point

The fraction length or the scaling determines the position of the binary point in the `fi` object.

The Fraction Length is Positive and Less than the Word Length

When the fraction length `f` is positive and less than the word length, the binary point lies `f` places to the left of the least significant bit (LSB) and within the word.

For example, in a signed 3-bit `fi` with fraction length of 1 and value -0.5, the binary point lies 1 place to the left of the LSB. In this case each bit is set to 1 and the binary equivalent of the `fi` with its binary point is `11.1`.

The real world value of -0.5 is obtained by multiplying each bit by its scaling factor, starting with the LSB and working up to the signed MSB.

$$(1*2^{-1}) + (1*2^0) + (-1*2^1) = -0.5$$

`storedInteger(a)` returns the stored signed, unscaled integer value -1.

$$(1*2^0) + (1*2^1) + (-1*2^2) = -1$$

```
a = fi(-0.5,true,3,1)
bin(a)
storedInteger(a)
```

```
a =
```

```
-0.5000
```

```
      DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
      WordLength: 3
      FractionLength: 1
```

```
ans =
```

```
111
```

```
ans =
```

```
-1
```

The Fraction Length is Positive and Greater than the Word Length

When the fraction length f is positive and greater than the word length, the binary point lies f places to the left of the LSB and outside the word.

For example the binary equivalent of a signed 3-bit word with fraction length of 4 and value of -0.0625 is `._111`. Here `_` in the `._111` denotes an unused bit that is not a part of the 3-bit word. The first 1 after the `_` is the MSB or the sign bit.

The real world value of -0.0625 is computed as follows (LSB to MSB).

$$(1*2^{-4}) + (1*2^{-3}) + (-1*2^{-2}) = -0.0625$$

`bin(b)` will return 111 at the MATLAB® prompt and `storedInteger(b) = -1`

```
b = fi(-0.0625,true,3,4)
bin(b)
storedInteger(b)
```

```
b =
```

```
-0.0625
```

```
      DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
      WordLength: 3
      FractionLength: 4
```

```
ans =
```

```
111
```

```
ans =
```

```
-1
```

The Fraction Length is a Negative Integer and Less than the Word Length

When the fraction length f is negative the binary point lies f places to the right of LSB and is outside the physical word.

For instance in $c = fi(-4, true, 3, -2)$ the binary point lies 2 places to the right of the LSB `111__.`. Here the two right most spaces are unused bits that are not part of the 3-bit word. The right most 1 is the LSB and the leading 1 is the sign bit.

The real world value of -4 is obtained by multiplying each bit by its scaling factor $2^{(-f)}$, i.e. $2^{-(-2)} = 2^2$ for the LSB, and then adding the products together.

$$(1*2^2) + (1*2^3) + (-1*2^4) = -4$$

`bin(c)` and `storedInteger(c)` will still give 111 and -1 as in the previous two examples.

```
c = fi(-4,true,3,-2)
bin(c)
storedInteger(c)
```

```
c =  
    -4  
    DataTypeMode: Fixed-point: binary point scaling  
    Signedness: Signed  
    WordLength: 3  
    FractionLength: -2  
  
ans =  
111  
  
ans =  
-1
```

The Fraction Length is Set Automatically to the Best Precision Possible and is Negative

In this example we create a signed 3-bit `fi` where the fraction length is set automatically depending on the value that the `fi` is supposed to contain. The resulting `fi` has a value of 6, with a wordlength of 3 bits and a fraction length of -1. Here the binary point is 1 place to the right of the LSB: `011_.`. The `_` is again an unused bit and the first 1 before the `_` is the LSB. The leading 1 is the sign bit.

The real world value (6) is obtained as follows:

$$(1*2^1) + (1*2^2) + (-0*2^3) = 6$$

`bin(d)` and `storedInteger(d)` will give `011` and `3` respectively.

```
d = fi(5,true,3)  
bin(d)  
storedInteger(d)
```

```
d =  
    6  
    DataTypeMode: Fixed-point: binary point scaling
```

```
Signedness: Signed  
WordLength: 3  
FractionLength: -1
```

```
ans =
```

```
011
```

```
ans =
```

```
3
```

Interactive FI Binary Point Scaling Example

This is an interactive example that allows the user to change the fraction length of a 3-bit fixed-point number by moving the binary point using a slider. The fraction length can be varied from -3 to 5 and the user can change the value of the 3 bits to '0' or '1' for either signed or unsigned numbers.

The "Scaling factors" above the 3 bits display the scaling or weight that each bit is given for the specified signedness and fraction length. The `fi` code, the double precision real-world value and the fixed-point attributes are also displayed.

Type `fibinscaling` at the MATLAB prompt to run this example.

Develop Fixed-Point Algorithms

This example shows how to develop and verify a simple fixed-point algorithm.

Simple Example of Algorithm Development

This example shows the development and verification of a simple fixed-point filter algorithm. We will follow the following steps:

- 1) Implement a second order filter algorithm and simulate in double-precision floating-point.
- 2) Instrument the code to visualize the dynamic range of the output and state.
- 3) Convert the algorithm to fixed-point by changing the data type of the variables - the algorithm itself does not change.
- 4) Compare and plot the fixed-point and floating-point results.

Floating-Point Variable Definitions

We develop our algorithm in double-precision floating-point. We will use a second-order lowpass filter to remove the high frequencies in the input signal.

```
b = [ 0.25 0.5      0.25   ]; % Numerator coefficients
a = [ 1    0.09375 0.28125 ]; % Denominator coefficients
% Random input that has both high and low frequencies.
s = rng; rng(0,'v5uniform');
x = randn(1000,1);
rng(s); % restore RNG state
% Pre-allocate the output and state for speed.
y = zeros(size(x));
z = [0;0];
```

Data-Type-Independent Algorithm

This is a second-order filter that implements the standard difference equation:

$$y(n) = b(1)*x(n) + b(2)*x(n-1) + b(3)*x(n-2) - a(2)*y(n-1) - a(3)*y(n-2)$$

```
for k=1:length(x)
    y(k) = b(1)*x(k) + z(1);
```

```

        z(1) = (b(2)*x(k) + z(2)) - a(2)*y(k);
        z(2) = b(3)*x(k)          - a(3)*y(k);
end
% Save the Floating-Point Result
ydouble = y;

```

Visualize Dynamic Range

In order to convert to fixed-point, we need to know the range of the variables. Depending on the complexity of an algorithm, this task can be simple or quite challenging. In this example, the range of the input value is known, so selecting an appropriate fixed-point data type is simple. We will concentrate on the output (y) and states (z) since their range is unknown. To view the dynamic range of the output and states, we will modify the code slightly to instrument it. We will create two `NumericTypeScope` objects and view the dynamic range of the output (y) and states (z) simultaneously.


Instrument Floating-Point Code


```

% Reset states
z = [0;0];

hscope1 = NumericTypeScope;
hscope2 = NumericTypeScope;
for k=1:length(x)
    y(k) = b(1)*x(k) + z(1);
    z(1) = (b(2)*x(k) + z(2)) - a(2)*y(k);
    z(2) = b(3)*x(k)          - a(3)*y(k);
    % process the data and update the visual.
    step(hscope1,z);
end
step(hscope2,y);

```

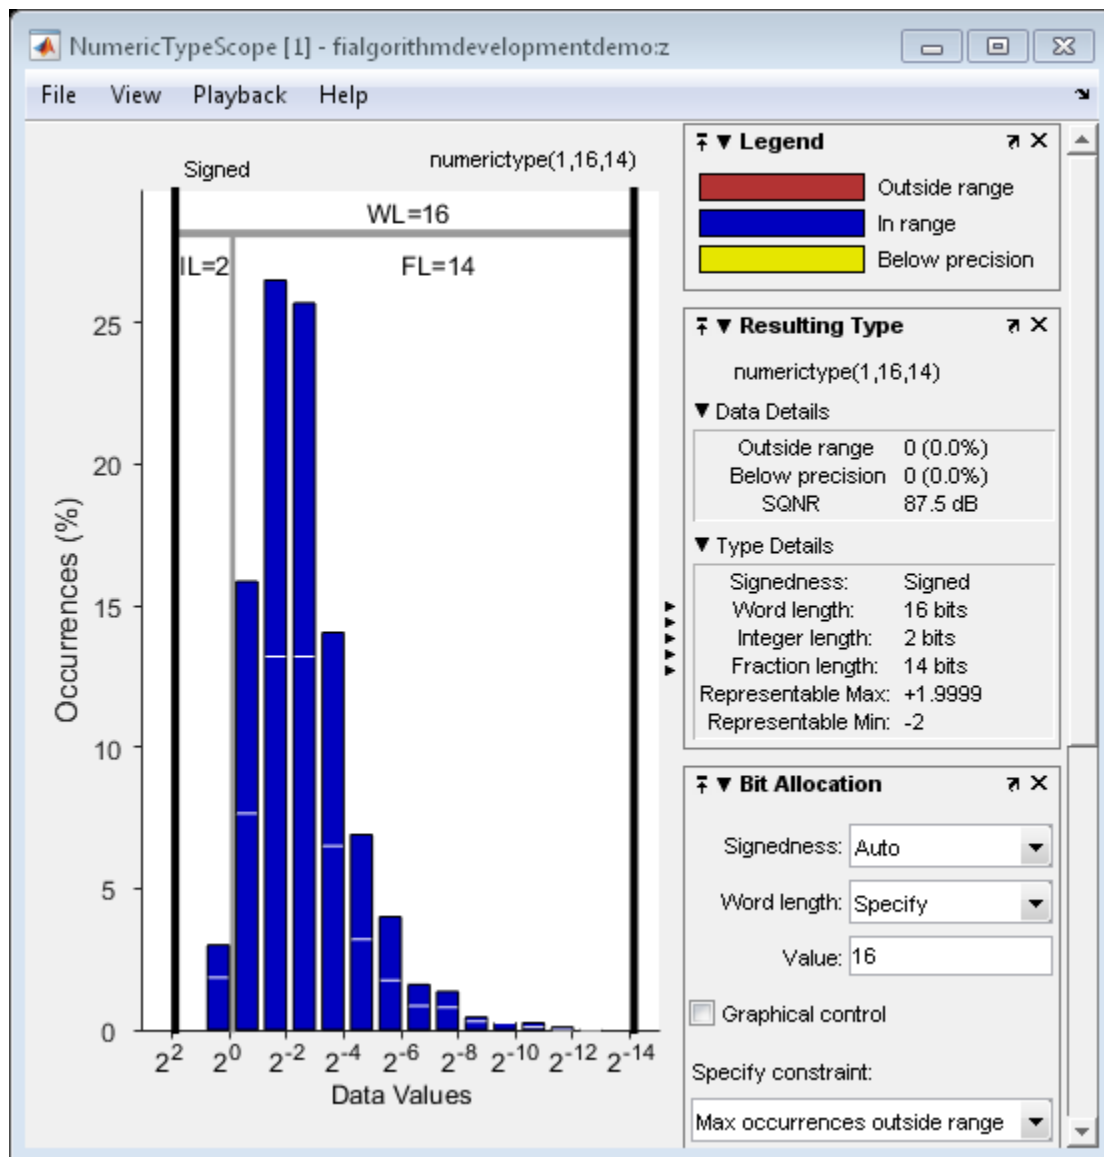

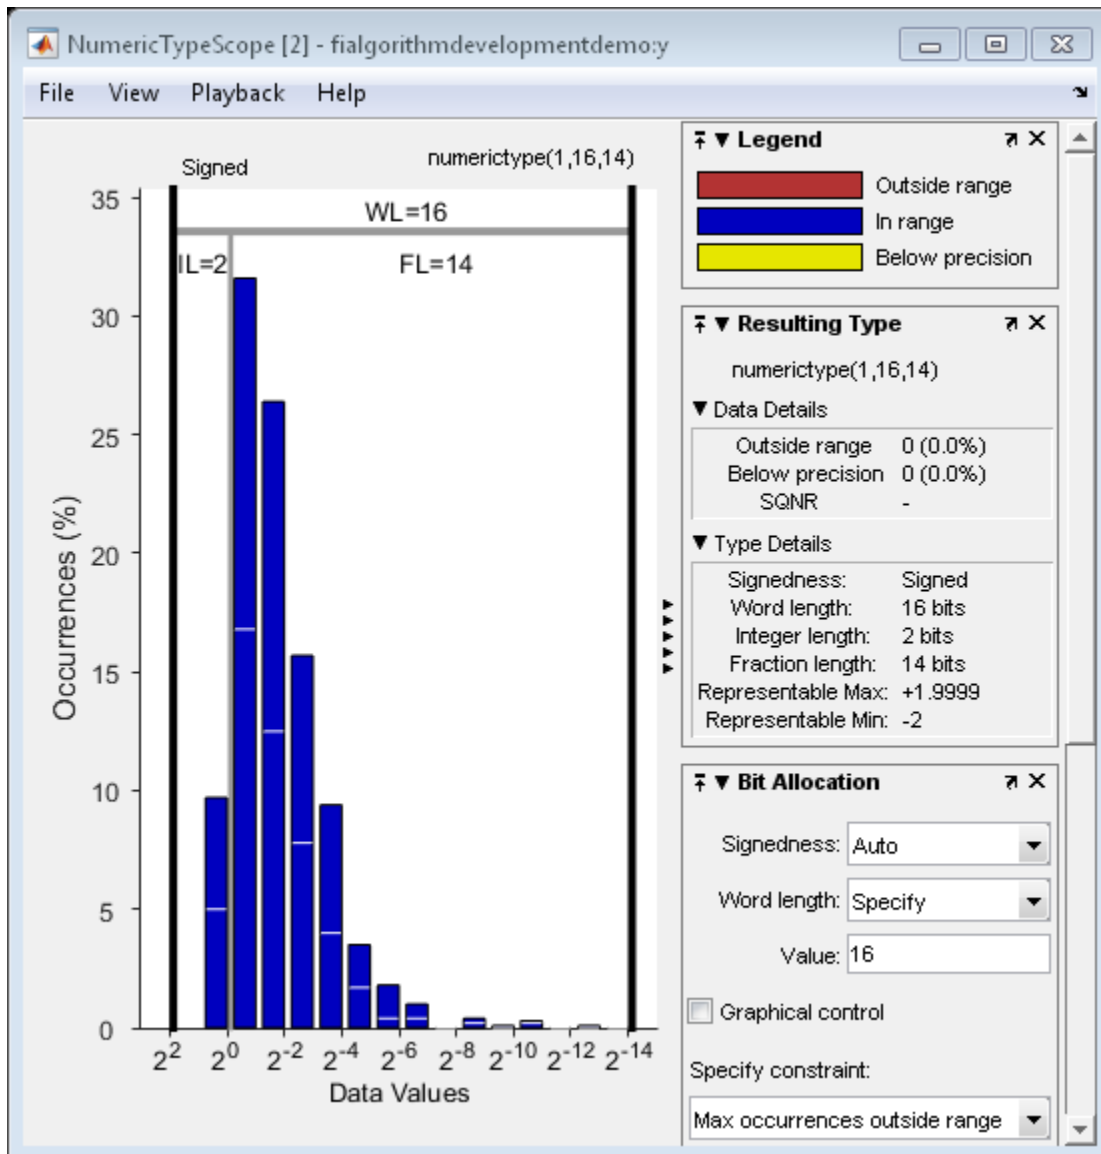

Analyze Information in the Scope

Let us first analyze the information displayed for variable *z* (state). From the histogram we can see that the dynamic range lies between $(2^1 2^{-12}]$.

By default, the scope uses a word length of 16 bits with zero tolerable overflows. This results in a data type of `numerictype(true,16, 14)` since we need at least 2 integer bit to avoid overflows. You can get more information on the statistical data from the Input Data and Resulting Type panels. From the Input Data panel we can see that the data has both positive and negative values and hence a signed quantity which is reflected in the suggested `numerictype`. Also, the maximum data value is 1.51 which can be represented by the suggested type.

Next, let us look at variable *y* (output). From the histogram plot we see that the dynamic range lies between $(2^1 2^{-13}]$.

By default, the scope uses a word length of 16 bits with zero tolerable overflows. This results in a data type of `numerictype(true,16, 14)` since we need at least 2 integer bits to avoid overflows. With this suggested type you see no overflows or underflows.

Fixed-Point Variable Definitions

We convert variables to fixed-point and run the algorithm again. We will turn on logging to see the overflows and underflows introduced by the selected data types.

```
% Turn on logging to see overflows/underflows.
FIPREF_STATE = get(fipref);
reset(fipref)
fp = fipref;
default_loggingmode = fp.LoggingMode;
fp.LoggingMode = 'On';
% Capture the present state of and reset the global fimath to the factory
% settings.
globalFimathAtStart = fimath;
resetglobalfimath;
% Define the fixed-point types for the variables in the below format:
%   fi(Data, Signed, WordLength, FractionLength)
b = fi(b, 1, 8, 6);
a = fi(a, 1, 8, 6);

x = fi(x, 1, 16, 13);
y = fi(zeros(size(x)), 1, 16, 13);
```

```
z = fi([0;0], 1, 16, 14);
```

Same Data-Type-Independent Algorithm


```
for k=1:length(x)
    y(k) = b(1)*x(k) + z(1);
    z(1) = (b(2)*x(k) + z(2)) - a(2)*y(k);
    z(2) = b(3)*x(k)          - a(3)*y(k);
end
% Reset the logging mode.
fp.LoggingMode = default_loggingmode;
```

In this example, we have redefined the fixed-point variables with the same names as the floating-point so that we could inline the algorithm code for clarity. However, it is a better practice to enclose the algorithm code in a MATLAB® file function that could be called with either floating-point or fixed-point variables. See `filimitcycledemo.m` for an example of writing and using a datatype-agnostic algorithm.

Compare and Plot the Floating-Point and Fixed-Point Results

We will now plot the magnitude response of the floating-point and fixed-point results and the response of the filter to see if the filter behaves as expected when it is converted to fixed-point.


```
n = length(x);
f = linspace(0,0.5,n/2);
x_response = 20*log10(abs(fft(double(x))));
ydouble_response = 20*log10(abs(fft(ydouble)));
y_response = 20*log10(abs(fft(double(y))));
plot(f,x_response(1:n/2),'c-',...
     f,ydouble_response(1:n/2),'bo-',...
     f,y_response(1:n/2),'gs-');
ylabel('Magnitude in dB');
xlabel('Normalized Frequency');
legend('Input','Floating point output','Fixed point output','Location','Best');
title('Magnitude response of Floating-point and Fixed-point results');
```

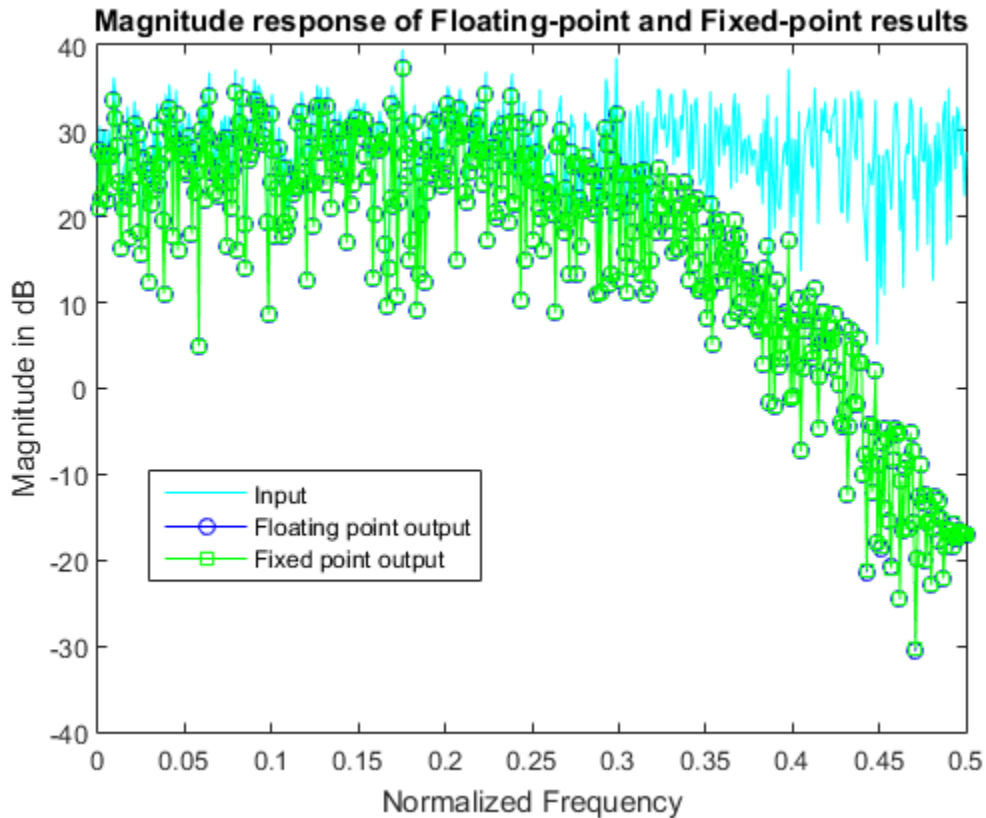

```

h = fft(double(b),n)./fft(double(a),n);
h = h(1:end/2);
clf
hax = axes;
plot(hax,f,20*log10(abs(h)));
set(hax,'YLim',[-40 0]);
title('Magnitude response of the filter');
ylabel('Magnitude in dB')
xlabel('Frequency');


```

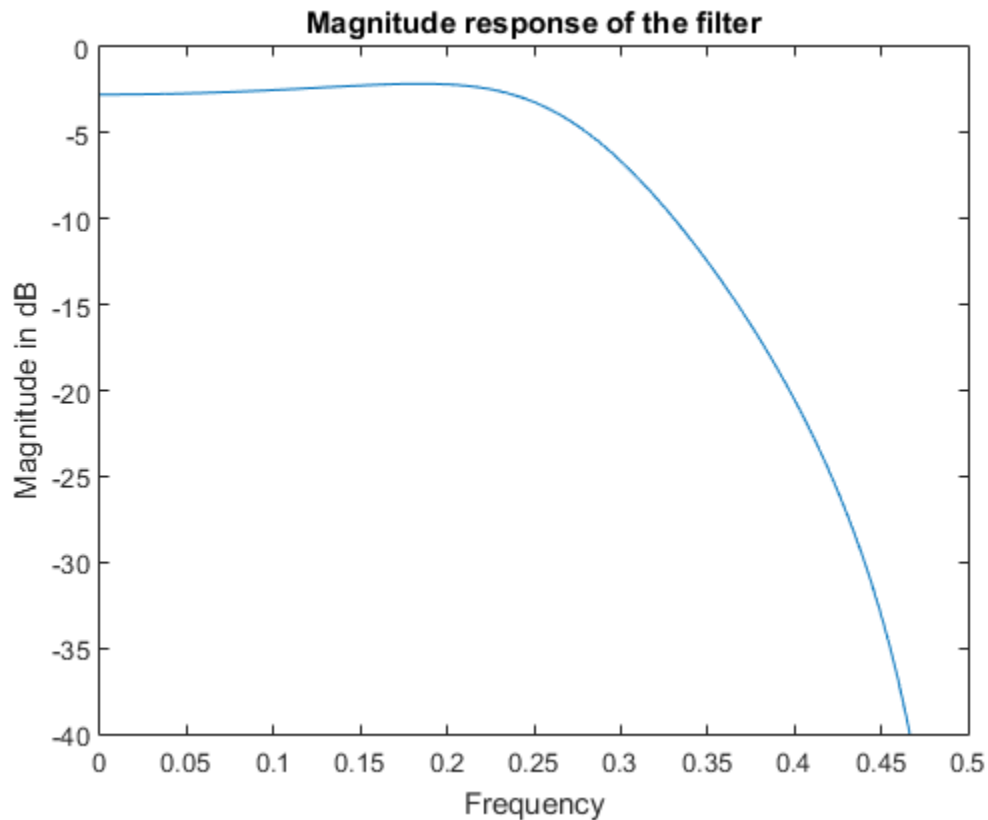

Notice that the high frequencies in the input signal are attenuated by the low-pass filter which is the expected behavior.

Plot the Error

```
clf
n = (0:length(y)-1)';
e = double(lsb(y));
plot(n,double(y)-ydouble,'.-r', ...
      [n(1) n(end)],[e/2 e/2],'c', ...
      [n(1) n(end)],[-e/2 -e/2],'c')
text(n(end),e/2,'+1/2 LSB','HorizontalAlignment','right','VerticalAlignment','bottom')
text(n(end),-e/2,'-1/2 LSB','HorizontalAlignment','right','VerticalAlignment','top')
xlabel('n (samples)'); ylabel('error')
```

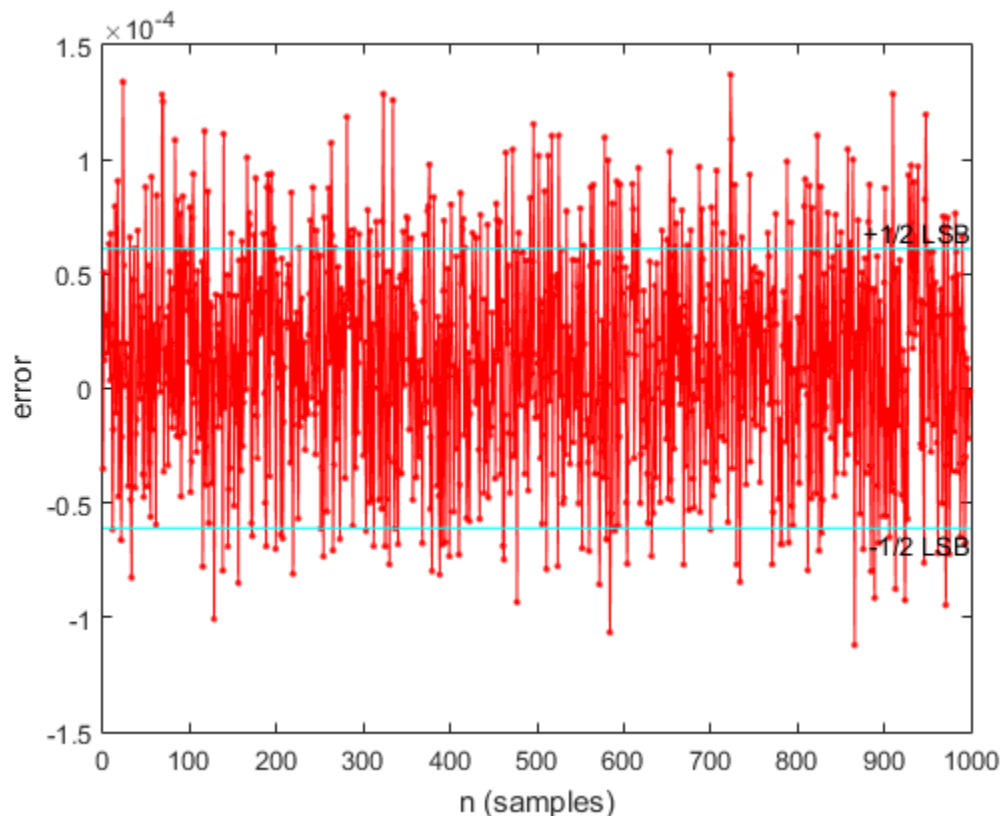


Simulink®

If you have Simulink® and Fixed-Point Designer™, you can run this model, which is the equivalent of the algorithm above. The output, `y_sim` is a fixed-point variable equal to the variable `y` calculated above in MATLAB code.

As in the MATLAB code, the fixed-point parameters in the blocks can be modified to match an actual system; these have been set to match the MATLAB code in the example above. Double-click on the blocks to see the settings.

```
if fidemo.hasSimulinkLicense
    % Set up the From Workspace variable
```

```
x_sim.time = n;  
x_sim.signals.values = x;  
x_sim.signals.dimensions = 1;  
  
% Run the simulation  
out_sim = sim('fitdf2filter_demo', 'SaveOutput', 'on', ...  
             'SrcWorkspace', 'current');  
  
% Open the model  
fitdf2filter_demo  
  
% Verify that the Simulink results are the same as the MATLAB file  
isequal(y, out_sim.get('y_sim'))  
  
end  
  
ans =  
  
1
```

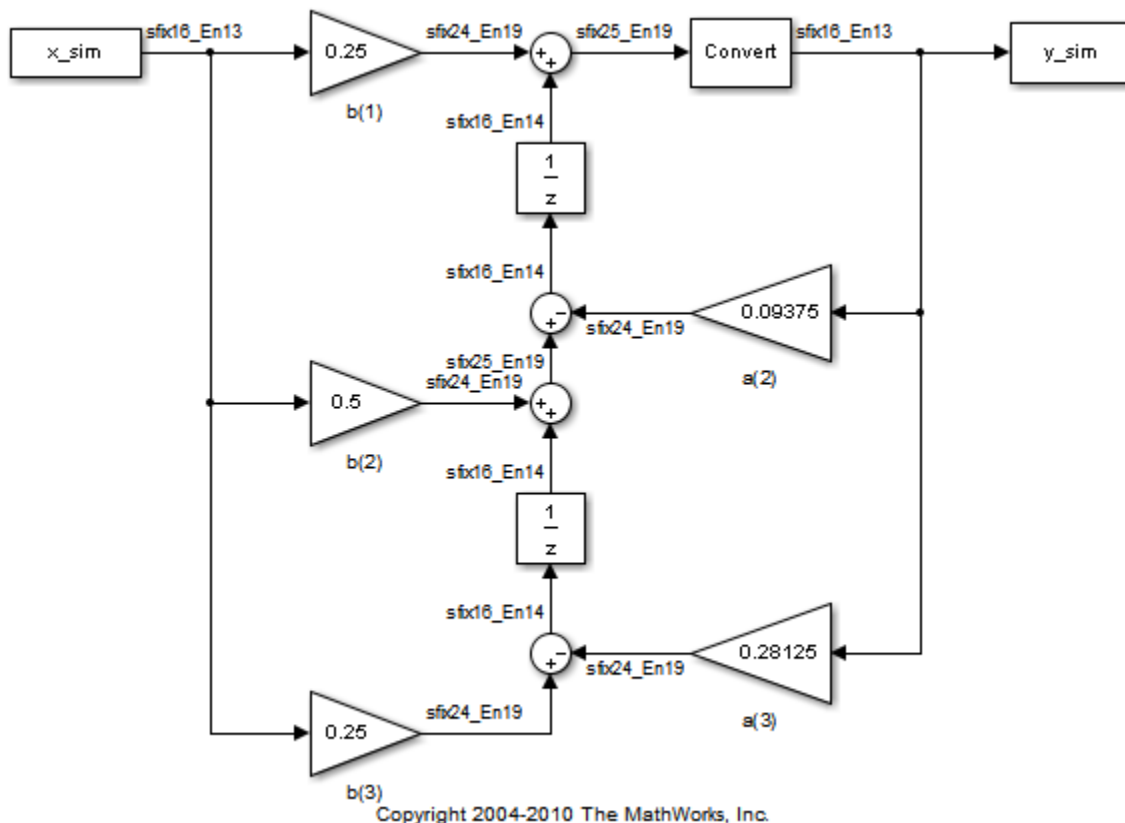

Assumptions Made for this Example

In order to simplify the example, we have taken the default math parameters: round-to-nearest, saturate on overflow, full precision products and sums. We can modify all of these parameters to match an actual system.

The settings were chosen as a starting point in algorithm development. Save a copy of this MATLAB file, start playing with the parameters, and see what effects they have on the output. How does the algorithm behave with a different input? See the help for `fi`, `fi math`, and `numeric type` for information on how to set other parameters, such as rounding mode, and overflow mode.

```
close all force;
```



```
bdclose all;  
% Reset the global fimath  
globalfimath(globalFimathAtStart);  
fipref(FIPREF_STATE);
```

Calculate Fixed-Point Sine and Cosine

This example shows how to use both CORDIC-based and lookup table-based algorithms provided by the Fixed-Point Designer™ to approximate the MATLAB® sine (SIN) and cosine (COS) functions. Efficient fixed-point sine and cosine algorithms are critical to many embedded applications, including motor controls, navigation, signal processing, and wireless communications.

Calculating Sine and Cosine Using the CORDIC Algorithm

Introduction

The `cordiccxp`, `cordicsincos`, `cordicsin`, and `cordiccoss` functions approximate the MATLAB `sin` and `cos` functions using a CORDIC-based algorithm. CORDIC is an acronym for COordinate Rotation DIgital Computer. The Givens rotation-based CORDIC algorithm (see [1,2]) is one of the most hardware efficient algorithms because it only requires iterative shift-add operations. The CORDIC algorithm eliminates the need for explicit multipliers, and is suitable for calculating a variety of functions, such as sine, cosine, arcsine, arccosine, arctangent, vector magnitude, divide, square root, hyperbolic and logarithmic functions.

You can use the CORDIC rotation computing mode to calculate sine and cosine, and also polar-to-cartesian conversion operations. In this mode, the vector magnitude and an angle of rotation are known and the coordinate (X-Y) components are computed after rotation.

CORDIC Rotation Computation Mode

The CORDIC rotation mode algorithm begins by initializing an angle accumulator with the desired rotation angle. Next, the rotation decision at each CORDIC iteration is done in a way that decreases the magnitude of the residual angle accumulator. The rotation decision is based on the sign of the residual angle in the angle accumulator after each iteration.

In rotation mode, the CORDIC equations are:

$$z_{i+1} = z_i - d_i * atan(2^{-i})$$

$$x_{i+1} = x_i - y_i * d_i * 2^{-i}$$

$$y_{i+1} = y_i + x_i * d_i * 2^{-i}$$

where $d_i = -1$ if $z_i < 0$, and $+1$ otherwise;

$i = 0, 1, \dots, N - 1$, and N is the total number of iterations.

This provides the following result as N approaches $+\infty$:

$$z_N = 0$$

$$x_N = A_N(x_0 \cos z_0 - y_0 \sin z_0)$$

$$y_N = A_N(y_0 \cos z_0 + x_0 \sin z_0)$$

Where:

$$A_N = \prod_{i=0}^{N-1} \sqrt{1 + 2^{-2i}}$$

In rotation mode, the CORDIC algorithm is limited to rotation angles between $-\pi/2$ and $\pi/2$. To support angles outside of that range, the `cordicexp`, `cordicsincos`, `cordicsin`, and `cordiccoss` functions use quadrant correction (including possible extra negation) after the CORDIC iterations are completed.

Understanding the CORDICSINCOS Sine and Cosine Code

Introduction

The `cordicsincos` function calculates the sine and cosine of input angles in the range $[-2\pi, 2\pi]$ using the CORDIC algorithm. This function takes an angle θ (radians) and the number of iterations as input arguments. The function returns approximations of sine and cosine.

The CORDIC computation outputs are scaled by the rotator gain. This gain is accounted for by pre-scaling the initial $1/A_N$ constant value.

Initialization

The `cordicsincos` function performs the following initialization steps:

- The angle input look-up table `inpLUT` is set to `atan(2.^-(0:N-1))`.

- z_0 is set to the θ input argument value.
- x_0 is set to $1/A_N$.
- y_0 is set to zero.

The judicious choice of initial values allows the algorithm to directly compute both sine and cosine simultaneously. After N iterations, these initial values lead to the following outputs as N approaches $+\infty$:

$$x_N \approx \cos(\theta)$$

$$y_N \approx \sin(\theta)$$

Shared Fixed-Point and Floating-Point CORDIC Kernel Code

The MATLAB code for the CORDIC algorithm (rotation mode) kernel portion is as follows (for the case of scalar x , y , and z). This same code is used for both fixed-point and floating-point operations:

```
function [x, y, z] = cordic_rotation_kernel(x, y, z, inpLUT, n)
% Perform CORDIC rotation kernel algorithm for N kernel iterations.
xtmp = x;
ytmp = y;
for idx = 1:n
    if z < 0
        z(:) = z + inpLUT(idx);
        x(:) = x + ytmp;
        y(:) = y - xtmp;
    else
        z(:) = z - inpLUT(idx);
        x(:) = x - ytmp;
        y(:) = y + xtmp;
    end
    xtmp = bitsra(x, idx); % bit-shift-right for multiply by 2^(-idx)
    ytmp = bitsra(y, idx); % bit-shift-right for multiply by 2^(-idx)
end
```

Visualizing the Sine-Cosine Rotation Mode CORDIC Iterations

The CORDIC algorithm is usually run through a specified (constant) number of iterations since ending the CORDIC iterations early would break pipelined code, and the CORDIC gain A_n would not be constant because n would vary.

For very large values of n , the CORDIC algorithm is guaranteed to converge, but not always monotonically. As will be shown in the following example, intermediate iterations occasionally produce more accurate results than later iterations. You can typically achieve greater accuracy by increasing the total number of iterations.

Example

In the following example, iteration 5 provides a better estimate of the result than iteration 6, and the CORDIC algorithm converges in later iterations.


```
theta = pi/5; % input angle in radians
nitters = 10; % number of iterations
sinTh = sin(theta); % reference result
cosTh = cos(theta); % reference result
y_sin = zeros(nitters, 1);
sin_err = zeros(nitters, 1);
x_cos = zeros(nitters, 1);
cos_err = zeros(nitters, 1);
fprintf('\n\nNITERS \tERROR\n');
fprintf('-----\t-----\n');
for n = 1:nitters
    [y_sin(n), x_cos(n)] = cordicsincos(theta, n);
    sin_err(n) = abs(y_sin(n) - sinTh);
    cos_err(n) = abs(x_cos(n) - cosTh);
    if n < 10
        fprintf('  %d \t %1.8f\n', n, cos_err(n));
    else
        fprintf('  %d \t %1.8f\n', n, cos_err(n));
    end
end
fprintf('\n');
```

```
NITERS  ERROR
-----  -
  1  0.10191021
  2  0.13966630
  3  0.03464449
  4  0.03846157
  5  0.00020393
  6  0.01776952
  7  0.00888037
  8  0.00436052
```

```
9 0.00208192
10 0.00093798
```

Plot the CORDIC approximation error on a bar graph

```
figure(1); clf;
bar(1:niters, cos_err(1:niters));
xlabel('Number of iterations','fontsize',12,'fontweight','b');
ylabel('Error','fontsize',12,'fontweight','b');
title('CORDIC approximation error for cos(pi/5) computation',...
      'fontsize',12,'fontweight','b');
axis([0 niters 0 0.14]);
```

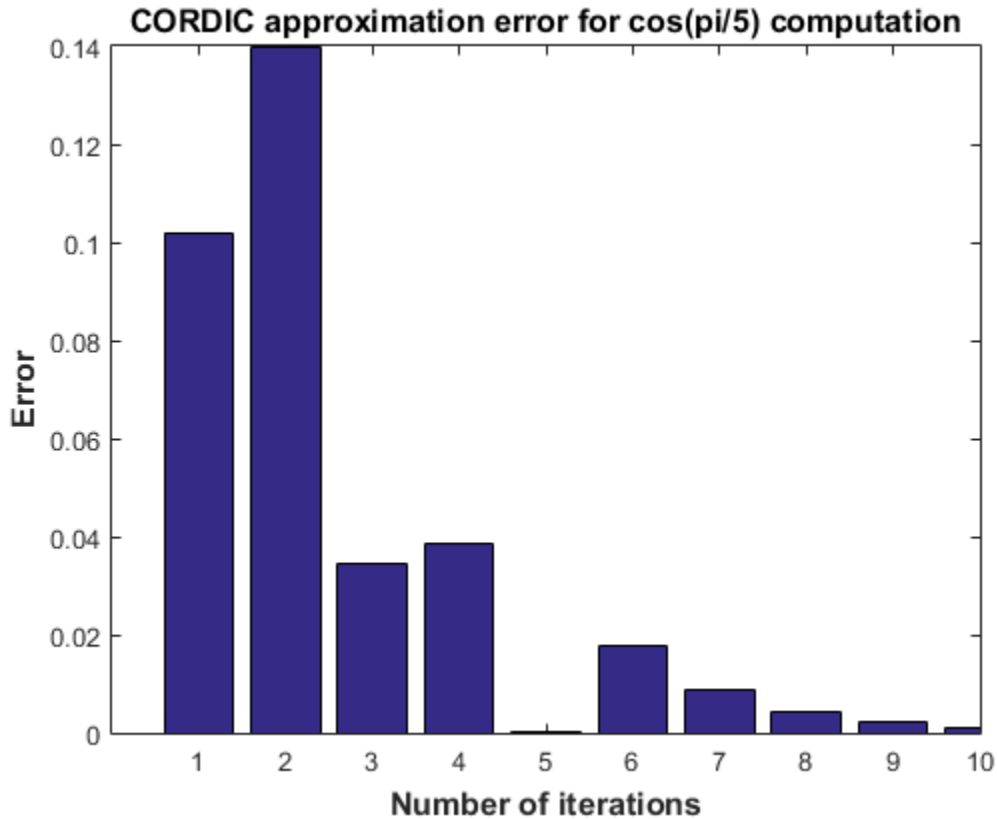


Plot the X-Y results for 5 iterations

```

Niter2Draw = 5;
figure(2), clf, hold on
plot(cos(0:0.1:pi/2), sin(0:0.1:pi/2), 'b--'); % semi-circle
for i=1:Niter2Draw
    plot([0 x_cos(i)], [0 y_sin(i)], 'LineWidth', 2); % CORDIC iteration result
    text(x_cos(i), y_sin(i), int2str(i), 'fontSize', 12, 'fontWeight', 'b');
end
plot(cos(theta), sin(theta), 'r*', 'MarkerSize', 20); % IDEAL result
xlabel('X (COS)', 'fontSize', 12, 'fontWeight', 'b')
ylabel('Y (SIN)', 'fontSize', 12, 'fontWeight', 'b')
title('CORDIC iterations for cos(pi/5) computation', ...
      'fontSize', 12, 'fontWeight', 'b')
axis equal;
axis square;

```

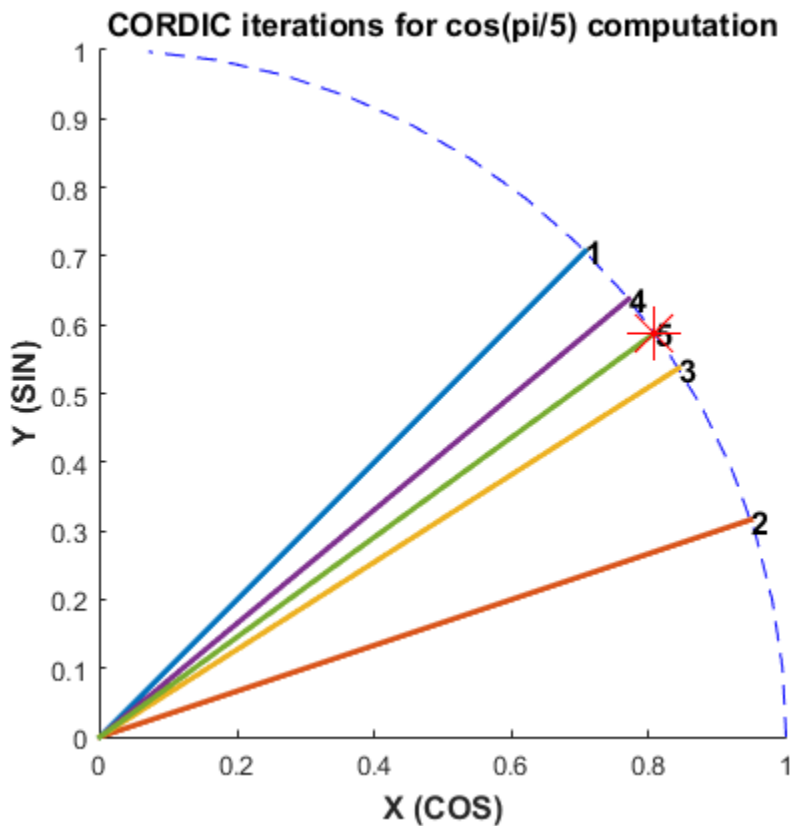

Computing Fixed-point Sine with `cordicsin`


Create 1024 points between $[-2\pi, 2\pi]$


```
stepSize = pi/256;
thRadDb1 = (-2*pi):stepSize:(2*pi - stepSize);
thRadFxp = sfi(thRadDb1, 12); % signed, 12-bit fixed-point values
sinThRef = sin(double(thRadFxp)); % reference results
```


Compare fixed-point CORDIC vs. double-precision trig function results

Use 12-bit quantized inputs and vary number of iterations from 4 to 10.

```
for niters = 4:3:10
    cdcSinTh = cordicsin(thRadFxp, niters);
    errCdcRef = sinThRef - double(cdcSinTh);
    figure; hold on; axis([-2*pi 2*pi -1.25 1.25]);
    plot(thRadFxp, sinThRef, 'b');
    plot(thRadFxp, cdcSinTh, 'g');
    plot(thRadFxp, errCdcRef, 'r');
    ylabel('sin(\Theta)', 'fontsize', 12, 'fontweight', 'b');
    set(gca, 'XTick', -2*pi:pi/2:2*pi);
    set(gca, 'XTickLabel', ...
        {'-2*pi', '-3*pi/2', '-pi', '-pi/2', ...
         '0', 'pi/2', 'pi', '3*pi/2', '2*pi'});
    set(gca, 'YTick', -1:0.5:1);
    set(gca, 'YTickLabel', {'-1.0', '-0.5', '0', '0.5', '1.0'});
    ref_str = 'Reference: sin(double(\Theta))';
    cdc_str = sprintf('12-bit CORDICSIN; N = %d', niters);
    err_str = sprintf('Error (max = %f)', max(abs(errCdcRef)));
    legend(ref_str, cdc_str, err_str);
    title(cdc_str, 'fontsize', 12, 'fontweight', 'b');
end
```

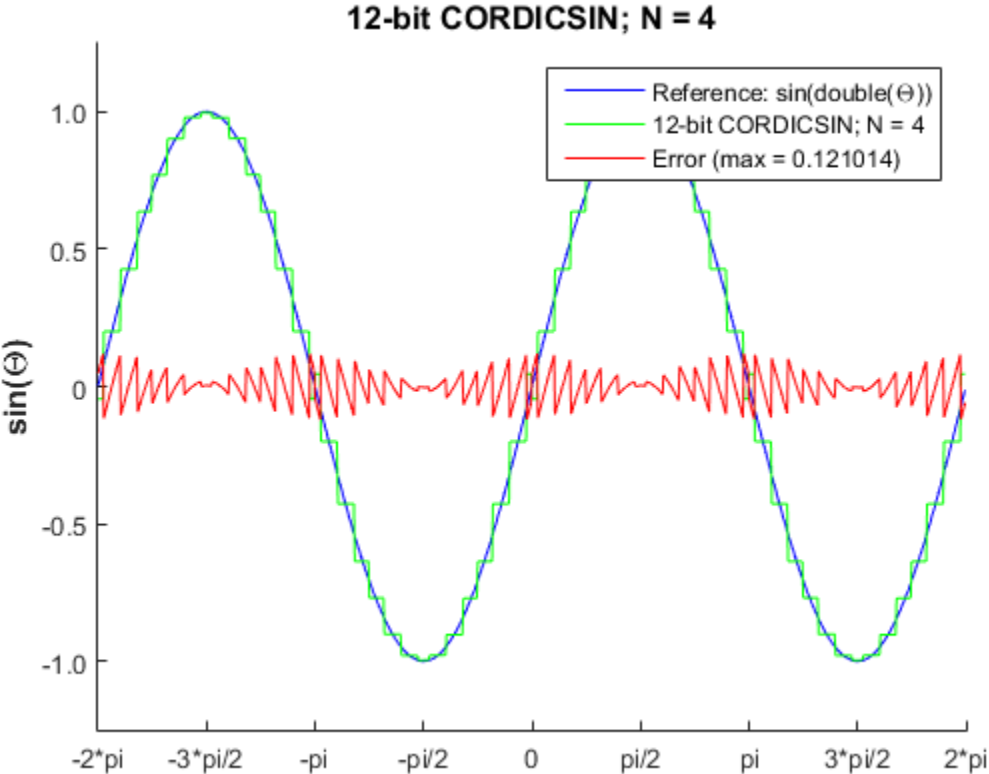


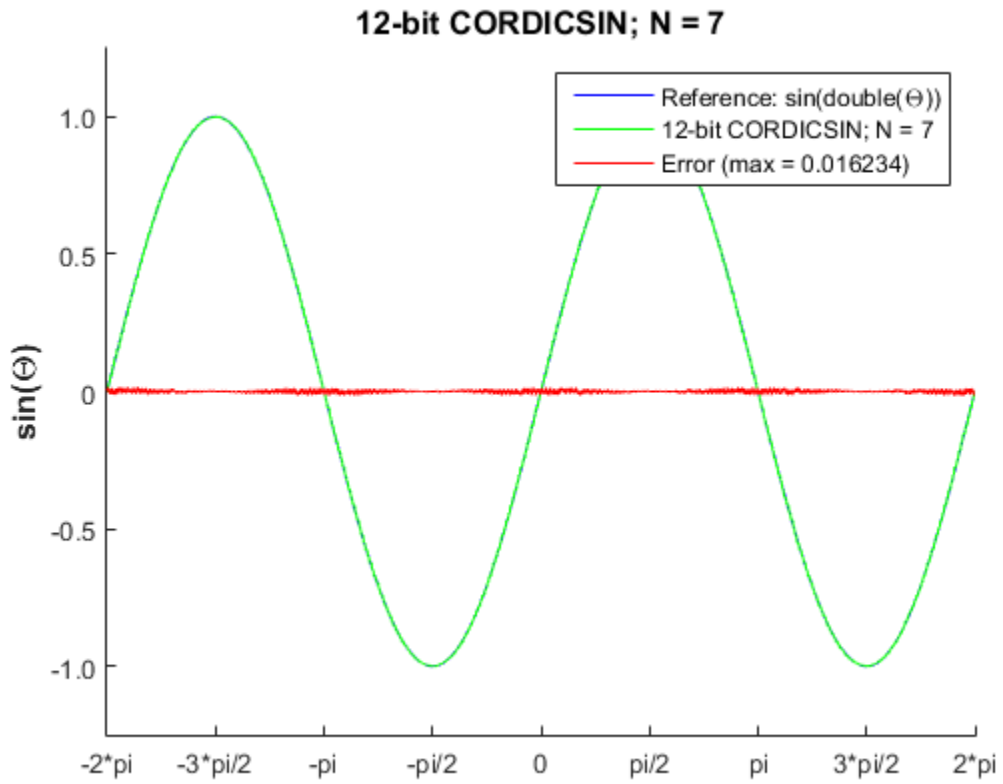

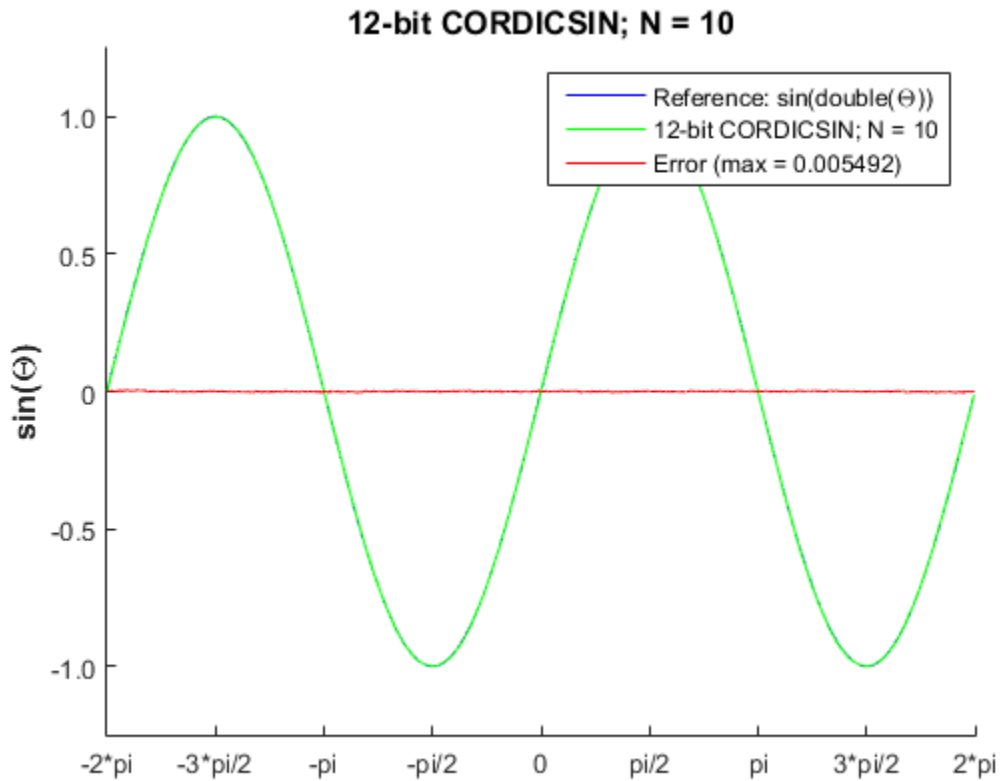


Compute the LSB Error for N = 10


```
figure;
fracLen = cdcSinTh.FractionLength;
plot(thRadFxp, abs(errCdcRef) * pow2(fracLen));
set(gca, 'XTick', -2*pi:pi/2:2*pi);
set(gca, 'XTickLabel', ...
    {'-2*pi', '-3*pi/2', '-pi', '-pi/2', ...
    '0', 'pi/2', 'pi', '3*pi/2', '2*pi'});
ylabel(sprintf('LSB Error: 1 LSB = 2^{-%d}', fracLen), 'fontsize', 12, 'fontweight', 'b');
title('LSB Error: 12-bit CORDICSIN; N=10', 'fontsize', 12, 'fontweight', 'b');
axis([-2*pi 2*pi 0 6]);
```

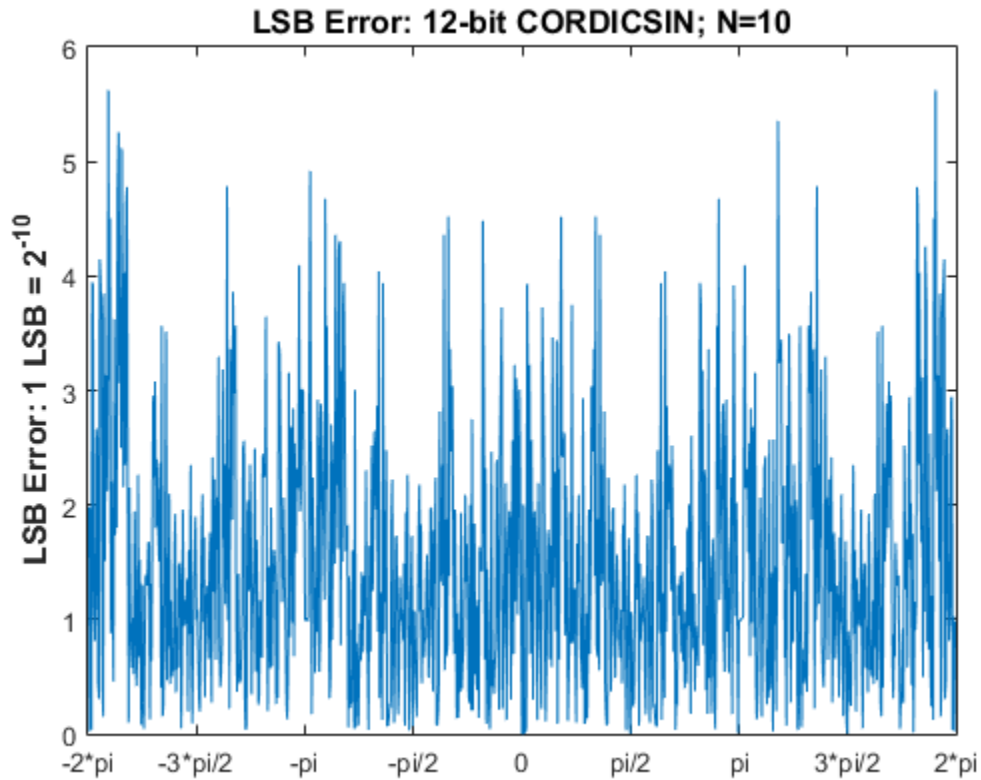

Compute Noise Floor

```
fft_mag = abs(fft(double(cdcSinTh)));
max_mag = max(fft_mag);
mag_db = 20*log10(fft_mag/max_mag);
figure;
hold on;
plot(0:1023, mag_db);
plot(0:1023, zeros(1,1024),'r--'); % Normalized peak (0 dB)
plot(0:1023, -62.*ones(1,1024),'r--'); % Noise floor level
ylabel('dB Magnitude','fontsize',12,'fontweight','b');
title('62 dB Noise Floor: 12-bit CORDICSIN; N=10',...
      'fontsize',12,'fontweight','b');
% axis([0 1023 -120 0]); full FFT
```

```
axis([0 round(1024*(pi/8)) -100 10]); % zoom in
set(gca,'XTick',[0 round(1024*pi/16) round(1024*pi/8)]);
set(gca,'XTickLabel',{'0','pi/16','pi/8'});
```

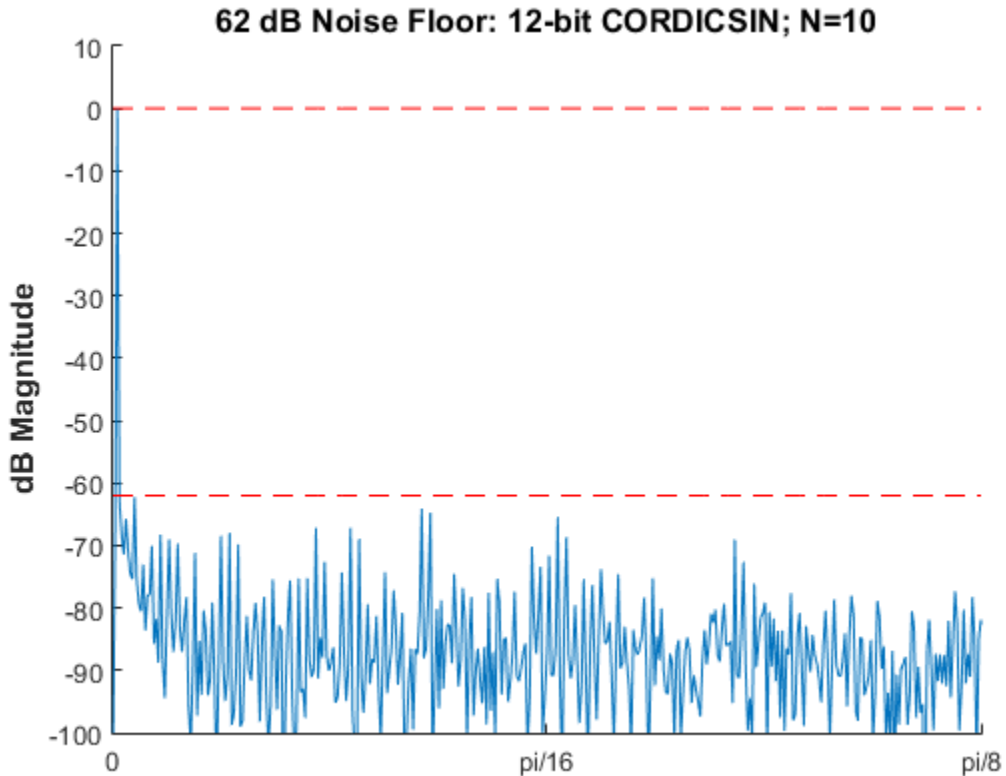

Accelerating the Fixed-Point CORDICSINCOS Function with FIACCEL

You can generate a MEX function from MATLAB code using the MATLAB® `fiaccl` function. Typically, running a generated MEX function can improve the simulation speed, although the actual speed improvement depends on the simulation platform being used. The following example shows how to accelerate the fixed-point `cordicsincos` function using `fiaccl`.

The `fiaccl` function compiles the MATLAB code into a MEX function. This step requires the creation of a temporary directory and write permissions in this directory.

```
tempdirObj = fidemo.fiTempdir('fi_sin_cos_demo');
```

When you declare the number of iterations to be a constant (e.g., 10) using `coder.newtype('constant',10)`, the compiled angle look-up table will also be constant, and thus won't be computed at each iteration. Also, when you call `cordicsincos_mex`, you will not need to give it the input argument for the number of iterations. If you pass in the number of iterations, the MEX-function will error.

The data type of the input parameters determines whether the `cordicsincos` function performs fixed-point or floating-point calculations. When MATLAB generates code for this file, code is only generated for the specific data type. For example, if the `THETA` input argument is fixed point, then only fixed-point code is generated.

```
inp = {thRadFxp, coder.newtype('constant',10)}; % example inputs for the function  
fiaccel('cordicsincos', '-o', 'cordicsincos_mex', '-args', inp)
```

First, calculate sine and cosine by calling `cordicsincos`.

```
tstart = tic;  
cordicsincos(thRadFxp,10);  
telapsed_Mcordicsincos = toc(tstart);
```

Next, calculate sine and cosine by calling the MEX-function `cordicsincos_mex`.

```
cordicsincos_mex(thRadFxp); % load the MEX file  
tstart = tic;  
cordicsincos_mex(thRadFxp);  
telapsed_MEXcordicsincos = toc(tstart);
```

Now, compare the speed. Type the following at the MATLAB command line to see the speed improvement on your platform:

```
fiaccel_speedup = telapsed_Mcordicsincos/telapsed_MEXcordicsincos;
```

To clean up the temporary directory, run the following commands:

```
clear cordicsincos_mex;  
status = tempdirObj.cleanUp;
```

Calculating SIN and COS Using Lookup Tables

There are many lookup table-based approaches that may be used to implement fixed-point sine and cosine approximations. The following is a low-cost approach based on a single real-valued lookup table and simple nearest-neighbor linear interpolation.

Single Lookup Table Based Approach

The `SIN` and `COS` methods of the `fi` object in the Fixed-Point Designer approximate the MATLAB® builtin floating-point `SIN` and `COS` functions, using a lookup table-based approach with simple nearest-neighbor linear interpolation between values. This approach allows for a small real-valued lookup table and uses simple arithmetic.

Using a single real-valued lookup table simplifies the index computation and the overall arithmetic required to achieve very good accuracy of the results. These simplifications yield relatively high speed performance and also relatively low memory requirements.

Understanding the Lookup Table Based SIN and COS Implementation

Lookup Table Size and Accuracy

Two important design considerations of a lookup table are its size and its accuracy. It is not possible to create a table for every possible input value u . It is also not possible to be perfectly accurate due to the quantization of $\sin(u)$ or $\cos(u)$ lookup table values.

As a compromise, the Fixed-Point Designer `SIN` and `COS` methods of `FI` use an 8-bit lookup table as part of their implementation. An 8-bit table is only 256 elements long, so it is small and efficient. Eight bits also corresponds to the size of a byte or a word on many platforms. Used in conjunction with linear interpolation, and 16-bit output (lookup table value) precision, an 8-bit-addressable lookup table provides both very good accuracy and performance.

Initializing the Constant SIN Lookup Table Values

For implementation simplicity, table value uniformity, and speed, a full sinewave table is used. First, a quarter-wave `SIN` function is sampled at 64 uniform intervals in the range $[0, \pi/2)$ radians. Choosing a signed 16-bit fractional fixed-point data type for the table values, i.e., `tblValsNT = numerictype(1,16,15)`, produces best precision results in the `SIN` output range $[-1.0, 1.0)$. The values are pre-quantized before they are set, to avoid overflow warnings.

```
tblValsNT = numerictype(1,16,15);
quarterSinDb1FltPtVals = (sin(2*pi*((0:63) ./ 256)))';
endpointQuantized_Plus1 = 1.0 - double(eps(fi(0,tblValsNT)));

halfSinWaveDb1FltPtVals = ...
    [quarterSinDb1FltPtVals; ...
    endpointQuantized_Plus1; ...
    flipud(quarterSinDb1FltPtVals(2:end))];
```

```
fullSinWaveDb1FltPtVals = ...  
    [halfSinWaveDb1FltPtVals; -halfSinWaveDb1FltPtVals];  
  
FI_SIN_LUT = fi(fullSinWaveDb1FltPtVals, tblValsNT);
```

Overview of Algorithm Implementation

The implementation of the Fixed-Point Designer `sin` and `cos` methods of `fi` objects involves first casting the fixed-point angle inputs `u` (in radians) to a pre-defined data type in the range $[0, 2\pi]$. For this purpose, a modulo- 2π operation is performed to obtain the fixed-point input value `inpValInRange` in the range $[0, 2\pi]$ and cast to in the best precision binary point scaled unsigned 16-bit fixed-point type `numericType(0, 16, 13)`:

```
% Best UNSIGNED type for real-world value range [0, 2*pi],  
% which maps to fixed-point stored integer vals [0, 51472].  
inpInRangeNT = numericType(0, 16, 13);
```

Next, we get the 16-bit stored unsigned integer value from this in-range fixed-point `FI` angle value:

```
idxUFI16 = fi(storedInteger(inpValInRange), numericType(0, 16, 0));
```

We multiply the stored integer value by a normalization constant, $65536/51472$. The resulting integer value will be in a full-scale `uint16` index range:

```
normConst_NT = numericType(0, 32, 31);  
normConstant = fi(65536/51472, normConst_NT);  
fullScaleIdx = normConstant * idxUFI16;  
idxUFI16(:) = fullScaleIdx;
```

The top 8 most significant bits (MSBs) of this full-scale unsigned 16-bit index `idxUFI16` are used to directly index into the 8-bit sine lookup table. Two table lookups are performed, one at the computed table index location `lutValBelow`, and one at the next index location `lutValAbove`:

```
idxUint8MSBs = storedInteger(bitsliceget(idxUFI16, 16, 9));  
zeroBasedIdx = int16(idxUint8MSBs);  
lutValBelow = FI_SIN_LUT(zeroBasedIdx + 1);  
lutValAbove = FI_SIN_LUT(zeroBasedIdx + 2);
```

The remaining 8 least significant bits (LSBs) of `idxUFI16` are used to interpolate between these two table values. The LSB values are treated as a normalized scaling factor with 8-bit fractional data type `rFracNT`:


```

rFracNT      = numerictype(0,8,8); % fractional remainder data type
idxFrac8LSBs = reinterpretcast(bitsliceget(idxUFX16,8,1), rFracNT);
rFraction    = idxFrac8LSBs;

```

A real multiply is used to determine the weighted difference between the two points. This results in a simple calculation (equivalent to one product and two sums) to obtain the interpolated fixed-point sine result:

```

temp = rFraction * (lutValAbove - lutValBelow);
rslt = lutValBelow + temp;

```

Example

Using the above algorithm, here is an example of the lookup table and linear interpolation process used to compute the value of SIN for a fixed-point input `inpValInRange = 0.425` radians:

```

% Use an arbitrary input value (e.g., 0.425 radians)
inpInRangeNT = numerictype(0,16,13); % best precision, [0, 2*pi] radians
inpValInRange = fi(0.425, inpInRangeNT); % arbitrary fixed-point input angle

% Normalize its stored integer to get full-scale unsigned 16-bit integer index
idxUFX16      = fi(storedInteger(inpValInRange), numerictype(0,16,0));
normConst_NT = numerictype(0,32,31);
normConstant  = fi(65536/51472, normConst_NT);
fullScaleIdx  = normConstant * idxUFX16;
idxUFX16(:)   = fullScaleIdx;

% Do two table lookups using unsigned 8-bit integer index (i.e., 8 MSBs)
idxUint8MSBs = storedInteger(bitsliceget(idxUFX16, 16, 9));
zeroBasedIdx = int16(idxUint8MSBs); % zero-based table index value
lutValBelow  = FI_SIN_LUT(zeroBasedIdx + 1); % 1st table lookup value
lutValAbove  = FI_SIN_LUT(zeroBasedIdx + 2); % 2nd table lookup value

% Do nearest-neighbor interpolation using 8 LSBs (treat as fractional remainder)
rFracNT      = numerictype(0,8,8); % fractional remainder data type
idxFrac8LSBs = reinterpretcast(bitsliceget(idxUFX16,8,1), rFracNT);
rFraction    = idxFrac8LSBs; % fractional value for linear interpolation
temp         = rFraction * (lutValAbove - lutValBelow);
rslt         = lutValBelow + temp;

```

Here is a plot of the algorithm results:


```

x_vals = 0:(pi/128):(pi/4);
xIdxLo = zeroBasedIdx - 1;

```

```
xIdxHi = zeroBasedIdx + 4;
figure; hold on; axis([x_vals(xIdxLo) x_vals(xIdxHi) 0.25 0.65]);
plot(x_vals(xIdxLo:xIdxHi), double(FI_SIN_LUT(xIdxLo:xIdxHi)), 'b^--');
plot([x_vals(zeroBasedIdx+1) x_vals(zeroBasedIdx+2)], ...
     [lutValBelow lutValAbove], 'k. '); % Closest values
plot(0.425, double(rslt), 'r*'); % Interpolated fixed-point result
plot(0.425, sin(0.425), 'gs'); % Double precision reference result
xlabel('X'); ylabel('SIN(X)');
lut_val_str = 'Fixed-point lookup table values';
near_str    = 'Two closest fixed-point LUT values';
interp_str  = 'Interpolated fixed-point result';
ref_str     = 'Double precision reference value';
legend(lut_val_str, near_str, interp_str, ref_str);
title('Fixed-Point Designer Lookup Table Based SIN with Linear Interpolation', ...
      'fontsize',12,'fontweight','b');
```

Fixed-Point Designer Lookup Table Based SIN with Linear Interpolation

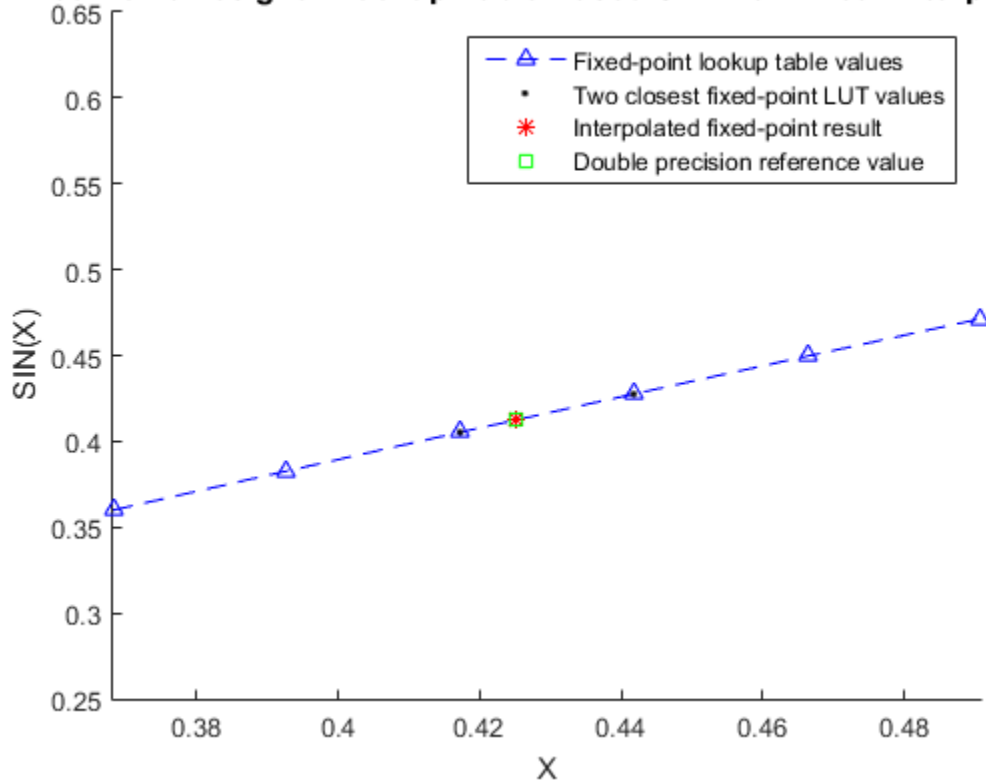

Computing Fixed-point Sine Using SIN

Create 1024 points between $[-2\pi, 2\pi]$

```
stepSize = pi/256;
thRadDb1 = (-2*pi):stepSize:(2*pi - stepSize); % double precision floating-point
thRadFxp = sfi(thRadDb1, 12); % signed, 12-bit fixed-point inputs
```


Compare fixed-point SIN vs. double-precision SIN results

```
fxpSinTh = sin(thRadFxp); % fixed-point results
sinThRef = sin(double(thRadFxp)); % reference results
errSinRef = sinThRef - double(fxpSinTh);
figure; hold on; axis([-2*pi 2*pi -1.25 1.25]);
plot(thRadFxp, sinThRef, 'b');
```

```

plot(thRadFxp, fxpSinTh, 'g');
plot(thRadFxp, errSinRef, 'r');
ylabel('sin(\Theta)', 'fontsize', 12, 'fontweight', 'b');
set(gca, 'XTick', -2*pi:pi/2:2*pi);
set(gca, 'XTickLabel', ...
    {'-2*pi', '-3*pi/2', '-pi', '-pi/2', ...
     '0', 'pi/2', 'pi', '3*pi/2', '2*pi'});
set(gca, 'YTick', -1:0.5:1);
set(gca, 'YTickLabel', {'-1.0', '-0.5', '0', '0.5', '1.0'});
ref_str = 'Reference: sin(double(\Theta))';
fxp_str = sprintf('16-bit Fixed-Point SIN with 12-bit Inputs');
err_str = sprintf('Error (max = %f)', max(abs(errSinRef)));
legend(ref_str, fxp_str, err_str);
title(fxp_str, 'fontsize', 12, 'fontweight', 'b');

```

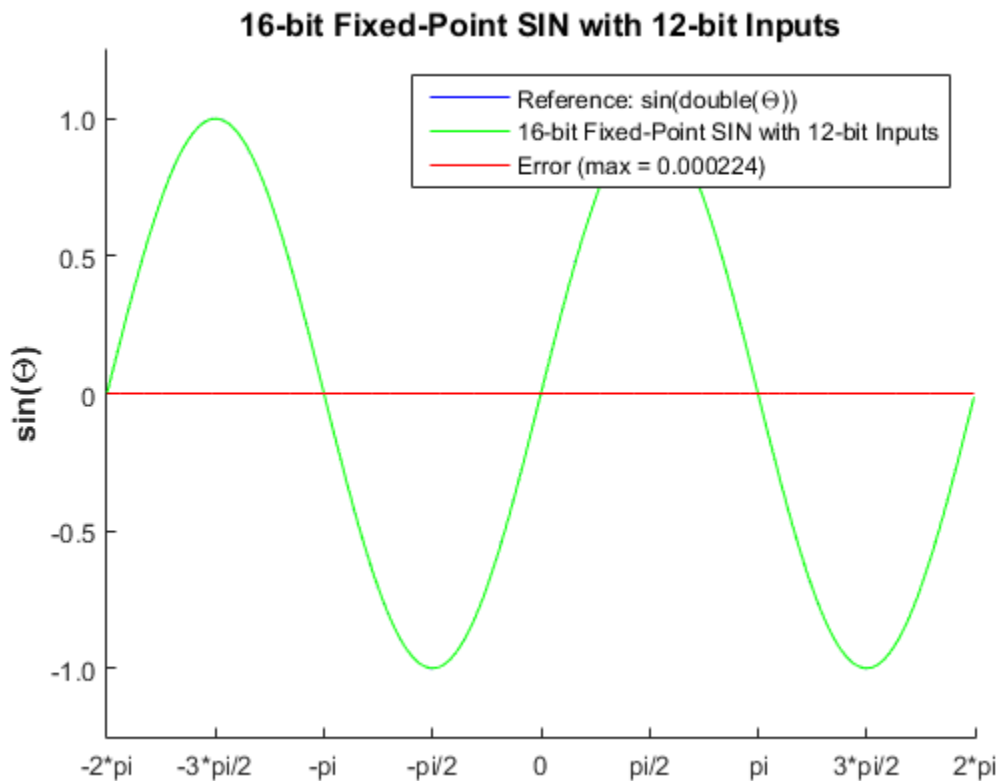


Compute the LSB Error


```

figure;
fracLen = fxpSinTh.FractionLength;
plot(thRadFxp, abs(ErrSinRef) * pow2(fracLen));
set(gca, 'XTick', -2*pi:pi/2:2*pi);
set(gca, 'XTickLabel', ...
    {'-2*pi', '-3*pi/2', '-pi', '-pi/2', ...
    '0', 'pi/2', 'pi', '3*pi/2', '2*pi'});
ylabel(sprintf('LSB Error: 1 LSB = 2^{-%d}', fracLen), 'fontsize', 12, 'fontweight', 'b');
title('LSB Error: 16-bit Fixed-Point SIN with 12-bit Inputs', 'fontsize', 12, 'fontweight');
axis([-2*pi 2*pi 0 8]);

```

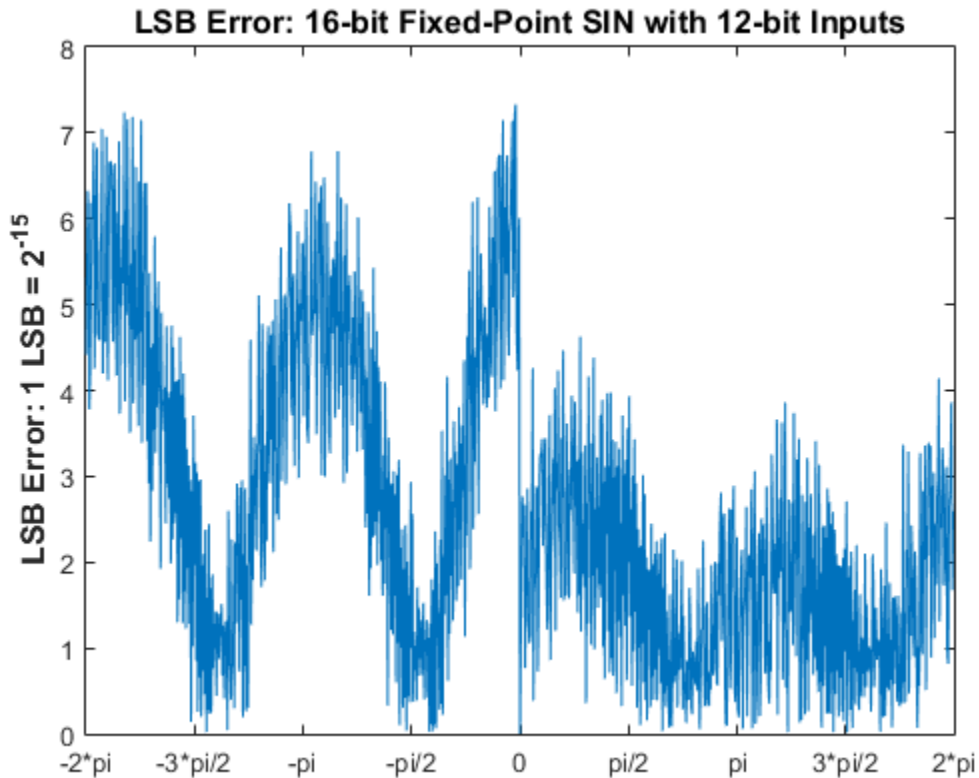**Compute Noise Floor**

```
fft_mag = abs(fft(double(fxpSinTh)));
max_mag = max(fft_mag);
mag_db = 20*log10(fft_mag/max_mag);
figure;
hold on;
plot(0:1023, mag_db);
plot(0:1023, zeros(1,1024), 'r--'); % Normalized peak (0 dB)
plot(0:1023, -64.*ones(1,1024), 'r--'); % Noise floor level (dB)
ylabel('dB Magnitude', 'fontsize', 12, 'fontweight', 'b');
title('64 dB Noise Floor: 16-bit Fixed-Point SIN with 12-bit Inputs', ...
      'fontsize', 12, 'fontweight', 'b');
% axis([0 1023 -120 0]); full FFT
axis([0 round(1024*(pi/8)) -100 10]); % zoom in
set(gca, 'XTick', [0 round(1024*pi/16) round(1024*pi/8)]);
set(gca, 'XTickLabel', {'0', 'pi/16', 'pi/8'});
```

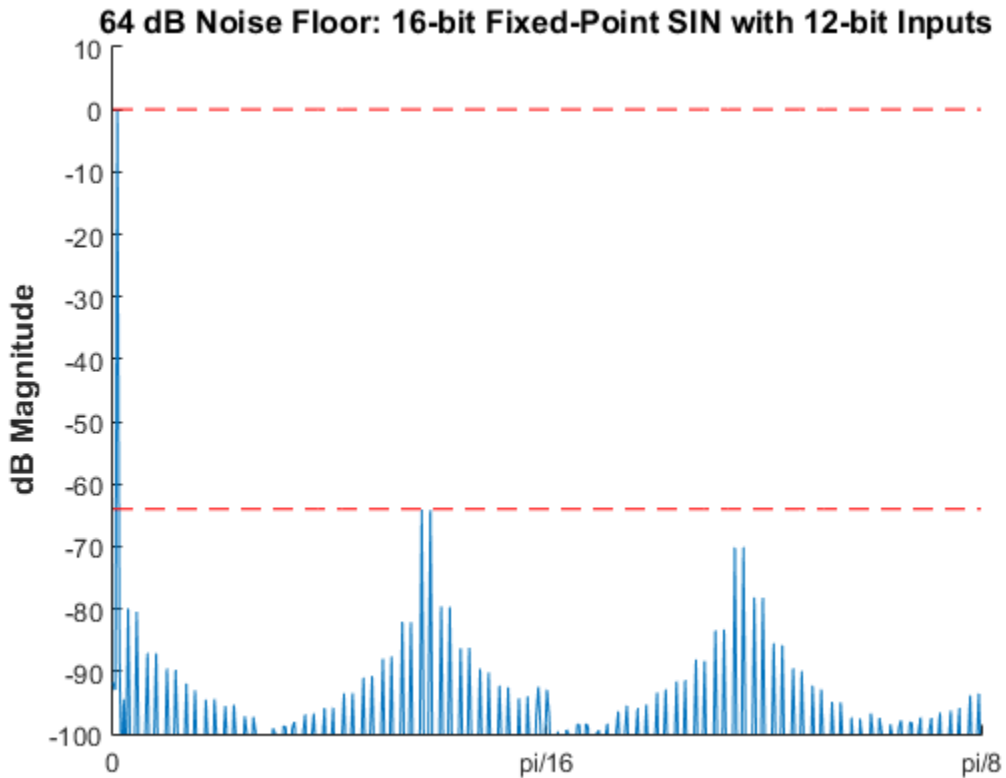

Comparing the Costs of the Fixed-Point Approximation Algorithms

The fixed-point CORDIC algorithm requires the following operations:

- 1 table lookup **per iteration**
- 2 shifts **per iteration**
- 3 additions **per iteration**

The simplified single lookup table algorithm with nearest-neighbor linear interpolation requires the following operations:

- 2 table lookups
- 1 multiplication

- 2 additions

In real world applications, selecting an algorithm for the fixed-point trigonometric function calculations typically depends on the required accuracy, cost and hardware constraints.

```
close all; % close all figure windows
```

References

- 1 Jack E. Volder, The CORDIC Trigonometric Computing Technique, IRE Transactions on Electronic Computers, Volume EC-8, September 1959, pp330-334.
- 2 Ray Andraka, A survey of CORDIC algorithm for FPGA based computers, Proceedings of the 1998 ACM/SIGDA sixth international symposium on Field programmable gate arrays, Feb. 22-24, 1998, pp191-200

Calculate Fixed-Point Arctangent

This example shows how to use the CORDIC algorithm, polynomial approximation, and lookup table approaches to calculate the fixed-point, four quadrant inverse tangent. These implementations are approximations to the MATLAB® built-in function `atan2`. An efficient fixed-point arctangent algorithm to estimate an angle is critical to many applications, including control of robotics, frequency tracking in wireless communications, and many more.

Calculating `atan2(y, x)` Using the CORDIC Algorithm

Introduction

The `cordicatan2` function approximates the MATLAB® `atan2` function, using a CORDIC-based algorithm. CORDIC is an acronym for COordinate Rotation DIGital Computer. The Givens rotation-based CORDIC algorithm (see [1,2]) is one of the most hardware efficient algorithms because it only requires iterative shift-add operations. The CORDIC algorithm eliminates the need for explicit multipliers, and is suitable for calculating a variety of functions, such as sine, cosine, arcsine, arccosine, arctangent, vector magnitude, divide, square root, hyperbolic and logarithmic functions.

CORDIC Vectoring Computation Mode

The CORDIC vectoring mode equations are widely used to calculate `atan(y/x)`. In vectoring mode, the CORDIC rotator rotates the input vector towards the positive X-axis to minimize the *y* component of the residual vector. For each iteration, if the *y* coordinate of the residual vector is positive, the CORDIC rotator rotates clockwise (using a negative angle); otherwise, it rotates counter-clockwise (using a positive angle). If the angle accumulator is initialized to 0, at the end of the iterations, the accumulated rotation angle is the angle of the original input vector.

In vectoring mode, the CORDIC equations are:

$$x_{i+1} = x_i - y_i * d_i * 2^{-i}$$

$$y_{i+1} = y_i + x_i * d_i * 2^{-i}$$

$z_{i+1} = z_i + d_i * \text{atan}(2^{-i})$ is the angle accumulator

where $d_i = +1$ if $y_i < 0$, and -1 otherwise;

$i = 0, 1, \dots, N - 1$, and N is the total number of iterations.

As N approaches $+\infty$:

$$x_N = A_N \sqrt{x_0^2 + y_0^2}$$

$$y_N = 0$$

$$z_N = z_0 + \text{atan}(y_0/x_0)$$

$$A_N = 1/(\cos(\text{atan}(2^0)) * \cos(\text{atan}(2^{-1})) * \dots * \cos(\text{atan}(2^{-(N-1)}))) = \prod_{i=0}^{N-1} \sqrt{1 + 2^{-2i}}$$

As explained above, the arctangent can be directly computed using the vectoring mode CORDIC rotator with the angle accumulator initialized to zero, i.e., $z_0 = 0$, and $z_N \approx \text{atan}(y_0/x_0)$.

Understanding the CORDICATAN2 Code

Introduction

The `cordicatan2` function computes the four quadrant arctangent of the elements of x and y , where $-\pi \leq \text{ATAN2}(y, x) \leq +\pi$. `cordicatan2` calculates the arctangent using the vectoring mode CORDIC algorithm, according to the above CORDIC equations.

Initialization

The `cordicatan2` function performs the following initialization steps:

- x_0 is set to the initial X input value.
- y_0 is set to the initial Y input value.
- z_0 is set to zero.

After N iterations, these initial values lead to $z_N \approx \text{atan}(y_0/x_0)$

Shared Fixed-Point and Floating-Point CORDIC Kernel Code

The MATLAB code for the CORDIC algorithm (vectoring mode) kernel portion is as follows (for the case of scalar x , y , and z). This same code is used for both fixed-point and floating-point operations:

```
function [x, y, z] = cordic_vectoring_kernel(x, y, z, inpLUT, n)
% Perform CORDIC vectoring kernel algorithm for N kernel iterations.
xtmp = x;
ytmp = y;
for idx = 1:n
    if y < 0
        x(:) = x - ytmp;
        y(:) = y + xtmp;
        z(:) = z - inpLUT(idx);
    else
        x(:) = x + ytmp;
        y(:) = y - xtmp;
        z(:) = z + inpLUT(idx);
    end
    xtmp = bitsra(x, idx); % bit-shift-right for multiply by 2^(-idx)
    ytmp = bitsra(y, idx); % bit-shift-right for multiply by 2^(-idx)
end
```

Visualizing the Vectoring Mode CORDIC Iterations

The CORDIC algorithm is usually run through a specified (constant) number of iterations since ending the CORDIC iterations early would break pipelined code, and the CORDIC gain A_n would not be constant because n would vary.

For very large values of n , the CORDIC algorithm is guaranteed to converge, but not always monotonically. As will be shown in the following example, intermediate iterations occasionally rotate the vector closer to the positive X-axis than the following iteration does. You can typically achieve greater accuracy by increasing the total number of iterations.

Example

In the following example, iteration 5 provides a better estimate of the angle than iteration 6, and the CORDIC algorithm converges in later iterations.

Initialize the input vector with angle $\theta = 43$ degrees, magnitude = 1

```
origFormat = get(0, 'format'); % store original format setting;
                                % restore this setting at the end.
format short
%
theta = 43*pi/180; % input angle in radians
Niter = 10;       % number of iterations
inX   = cos(theta); % x coordinate of the input vector
inY   = sin(theta); % y coordinate of the input vector
%
% pre-allocate memories
zf = zeros(1, Niter);
xf = [inX, zeros(1, Niter)];
yf = [inY, zeros(1, Niter)];
angleLUT = atan(2.^-(0:Niter-1)); % pre-calculate the angle lookup table
%
% Call CORDIC vectoring kernel algorithm
for k = 1:Niter
    [xf(k+1), yf(k+1), zf(k)] = fixed.internal.cordic_vectoring_kernel_private(inX, inY,
end
end
```

The following output shows the CORDIC angle accumulation (in degrees) through 10 iterations. Note that the 5th iteration produced less error than the 6th iteration, and that the calculated angle quickly converges to the actual input angle afterward.

```
angleAccumulator = zf*180/pi; angleError = angleAccumulator - theta*180/pi;
fprintf('Iteration: %2d, Calculated angle: %7.3f, Error in degrees: %10g, Error in bits: %10g\n',
        [(1:Niter); angleAccumulator(:)'; angleError(:)'; log2(abs(zf(:) - theta))]);
```

```
Iteration:  1, Calculated angle:  45.000, Error in degrees:          2, Error in bits:
Iteration:  2, Calculated angle:  18.435, Error in degrees: -24.5651, Error in bits:
Iteration:  3, Calculated angle:  32.471, Error in degrees: -10.5288, Error in bits:
Iteration:  4, Calculated angle:  39.596, Error in degrees:  -3.40379, Error in bits:
Iteration:  5, Calculated angle:  43.173, Error in degrees:  0.172543, Error in bits:
Iteration:  6, Calculated angle:  41.383, Error in degrees: -1.61737, Error in bits:
Iteration:  7, Calculated angle:  42.278, Error in degrees: -0.722194, Error in bits:
Iteration:  8, Calculated angle:  42.725, Error in degrees: -0.27458, Error in bits:
Iteration:  9, Calculated angle:  42.949, Error in degrees: -0.0507692, Error in bits:
Iteration: 10, Calculated angle:  43.061, Error in degrees:  0.0611365, Error in bits:
```

As N approaches $+\infty$, the CORDIC rotator gain A_N approaches 1.64676. In this example, the input (x_0, y_0) was on the unit circle, so the initial rotator magnitude is 1. The following output shows the rotator magnitude through 10 iterations:

```
rotatorMagnitude = sqrt(xf.^2+yf.^2); % CORDIC rotator gain through iterations
fprintf('Iteration: %2d, Rotator magnitude: %g\n',...
        [(0:Niter); rotatorMagnitude(:)']);
```

```
Iteration: 0, Rotator magnitude: 1
Iteration: 1, Rotator magnitude: 1.41421
Iteration: 2, Rotator magnitude: 1.58114
Iteration: 3, Rotator magnitude: 1.6298
Iteration: 4, Rotator magnitude: 1.64248
Iteration: 5, Rotator magnitude: 1.64569
Iteration: 6, Rotator magnitude: 1.64649
Iteration: 7, Rotator magnitude: 1.64669
Iteration: 8, Rotator magnitude: 1.64674
Iteration: 9, Rotator magnitude: 1.64676
Iteration: 10, Rotator magnitude: 1.64676
```

Note that y_n approaches 0, and x_n approaches $A_n \sqrt{x_0^2 + y_0^2} = A_n$, because $\sqrt{x_0^2 + y_0^2} = 1$.


```
y_n = yf(end)
```

```
y_n =
    -0.0018
```


```
x_n = xf(end)
```

```
x_n =
    1.6468
```

```
figno = 1;
fidemo.fixpt_atan2_demo_plot(figno, xf, yf) %Vectoring Mode CORDIC Iterations
```

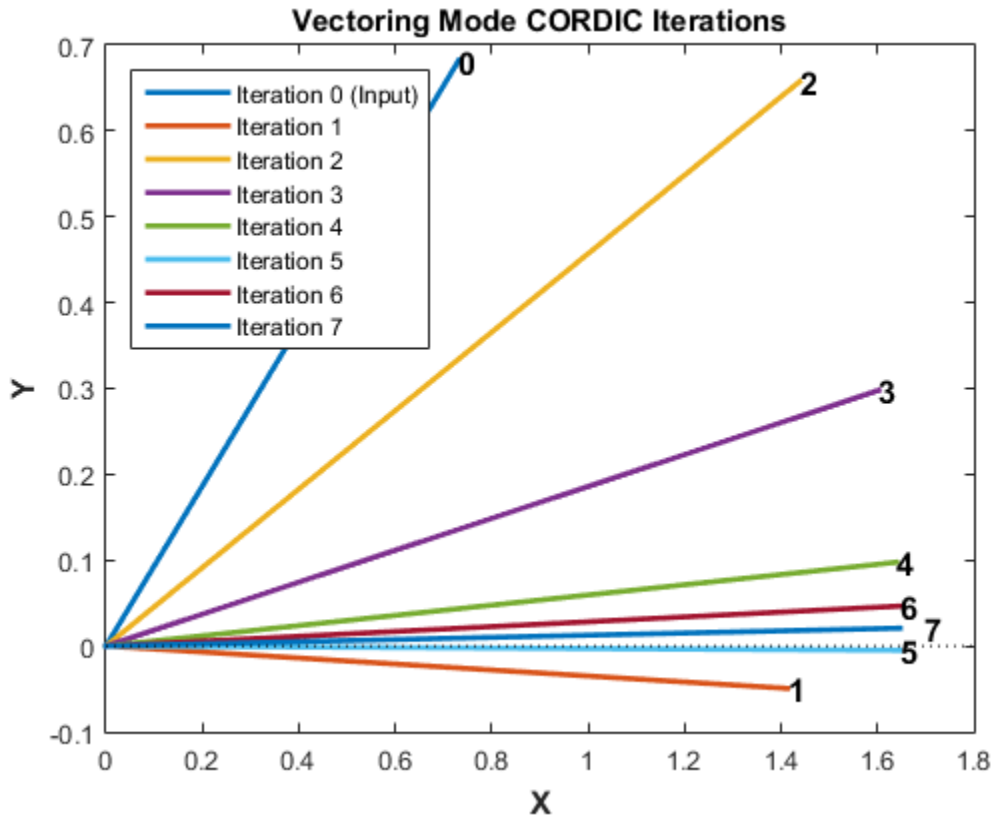

```
figno = figno + 1; %Cumulative Angle and Rotator Magnitude Through Iterations
fidemo.fixpt_atan2_demo_plot(figno,Niter, theta, angleAccumulator, rotatorMagnitude)
```

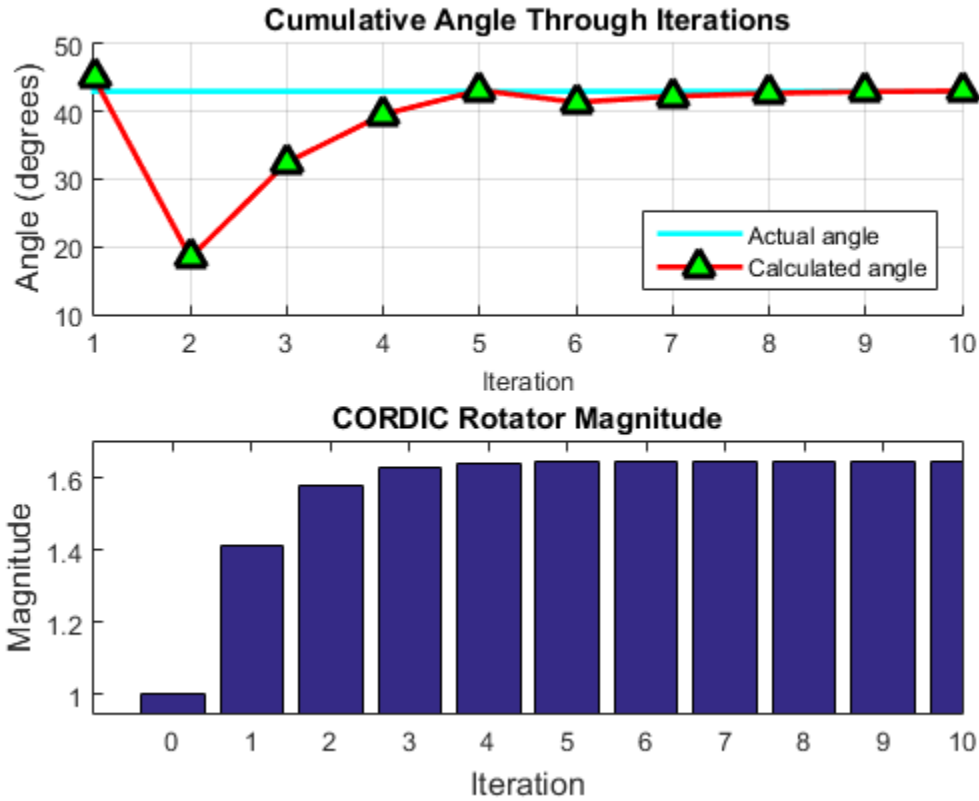

Performing Overall Error Analysis of the CORDIC Algorithm

The overall error consists of two parts:

- 1 The algorithmic error that results from the CORDIC rotation angle being represented by a finite number of basic angles.
- 2 The quantization or rounding error that results from the finite precision representation of the angle lookup table, and from the finite precision arithmetic used in fixed-point operations.

Calculate the CORDIC Algorithmic Error

```
theta = (-178:2:180)*pi/180; % angle in radians
```

```
inXflt = cos(theta); % generates input vector
inYflt = sin(theta);
Niter  = 12; % total number of iterations
zflt   = cordicatan2(inYflt, inXflt, Niter); % floating-point results
```

Calculate the maximum magnitude of the CORDIC algorithmic error by comparing the CORDIC computation to the builtin `atan2` function.

```
format long
cordic_algErr_real_world_value = max(abs((atan2(inYflt, inXflt) - zflt)))

cordic_algErr_real_world_value =

    4.753112306290497e-04
```

The log base 2 error is related to the number of iterations. In this example, we use 12 iterations (i.e., accurate to 11 binary digits), so the magnitude of the error is less than 2^{-11}

```
cordic_algErr_bits = log2(cordic_algErr_real_world_value)

cordic_algErr_bits =

   -11.038839889583048
```

Relationship Between Number of Iterations and Precision

Once the quantization error dominates the overall error, i.e., the quantization error is greater than the algorithmic error, increasing the total number of iterations won't significantly decrease the overall error of the fixed-point CORDIC algorithm. You should pick your fraction lengths and total number of iterations to ensure that the quantization error is smaller than the algorithmic error. In the CORDIC algorithm, the precision increases by one bit every iteration. Thus, there is no reason to pick a number of iterations greater than the precision of the input data.

Another way to look at the relationship between the number of iterations and the precision is in the right-shift step of the algorithm. For example, on the counter-clockwise rotation

```
x(:) = x0 - bitsra(y,i);
```



```
y(:) = y + bitsra(x0,i);
```

if i is equal to the word length of y and $x0$, then `bitsra(y,i)` and `bitsra(x0,i)` shift all the way to zero and do not contribute anything to the next step.

To measure the error from the fixed-point algorithm, and not the differences in input values, compute the floating-point reference with the same inputs as the fixed-point CORDIC algorithm.

```
inXfix = sfi(inXflt, 16, 14);
inYfix = sfi(inYflt, 16, 14);
zref   = atan2(double(inYfix), double(inXfix));
zfix8  = cordicatan2(inYfix, inXfix, 8);
zfix10 = cordicatan2(inYfix, inXfix, 10);
zfix12 = cordicatan2(inYfix, inXfix, 12);
zfix14 = cordicatan2(inYfix, inXfix, 14);
zfix15 = cordicatan2(inYfix, inXfix, 15);
cordic_err = bsxfun(@minus,zref,double([zfix8;zfix10;zfix12;zfix14;zfix15]));
```

The error depends on the number of iterations and the precision of the input data. In the above example, the input data is in the range $[-1, +1]$, and the fraction length is 14. From the following tables showing the maximum error at each iteration, and the figure showing the overall error of the CORDIC algorithm, you can see that the error decreases by about 1 bit per iteration until the precision of the data is reached.


```
iterations = [8, 10, 12, 14, 15];
max_cordicErr_real_world_value = max(abs(cordic_err'));
fprintf('Iterations: %2d, Max error in real-world-value: %g\n',...
        [iterations; max_cordicErr_real_world_value]);
```

```
Iterations: 8, Max error in real-world-value: 0.00773633
Iterations: 10, Max error in real-world-value: 0.00187695
Iterations: 12, Max error in real-world-value: 0.000501175
Iterations: 14, Max error in real-world-value: 0.000244621
Iterations: 15, Max error in real-world-value: 0.000244621
```

```
max_cordicErr_bits = log2(max_cordicErr_real_world_value);
fprintf('Iterations: %2d, Max error in bits: %g\n',[iterations; max_cordicErr_bits]);
```

```
Iterations: 8, Max error in bits: -7.01414
Iterations: 10, Max error in bits: -9.05739
Iterations: 12, Max error in bits: -10.9624
Iterations: 14, Max error in bits: -11.9972
Iterations: 15, Max error in bits: -11.9972
```

```
figno = figno + 1;
fidemo.fixpt_atan2_demo_plot(figno, theta, cordic_err)
```

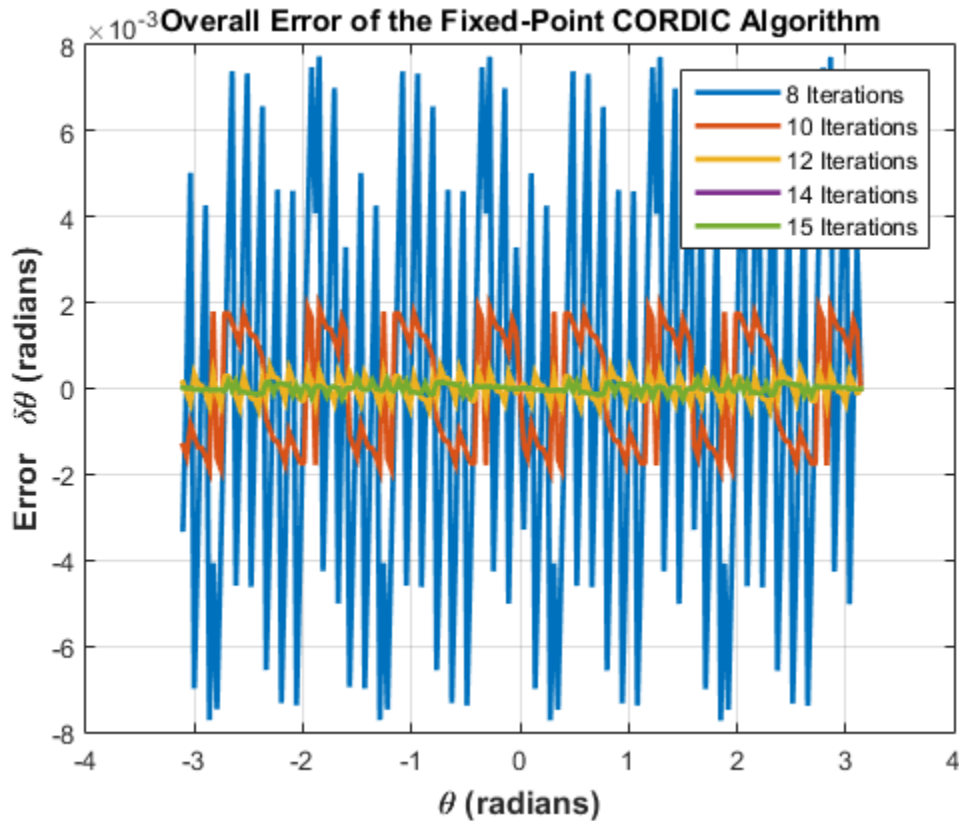

Accelerating the Fixed-Point CORDICATAN2 Algorithm Using FIACCCEL

You can generate a MEX function from MATLAB code using the MATLAB® `fiaccel` command. Typically, running a generated MEX function can improve the simulation speed, although the actual speed improvement depends on the simulation platform being used. The following example shows how to accelerate the fixed-point `cordicatan2` algorithm using `fiaccel`.

The `fiaccel` function compiles the MATLAB code into a MEX function. This step requires the creation of a temporary directory and write permissions in that directory.

```
tempdirObj = fidemo.fiTempdir('fixpt_atan2_demo');
```

When you declare the number of iterations to be a constant (e.g., 12) using `coder.newtype('constant', 12)`, the compiled angle lookup table will also be constant, and thus won't be computed at each iteration. Also, when you call the compiled MEX file `cordicatan2_mex`, you will not need to give it the input argument for the number of iterations. If you pass in the number of iterations, the MEX function will error.

The data type of the input parameters determines whether the `cordicatan2` function performs fixed-point or floating-point calculations. When MATLAB generates code for this file, code is only generated for the specific data type. For example, if the inputs are fixed point, only fixed-point code is generated.

```
inp = {inYfix, inXfix, coder.newtype('constant',12)}; % example inputs for the function
fiaccel('cordicatan2', '-o', 'cordicatan2_mex', '-args', inp)
```

First, calculate a vector of 4 quadrant `atan2` by calling `cordicatan2`.

```
tstart = tic;
cordicatan2(inYfix,inXfix,Niter);
telapsed_Mcordicatan2 = toc(tstart);
```

Next, calculate a vector of 4 quadrant `atan2` by calling the MEX-function `cordicatan2_mex`

```
cordicatan2_mex(inYfix,inXfix); % load the MEX file
tstart = tic;
cordicatan2_mex(inYfix,inXfix);
telapsed_MEXcordicatan2 = toc(tstart);
```

Now, compare the speed. Type the following in the MATLAB command window to see the speed improvement on your specific platform:

```
fiaccel_speedup = telapsed_Mcordicatan2/telapsed_MEXcordicatan2;
```

To clean up the temporary directory, run the following commands:

```
clear cordicatan2_mex;
status = tempdirObj.cleanUp;
```

Calculating `atan2(y, x)` Using Chebyshev Polynomial Approximation

Polynomial approximation is a multiply-accumulate (MAC) centric algorithm. It can be a good choice for DSP implementations of non-linear functions like `atan(x)`.

For a given degree of polynomial, and a given function $f(x) = \text{atan}(x)$ evaluated over the interval of $[-1, +1]$, the polynomial approximation theory tries to find the polynomial that minimizes the maximum value of $|P(x) - f(x)|$, where $P(x)$ is the approximating polynomial. In general, you can obtain polynomials very close to the optimal one by approximating the given function in terms of Chebyshev polynomials and cutting off the polynomial at the desired degree.

The approximation of arctangent over the interval of $[-1, +1]$ using the Chebyshev polynomial of the first kind is summarized in the following formula:

$$\text{atan}(x) = 2 \sum_{n=0}^{\infty} \frac{(-1)^n q^{2n+1}}{(2n+1)} T_{2n+1}(x)$$

where

$$q = 1/(1 + \sqrt{2})$$

$$x \in [-1, +1]$$

$$T_0(x) = 1$$

$$T_1(x) = x$$

$$T_{n+1}(x) = 2xT_n(x) - T_{n-1}(x).$$

Therefore, the 3rd order Chebyshev polynomial approximation is

$$\text{atan}(x) = 0.970562748477141 * x - 0.189514164974601 * x^3.$$

The 5th order Chebyshev polynomial approximation is

$$\text{atan}(x) = 0.994949366116654 * x - 0.287060635532652 * x^3 + 0.078037176446441 * x^5.$$

The 7th order Chebyshev polynomial approximation is

$$\begin{aligned} \operatorname{atan}(x) = & 0.999133448222780 * x - 0.320533292381664 * x^3 \\ & + 0.144982490144465 * x^5 - 0.038254464970299 * x^7. \end{aligned}$$

You can obtain four quadrant output through angle correction based on the properties of the arctangent function.

Comparing the Algorithmic Error of the CORDIC and Polynomial Approximation Algorithms

In general, higher degrees of polynomial approximation produce more accurate final results. However, higher degrees of polynomial approximation also increase the complexity of the algorithm and require more MAC operations and more memory. To be consistent with the CORDIC algorithm and the MATLAB `atan2` function, the input arguments consist of both `x` and `y` coordinates instead of the ratio `y/x`.

To eliminate quantization error, floating-point implementations of the CORDIC and Chebyshev polynomial approximation algorithms are used in the comparison below. An algorithmic error comparison reveals that increasing the number of CORDIC iterations results in less error. It also reveals that the CORDIC algorithm with 12 iterations provides a slightly better angle estimation than the 5th order Chebyshev polynomial approximation. The approximation error of the 3rd order Chebyshev Polynomial is about 8 times larger than that of the 5th order Chebyshev polynomial. You should choose the order or degree of the polynomial based on the required accuracy of the angle estimation and the hardware constraints.

The coefficients of the Chebyshev polynomial approximation for `atan(x)` are shown in ascending order of `x`.

```
constA3 = [0.970562748477141, -0.189514164974601]; % 3rd order
constA5 = [0.994949366116654, -0.287060635532652, 0.078037176446441]; % 5th order
constA7 = [0.999133448222780 -0.320533292381664 0.144982490144465...
          -0.038254464970299]; % 7th order

theta = (-90:1:90)*pi/180; % angle in radians
inXflt = cos(theta);
inYflt = sin(theta);
zfltRef = atan2(inYflt, inXflt); % Ideal output from ATAN2 function
zflt3 = fidemo.poly_atan2(inYflt, inXflt, 3, constA3); % 3rd order polynomial
zflt5 = fidemo.poly_atan2(inYflt, inXflt, 5, constA5); % 5th order polynomial
zflt7 = fidemo.poly_atan2(inYflt, inXflt, 7, constA7); % 7th order polynomial
zflt8 = cordicatan2(inYflt, inXflt, 8); % CORDIC alg with 8 iterations
zflt12 = cordicatan2(inYflt, inXflt, 12); % CORDIC alg with 12 iterations
```

The maximum algorithmic error magnitude (or infinity norm of the algorithmic error) for the CORDIC algorithm with 8 and 12 iterations is shown below:

```
cordic_algErr    = [zfltRef;zfltRef] - [zflt8;zflt12];
max_cordicAlgErr = max(abs(cordic_algErr'));
fprintf('Iterations: %2d, CORDIC algorithmic error in real-world-value: %g\n',...
        [[8,12]; max_cordicAlgErr(:)']');
```

```
Iterations:  8, CORDIC algorithmic error in real-world-value: 0.00772146
Iterations: 12, CORDIC algorithmic error in real-world-value: 0.000483258
```

The log base 2 error shows the number of binary digits of accuracy. The 12th iteration of the CORDIC algorithm has an estimated angle accuracy of 2^{-11} :

```
max_cordicAlgErr_bits = log2(max_cordicAlgErr);
fprintf('Iterations: %2d, CORDIC algorithmic error in bits: %g\n',...
        [[8,12]; max_cordicAlgErr_bits(:)']');
```

```
Iterations:  8, CORDIC algorithmic error in bits: -7.01691
Iterations: 12, CORDIC algorithmic error in bits: -11.0149
```

The following code shows the magnitude of the maximum algorithmic error of the polynomial approximation for orders 3, 5, and 7:

```
poly_algErr      = [zfltRef;zfltRef;zfltRef] - [zfltp3;zfltp5;zfltp7];
max_polyAlgErr   = max(abs(poly_algErr'));
fprintf('Order: %d, Polynomial approximation algorithmic error in real-world-value: %g\n',...
        [3:2:7; max_polyAlgErr(:)']');
```


```
Order: 3, Polynomial approximation algorithmic error in real-world-value: 0.00541647
Order: 5, Polynomial approximation algorithmic error in real-world-value: 0.000679384
Order: 7, Polynomial approximation algorithmic error in real-world-value: 9.16204e-05
```

The log base 2 error shows the number of binary digits of accuracy.

```
max_polyAlgErr_bits = log2(max_polyAlgErr);
fprintf('Order: %d, Polynomial approximation algorithmic error in bits: %g\n',...
        [3:2:7; max_polyAlgErr_bits(:)']');
```

```
Order: 3, Polynomial approximation algorithmic error in bits: -7.52843
Order: 5, Polynomial approximation algorithmic error in bits: -10.5235
Order: 7, Polynomial approximation algorithmic error in bits: -13.414
```

```
figno = figno + 1;
fidemo.fixpt_atan2_demo_plot(figno, theta, cordic_algErr, poly_algErr)
```

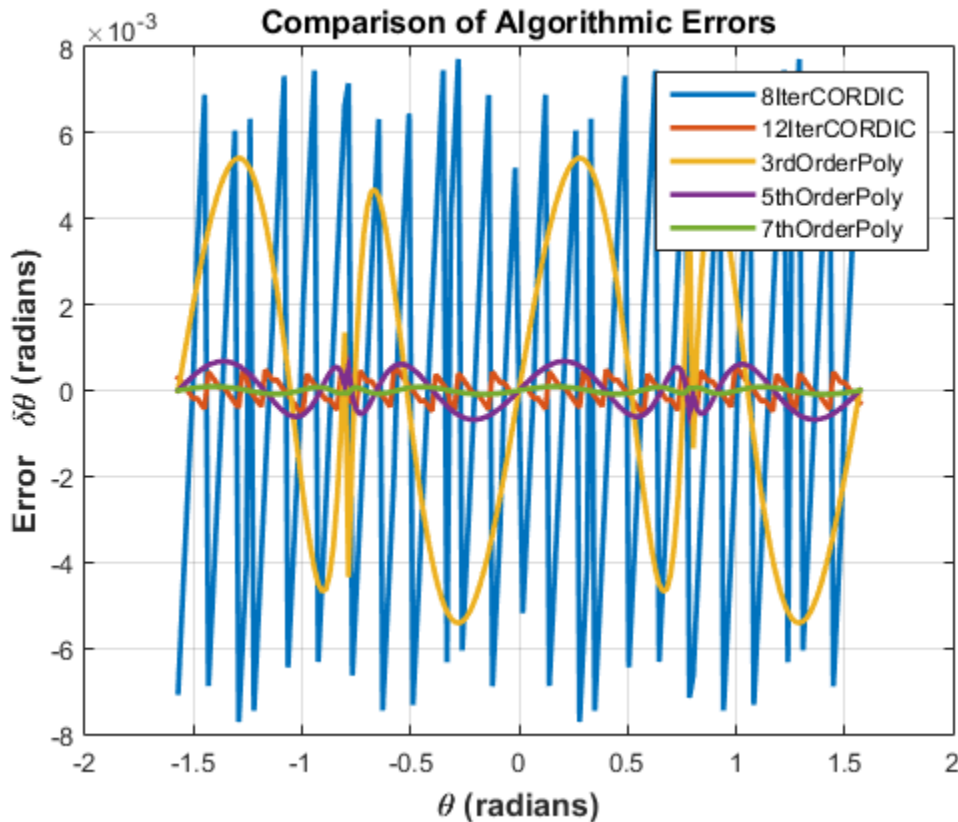

Converting the Floating-Point Chebyshev Polynomial Approximation Algorithm to Fixed Point

Assume the input and output word lengths are constrained to 16 bits by the hardware, and the 5th order Chebyshev polynomial is used in the approximation. Because the dynamic range of inputs x , y and y/x are all within $[-1, +1]$, you can avoid overflow by picking a signed fixed-point input data type with a word length of 16 bits and a fraction length of 14 bits. The coefficients of the polynomial are purely fractional and within $(-1, +1)$, so we can pick their data types as signed fixed point with a word length of 16 bits and a fraction length of 15 bits (best precision). The algorithm is robust because $(y/x)^n$ is within $[-1, +1]$, and the multiplication of the coefficients and $(y/x)^n$ is within $(-1, +1)$. Thus, the dynamic range will not grow, and due to the pre-determined fixed-point data types, overflow is not expected.

Similar to the CORDIC algorithm, the four quadrant polynomial approximation-based `atan2` algorithm outputs estimated angles within $[-\pi, \pi]$. Therefore, we can pick an output fraction length of 13 bits to avoid overflow and provide a dynamic range of $[-4, +3.9998779296875]$.

The basic floating-point Chebyshev polynomial approximation of arctangent over the interval $[-1, +1]$ is implemented as the `chebyPoly_atan_fltpt` local function in the `poly_atan2.m` file.

```
function z = chebyPoly_atan_fltpt(y,x,N,constA,Tz,RoundingMethodStr)
tmp = y/x;
switch N
    case 3
        z = constA(1)*tmp + constA(2)*tmp^3;
    case 5
        z = constA(1)*tmp + constA(2)*tmp^3 + constA(3)*tmp^5;
    case 7
        z = constA(1)*tmp + constA(2)*tmp^3 + constA(3)*tmp^5 + constA(4)*tmp^7;
    otherwise
        disp('Supported order of Chebyshev polynomials are 3, 5 and 7');
end
```

The basic fixed-point Chebyshev polynomial approximation of arctangent over the interval $[-1, +1]$ is implemented as the `chebyPoly_atan_fixpt` local function in the `poly_atan2.m` file.

```
function z = chebyPoly_atan_fixpt(y,x,N,constA,Tz,RoundingMethodStr)
z = fi(0, 'numerictype', Tz, 'RoundingMethod', RoundingMethodStr);
Tx = numerictype(x);
tmp = fi(0, 'numerictype', Tx, 'RoundingMethod', RoundingMethodStr);
tmp(:) = Tx.divide(y, x); % y/x;

tmp2 = fi(0, 'numerictype', Tx, 'RoundingMethod', RoundingMethodStr);
tmp3 = fi(0, 'numerictype', Tx, 'RoundingMethod', RoundingMethodStr);
tmp2(:) = tmp*tmp; % (y/x)^2
tmp3(:) = tmp2*tmp; % (y/x)^3

z(:) = constA(1)*tmp + constA(2)*tmp3; % for order N = 3

if (N == 5) || (N == 7)
    tmp5 = fi(0, 'numerictype', Tx, 'RoundingMethod', RoundingMethodStr);
    tmp5(:) = tmp3 * tmp2; % (y/x)^5
    z(:) = z + constA(3)*tmp5; % for order N = 5
end
```



```

    if N == 7
        tmp7 = fi(0, 'numericType', Tx, 'RoundingMethod', RoundingMethodStr);
        tmp7(:) = tmp5 * tmp2; % (y/x)^7
        z(:) = z + constA(4)*tmp7; %for order N = 7
    end
end

```

The universal four quadrant `atan2` calculation using Chebyshev polynomial approximation is implemented in the `poly_atan2.m` file.

```

function z = poly_atan2(y,x,N,constA,Tz,RoundingMethodStr)
if nargin < 5
    % floating-point algorithm
    fhandle = @chebyPoly_atan_fltpt;
    Tz = [];
    RoundingMethodStr = [];
    z = zeros(size(y));
else
    % fixed-point algorithm
    fhandle = @chebyPoly_atan_fixpt;
    %pre-allocate output
    z = fi(zeros(size(y)), 'numericType', Tz, 'RoundingMethod', RoundingMethodStr);
end

% Apply angle correction to obtain four quadrant output
for idx = 1:length(y)
    % first quadrant
    if abs(x(idx)) >= abs(y(idx))
        % (0, pi/4]
        z(idx) = feval(fhandle, abs(y(idx)), abs(x(idx)), N, constA, Tz, RoundingMethodStr);
    else
        % (pi/4, pi/2)
        z(idx) = pi/2 - feval(fhandle, abs(x(idx)), abs(y(idx)), N, constA, Tz, RoundingMethodStr);
    end

    if x(idx) < 0
        % second and third quadrant
        if y(idx) < 0
            z(idx) = -pi + z(idx);
        else
            z(idx) = pi - z(idx);
        end
    else % fourth quadrant
        if y(idx) < 0
            z(idx) = -z(idx);
        end
    end
end

```

```
        end
    end
end
```

Performing the Overall Error Analysis of the Polynomial Approximation Algorithm

Similar to the CORDIC algorithm, the overall error of the polynomial approximation algorithm consists of two parts - the algorithmic error and the quantization error. The algorithmic error of the polynomial approximation algorithm was analyzed and compared to the algorithmic error of the CORDIC algorithm in a previous section.

Calculate the Quantization Error

Compute the quantization error by comparing the fixed-point polynomial approximation to the floating-point polynomial approximation.

Quantize the inputs and coefficients with convergent rounding:

```
inXfix = fi(fi(inXflt, 1, 16, 14, 'RoundingMethod', 'Convergent'), 'fimath', []);
inYfix = fi(fi(inYflt, 1, 16, 14, 'RoundingMethod', 'Convergent'), 'fimath', []);
constAfix3 = fi(fi(constA3, 1, 16, 'RoundingMethod', 'Convergent'), 'fimath', []);
constAfix5 = fi(fi(constA5, 1, 16, 'RoundingMethod', 'Convergent'), 'fimath', []);
constAfix7 = fi(fi(constA7, 1, 16, 'RoundingMethod', 'Convergent'), 'fimath', []);
```

Calculate the maximum magnitude of the quantization error using `FLOOR` rounding:

```
ord = 3:2:7; % using 3rd, 5th, 7th order polynomials
Tz = numerictype(1, 16, 13); % output data type
zfix3p = fidemo.poly_atan2(inYfix, inXfix, ord(1), constAfix3, Tz, 'Floor'); % 3rd order
zfix5p = fidemo.poly_atan2(inYfix, inXfix, ord(2), constAfix5, Tz, 'Floor'); % 5th order
zfix7p = fidemo.poly_atan2(inYfix, inXfix, ord(3), constAfix7, Tz, 'Floor'); % 7th order
poly_quantErr = bsxfun(@minus, [zfltp3; zfltp5; zfltp7], double([zfix3p; zfix5p; zfix7p]));
max_polyQuantErr_real_world_value = max(abs(poly_quantErr));
max_polyQuantErr_bits = log2(max_polyQuantErr_real_world_value);
fprintf('PolyOrder: %2d, Quant error in bits: %g\n', ...
        [ord; max_polyQuantErr_bits]);

PolyOrder: 3, Quant error in bits: -12.7101
PolyOrder: 5, Quant error in bits: -12.325
PolyOrder: 7, Quant error in bits: -11.8416
```

Calculate the Overall Error

Compute the overall error by comparing the fixed-point polynomial approximation to the builtin `atan2` function. The ideal reference output is `zfltRef`. The overall error of the 7th order polynomial approximation is dominated by the quantization error, which is due

to the finite precision of the input data, coefficients and the rounding effects from the fixed-point arithmetic operations.

```
poly_err = bsxfun(@minus, zfltRef, double([zfix3p;zfix5p;zfix7p]));
max_polyErr_real_world_value = max(abs(poly_err'));
max_polyErr_bits = log2(max_polyErr_real_world_value);
fprintf('PolyOrder: %2d, Overall error in bits: %g\n',...
        [ord; max_polyErr_bits]);
```


```
PolyOrder: 3, Overall error in bits: -7.51907
```

```
PolyOrder: 5, Overall error in bits: -10.2497
```

```
PolyOrder: 7, Overall error in bits: -11.5883
```

```
figno = figno + 1;
```

```
fidemo.fixpt_atan2_demo_plot(figno, theta, poly_err)
```

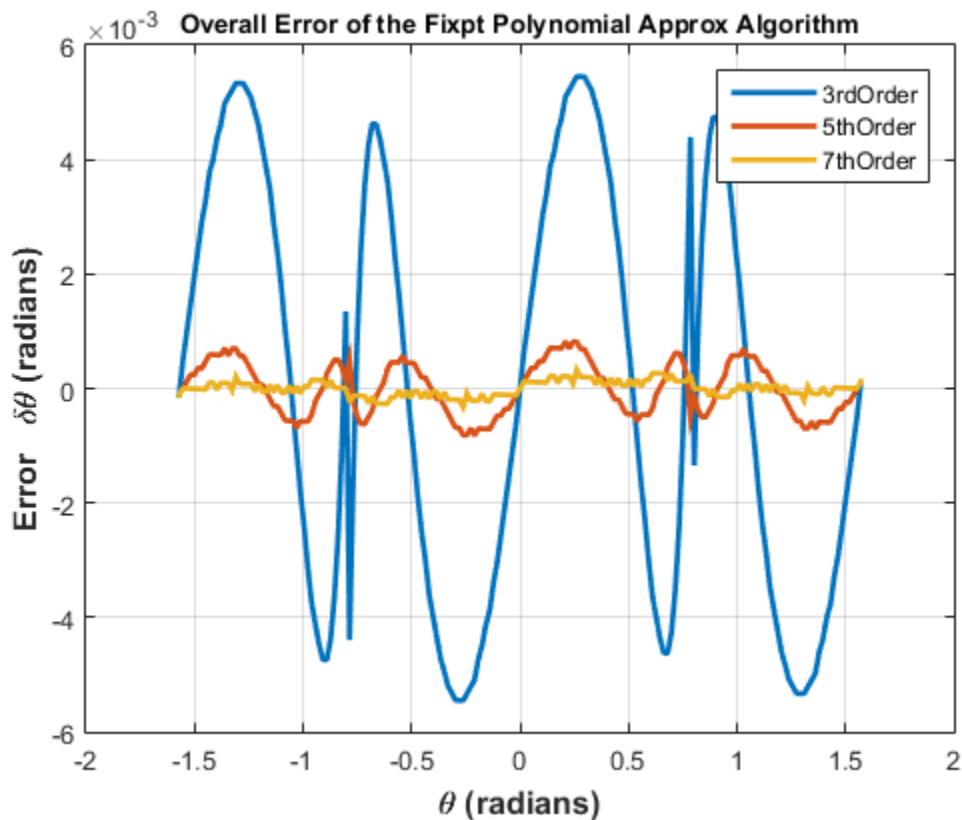

The Effect of Rounding Modes in Polynomial Approximation

Compared to the CORDIC algorithm with 12 iterations and a 13-bit fraction length in the angle accumulator, the fifth order Chebyshev polynomial approximation gives a similar order of quantization error. In the following example, Nearest, Round and Convergent rounding modes give smaller quantization errors than the Floor rounding mode.

Maximum magnitude of the quantization error using Floor rounding

```
poly5_quantErrFloor = max(abs(poly_quantErr(2,:)));  
poly5_quantErrFloor_bits = log2(poly5_quantErrFloor)
```

```
poly5_quantErrFloor_bits =
```

```
-12.324996933210334
```

For comparison, calculate the maximum magnitude of the quantization error using Nearest rounding:

```
zfixp5n = fidemo.poly_atan2(inYfix,inXfix,5,constAfix5,Tz,'Nearest');  
poly5_quantErrNearest = max(abs(zfltp5 - double(zfixp5n)));  
poly5_quantErrNearest_bits = log2(poly5_quantErrNearest)  
set(0, 'format', origFormat); % reset MATLAB output format
```

```
poly5_quantErrNearest_bits =
```

```
-13.175966487895451
```

Calculating atan2(y, x) Using Lookup Tables

There are many lookup table based approaches that may be used to implement fixed-point argtangent approximations. The following is a low-cost approach based on a single real-valued lookup table and simple nearest-neighbor linear interpolation.

Single Lookup Table Based Approach

The atan2 method of the fi object in the Fixed-Point Designer™ approximates the MATLAB® builtin floating-point atan2 function, using a single lookup table based approach with simple nearest-neighbor linear interpolation between values. This approach allows for a small real-valued lookup table and uses simple arithmetic.

Using a single real-valued lookup table simplifies the index computation and the overall arithmetic required to achieve very good accuracy of the results. These simplifications yield a relatively high speed performance as well as relatively low memory requirements.

Understanding the Lookup Table Based ATAN2 Implementation

Lookup Table Size and Accuracy

Two important design considerations of a lookup table are its size and its accuracy. It is not possible to create a table for every possible y/x input value. It is also not possible to be perfectly accurate due to the quantization of the lookup table values.

As a compromise, the `atan2` method of the Fixed-Point Designer `fi` object uses an 8-bit lookup table as part of its implementation. An 8-bit table is only 256 elements long, so it is small and efficient. Eight bits also corresponds to the size of a byte or a word on many platforms. Used in conjunction with linear interpolation, and 16-bit output (lookup table value) precision, an 8-bit-addressable lookup table provides very good accuracy as well as performance.

Overview of Algorithm Implementation

To better understand the Fixed-Point Designer implementation, first consider the symmetry of the four-quadrant `atan2(y, x)` function. If you always compute the arctangent in the first-octant of the x-y space (i.e., between angles 0 and $\pi/4$ radians), then you can perform octant correction on the resulting angle for any y and x values.

As part of the pre-processing portion, the signs and relative magnitudes of y and x are considered, and a division is performed. Based on the signs and magnitudes of y and x, only one of the following values is computed: y/x , x/y , $-y/x$, $-x/y$, $-y/-x$, $-x/-y$. The unsigned result that is guaranteed to be non-negative and purely fractional is computed, based on the a priori knowledge of the signs and magnitudes of y and x. An unsigned 16-bit fractional fixed-point type is used for this value.

The 8 most significant bits (MSBs) of the stored unsigned integer representation of the purely-fractional unsigned fixed-point result is then used to directly index an 8-bit (length-256) lookup table value containing angle values between 0 and $\pi/4$ radians. Two table lookups are performed, one at the computed table index location `lutValBelow`, and one at the next index location `lutValAbove`:

```
idxUint8MSBs = bitsliceget(idxUFIX16, 16, 9);
zeroBasedIdx = int16(idxUint8MSBs);
```

```
lutValBelow = FI_ATAN_LUT(zeroBasedIdx + 1);  
lutValAbove = FI_ATAN_LUT(zeroBasedIdx + 2);
```

The remaining 8 least significant bits (LSBs) of `idxUFI16` are used to interpolate between these two table values. The LSB values are treated as a normalized scaling factor with 8-bit fractional data type `rFracNT`:

```
rFracNT      = numerictype(0,8,8); % fractional remainder data type  
idxFrac8LSBs = reinterpretcast(bitsliceget(idxUFI16,8,1), rFracNT);  
rFraction    = idxFrac8LSBs;
```

The two lookup table values, with the remainder (`rFraction`) value, are used to perform a simple nearest-neighbor linear interpolation. A real multiply is used to determine the weighted difference between the two points. This results in a simple calculation (equivalent to one product and two sums) to obtain the interpolated fixed-point result:

```
temp = rFraction * (lutValAbove - lutValBelow);  
rslt = lutValBelow + temp;
```

Finally, based on the original signs and relative magnitudes of `y` and `x`, the output result is formed using simple octant-correction logic and arithmetic. The first-octant $[0, \pi/4]$ angle value results are added or subtracted with constants to form the octant-corrected angle outputs.

Computing Fixed-point Argtangent Using ATAN2

You can call the `atan2` function directly using fixed-point or floating-point inputs. The lookup table based algorithm is used for the fixed-point `atan2` implementation:

```
zFxpLUT = atan2(inYfix,inXfix);
```

Calculate the Overall Error


You can compute the overall error by comparing the fixed-point lookup table based approximation to the builtin `atan2` function. The ideal reference output is `zfltRef`.

```
lut_err = bsxfun(@minus, zfltRef, double(zFxpLUT));  
max_lutErr_real_world_value = max(abs(lut_err));  
max_lutErr_bits = log2(max_lutErr_real_world_value);  
fprintf('Overall error in bits: %g\n', max_lutErr_bits);
```

```
Overall error in bits: -12.6743
```

```
figno = figno + 1;
```


```
fidemo.fixpt_atan2_demo_plot(figno, theta, lut_err)
```

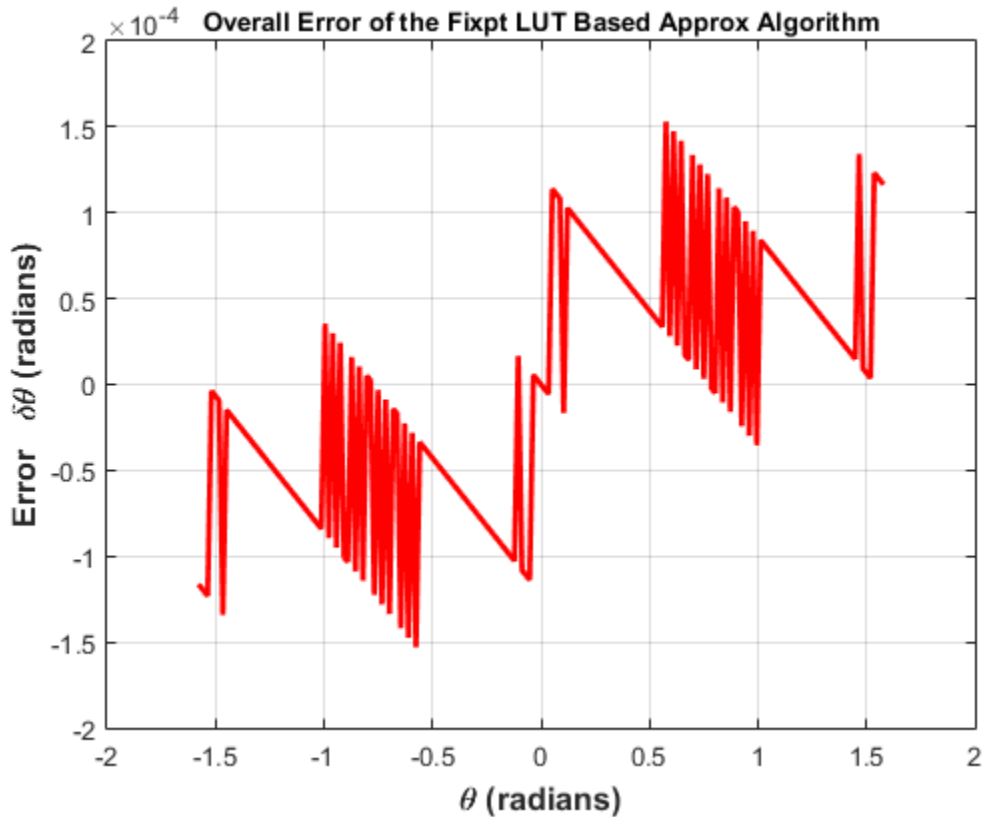

Comparison of Overall Error Between the Fixed-Point Implementations

As was done previously, you can compute the overall error by comparing the fixed-point approximation(s) to the builtin `atan2` function. The ideal reference output is `zfltRef`.

```
zfixCDC15      = cordicatan2(inYfix, inXfix, 15);
cordic_15I_err = bsxfun(@minus, zfltRef, double(zfixCDC15));
poly_7p_err    = bsxfun(@minus, zfltRef, double(zfix7p));
figno = figno + 1;
fidemo.fixpt_atan2_demo_plot(figno, theta, cordic_15I_err, poly_7p_err, lut_err)
```

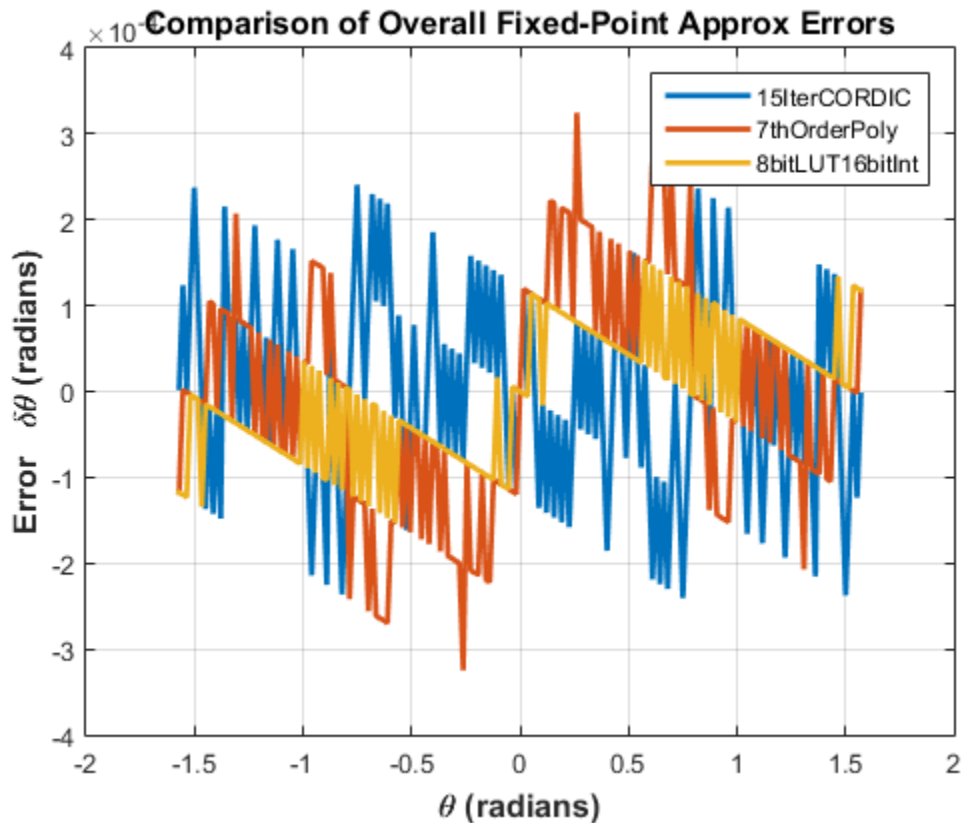

Comparing the Costs of the Fixed-Point Approximation Algorithms

The fixed-point CORDIC algorithm requires the following operations:

- 1 table lookup **per iteration**
- 2 shifts **per iteration**
- 3 additions **per iteration**

The N-th order fixed-point Chebyshev polynomial approximation algorithm requires the following operations:

- 1 division
- (N+1) multiplications

- $(N-1)/2$ additions

The simplified single lookup table algorithm with nearest-neighbor linear interpolation requires the following operations:

- 1 division
- 2 table lookups
- 1 multiplication
- 2 additions

In real world applications, selecting an algorithm for the fixed-point arctangent calculation typically depends on the required accuracy, cost and hardware constraints.

```
close all; % close all figure windows
```

References

- 1 Jack E. Volder, The CORDIC Trigonometric Computing Technique, IRE Transactions on Electronic Computers, Volume EC-8, September 1959, pp330-334.
- 2 Ray Andraka, A survey of CORDIC algorithm for FPGA based computers, Proceedings of the 1998 ACM/SIGDA sixth international symposium on Field programmable gate arrays, Feb. 22-24, 1998, pp191-200

Compute Sine and Cosine Using CORDIC Rotation Kernel

This example shows how to compute sine and cosine using a CORDIC rotation kernel in MATLAB®. CORDIC-based algorithms are critical to many embedded applications, including motor controls, navigation, signal processing, and wireless communications.

Introduction

CORDIC is an acronym for COordinate Rotation DIgital Computer. The Givens rotation-based CORDIC algorithm (see [1,2]) is one of the most hardware efficient algorithms because it only requires iterative shift-add operations. The CORDIC algorithm eliminates the need for explicit multipliers, and is suitable for calculating a variety of functions, such as sine, cosine, arcsine, arccosine, arctangent, vector magnitude, divide, square root, hyperbolic and logarithmic functions.

The fixed-point CORDIC algorithm requires the following operations:

- 1 table lookup **per iteration**
- 2 shifts **per iteration**
- 3 additions **per iteration**

CORDIC Kernel Algorithm Using the Rotation Computation Mode

You can use a CORDIC rotation computing mode algorithm to calculate sine and cosine simultaneously, compute polar-to-cartesian conversions, and for other operations. In the rotation mode, the vector magnitude and an angle of rotation are known and the coordinate (X-Y) components are computed after rotation.

The CORDIC rotation mode algorithm begins by initializing an angle accumulator with the desired rotation angle. Next, the rotation decision at each CORDIC iteration is done in a way that decreases the magnitude of the residual angle accumulator. The rotation decision is based on the sign of the residual angle in the angle accumulator after each iteration.

In rotation mode, the CORDIC equations are:

$$z_{i+1} = z_i - d_i * \text{atan}(2^{-i})$$

$$x_{i+1} = x_i - y_i * d_i * 2^{-i}$$

$$y_{i+1} = y_i + x_i * d_i * 2^{-i}$$

where $d_i = -1$ if $z_i < 0$, and $+1$ otherwise;

$i = 0, 1, \dots, N - 1$, and N is the total number of iterations.

This provides the following result as N approaches $+\infty$:

$$z_N = 0$$

$$x_N = A_N(x_0 \cos z_0 - y_0 \sin z_0)$$

$$y_N = A_N(y_0 \cos z_0 + x_0 \sin z_0)$$

Where:

$$A_N = \prod_{i=0}^{N-1} \sqrt{1 + 2^{-2i}}$$

Typically N is chosen to be a large-enough constant value. Thus, A_N may be pre-computed.

In rotation mode, the CORDIC algorithm is limited to rotation angles between $-\pi/2$ and $\pi/2$. To support angles outside of that range, quadrant correction is often used.

Efficient MATLAB Implementation of a CORDIC Rotation Kernel Algorithm

A MATLAB code implementation example of the CORDIC Rotation Kernel algorithm follows (for the case of scalar x , y , and z). This same code can be used for both fixed-point and floating-point operation.

CORDIC Rotation Kernel

```
function [x, y, z] = cordic_rotation_kernel(x, y, z, inpLUT, n)
% Perform CORDIC rotation kernel algorithm for N iterations.
xtmp = x;
ytmp = y;
for idx = 1:n
    if z < 0
        z(:) = accumpos(z, inpLUT(idx));
```

```

        x(:) = accumpos(x, ytmp);
        y(:) = accumneg(y, xtmp);
    else
        z(:) = accumneg(z, inpLUT(idx));
        x(:) = accumneg(x, ytmp);
        y(:) = accumpos(y, xtmp);
    end
    xtmp = bitsra(x, idx); % bit-shift-right for multiply by 2^(-idx)
    ytmp = bitsra(y, idx); % bit-shift-right for multiply by 2^(-idx)
end

```

CORDIC-Based Sine and Cosine Computation Using Normalized Inputs

Sine and Cosine Computation Using the CORDIC Rotation Kernel

The judicious choice of initial values allows the CORDIC kernel rotation mode algorithm to directly compute both sine and cosine simultaneously.

First, the following initialization steps are performed:

- The angle input look-up table `inpLUT` is set to $\text{atan}(2^{-i})$.
- z_0 is set to the θ input argument value.
- x_0 is set to $1/A_N$.
- y_0 is set to zero.

After N iterations, these initial values lead to the following outputs as N approaches $+\infty$:

- $x_N \approx \cos(\theta)$
- $y_N \approx \sin(\theta)$

Other rotation-kernel-based function approximations are possible via pre- and post-processing and using other initial conditions (see [1,2]).

The CORDIC algorithm is usually run through a specified (constant) number of iterations since ending the CORDIC iterations early would break pipelined code, and the CORDIC gain A_n would not be constant because n would vary.

For very large values of n , the CORDIC algorithm is guaranteed to converge, but not always monotonically. You can typically achieve greater accuracy by increasing the total number of iterations.

Example

Suppose that you have a rotation angle sensor (e.g. in a servo motor) that uses formatted integer values to represent measured angles of rotation. Also suppose that you have a 16-bit integer arithmetic unit that can perform add, subtract, shift, and memory operations. With such a device, you could implement the CORDIC rotation kernel to efficiently compute cosine and sine (equivalently, cartesian X and Y coordinates) from the sensor angle values, without the use of multiplies or large lookup tables.

```

sumWL = 16; % CORDIC sum word length
thNorm = -1.0:(2^-8):1.0; % Normalized [-1.0, 1.0] angle values
theta = fi(thNorm, 1, sumWL); % Fixed-point angle values (best precision)

z_NT = numerictype(theta); % Data type for Z
xyNT = numerictype(1, sumWL, sumWL-2); % Data type for X-Y
x_out = fi(zeros(size(theta)), xyNT); % X array pre-allocation
y_out = fi(zeros(size(theta)), xyNT); % Y array pre-allocation
z_out = fi(zeros(size(theta)), z_NT); % Z array pre-allocation

nitters = 13; % Number of CORDIC iterations
inpLUT = fi(atan(2 .^ (-((0:(nitters-1)))))) .* (2/pi), z_NT); % Normalized
AnGain = prod(sqrt(1+2.^(-2*(0:(nitters-1))))); % CORDIC gain
inv_An = 1 / AnGain; % 1/A_n inverse of CORDIC gain


for idx = 1:length(theta)
    % CORDIC rotation kernel iterations
    [x_out(idx), y_out(idx), z_out(idx)] = ...
        fidemo.cordic_rotation_kernel(...
            fi(inv_An, xyNT), fi(0, xyNT), theta(idx), inpLUT, nitters);
end

% Plot the CORDIC-approximated sine and cosine values
figure;
subplot(411);
plot(thNorm, x_out);
axis([-1 1 -1 1]);
title('Normalized X Values from CORDIC Rotation Kernel Iterations');
subplot(412);
thetaRadians = pi/2 .* thNorm; % real-world range [-pi/2 pi/2] angle values
plot(thNorm, cos(thetaRadians) - double(x_out));
title('Error between MATLAB COS Reference Values and X Values');
subplot(413);
plot(thNorm, y_out);
axis([-1 1 -1 1]);
    
```

```

title('Normalized Y Values from CORDIC Rotation Kernel Iterations');
subplot(414);
plot(thNorm, sin(thetaRadians) - double(y_out));
title('Error between MATLAB SIN Reference Values and Y Values');

```

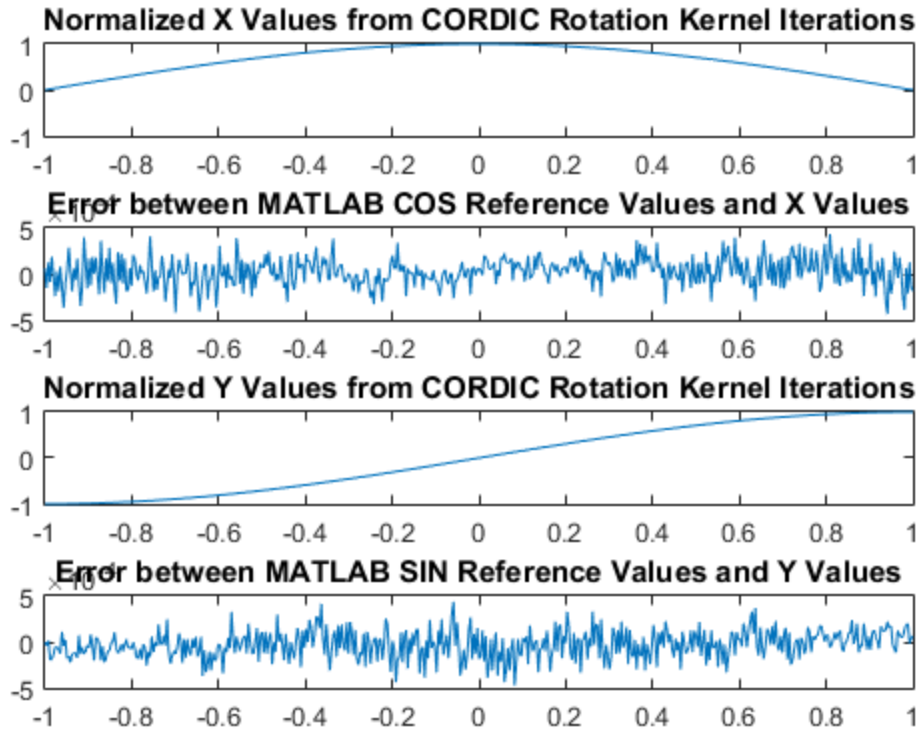

References

- 1 Jack E. Volder, The CORDIC Trigonometric Computing Technique, IRE Transactions on Electronic Computers, Volume EC-8, September 1959, pp330-334.
- 2 Ray Andraka, A survey of CORDIC algorithm for FPGA based computers, Proceedings of the 1998 ACM/SIGDA sixth international symposium on Field programmable gate arrays, Feb. 22-24, 1998, pp191-200

Perform QR Factorization Using CORDIC

This example shows how to write MATLAB® code that works for both floating-point and fixed-point data types. The algorithm used in this example is the QR factorization implemented via CORDIC (Coordinate Rotation Digital Computer).

A good way to write an algorithm intended for a fixed-point target is to write it in MATLAB using builtin floating-point types so you can verify that the algorithm works. When you refine the algorithm to work with fixed-point types, then the best thing to do is to write it so that the same code continues working with floating-point. That way, when you are debugging, then you can switch the inputs back and forth between floating-point and fixed-point types to determine if a difference in behavior is because of fixed-point effects such as overflow and quantization versus an algorithmic difference. Even if the algorithm is not well suited for a floating-point target (as is the case of using CORDIC in the following example), it is still advantageous to have your MATLAB code work with floating-point for debugging purposes.

In contrast, you may have a completely different strategy if your target is floating point. For example, the QR algorithm is often done in floating-point with Householder transformations and row or column pivoting. But in fixed-point it is often more efficient to use CORDIC to apply Givens rotations with no pivoting.

This example addresses the first case, where your target is fixed-point, and you want an algorithm that is independent of data type because it is easier to develop and debug.

In this example you will learn various coding methods that can be applied across systems. The significant design patterns used in this example are the following:

- **Data Type Independence:** the algorithm is written in such a way that the MATLAB code is independent of data type, and will work equally well for fixed-point, double-precision floating-point, and single-precision floating-point.
- **Overflow Prevention:** method to guarantee not to overflow. This demonstrates how to prevent overflows in fixed-point.
- **Solving Systems of Equations:** method to use computational efficiency. Narrow your code scope by isolating what you need to define.

The main part in this example is an implementation of the QR factorization in fixed-point arithmetic using CORDIC for the Givens rotations. The algorithm is written in such a way that the MATLAB code is independent of data type, and will work equally well for fixed-point, double-precision floating-point, and single-precision floating-point.

The QR factorization of M-by-N matrix A produces an M-by-N upper triangular matrix R and an M-by-M orthogonal matrix Q such that $A = Q \cdot R$. A matrix is upper triangular if it has all zeros below the diagonal. An M-by-M matrix Q is orthogonal if $Q' \cdot Q = \text{eye}(M)$, the identity matrix.

The QR factorization is widely used in least-squares problems, such as the recursive least squares (RLS) algorithm used in adaptive filters.

The CORDIC algorithm is attractive for computing the QR algorithm in fixed-point because you can apply orthogonal Givens rotations with CORDIC using only shift and add operations.

Setup

So this example does not change your preferences or settings, we store the original state here, and restore them at the end.

```
originalFormat = get(0, 'format'); format short
originalFipref = get(fipref);       reset(fipref);
originalGlobalFimath = fimath;     resetglobalfimath;
```

Defining the CORDIC QR Algorithm

The CORDIC QR algorithm is given in the following MATLAB function, where A is an M-by-N real matrix, and niter is the number of CORDIC iterations. Output Q is an M-by-M orthogonal matrix, and R is an M-by-N upper-triangular matrix such that $Q \cdot R = A$.

```
function [Q,R] = cordicqr(A,niter)
    Kn = inverse_cordic_growth_constant(niter);
    [m,n] = size(A);
    R = A;
    Q = coder.nullcopy(repmat(A(:,1),1,m)); % Declare type and size of Q
    Q(:) = eye(m); % Initialize Q
    for j=1:n
        for i=j+1:m
            [R(j,j:end),R(i,j:end),Q(:,j),Q(:,i)] = ...
                cordicgivens(R(j,j:end),R(i,j:end),Q(:,j),Q(:,i),niter,Kn);
        end
    end
end
```

This function was written to be independent of data type. It works equally well with builtin floating-point types (double and single) and with the fixed-point fi object.

One of the trickiest aspects of writing data-type independent code is to specify data type and size for a new variable. In order to preserve data types without having to explicitly specify them, the output R was set to be the same as input A , like this:

```
R = A;
```

In addition to being data-type independent, this function was written in such a way that MATLAB Coder™ will be able to generate efficient C code from it. In MATLAB, you most often declare and initialize a variable in one step, like this:

```
Q = eye(m)
```

However, `Q=eye(m)` would always produce Q as a double-precision floating point variable. If A is fixed-point, then we want Q to be fixed-point; if A is single, then we want Q to be single; etc.

Hence, you need to declare the type and size of Q in one step, and then initialize it in a second step. This gives MATLAB Coder the information it needs to create an efficient C program with the correct types and sizes. In the finished code you initialize output Q to be an M -by- M identity matrix and the same data type as A , like this:

```
Q = coder.nullcopy(repmat(A(:,1),1,m)); % Declare type and size of Q
Q(:) = eye(m); % Initialize Q
```

The `coder.nullcopy` function declares the size and type of Q without initializing it. The expansion of the first column of A with `repmat` won't appear in code generated by MATLAB; it is only used to specify the size. The `repmat` function was used instead of `A(:,1:m)` because A may have more rows than columns, which will be the case in a least-squares problem. You have to be sure to always assign values to every element of an array when you declare it with `coder.nullcopy`, because if you don't then you will have uninitialized memory.

You will notice this pattern of assignment again and again. This is another key enabler of data-type independent code.

The heart of this function is applying orthogonal Givens rotations in-place to the rows of R to zero out sub-diagonal elements, thus forming an upper-triangular matrix. The same rotations are applied in-place to the columns of the identity matrix, thus forming orthogonal Q . The Givens rotations are applied using the `cordicgivens` function, as defined in the next section. The rows of R and columns of Q are used as both input and output to the `cordicgivens` function so that the computation is done in-place, overwriting R and Q .

```
[R(j,j:end),R(i,j:end),Q(:,j),Q(:,i)] = ...
    cordicgivens(R(j,j:end),R(i,j:end),Q(:,j),Q(:,i),niter,Kn);
```

Defining the CORDIC Givens Rotation

The `cordicgivens` function applies a Givens rotation by performing CORDIC iterations to rows $x=R(j, j:end)$, $y=R(i, j:end)$ around the angle defined by $x(1)=R(j, j)$ and $y(1)=R(i, j)$ where $i>j$, thus zeroing out $R(i, j)$. The same rotation is applied to columns $u = Q(:, j)$ and $v = Q(:, i)$, thus forming the orthogonal matrix Q .

```
function [x,y,u,v] = cordicgivens(x,y,u,v,niter,Kn)
    if x(1)<0
        % Compensation for 3rd and 4th quadrants
        x(:) = -x; u(:) = -u;
        y(:) = -y; v(:) = -v;
    end
    for i=0:niter-1
        x0 = x;
        u0 = u;
        if y(1)<0
            % Counter-clockwise rotation
            % x and y form R, u and v form Q
            x(:) = x - bitsra(y, i); u(:) = u - bitsra(v, i);
            y(:) = y + bitsra(x0,i); v(:) = v + bitsra(u0,i);
        else
            % Clockwise rotation
            % x and y form R, u and v form Q
            x(:) = x + bitsra(y, i); u(:) = u + bitsra(v, i);
            y(:) = y - bitsra(x0,i); v(:) = v - bitsra(u0,i);
        end
    end
    % Set y(1) to exactly zero so R will be upper triangular without round off
    % showing up in the lower triangle.
    y(1) = 0;
    % Normalize the CORDIC gain
    x(:) = Kn * x; u(:) = Kn * u;
    y(:) = Kn * y; v(:) = Kn * v;
end
```

The advantage of using CORDIC in fixed-point over the standard Givens rotation is that CORDIC does not use square root or divide operations. Only bit-shifts, addition, and subtraction are needed in the main loop, and one scalar-vector multiply at the end to normalize the CORDIC gain. Also, CORDIC rotations work well in pipelined architectures.

The bit shifts in each iteration are performed with the bit shift right arithmetic (`bitsra`) function instead of `bitshift`, multiplication by 0.5, or division by 2, because `bitsra`

- generates more efficient embedded code,
- works equally well with positive and negative numbers,
- works equally well with floating-point, fixed-point and integer types, and
- keeps this code independent of data type.

It is worthwhile to note that there is a difference between sub-scripted assignment (subscripted assignment) into a variable `a(:) = b` versus overwriting a variable `a = b`. Sub-scripted assignment into a variable like this

```
x(:) = x + bitsra(y, i);
```

always preserves the type of the left-hand-side argument `x`. This is the recommended programming style in fixed-point. For example fixed-point types often grow their word length in a sum, which is governed by the `SumMode` property of the `fimath` object, so that the right-hand-side `x + bitsra(y, i)` can have a different data type than `x`.

If, instead, you overwrite the left-hand-side like this

```
x = x + bitsra(y, i);
```

then the left-hand-side `x` takes on the type of the right-hand-side sum. This programming style leads to changing the data type of `x` in fixed-point code, and is discouraged.

Defining the Inverse CORDIC Growth Constant

This function returns the inverse of the CORDIC growth factor after `niter` iterations. It is needed because CORDIC rotations grow the values by a factor of approximately 1.6468, depending on the number of iterations, so the gain is normalized in the last step of `cordicgivens` by a multiplication by the inverse $K_n = 1/1.6468 = 0.60725$.

```
function Kn = inverse_cordic_growth_constant(niter)
    Kn = 1/prod(sqrt(1+2.^(-2*(0:double(niter)-1))));
end
```

Exploring CORDIC Growth as a Function of Number of Iterations

The function for CORDIC growth is defined as

```
growth = prod(sqrt(1+2.^(-2*(0:double(niter)-1))));
```

and the inverse is

```
inverse_growth = 1 ./ growth
```

Growth is a function of the number of iterations `niter`, and quickly converges to approximately 1.6468, and the inverse converges to approximately 0.60725. You can see in the following table that the difference from one iteration to the next ceases to change after 27 iterations. This is because the calculation hit the limit of precision in double floating-point at 27 iterations.

niter	growth	diff(growth)	1./growth	diff(1./growth)
0	1.0000000000000000	0	1.0000000000000000	0
1	1.414213562373095	0.414213562373095	0.707106781186547	-0.292893218813453
2	1.581138830084190	0.166925267711095	0.632455532033676	-0.074651249152872
3	1.629800601300662	0.048661771216473	0.613571991077896	-0.018883540955780
4	1.642484065752237	0.012683464451575	0.608833912517752	-0.004738078560144
5	1.645688915757255	0.003204850005018	0.607648256256168	-0.001185656261584
6	1.646492278712479	0.000803362955224	0.607351770141296	-0.000296486114872
7	1.646693254273644	0.000200975561165	0.607277644093526	-0.000074126047770
8	1.646743506596901	0.000050252323257	0.607259112298893	-0.000018531794633
9	1.646756070204878	0.000012563607978	0.607254479332562	-0.000004632966330
10	1.646759211139822	0.000003140934944	0.607253321089875	-0.000001158242687
11	1.646759996375617	0.000000785235795	0.607253031529134	-0.000000289560741
12	1.646760192684695	0.000000196309077	0.607252959138945	-0.000000072390190
13	1.646760241761972	0.000000049077277	0.607252941041397	-0.000000018097548
14	1.646760254031292	0.000000012269320	0.607252936517010	-0.000000004524387
15	1.646760257098622	0.000000003067330	0.607252935385914	-0.000000001131097
16	1.646760257865455	0.000000000766833	0.607252935103139	-0.000000000282774
17	1.646760258057163	0.000000000191708	0.607252935032446	-0.000000000070694
18	1.646760258105090	0.000000000047927	0.607252935014772	-0.000000000017673
19	1.646760258117072	0.000000000011982	0.607252935010354	-0.000000000004418
20	1.646760258120067	0.000000000002995	0.607252935009249	-0.000000000001105
21	1.646760258120816	0.000000000000749	0.607252935008973	-0.000000000000276
22	1.646760258121003	0.000000000000187	0.607252935008904	-0.000000000000069
23	1.646760258121050	0.000000000000047	0.607252935008887	-0.000000000000017
24	1.646760258121062	0.000000000000012	0.607252935008883	-0.000000000000004
25	1.646760258121065	0.000000000000003	0.607252935008882	-0.000000000000001
26	1.646760258121065	0.000000000000001	0.607252935008881	-0.000000000000000
27	1.646760258121065	0	0.607252935008881	0
28	1.646760258121065	0	0.607252935008881	0
29	1.646760258121065	0	0.607252935008881	0
30	1.646760258121065	0	0.607252935008881	0
31	1.646760258121065	0	0.607252935008881	0
32	1.646760258121065	0	0.607252935008881	0

Comparing CORDIC to the Standard Givens Rotation

The `cordicgivens` function is numerically equivalent to the following standard Givens rotation algorithm from Golub & Van Loan, *Matrix Computations*. In the `cordicqr` function, if you replace the call to `cordicgivens` with a call to `givensrotation`, then you will have the standard Givens QR algorithm.

```
function [x,y,u,v] = givensrotation(x,y,u,v)
    a = x(1); b = y(1);
    if b==0
        % No rotation necessary.  c = 1; s = 0;
        return;
    else
        if abs(b) > abs(a)
            t = -a/b; s = 1/sqrt(1+t^2); c = s*t;
        else
            t = -b/a; c = 1/sqrt(1+t^2); s = c*t;
        end
    end
    x0 = x;          u0 = u;
    % x and y form R,  u and v form Q
    x(:) = c*x0 - s*y; u(:) = c*u0 - s*v;
    y(:) = s*x0 + c*y; v(:) = s*u0 + c*v;
end
```

The `givensrotation` function uses division and square root, which are expensive in fixed-point, but good for floating-point algorithms.

Example of CORDIC Rotations

Here is a 3-by-3 example that follows the CORDIC rotations through each step of the algorithm. The algorithm uses orthogonal rotations to zero out the subdiagonal elements of R using the diagonal elements as pivots. The same rotations are applied to the identity matrix, thus producing orthogonal Q such that $Q^*R = A$.

Let A be a random 3-by-3 matrix, and initialize $R = A$, and $Q = \text{eye}(3)$.

$$R = A = \begin{bmatrix} -0.8201 & 0.3573 & -0.0100 \\ -0.7766 & -0.0096 & -0.7048 \\ -0.7274 & -0.6206 & -0.8901 \end{bmatrix}$$


$$Q = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

The first rotation is about the first and second row of R and the first and second column of Q. Element $R(1, 1)$ is the pivot and $R(2, 1)$ rotates to 0.

	R before the first rotation			R after the first rotation
x	[-0.8201 0.3573 -0.0100]	->	x	[1.1294 -0.2528 0.4918]
y	[-0.7766 -0.0096 -0.7048]	->	y	[0 0.2527 0.5049]
	[-0.7274 -0.6206 -0.8901]			[-0.7274 -0.6206 -0.8901]

	Q before the first rotation		Q after the first rotation
	u v		u v
	[1] [0] 0		[-0.7261] [0.6876] 0
	[0] [1] 0	->	[-0.6876] [-0.7261] 0
	[0] [0] 1		[0] [0] 1

In the following plot, you can see the growth in x in each of the CORDIC iterations. The growth is factored out at the last step by multiplying it by $K_n = 0.60725$. You can see that $y(1)$ iterates to 0. Initially, the point $[x(1), y(1)]$ is in the third quadrant, and is reflected into the first quadrant before the start of the CORDIC iterations.

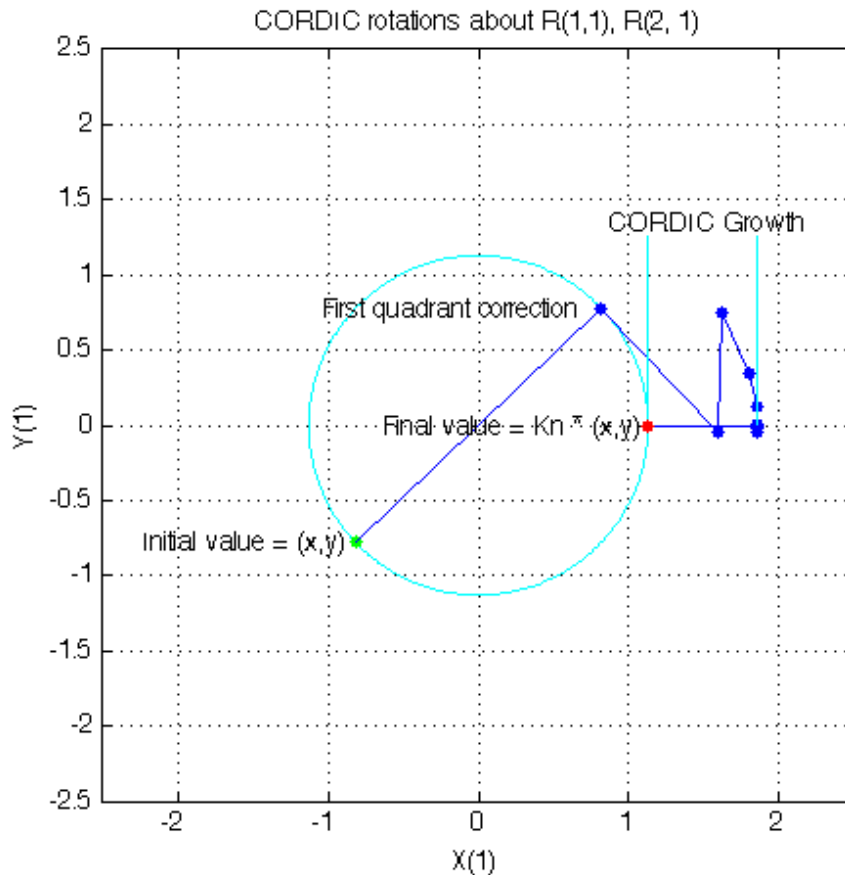


The second rotation is about the first and third row of R and the first and third column of Q. Element $R(1, 1)$ is the pivot and $R(3, 1)$ rotates to 0.

	R before the second rotation	->	R after the second rotation
x	[1.1294 -0.2528 0.4918]		x [1.3434 0.1235 0.8954]
	0 0.2527 0.5049		0 0.2527 0.5049
y	[-0.7274] -0.6206 -0.8901	->	y [0 -0.6586 -0.4820]

	Q before the second rotation		Q after the second rotation	
u		v	u	v
	[-0.7261]	0.6876	[-0.6105]	0.6876
		[0]		[-0.3932]


$$\begin{bmatrix} -0.6876 & -0.7261 & 0 \\ 0 & 0 & 1 \end{bmatrix} \rightarrow \begin{bmatrix} -0.5781 & -0.7261 & -0.3723 \\ -0.5415 & 0 & 0.8407 \end{bmatrix}$$

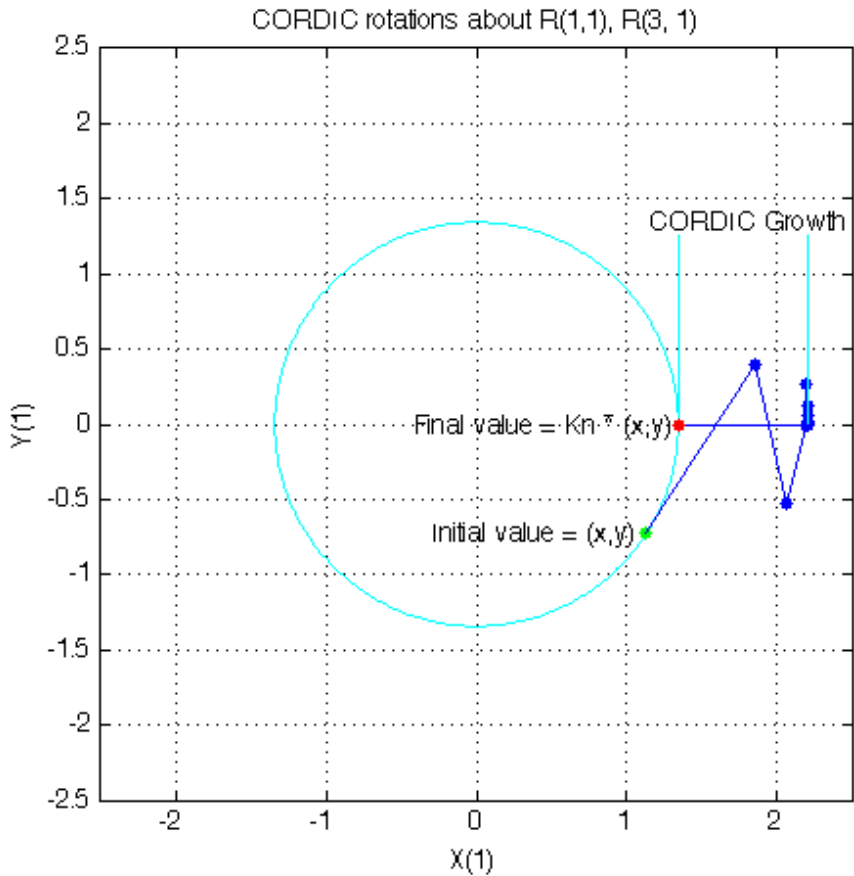

The third rotation is about the second and third row of R and the second and third column of Q. Element R(2,2) is the pivot and R(3,2) rotates to 0.

	R before the third rotation		R after the third rotation
	1.3434 0.1235 0.8954		1.3434 0.1235 0.8954
x	0 [0.2527 0.5049]	->	x 0 [0.7054 0.6308]
y	0 [-0.6586 -0.4820]	->	y 0 [0 0.2987]
	Q before the third rotation		Q after the third rotation

$$\begin{array}{r}
 -0.6105 \quad [\quad u \quad] \quad [\quad v \quad] \\
 -0.5781 \quad [0.6876] \quad [-0.3932] \\
 -0.5415 \quad [-0.7261] \quad [-0.3723] \quad \rightarrow \\
 \quad \quad \quad [\quad \quad 0] \quad [0.8407]
 \end{array}
 \begin{array}{r}
 -0.6105 \quad [\quad u \quad] \quad [\quad v \quad] \\
 -0.5781 \quad [0.6134] \quad [0.5011] \\
 -0.5415 \quad [0.0875] \quad [-0.8113] \\
 \quad \quad \quad [-0.7849] \quad [0.3011]
 \end{array}$$

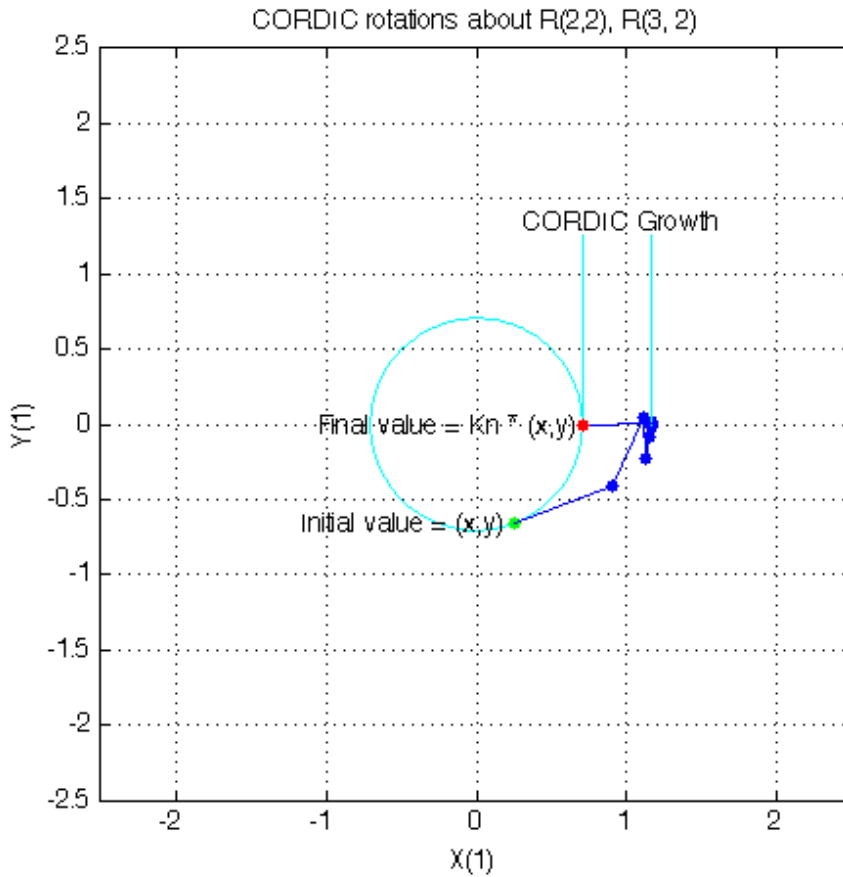

This completes the QR factorization. R is upper triangular, and Q is orthogonal.

$$R = \begin{array}{ccc}
 1.3434 & 0.1235 & 0.8954 \\
 0 & 0.7054 & 0.6308 \\
 0 & 0 & 0.2987
 \end{array}$$

```

Q =
  -0.6105    0.6134    0.5011
  -0.5781    0.0875   -0.8113
  -0.5415   -0.7849    0.3011

```

You can verify that Q is within roundoff error of being orthogonal by multiplying and seeing that it is close to the identity matrix.

```

Q*Q' =  1.0000    0.0000    0.0000
        0.0000    1.0000     0
        0.0000     0    1.0000

Q'*Q =  1.0000    0.0000   -0.0000
        0.0000    1.0000   -0.0000
       -0.0000   -0.0000    1.0000

```

You can see the error difference by subtracting the identity matrix.

```

Q*Q' - eye(size(Q)) =
                        0  2.7756e-16  3.0531e-16
                    2.7756e-16  4.4409e-16  0
                    3.0531e-16  0  6.6613e-16

```

You can verify that Q*R is close to A by subtracting to see the error difference.

```

Q*R - A =  -3.7802e-11  -7.2325e-13  -2.7756e-17
           -3.0512e-10  1.1708e-12  -4.4409e-16
           3.6836e-10  -4.3487e-13  -7.7716e-16

```

Determining the Optimal Output Type of Q for Fixed Word Length

Since Q is orthogonal, you know that all of its values are between -1 and +1. In floating-point, there is no decision about the type of Q: it should be the same floating-point type as A. However, in fixed-point, you can do better than making Q have the identical fixed-point type as A. For example, if A has word length 16 and fraction length 8, and if we make Q also have word length 16 and fraction length 8, then you force Q to be less accurate than it could be and waste the upper half of the fixed-point range.

The best type for Q is to make it have full range of its possible outputs, plus accommodate the 1.6468 CORDIC growth factor in intermediate calculations. Therefore, assuming that the word length of Q is the same as the word length of input A, then the best fraction length for Q is 2 bits less than the word length (one bit for 1.6468 and one bit for the sign).

Hence, our initialization of Q in `cordicqr` can be improved like this.

```

if isfi(A) && (isfixed(A) || isscaledouble(A))
    Q = fi(one*eye(m), get(A, 'NumericType'), ...
          'FractionLength', get(A, 'WordLength')-2);
else
    Q = coder.nullcopy(repmat(A(:,1),1,m));
    Q(:) = eye(m);
end

```

A slight disadvantage is that this section of code is dependent on data type. However, you gain a major advantage by picking the optimal type for Q , and the main algorithm is still independent of data type. You can do this kind of input parsing in the beginning of a function and leave the main algorithm data-type independent.

Preventing Overflow in Fixed Point R

This section describes how to determine a fixed-point output type for R in order to prevent overflow. In order to pick an output type, you need to know how much the magnitude of the values of R will grow.

Given real matrix A and its QR factorization computed by Givens rotations without pivoting, an upper-bound on the magnitude of the elements of R is the square-root of the number of rows of A times the magnitude of the largest element in A . Furthermore, this growth will never be greater during an intermediate computation. In other words, let $[m,n]=\text{size}(A)$, and $[Q,R]=\text{givensqr}(A)$. Then

$$\max(\text{abs}(R(:))) \leq \sqrt{m} * \max(\text{abs}(A(:))).$$

This is true because the each element of R is formed from orthogonal rotations from its corresponding column in A , so the largest that any element $R(i, j)$ can get is if all of the elements of its corresponding column $A(:, j)$ were rotated to a single value. In other words, the largest possible value will be bounded by the 2-norm of $A(:, j)$. Since the 2-norm of $A(:, j)$ is equal to the square-root of the sum of the squares of the m elements, and each element is less-than-or-equal-to the largest element of A , then

$$\text{norm}(A(:, j)) \leq \sqrt{m} * \max(\text{abs}(A(:))).$$

That is, for all j

$$\begin{aligned}
\text{norm}(A(:, j)) &= \sqrt{A(1, j)^2 + A(2, j)^2 + \dots + A(m, j)^2} \\
&\leq \sqrt{m * \max(\text{abs}(A(:)))^2} \\
&= \sqrt{m} * \max(\text{abs}(A(:))).
\end{aligned}$$

and so for all i, j

$$\text{abs}(R(i,j)) \leq \text{norm}(A(:,j)) \leq \text{sqrt}(m) * \text{max}(\text{abs}(A(:))).$$

Hence, it is also true for the largest element of R

$$\text{max}(\text{abs}(R(:))) \leq \text{sqrt}(m) * \text{max}(\text{abs}(A(:))).$$

This becomes useful in fixed-point where the elements of A are often very close to the maximum value attainable by the data type, so we can set a tight upper bound without knowing the values of A. This is important because we want to set an output type for R with a minimum number of bits, only knowing the upper bound of the data type of A. You can use `fi` method `upperbound` to get this value.

Therefore, for all i,j

$$\text{abs}(R(i,j)) \leq \text{sqrt}(m) * \text{upperbound}(A)$$

Note that $\text{sqrt}(m) * \text{upperbound}(A)$ is also an upper bound for the elements of A:

$$\text{abs}(A(i,j)) \leq \text{upperbound}(A) \leq \text{sqrt}(m) * \text{upperbound}(A)$$

Therefore, when picking fixed-point data types, $\text{sqrt}(m) * \text{upperbound}(A)$ is an upper bound that will work for both A and R.

Attaining the maximum is easy and common. The maximum will occur when all elements get rotated into a single element, like the following matrix with orthogonal columns:

$$A = \begin{bmatrix} 7 & -7 & 7 & 7 \\ 7 & 7 & -7 & 7 \\ 7 & -7 & -7 & -7 \\ 7 & 7 & 7 & -7 \end{bmatrix};$$

Its maximum value is 7 and its number of rows is $m=4$, so we expect that the maximum value in R will be bounded by $\text{max}(\text{abs}(A(:))) * \text{sqrt}(m) = 7 * \text{sqrt}(4) = 14$. Since A in this example is orthogonal, each column gets rotated to the max value on the diagonal.

```
niter = 52;
[Q,R] = cordicqr(A,niter)
```

```
Q =
    0.5000    -0.5000    0.5000    0.5000
    0.5000     0.5000   -0.5000    0.5000
    0.5000   -0.5000   -0.5000   -0.5000
```

```
0.5000    0.5000    0.5000   -0.5000
```

```
R =
```

```
14.0000    0.0000   -0.0000   -0.0000
      0    14.0000   -0.0000    0.0000
      0      0    14.0000    0.0000
      0      0      0    14.0000
```

Another simple example of attaining maximum growth is a matrix that has all identical elements, like a matrix of all ones. A matrix of ones will get rotated into $1 \cdot \sqrt{m}$ in the first row and zeros elsewhere. For example, this 9-by-5 matrix will have all $1 \cdot \sqrt{9} = 3$ in the first row of R.

```
m = 9; n = 5;
A = ones(m,n)
niter = 52;
[Q,R] = cordicqr(A,niter)
```

```
A =
```

```
1    1    1    1    1
1    1    1    1    1
1    1    1    1    1
1    1    1    1    1
1    1    1    1    1
1    1    1    1    1
1    1    1    1    1
1    1    1    1    1
1    1    1    1    1
```

```
Q =
```

```
Columns 1 through 7
```

```
0.3333    0.5567   -0.6784    0.3035   -0.1237    0.0503    0.0158
0.3333    0.0296    0.2498   -0.1702   -0.6336    0.1229   -0.3012
0.3333    0.2401    0.0562   -0.3918    0.4927    0.2048   -0.5395
0.3333    0.0003    0.0952   -0.1857    0.2148    0.4923    0.7080
0.3333    0.1138    0.0664   -0.2263    0.1293   -0.8348    0.2510
0.3333   -0.3973   -0.0143    0.3271    0.4132   -0.0354   -0.2165
```

```

0.3333  0.1808  0.3538  -0.1012  -0.2195      0  0.0824
0.3333  -0.6500 -0.4688  -0.2380  -0.2400      0      0
0.3333  -0.0740  0.3400   0.6825  -0.0331      0      0

```

Columns 8 through 9

```

0.0056  -0.0921
-0.5069  -0.1799
0.0359   0.3122
-0.2351  -0.0175
-0.2001   0.0610
-0.0939  -0.6294
0.7646  -0.2849
0.2300   0.2820
      0   0.5485

```

R =

```

3.0000  3.0000  3.0000  3.0000  3.0000
      0   0.0000  0.0000  0.0000  0.0000
      0      0   0.0000  0.0000  0.0000
      0      0      0   0.0000  0.0000
      0      0      0      0   0.0000
      0      0      0      0      0
      0      0      0      0      0
      0      0      0      0      0
      0      0      0      0      0

```

As in the `cordicqr` function, the Givens QR algorithm is often written by overwriting `A` in-place with `R`, so being able to cast `A` into `R`'s data type at the beginning of the algorithm is convenient.

In addition, if you compute the Givens rotations with CORDIC, there is a growth-factor that converges quickly to approximately 1.6468. This growth factor gets normalized out after each Givens rotation, but you need to accommodate it in the intermediate calculations. Therefore, the number of additional bits that are required including the Givens and CORDIC growth are $\log_2(1.6468 * \sqrt{m})$. The additional bits of head-room can be added either by increasing the word length, or decreasing the fraction length.

A benefit of increasing the word length is that it allows for the maximum possible precision for a given word length. A disadvantage is that the optimal word length may

not correspond to a native type on your processor (e.g. increasing from 16 to 18 bits), or you may have to increase to the next larger native word size which could be quite large (e.g. increasing from 16 to 32 bits, when you only needed 18).

A benefit of decreasing fraction length is that you can do the computation in-place in the native word size of A. A disadvantage is that you lose precision.

Another option is to pre-scale the input by right-shifting. This is equivalent to decreasing the fraction length, with the additional disadvantage of changing the scaling of your problem. However, this may be an attractive option to you if you prefer to only work in fractional arithmetic or integer arithmetic.

Example of Fixed Point Growth in R

If you have a fixed-point input matrix A, you can define fixed-point output R with the growth defined in the previous section.

Start with a random matrix X.

```
X = [0.0513   -0.2097   0.9492   0.2614
      0.8261   0.6252   0.3071  -0.9415
      1.5270   0.1832   0.1352  -0.1623
      0.4669  -1.0298   0.5152  -0.1461];
```

Create a fixed-point A from X.

```
A = sfi(X)
```

```
A =
```

```
0.0513   -0.2097   0.9492   0.2614
0.8261   0.6252   0.3071  -0.9415
1.5270   0.1832   0.1352  -0.1623
0.4669  -1.0298   0.5152  -0.1461
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 16
FractionLength: 14
```

```
m = size(A,1)
```

```
m =
```

4

The growth factor is 1.6468 times the square-root of the number of rows of A. The bit growth is the next integer above the base-2 logarithm of the growth.

```
bit_growth = ceil(log2(cordic_growth_constant * sqrt(m)))
```

```
bit_growth =
```

2

Initialize R with the same values as A, and a word length increased by the bit growth.

```
R = sfi(A, get(A, 'WordLength')+bit_growth, get(A, 'FractionLength'))
```

```
R =
```

```
0.0513   -0.2097   0.9492   0.2614
0.8261    0.6252   0.3071  -0.9415
1.5270    0.1832   0.1352  -0.1623
0.4669   -1.0298   0.5152  -0.1461
```

```
      DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
      WordLength: 18
      FractionLength: 14
```

Use R as input and overwrite it.

```
niter = get(R, 'WordLength') - 1
[Q,R] = cordicqr(R, niter)
```

```
niter =
```

17

```
Q =
```



```

0.0284   -0.1753   0.9110   0.3723
0.4594   0.4470   0.3507  -0.6828
0.8490   0.0320  -0.2169   0.4808
0.2596  -0.8766  -0.0112  -0.4050

```

```

DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 18
FractionLength: 16

```

R =

```

1.7989   0.1694   0.4166  -0.6008
0         1.2251  -0.4764  -0.3438
0         0         0.9375  -0.0555
0         0         0         0.7214

```

```

DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 18
FractionLength: 14

```

Verify that $Q \cdot Q'$ is near the identity matrix.

```
double(Q)*double(Q')
```

ans =

```

1.0000   -0.0001   0.0000   0.0000
-0.0001   1.0001   0.0000  -0.0000
0.0000   0.0000   1.0000  -0.0000
0.0000  -0.0000  -0.0000   1.0000

```

Verify that $Q \cdot R - A$ is small relative to the precision of A .

```
err = double(Q)*double(R) - double(A)
```

err =

```

1.0e-03 *
-0.1048  -0.2355   0.1829  -0.2146

```

```
0.3472    0.2949    0.0260   -0.2570
0.2776   -0.1740   -0.1007    0.0966
0.0138   -0.1558    0.0417   -0.0362
```

Increasing Precision in R

The previous section showed you how to prevent overflow in R while maintaining the precision of A. If you leave the fraction length of R the same as A, then R cannot have more precision than A, and your precision requirements may be such that the precision of R must be greater.

An extreme example of this is to define a matrix with an integer fixed-point type (i.e. fraction length is zero). Let matrix X have elements that are the full range for signed 8 bit integers, between -128 and +127.

```
X = [-128  -128  -128   127
      -128   127   127  -128
         127   127   127   127
         127   127  -128  -128];
```

Define fixed-point A to be equivalent to an 8-bit integer.

```
A = sfi(X,8,0)
```

```
A =
```

```
-128  -128  -128   127
-128   127   127  -128
  127   127   127   127
  127   127  -128  -128
```

```
      DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
      WordLength: 8
      FractionLength: 0
```

```
m = size(A,1)
```

```
m =
```

```
4
```

The necessary growth is 1.6468 times the square-root of the number of rows of A.

```
bit_growth = ceil(log2(cordic_growth_constant*sqrt(m)))
```

```
bit_growth =
```

```
2
```

Initialize R with the same values as A, and allow for bit growth like you did in the previous section.

```
R = sfi(A, get(A, 'WordLength')+bit_growth, get(A, 'FractionLength'))
```

```
R =
```

```
-128 -128 -128 127
-128 127 127 -128
127 127 127 127
127 127 -128 -128
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 10
FractionLength: 0
```

Compute the QR factorization, overwriting R.

```
niter = get(R, 'WordLength') - 1;
[Q,R] = cordicqr(R, niter)
```

```
Q =
```

```
-0.5039 -0.2930 -0.4063 -0.6914
-0.5039 0.8750 0.0039 0.0078
0.5000 0.2930 0.3984 -0.7148
0.4922 0.2930 -0.8203 0.0039
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 10
FractionLength: 8
```

R =

```

257  126   -1   -1
  0  225  151 -148
  0   0  211  104
  0   0   0  -180

```

```

        DataTypeMode: Fixed-point: binary point scaling
          Signedness: Signed
          WordLength: 10
        FractionLength: 0

```

Notice that R is returned with integer values because you left the fraction length of R at 0, the same as the fraction length of A.

The scaling of the least-significant bit (LSB) of A is 1, and you can see that the error is proportional to the LSB.

```
err = double(Q)*double(R)-double(A)
```

err =

```

-1.5039   -1.4102   -1.4531   -0.9336
-1.5039    6.3828    6.4531   -1.9961
 1.5000    1.9180    0.8086   -0.7500
-0.5078    0.9336   -1.3398   -1.8672

```

You can increase the precision in the QR factorization by increasing the fraction length. In this example, you needed 10 bits for the integer part (8 bits to start with, plus 2 bits growth), so when you increase the fraction length you still need to keep the 10 bits in the integer part. For example, you can increase the word length to 32 and set the fraction length to 22, which leaves 10 bits in the integer part.

```
R = sfi(A, 32, 22)
```

R =

```

-128  -128  -128   127
-128   127   127  -128
 127   127   127   127
 127   127  -128  -128

```

```

        DataTypeMode: Fixed-point: binary point scaling
          Signedness: Signed
          WordLength: 32
        FractionLength: 22

```

```

niter = get(R, 'WordLength') - 1;
[Q,R] = cordicqr(R, niter)

```

Q =

```

-0.5020   -0.2913   -0.4088   -0.7043
-0.5020    0.8649    0.0000    0.0000
 0.4980    0.2890    0.4056   -0.7099
 0.4980    0.2890   -0.8176    0.0000

```

```

        DataTypeMode: Fixed-point: binary point scaling
          Signedness: Signed
          WordLength: 32
        FractionLength: 30

```

R =

```

255.0020  127.0029    0.0039    0.0039
         0  220.5476  146.8413 -147.9930
         0         0  208.4793  104.2429
         0         0         0 -179.6037

```

```

        DataTypeMode: Fixed-point: binary point scaling
          Signedness: Signed
          WordLength: 32
        FractionLength: 22

```

Now you can see fractional parts in R, and $Q \cdot R - A$ is small.

```

err = double(Q)*double(R)-double(A)

```

err =

```

1.0e-05 *
-0.1234   -0.0014   -0.0845    0.0267
-0.1234    0.2574    0.1260   -0.1094

```

```
0.0720    0.0289   -0.0400   -0.0684
0.0957    0.0818   -0.1034    0.0095
```

The number of bits you choose for fraction length will depend on the precision requirements for your particular algorithm.

Picking Default Number of Iterations

The number of iterations is dependent on the desired precision, but limited by the word length of `A`. With each iteration, the values are right-shifted one bit. After the last bit gets shifted off and the value becomes 0, then there is no additional value in continuing to rotate. Hence, the most precision will be attained by choosing `niter` to be one less than the word length.

For floating-point, the number of iterations is bounded by the size of the mantissa. In double, 52 iterations is the most you can do to continue adding to something with the same exponent. In single, it is 23. See the reference page for `eps` for more information about floating-point accuracy.

Thus, we can make our code more usable by not requiring the number of iterations to be input, and assuming that we want the most precision possible by changing `cordicqr` to use this default for `niter`.

```
function [Q,R] = cordicqr(A,varargin)
    if nargin>=2 && ~isempty(varargin{1})
        niter = varargin{1};
    elseif isa(A,'double') || isfi(A) && isdouble(A)
        niter = 52;
    elseif isa(A,'single') || isfi(A) && issingle(A)
        niter = single(23);
    elseif isfi(A)
        niter = int32(get(A,'WordLength') - 1);
    else
        assert(0,'First input must be double, single, or fi.');
```

```
end
```

A disadvantage of doing this is that this makes a section of our code dependent on data type. However, an advantage is that the function is much more convenient to use because you don't have to specify `niter` if you don't want to, and the main algorithm is still data-type independent. Similar to picking an optimal output type for `Q`, you can do this kind of input parsing in the beginning of a function and leave the main algorithm data-type independent.

Here is an example from a previous section, without needing to specify an optimal `niter`.

```
A = [7    -7    7    7
      7     7   -7    7
      7   -7   -7   -7
      7     7    7   -7];
[Q,R] = cordicqr(A)
```

Q =

```
0.5000   -0.5000    0.5000    0.5000
0.5000    0.5000   -0.5000    0.5000
0.5000   -0.5000   -0.5000   -0.5000
0.5000    0.5000    0.5000   -0.5000
```

R =

```
14.0000    0.0000   -0.0000   -0.0000
0          14.0000   -0.0000    0.0000
0           0        14.0000    0.0000
0           0           0        14.0000
```

Example: QR Factorization Not Unique

When you compare the results from `cordicqr` and the `QR` function in MATLAB, you will notice that the QR factorization is not unique. It is only important that `Q` is orthogonal, `R` is upper triangular, and `Q*R - A` is small.

Here is a simple example that shows the difference.

```
m = 3;
A = ones(m)
```

A =

```
1    1    1
1    1    1
1    1    1
```

The built-in `QR` function in MATLAB uses a different algorithm and produces:

`[Q0,R0] = qr(A)`

Q0 =

```
-0.5774   -0.5774   -0.5774
-0.5774    0.7887   -0.2113
-0.5774   -0.2113    0.7887
```

R0 =

```
-1.7321   -1.7321   -1.7321
      0         0         0
      0         0         0
```

And the `cordicqr` function produces:

`[Q,R] = cordicqr(A)`

Q =

```
0.5774    0.7495    0.3240
0.5774   -0.6553    0.4871
0.5774   -0.0942   -0.8110
```

R =

```
1.7321    1.7321    1.7321
      0    0.0000    0.0000
      0      0   -0.0000
```

Notice that the elements of **Q** from function `cordicqr` are different from **Q0** from built-in `QR`. However, both results satisfy the requirement that **Q** is orthogonal:

`Q0*Q0'`

ans =

```
1.0000    0.0000     0
```


$$\begin{bmatrix} 0.0000 & 1.0000 & 0 \\ 0 & 0 & 1.0000 \end{bmatrix}$$

$Q*Q'$

ans =

$$\begin{bmatrix} 1.0000 & 0.0000 & 0.0000 \\ 0.0000 & 1.0000 & -0.0000 \\ 0.0000 & -0.0000 & 1.0000 \end{bmatrix}$$

And they both satisfy the requirement that $Q*R - A$ is small:

$Q0*R0 - A$

ans =

$$1.0e-15 * \begin{bmatrix} -0.1110 & -0.1110 & -0.1110 \\ -0.1110 & -0.1110 & -0.1110 \\ -0.1110 & -0.1110 & -0.1110 \end{bmatrix}$$

$Q*R - A$

ans =

$$1.0e-15 * \begin{bmatrix} -0.2220 & 0.2220 & 0.2220 \\ 0.4441 & 0 & 0 \\ 0.2220 & 0.2220 & 0.2220 \end{bmatrix}$$

Solving Systems of Equations Without Forming Q

Given matrices A and B, you can use the QR factorization to solve for X in the following equation:

$$A*X = B.$$

If A has more rows than columns, then X will be the least-squares solution. If X and B have more than one column, then several solutions can be computed at the same time. If $A = Q \cdot R$ is the QR factorization of A , then the solution can be computed by back-solving

$$R \cdot X = C$$

where $C = Q' \cdot B$. Instead of forming Q and multiplying to get $C = Q' \cdot B$, it is more efficient to compute C directly. You can compute C directly by applying the rotations to the rows of B instead of to the columns of an identity matrix. The new algorithm is formed by the small modification of initializing $C = B$, and operating along the rows of C instead of the columns of Q .

```
function [R,C] = cordicrc(A,B,niter)
    Kn = inverse_cordic_growth_constant(niter);
    [m,n] = size(A);
    R = A;
    C = B;
    for j=1:n
        for i=j+1:m
            [R(j,j:end),R(i,j:end),C(j,:),C(i,:)] = ...
                cordicgivens(R(j,j:end),R(i,j:end),C(j,:),C(i,:),niter,Kn);
        end
    end
end
```

You can verify the algorithm with this example. Let A be a random 3-by-3 matrix, and B be a random 3-by-2 matrix.

```
A = [-0.8201    0.3573   -0.0100
     -0.7766   -0.0096   -0.7048
     -0.7274   -0.6206   -0.8901];
```

```
B = [-0.9286    0.3575
      0.6983    0.5155
      0.8680    0.4863];
```

Compute the QR factorization of A .

```
[Q,R] = cordicqr(A)
```

```
Q =
    -0.6105    0.6133    0.5012
```

```

-0.5781    0.0876   -0.8113
-0.5415   -0.7850    0.3011

```

R =

```

1.3434    0.1235    0.8955
      0    0.7054    0.6309
      0      0    0.2988

```

Compute $C = Q' * B$ directly.

```
[R,C] = cordicrc(A,B)
```

R =

```

1.3434    0.1235    0.8955
      0    0.7054    0.6309
      0      0    0.2988

```

C =

```

-0.3068   -0.7795
-1.1897   -0.1173
-0.7706   -0.0926

```

Subtract, and you will see that the error difference is on the order of roundoff.

```
Q'*B - C
```

ans =

```

1.0e-15 *
-0.0555    0.3331
      0      0
 0.1110    0.2914

```

Now try the example in fixed-point. Declare A and B to be fixed-point types.

```
A = sfi(A)
```

```
A =
```

```
-0.8201    0.3573   -0.0100  
-0.7766   -0.0096   -0.7048  
-0.7274   -0.6206   -0.8901
```

```
        DataTypeMode: Fixed-point: binary point scaling  
        Signedness: Signed  
        WordLength: 16  
        FractionLength: 15
```

```
B = sfi(B)
```

```
B =
```

```
-0.9286    0.3575  
 0.6983    0.5155  
 0.8680    0.4863
```

```
        DataTypeMode: Fixed-point: binary point scaling  
        Signedness: Signed  
        WordLength: 16  
        FractionLength: 15
```

The necessary growth is 1.6468 times the square-root of the number of rows of A.

```
bit_growth = ceil(log2(cordic_growth_constant*sqrt(m)))
```

```
bit_growth =
```

```
2
```

Initialize R with the same values as A, and allow for bit growth.

```
R = sfi(A, get(A, 'WordLength')+bit_growth, get(A, 'FractionLength'))
```

```
R =
```

```
-0.8201    0.3573   -0.0100
```

```
-0.7766  -0.0096  -0.7048
-0.7274  -0.6206  -0.8901
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 18
FractionLength: 15
```

The growth in C is the same as R, so initialize C and allow for bit growth the same way.

```
C = sfi(B, get(B, 'WordLength')+bit_growth, get(B, 'FractionLength'))
```

C =

```
-0.9286  0.3575
 0.6983  0.5155
 0.8680  0.4863
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 18
FractionLength: 15
```

Compute $C = Q^*B$ directly, overwriting R and C.

```
[R,C] = cordicrc(R,C)
```

R =

```
1.3435  0.1233  0.8954
      0  0.7055  0.6308
      0      0  0.2988
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 18
FractionLength: 15
```

C =

```
-0.3068  -0.7796
-1.1898  -0.1175
-0.7706  -0.0926
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 18
FractionLength: 15
```

An interesting use of this algorithm is that if you initialize B to be the identity matrix, then output argument C is Q'. You may want to use this feature to have more control over the data type of Q. For example,

```
A = [-0.8201    0.3573   -0.0100
      -0.7766   -0.0096   -0.7048
      -0.7274  -0.6206   -0.8901];
B = eye(size(A,1))
```

B =

```
    1    0    0
    0    1    0
    0    0    1
```

```
[R,C] = cordicrc(A,B)
```

R =

```
    1.3434    0.1235    0.8955
         0    0.7054    0.6309
         0         0    0.2988
```

C =

```
   -0.6105   -0.5781   -0.5415
    0.6133    0.0876   -0.7850
    0.5012   -0.8113    0.3011
```

Then C is orthogonal

```
C'*C
```

ans =

```

1.0000    0.0000    0.0000
0.0000    1.0000   -0.0000
0.0000   -0.0000    1.0000

```

and R = C*A

R - C*A

ans =

```

1.0e-15 *
0.6661   -0.0139   -0.1110
0.5551   -0.2220    0.6661
-0.2220   -0.1110    0.2776

```

Links to the Documentation

Fixed-Point Designer™

- `bitsra` Bit shift right arithmetic
- `fi` Construct fixed-point numeric object
- `fimath` Construct `fimath` object
- `fipref` Construct `fipref` object
- `get` Property values of object
- `globalfimath` Configure global `fimath` and return handle object
- `isfi` Determine whether variable is `fi` object
- `sfi` Construct signed fixed-point numeric object
- `upperbound` Upper bound of range of `fi` object
- `fiaccel` Accelerate fixed-point code

MATLAB

- `bitshift` Shift bits specified number of places
- `ceil` Round toward positive infinity

- `double` Convert to double precision floating point
- `eps` Floating-point relative accuracy
- `eye` Identity matrix
- `log2` Base 2 logarithm and dissect floating-point numbers into exponent and mantissa
- `prod` Product of array elements
- `qr` Orthogonal-triangular factorization
- `repmat` Replicate and tile array
- `single` Convert to single precision floating point
- `size` Array dimensions
- `sqrt` Square root
- `subsasgn` Subscripted assignment

Functions Used in this Example

These are the MATLAB functions used in this example.

CORDICQR computes the QR factorization using CORDIC.

- `[Q,R] = cordicqr(A)` chooses the number of CORDIC iterations based on the type of A.
- `[Q,R] = cordicqr(A,niter)` uses `niter` number of CORDIC iterations.

CORDICRC computes R from the QR factorization of A, and also returns $C = Q' * B$ without computing Q.

- `[R,C] = cordicrc(A,B)` chooses the number of CORDIC iterations based on the type of A.
- `[R,C] = cordicrc(A,B,niter)` uses `niter` number of CORDIC iterations.

CORDIC_GROWTH_CONSTANT returns the CORDIC growth constant.

- `cordic_growth = cordic_growth_constant(niter)` returns the CORDIC growth constant as a function of the number of CORDIC iterations, `niter`.

GIVENSQR computes the QR factorization using standard Givens rotations.

- `[Q,R] = givensqr(A)`, where A is M-by-N, produces an M-by-N upper triangular matrix R and an M-by-M orthogonal matrix Q so that $A = Q * R$.

CORDICQR_MAKEPLOTS makes the plots in this example by executing the following from the MATLAB command line.

```
load A_3_by_3_for_cordicqr_demo.mat
niter=32;
[Q,R] = cordicqr_makeplots(A,niter)
```

References

- 1 Ray Andraka, "A survey of CORDIC algorithms for FPGA based computers," 1998, ACM 0-89791-978-5/98/01.
- 2 Anthony J Cox and Nicholas J Higham, "Stability of Householder QR factorization for weighted least squares problems," in Numerical Analysis, 1997, Proceedings of the 17th Dundee Conference, Griffiths DF, Higham DJ, Watson GA (eds). Addison-Wesley, Longman: Harlow, Essex, U.K., 1998; 57-73.
- 3 Gene H. Golub and Charles F. Van Loan, *Matrix Computations*, 3rd ed, Johns Hopkins University Press, 1996, section 5.2.3 Givens QR Methods.
- 4 Daniel V. Rabinkin, William Song, M. Michael Vai, and Huy T. Nguyen, "Adaptive array beamforming with fixed-point arithmetic matrix inversion using Givens rotations," Proceedings of Society of Photo-Optical Instrumentation Engineers (SPIE) -- Volume 4474 Advanced Signal Processing Algorithms, Architectures, and Implementations XI, Franklin T. Luk, Editor, November 2001, pp. 294--305.
- 5 Jack E. Volder, "The CORDIC Trigonometric Computing Technique," Institute of Radio Engineers (IRE) Transactions on Electronic Computers, September, 1959, pp. 330-334.
- 6 Musheng Wei and Qiaohua Liu, "On growth factors of the modified Gram-Schmidt algorithm," Numerical Linear Algebra with Applications, Vol. 15, issue 7, September 2008, pp. 621-636.

Cleanup

```
fipref(originalFipref);
globalfimath(originalGlobalFimath);
close all
set(0, 'format', originalFormat);
```

Compute Square Root Using CORDIC

This example shows how to compute square root using a CORDIC kernel algorithm in MATLAB®. CORDIC-based algorithms are critical to many embedded applications, including motor controls, navigation, signal processing, and wireless communications.

Introduction

CORDIC is an acronym for COordinate Rotation DIgital Computer. The Givens rotation-based CORDIC algorithm (see [1,2]) is one of the most hardware efficient algorithms because it only requires iterative shift-add operations. The CORDIC algorithm eliminates the need for explicit multipliers, and is suitable for calculating a variety of functions, such as sine, cosine, arcsine, arccosine, arctangent, vector magnitude, divide, square root, hyperbolic and logarithmic functions.

The fixed-point CORDIC algorithm requires the following operations:

- 1 table lookup **per iteration**
- 2 shifts **per iteration**
- 3 additions **per iteration**

Note that for hyperbolic CORDIC-based algorithms, such as square root, certain iterations ($i = 4, 13, 40, 121, \dots, k, 3k+1, \dots$) are repeated to achieve result convergence.

CORDIC Kernel Algorithms Using Hyperbolic Computation Modes

You can use a CORDIC computing mode algorithm to calculate hyperbolic functions, such as hyperbolic trigonometric, square root, log, exp, etc.

CORDIC EQUATIONS IN HYPERBOLIC VECTORING MODE

The hyperbolic vectoring mode is used for computing **square root**.

For the vectoring mode, the CORDIC equations are as follows:

$$x_{i+1} = x_i + y_i * d_i * 2^{-i}$$

$$y_{i+1} = y_i + x_i * d_i * 2^{-i}$$

$$z_{i+1} = z_i - d_i * \operatorname{atanh}(2^{-i})$$

where

$d_i = +1$ if $y_i < 0$, and -1 otherwise.

This mode provides the following result as N approaches $+\infty$:

- $x_N \approx A_N \sqrt{x_0^2 - y_0^2}$
- $y_N \approx 0$
- $z_N \approx z_0 + \operatorname{atanh}(y_0/x_0)$

where

$$A_N = \prod_{i=0}^{N-1} \sqrt{1 - 2^{-2i}}$$

Typically N is chosen to be a large-enough constant value. Thus, A_N may be pre-computed.

Note also that for **square root** we will use only the x_N result.

MATLAB Implementation of a CORDIC Hyperbolic Vectoring Algorithm

A MATLAB code implementation example of the CORDIC Hyperbolic Vectoring Kernel algorithm follows (for the case of scalar x , y , and z). This same code can be used for both fixed-point and floating-point data types.

CORDIC Hyperbolic Vectoring Kernel

```
k = 4; % Used for the repeated (3*k + 1) iteration steps
for idx = 1:n
    xtmp = bitsra(x, idx); % multiply by 2^(-idx)
    ytmp = bitsra(y, idx); % multiply by 2^(-idx)
    if y < 0
        x(:) = x + ytmp;
        y(:) = y + xtmp;
```

```

        z(:) = z - atanhLookupTable(idx);
else
    x(:) = x - ytmp;
    y(:) = y - xtmp;
    z(:) = z + atanhLookupTable(idx);
end

if idx==k
    xtmp = bitsra(x, idx); % multiply by 2^(-idx)
    ytmp = bitsra(y, idx); % multiply by 2^(-idx)
    if y < 0
        x(:) = x + ytmp;
        y(:) = y + xtmp;
        z(:) = z - atanhLookupTable(idx);
    else
        x(:) = x - ytmp;
        y(:) = y - xtmp;
        z(:) = z + atanhLookupTable(idx);
    end
    k = 3*k + 1;
end
end % idx loop

```

CORDIC-Based Square Root Computation

Square Root Computation Using the CORDIC Hyperbolic Vectoring Kernel

The judicious choice of initial values allows the CORDIC kernel hyperbolic vectoring mode algorithm to compute square root.

First, the following initialization steps are performed:

- x_0 is set to $v + 0.25$.
- y_0 is set to $v - 0.25$.

After N iterations, these initial values lead to the following output as N approaches $+\infty$:

$$x_N \approx A_N \sqrt{(v + 0.25)^2 - (v - 0.25)^2}$$

This may be further simplified as follows:

$$x_N \approx A_N \sqrt{v}$$

where A_N is the CORDIC gain as defined above.

Note: for square root, z and `atanhLookupTable` have no impact on the result. Hence, z and `atanhLookupTable` are not used.

MATLAB Implementation of a CORDIC Square Root Kernel

A MATLAB code implementation example of the CORDIC Square Root Kernel algorithm follows (for the case of scalar x and y). This same code can be used for both fixed-point and floating-point data types.

CORDIC Square Root Kernel

```

k = 4; % Used for the repeated (3*k + 1) iteration steps

for idx = 1:n
    xtmp = bitsra(x, idx); % multiply by 2^(-idx)
    ytmp = bitsra(y, idx); % multiply by 2^(-idx)
    if y < 0
        x(:) = x + ytmp;
        y(:) = y + xtmp;
    else
        x(:) = x - ytmp;
        y(:) = y - xtmp;
    end

    if idx==k
        xtmp = bitsra(x, idx); % multiply by 2^(-idx)
        ytmp = bitsra(y, idx); % multiply by 2^(-idx)
        if y < 0
            x(:) = x + ytmp;
            y(:) = y + xtmp;
        else
            x(:) = x - ytmp;
            y(:) = y - xtmp;
        end
        k = 3*k + 1;
    end
end % idx loop

```


This code is identical to the **CORDIC Hyperbolic Vectoring Kernel** implementation above, except that z and `atanhLookupTable` are not used. This is a cost savings of 1 table lookup and 1 addition per iteration.

Example

Use the CORDICSQRT function to compute the approximate square root of `v_fix` using ten CORDIC kernel iterations:

```
step = 2^-7;
v_fix = fi(0.5:step:(2-step), 1, 20); % fixed-point inputs in range [.5, 2)
niter = 10; % number of CORDIC iterations
x_sqr = cordicsqrt(v_fix, niter);

% Get the Real World Value (RWV) of the CORDIC outputs for comparison
% and plot the error between the MATLAB reference and CORDIC sqrt values
x_cdc = double(x_sqr); % CORDIC results (scaled by An_hp)
v_ref = double(v_fix); % Reference floating-point input values
x_ref = sqrt(v_ref); % MATLAB reference floating-point results
figure;
subplot(211);
plot(v_ref, x_cdc, 'r.', v_ref, x_ref, 'b-');
legend('CORDIC', 'Reference', 'Location', 'SouthEast');
title('CORDIC Square Root (In-Range) and MATLAB Reference Results');
subplot(212);
absErr = abs(x_ref - x_cdc);
plot(v_ref, absErr);
title('Absolute Error (vs. MATLAB SQRT Reference Results)');
```

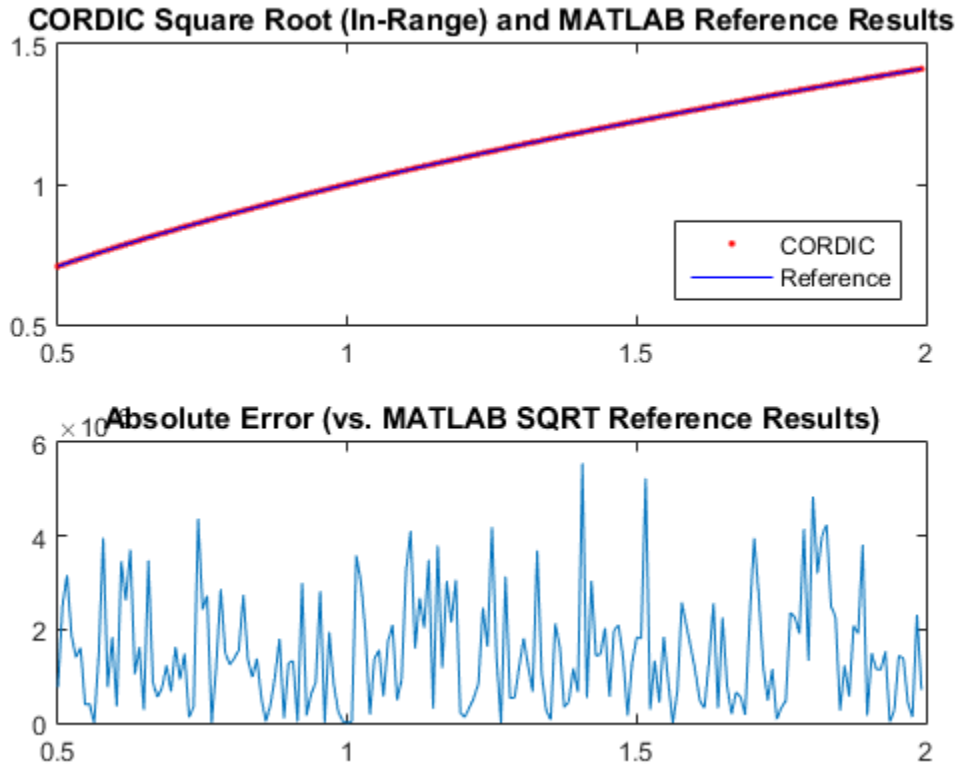

Overcoming Algorithm Input Range Limitations

Many square root algorithms normalize the input value, v , to within the range of $[0.5, 2)$ range. This pre-processing is typically done using a fixed word length normalization, and can be used to support small as well as large input value ranges.

The CORDIC-based square root algorithm implementation is particularly sensitive to inputs outside of this range. The function `CORDICSQRT` overcomes this algorithm range limitation through a normalization approach based on the following mathematical relationships:

$$v = u * 2^n, \text{ for some } 0.5 \leq u < 2 \text{ and some even integer } n.$$

Thus:

$$\sqrt{v} = \sqrt{u} * 2^{n/2}$$

In the CORDICSQRT function, the values for u and n , described above, are found during normalization of the input v . n is the number of leading zero most significant bits (MSBs) in the binary representation of the input v . These values are found through a series of bitwise logic and shifts. Note: because n must be even, if the number of leading zero MSBs is odd, one additional bit shift is made to make n even. The resulting value after these shifts is the value $0.5 \leq u < 2$.

u becomes the input to the CORDIC-based square root kernel, where an approximation to \sqrt{u} is calculated. The result is then scaled by $2^{n/2}$ so that it is back in the correct output range. This is achieved through a simple bit shift by $n/2$ bits. The (left or right) shift direction depends on the sign of n .

Example

Compute the square root of 10-bit fixed-point input data with a small non-negative range using CORDIC. Compare the CORDIC-based algorithm results to the floating-point MATLAB reference results over the same input range.



```

step      = 2^-8;
u_ref     = 0:step:(0.5-step); % Input array (small range of values)
u_in_arb  = fi(u_ref,0,10); % 10-bit unsigned fixed-point input data values
u_len     = numel(u_ref);
sqrt_ref  = sqrt(double(u_in_arb)); % MATLAB sqrt reference results
niter     = 10;
results   = zeros(u_len, 2);
results(:,2) = sqrt_ref(:);

% Compute the equivalent Real World Value result for plotting.
% Plot the Real World Value (RWV) of CORDIC and MATLAB reference results.
x_out = cordicsqrt(u_in_arb, niter);
results(:,1) = double(x_out);
figure;
subplot(211);
plot(u_ref, results(:,1), 'r.', u_ref, results(:,2), 'b-');
legend('CORDIC', 'Reference', 'Location', 'SouthEast');
title('CORDIC Square Root (Small Input Range) and MATLAB Reference Results');
axis([0 0.5 0 0.75]);
subplot(212);
absErr = abs(results(:,2) - results(:,1));
plot(u_ref, absErr);
title('Absolute Error (vs. MATLAB SQRT Reference Results)');

```


CORDIC Square Root (Small Input Range) and MATLAB Reference Results

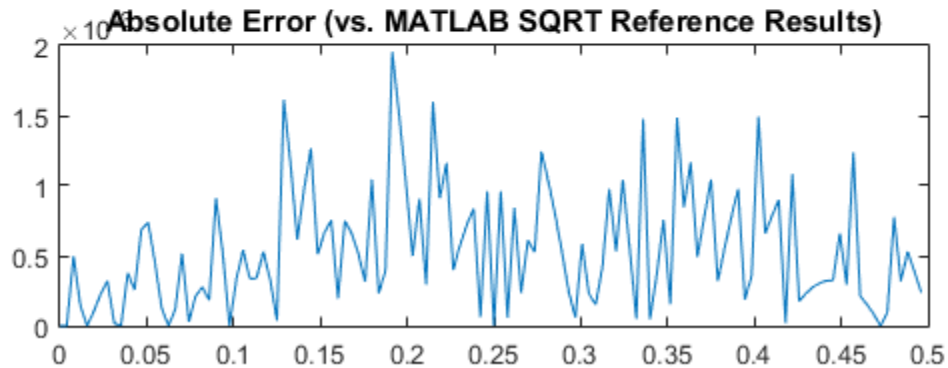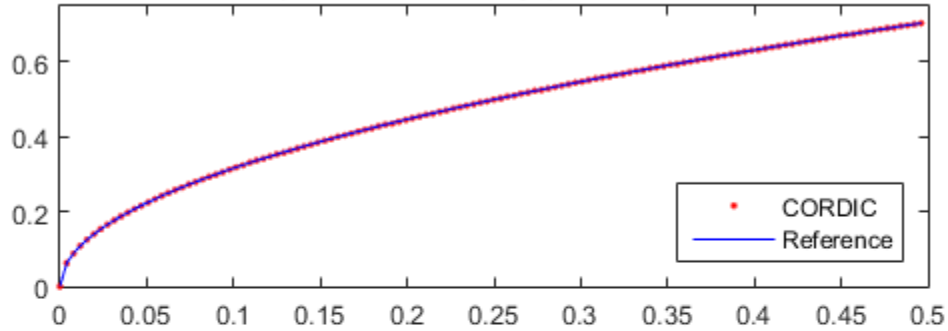

Example

Compute the square root of 16-bit fixed-point input data with a large positive range using CORDIC. Compare the CORDIC-based algorithm results to the floating-point MATLAB reference results over the same input range.

```



u_ref      = 0:5:2500;          % Input array (larger range of values)
u_in_arb  = fi(u_ref,0,16);    % 16-bit unsigned fixed-point input data values
u_len     = numel(u_ref);
sqrt_ref  = sqrt(double(u_in_arb)); % MATLAB sqrt reference results
niter     = 16;
results   = zeros(u_len, 2);
results(:,2) = sqrt_ref(:);
    
```

```

% Compute the equivalent Real World Value result for plotting.
% Plot the Real World Value (RWV) of CORDIC and MATLAB reference results.
x_out = cordicsqrt(u_in_arb, niter);
results(:,1) = double(x_out);
figure;
subplot(211);
plot(u_ref, results(:,1), 'r.', u_ref, results(:,2), 'b-');
legend('CORDIC', 'Reference', 'Location', 'SouthEast');
title('CORDIC Square Root (Large Input Range) and MATLAB Reference Results');
axis([0 2500 0 55]);
subplot(212);
absErr = abs(results(:,2) - results(:,1));
plot(u_ref, absErr);
title('Absolute Error (vs. MATLAB SQRT Reference Results)');

```

CORDIC Square Root (Large Input Range) and MATLAB Reference Results

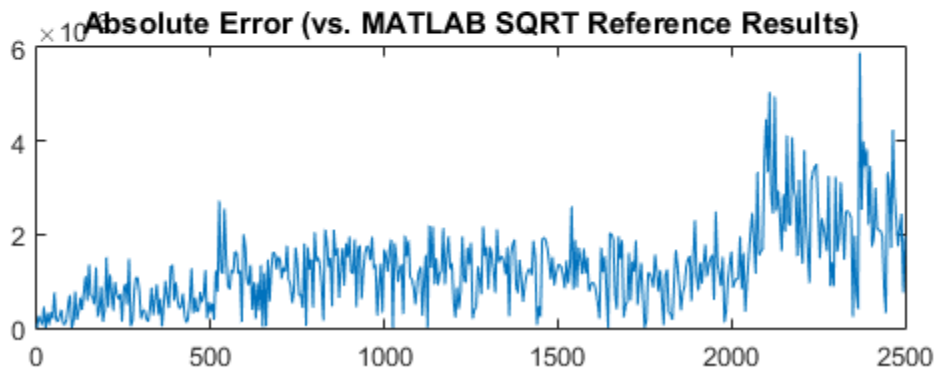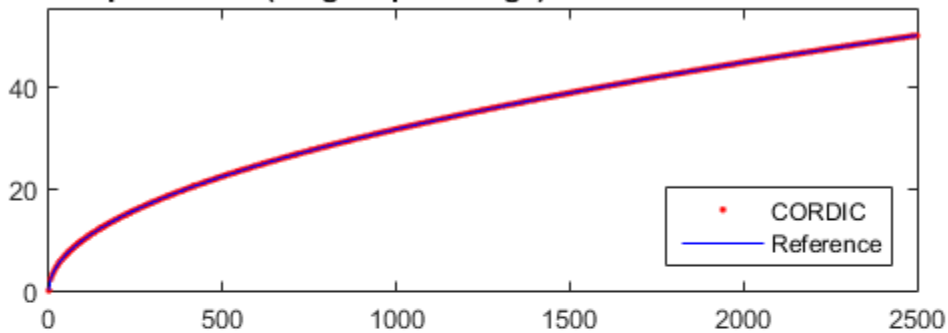

References

- 1 Jack E. Volder, The CORDIC Trigonometric Computing Technique, IRE Transactions on Electronic Computers, Volume EC-8, September 1959, pp330-334.
- 2 Ray Andraka, A survey of CORDIC algorithm for FPGA based computers, Proceedings of the 1998 ACM/SIGDA sixth international symposium on Field programmable gate arrays, Feb. 22-24, 1998, pp191-200

Convert Cartesian to Polar Using CORDIC Vectoring Kernel

This example shows how to convert Cartesian to polar coordinates using a CORDIC vectoring kernel algorithm in MATLAB®. CORDIC-based algorithms are critical to many embedded applications, including motor controls, navigation, signal processing, and wireless communications.

Introduction

CORDIC is an acronym for COordinate Rotation DIgital Computer. The Givens rotation-based CORDIC algorithm (see [1,2]) is one of the most hardware efficient algorithms because it only requires iterative shift-add operations. The CORDIC algorithm eliminates the need for explicit multipliers, and is suitable for calculating a variety of functions, such as sine, cosine, arcsine, arccosine, arctangent, vector magnitude, divide, square root, hyperbolic and logarithmic functions.

The fixed-point CORDIC algorithm requires the following operations:

- 1 table lookup **per iteration**
- 2 shifts **per iteration**
- 3 additions **per iteration**

CORDIC Kernel Algorithm Using the Vectoring Computation Mode

You can use a CORDIC vectoring computing mode algorithm to calculate $\text{atan}(y/x)$, compute cartesian-polar to cartesian conversions, and for other operations. In vectoring mode, the CORDIC rotator rotates the input vector towards the positive X-axis to minimize the y component of the residual vector. For each iteration, if the y coordinate of the residual vector is positive, the CORDIC rotator rotates clockwise (using a negative angle); otherwise, it rotates counter-clockwise (using a positive angle). Each rotation uses a progressively smaller angle value. If the angle accumulator is initialized to 0, at the end of the iterations, the accumulated rotation angle is the angle of the original input vector.

In vectoring mode, the CORDIC equations are:

$$x_{i+1} = x_i - y_i * d_i * 2^{-i}$$

$$y_{i+1} = y_i + x_i * d_i * 2^{-i}$$

$z_{i+1} = z_i + d_i * \text{atan}(2^{-i})$ is the angle accumulator

where $d_i = +1$ if $y_i < 0$, and -1 otherwise;

$i = 0, 1, \dots, N - 1$, and N is the total number of iterations.

As N approaches $+\infty$:

$$x_N = A_N \sqrt{x_0^2 + y_0^2}$$

$$y_N = 0$$

$$z_N = z_0 + \text{atan}(y_0/x_0)$$

Where:

$$A_N = \prod_{i=0}^{N-1} \sqrt{1 + 2^{-2i}}$$

Typically N is chosen to be a large-enough constant value. Thus, A_N may be pre-computed.

Efficient MATLAB Implementation of a CORDIC Vectoring Kernel Algorithm

A MATLAB code implementation example of the CORDIC Vectoring Kernel algorithm follows (for the case of scalar x , y , and z). This same code can be used for both fixed-point and floating-point operation.

CORDIC Vectoring Kernel

```
function [x, y, z] = cordic_vectoring_kernel(x, y, z, inPLUT, n)
% Perform CORDIC vectoring kernel algorithm for N iterations.
xtmp = x;
ytmp = y;
for idx = 1:n
    if y < 0
        x(:) = accumneg(x, ytmp);
        y(:) = accumpos(y, xtmp);
```

```
        z(:) = accumneg(z, inpLUT(idx));
else
    x(:) = accumpos(x, ytmp);
    y(:) = accumneg(y, xtmp);
    z(:) = accumpos(z, inpLUT(idx));
end
xtmp = bitsra(x, idx); % bit-shift-right for multiply by 2^(-idx)
ytmp = bitsra(y, idx); % bit-shift-right for multiply by 2^(-idx)
end
```

CORDIC-Based Cartesian to Polar Conversion Using Normalized Input Units

Cartesian to Polar Computation Using the CORDIC Vectoring Kernel

The judicious choice of initial values allows the CORDIC kernel vectoring mode algorithm to directly compute the magnitude $R = \sqrt{x_0^2 + y_0^2}$ and angle $\theta = \text{atan}(y_0/x_0)$.

The input accumulators are initialized to the input coordinate values:

- $x_0 = X$
- $y_0 = Y$

The angle accumulator is initialized to zero:

- $z_0 = 0$

After N iterations, these initial values lead to the following outputs as N approaches $+\infty$:

- $x_N \approx A_N \sqrt{x_0^2 + y_0^2}$
- $z_N \approx \text{atan}(y_0/x_0)$

Other vectoring-kernel-based function approximations are possible via pre- and post-processing and using other initial conditions (see [1,2]).

Example

Suppose that you have some measurements of Cartesian (X,Y) data, normalized to values between [-1, 1), that you want to convert into polar (magnitude, angle) coordinates.

Also suppose that you have a 16-bit integer arithmetic unit that can perform add, subtract, shift, and memory operations. With such a device, you could implement the CORDIC vectoring kernel to efficiently compute magnitude and angle from the input (X,Y) coordinate values, without the use of multiplies or large lookup tables.

```

sumWL = 16; % CORDIC sum word length
thNorm = -1.0:(2^-8):1.0; % Also using normalized [-1.0, 1.0] angle values
theta = fi(thNorm, 1, sumWL); % Fixed-point angle values (best precision)
z_NT = numerictype(theta); % Data type for Z
xyCPNT = numerictype(1,16,15); % Using normalized X-Y range [-1.0, 1.0)
thetaRadians = pi/2 .* thNorm; % real-world range [-pi/2 pi/2] angle values
inXfix = fi(0.50 .* cos(thetaRadians), xyCPNT); % X coordinate values
inYfix = fi(0.25 .* sin(thetaRadians), xyCPNT); % Y coordinate values

nitters = 13; % Number of CORDIC iterations
inpLUT = fi(atan(2 .^ (-(0:(nitters-1)))) .* (2/pi), z_NT); % Normalized
z_c2p = fi(zeros(size(theta)), z_NT); % Z array pre-allocation
x_c2p = fi(zeros(size(theta)), xyCPNT); % X array pre-allocation
y_c2p = fi(zeros(size(theta)), xyCPNT); % Y array pre-allocation

for idx = 1:length(inXfix)
    % CORDIC vectoring kernel iterations
    [x_c2p(idx), y_c2p(idx), z_c2p(idx)] = ...
        fidemo.cordic_vectoring_kernel(...
            inXfix(idx), inYfix(idx), fi(0, z_NT), inpLUT, nitters);
end


% Get the Real World Value (RWV) of the CORDIC outputs for comparison
% and plot the error between the (magnitude, angle) values
AnGain = prod(sqrt(1+2.^(-2*(0:(nitters-1))))); % CORDIC gain
x_c2p_RWV = (1/AnGain) .* double(x_c2p); % Magnitude (scaled by CORDIC gain)
z_c2p_RWV = (pi/2) .* double(z_c2p); % Angles (in radian units)
[thRWV,rRWV] = cart2pol(double(inXfix), double(inYfix)); % MATLAB reference
magnitudeErr = rRWV - x_c2p_RWV;
angleErr = thRWV - z_c2p_RWV;
figure;
subplot(411);
plot(thNorm, x_c2p_RWV);
axis([-1 1 0.25 0.5]);
title('CORDIC Magnitude (X) Values');
subplot(412);
plot(thNorm, magnitudeErr);
title('Error between Magnitude Reference Values and X Values');
subplot(413);

```

```

plot(thNorm, z_c2p_RWV);
title('CORDIC Angle (Z) Values');
subplot(414);
plot(thNorm, angleErr);
title('Error between Angle Reference Values and Z Values');

```

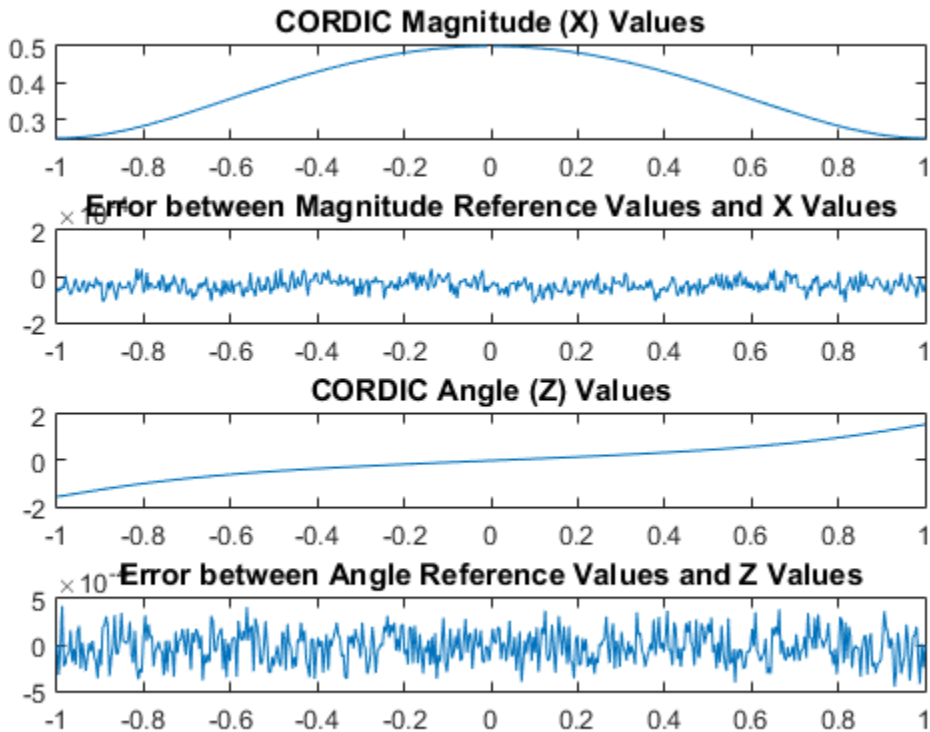

References

- 1 Jack E. Volder, The CORDIC Trigonometric Computing Technique, IRE Transactions on Electronic Computers, Volume EC-8, September 1959, pp330-334.
- 2 Ray Andraka, A survey of CORDIC algorithm for FPGA based computers, Proceedings of the 1998 ACM/SIGDA sixth international symposium on Field programmable gate arrays, Feb. 22-24, 1998, pp191-200

Set Data Types Using Min/Max Instrumentation

This example shows how to set fixed-point data types by instrumenting MATLAB® code for min/max logging and using the tools to propose data types.

The functions you will use are:

- `buildInstrumentedMex` - Build MEX function with instrumentation enabled
- `showInstrumentationResults` - Show instrumentation results
- `clearInstrumentationResults` - Clear instrumentation results

The Unit Under Test

The function that you convert to fixed-point in this example is a second-order direct-form 2 transposed filter. You can substitute your own function in place of this one to reproduce these steps in your own work.

```
function [y,z] = fi_2nd_order_df2t_filter(b,a,x,y,z)
    for i=1:length(x)
        y(i) = b(1)*x(i) + z(1);
        z(1) = b(2)*x(i) + z(2) - a(2) * y(i);
        z(2) = b(3)*x(i)          - a(3) * y(i);
    end
end
```

For a MATLAB® function to be instrumented, it must be suitable for code generation. For information on code generation, see the reference page for `buildInstrumentedMex`. A MATLAB® Coder™ license is not required to use `buildInstrumentedMex`.

In this function the variables `y` and `z` are used as both inputs and outputs. This is an important pattern because:

- You can set the data type of `y` and `z` outside the function, thus allowing you to re-use the function for both fixed-point and floating-point types.
- The generated C code will create `y` and `z` as references in the function argument list. For more information about this pattern, see the documentation under Code Generation from MATLAB® > User's Guide > Generating Efficient and Reusable Code > Generating Efficient Code > Eliminating Redundant Copies of Function Inputs.

Run the following code to copy the test function into a temporary directory so this example doesn't interfere with your own work.

```
tempdirObj = fidemo.fiTempdir('fi_instrumentation_fixed_point_filter_demo');  
copyfile(fullfile(matlabroot,'toolbox','fixedpoint','fidemos','+fidemo',...  
                'fi_2nd_order_df2t_filter.m'),'.','f');
```

Run the following code to capture current states, and reset the global states.

```
FIPREF_STATE = get(fipref);  
reset(fipref)
```

Data Types Determined by the Requirements of the Design

In this example, the requirements of the design determine the data type of input x . These requirements are signed, 16-bit, and fractional.

```
N = 256;  
x = fi(zeros(N,1),1,16,15);
```

The requirements of the design also determine the fixed-point math for a DSP target with a 40-bit accumulator. This example uses floor rounding and wrap overflow to produce efficient generated code.

```
F = fimath('RoundingMethod','Floor',...  
          'OverflowAction','Wrap',...  
          'ProductMode','KeepLSB',...  
          'ProductWordLength',40,...  
          'SumMode','KeepLSB',...  
          'SumWordLength',40);
```

The following coefficients correspond to a second-order lowpass filter created by

```
[num,den] = butter(2,0.125)
```

The values of the coefficients influence the range of the values that will be assigned to the filter output and states.

```
num = [0.0299545822080925 0.0599091644161849 0.0299545822080925];  
den = [1 -1.4542435862515900 0.5740619150839550];
```

The data type of the coefficients, determined by the requirements of the design, are specified as 16-bit word length and scaled to best-precision. A pattern for creating `fi` objects from constant coefficients is:

1. Cast the coefficients to `fi` objects using the default round-to-nearest and saturate overflow settings, which gives the coefficients better accuracy.

2. Attach `fi` with floor rounding and wrap overflow settings to control arithmetic, which leads to more efficient C code.

```
b = fi(num,1,16); b.fimath = F;
a = fi(den,1,16); a.fimath = F;
```

Hard-code the filter coefficients into the implementation of this filter by passing them as constants to the `buildInstrumentedMex` command.

```
B = coder.Constant(b);
A = coder.Constant(a);
```

Data Types Determined by the Values of the Coefficients and Inputs

The values of the coefficients and values of the inputs determine the data types of output `y` and state vector `z`. Create them with a scaled double datatype so their values will attain full range and you can identify potential overflows and propose data types.

```
yisd = fi(zeros(N,1),1,16,15,'DataType','ScaledDouble','fimath',F);
zisd = fi(zeros(2,1),1,16,15,'DataType','ScaledDouble','fimath',F);
```

Instrument the MATLAB® Function as a Scaled-Double MEX Function

To instrument the MATLAB® code, you create a MEX function from the MATLAB® function using the `buildInstrumentedMex` command. The inputs to `buildInstrumentedMex` are the same as the inputs to `fi`, but `buildInstrumentedMex` has no `fi`-object restrictions. The output of `buildInstrumentedMex` is a MEX function with instrumentation inserted, so when the MEX function is run, the simulated minimum and maximum values are recorded for all named variables and intermediate values.

Use the `'-o'` option to name the MEX function that is generated. If you do not use the `'-o'` option, then the MEX function is the name of the MATLAB® function with `'_mex'` appended. You can also name the MEX function the same as the MATLAB® function, but you need to remember that MEX functions take precedence over MATLAB® functions and so changes to the MATLAB® function will not run until either the MEX function is re-generated, or the MEX function is deleted and cleared.

```
buildInstrumentedMex fi_2nd_order_df2t_filter ...
    -o filter_scaled_double ...
    -args {B,A,x,yisd,zisd}
```

Test Bench with Chirp Input

The test bench for this system is set up to run chirp and step signals. In general, test benches for systems should cover a wide range of input signals.

The first test bench uses a chirp input. A chirp signal is a good representative input because it covers a wide range of frequencies.

```
t = linspace(0,1,N);      % Time vector from 0 to 1 second
f1 = N/2;                % Target frequency of chirp set to Nyquist
xchirp = sin(pi*f1*t.^2); % Linear chirp from 0 to Fs/2 Hz in 1 second
x(:) = xchirp;           % Cast the chirp to fixed-point
```

Run the Instrumented MEX Function to Record Min/Max Values


The instrumented MEX function must be run to record minimum and maximum values for that simulation run. Subsequent runs accumulate the instrumentation results until they are cleared with `clearInstrumentationResults`.

Note that the numerator and denominator coefficients were compiled as constants so they are not provided as input to the generated MEX function.

```
ychirp = filter_scaled_double(x,yisd,zisd);
```

The plot of the filtered chirp signal shows the lowpass behavior of the filter with these particular coefficients. Low frequencies are passed through and higher frequencies are attenuated.

```
clf
plot(t,x,'c',t,ychirp,'bo-')
title('Chirp')
legend('Input','Scaled-double output')
figure(gcf); drawnow;
```

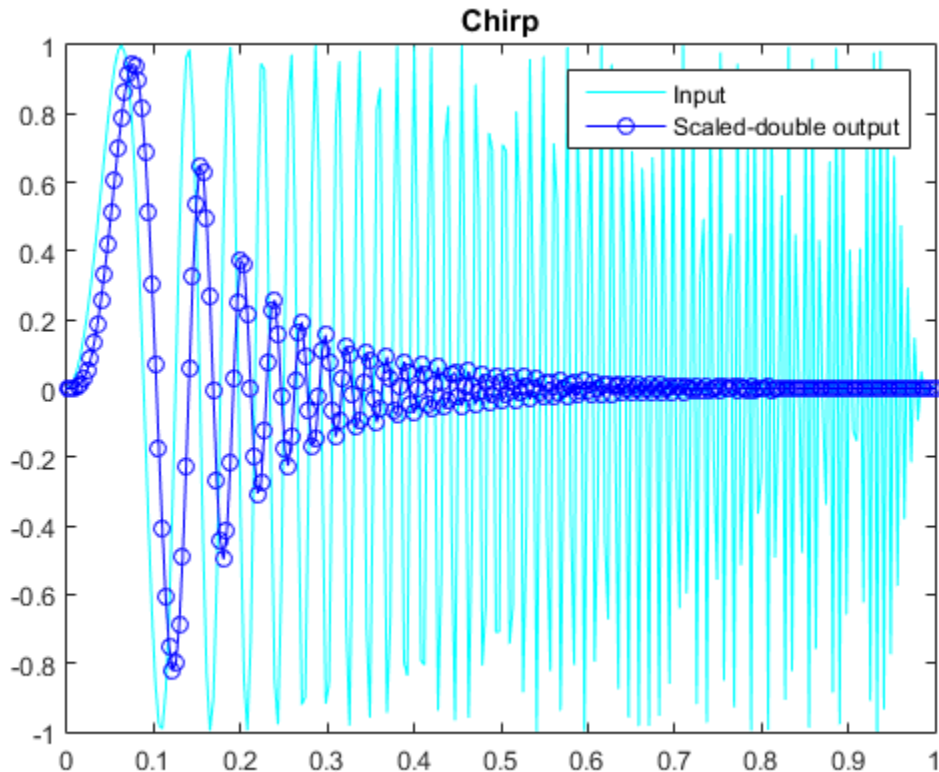

Show Instrumentation Results with Proposed Fraction Lengths for Chirp

The `showInstrumentationResults` command displays the code generation report with instrumented values. The input to `showInstrumentationResults` is the name of the instrumented MEX function for which you wish to show results.

This is the list of options to the `showInstrumentationResults` command:

- `-defaultDT T` Default data type to propose for doubles, where `T` is a numeric type object, or one of the strings `{remainFloat, double, single, int8, int16, int32, int64, uint8, uint16, uint32, uint64}`. The default is `remainFloat`.

- `-nocode` Do not show MATLAB code in the printable report. Display only the logged variables tables. This option only has effect in combination with the `-printable` option.
- `-optimizeWholeNumbers` Optimize the word length of variables whose simulation min/max logs indicate that they were always whole numbers.
- `-percentSafetyMargin N` Safety margin for simulation min/max, where `N` represents a percent value.
- `-printable` Create a printable report and open in the system browser.
- `-proposeFL` Propose fraction lengths for specified word lengths.
- `-proposeWL` Propose word lengths for specified fraction lengths.

Potential overflows are only displayed for `fi` objects with Scaled Double data type.

This particular design is for a DSP, where the word lengths are fixed, so use the `proposeFL` flag to propose fraction lengths.

```
showInstrumentationResults filter_scaled_double -proposeFL
```

Hover over expressions or variables in the instrumented code generation report to see the simulation minimum and maximum values. In this design, the inputs fall between -1 and +1, and the values of all variables and intermediate results also fall between -1 and +1. This suggests that the data types can all be fractional (fraction length one bit less than the word length). However, this will not always be true for this function for other kinds of inputs and it is important to test many types of inputs before setting final fixed-point data types.

The screenshot displays the MATLAB Code Generation Report for the function `zi_2nd_order_df2t_filter`. The function code is shown on the left, and the instrumentation results are shown on the right.

Function: `zi_2nd_order_df2t_filter`

```

1 function [y,z] = zi_2nd_order_df2t_filter(b,a,x,y,z)
2 %FI_2ND_ORDER_DF2T_FILTER Second-order Direct-Form II Transpose Filter
3
4 % Copyright 2011 The MathWorks, Inc.
5 for j=1:length(x)
6     y(j) = b(1)*x(j) + z(1);
7     z(1) = (b(2)*x(j) + z(2)) - a(2) * y(j);
8     z(2) = b(3)*x(j) - a(3) * y(j);
9 end
10 end
11

```

Information for the selected expression:

Size	1 x 1
Class	embedded.fi
Complex	No
DT Mode	ScaledDouble
Signedness	Signed
WL	40
FL	29
Percent of Current Range	< 1
Always Whole Number	No
SimMin	-0.47000708911889938
SimMax	0.542233211730554

Summary

Order	Variable	Type	Size	Class	Complex	DT Mode	Signedness	WL	FL	Proposed FL	Percent of Current Range	Always Whole Number	SimMin	SimMax
1	y	IO	256 x 1	embedded.fi	No	ScaledDouble	Signed	16	15	15	95	No	-0.8158220312628653	0.9446434665609258
2	z	IO	2 x 1	embedded.fi	No	ScaledDouble	Signed	16	15	15	93	No	-0.8098257866372123	0.9227265381763932
3	b	Input	1 x 3	embedded.fi	No	-	Signed	16	19	-	96	No	0.029954910278320312	0.059909820556640625
4	a	Input	1 x 3	embedded.fi	No	-	Signed	16	14	-	73	No	-1.4542236328125	1
5	x	Input	256 x 1	embedded.fi	No	-	Signed	16	15	-	100	No	-0.999999482421875	0.99993896484375
6	j	Local	1 x 1	double	No	-	-	-	-	-	-	Yes	1	256

Test Bench with Step Input

The next test bench is run with a step input. A step input is a good representative input because it is often used to characterize the behavior of a system.

```
xstep = [ones(N/2,1); -ones(N/2,1)];
x(:) = xstep;
```


Run the Instrumented MEX Function with Step Input

The instrumentation results are accumulated until they are cleared with `clearInstrumentationResults`.

```

ystep = filter_scaled_double(x,yisd,zisd);

clf
plot(t,x,'c',t,ystep,'bo-')
title('Step')
legend('Input', 'Scaled-double output')
figure(gcf); drawnow;
```

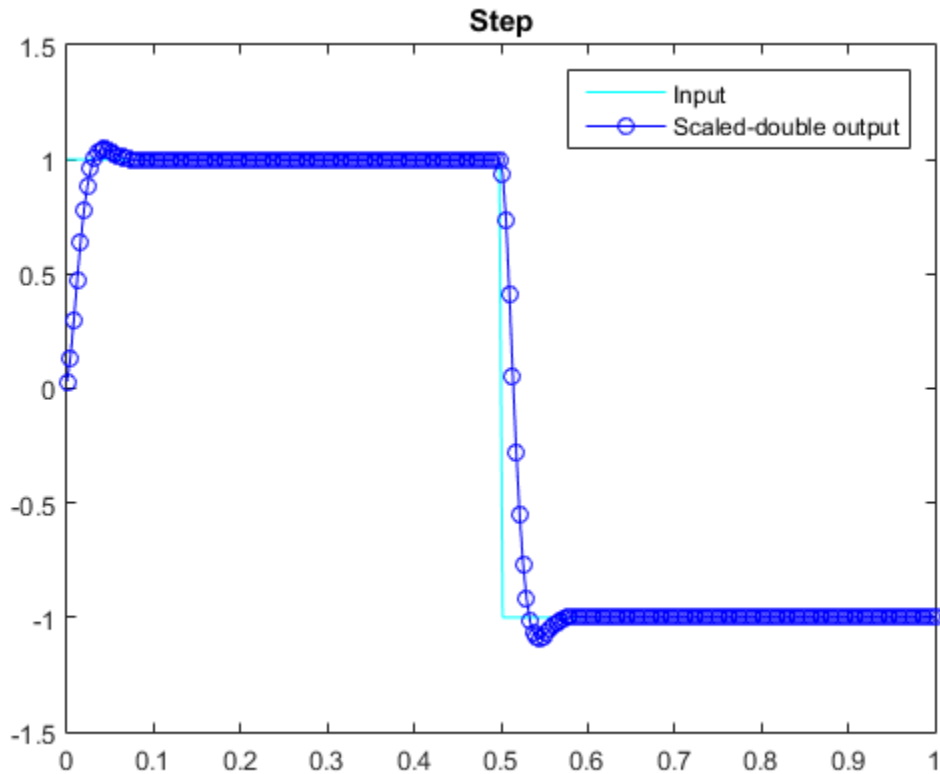

Show Accumulated Instrumentation Results

Even though the inputs for step and chirp inputs are both full range as indicated by x at 100 percent current range in the instrumented code generation report, the step input causes overflow while the chirp input did not. This is an illustration of the necessity to have many different inputs for your test bench. For the purposes of this example, only two inputs were used, but real test benches should be more thorough.

```
showInstrumentationResults filter_scaled_double -proposeFL
```


Code Generation Report

MATLAB code Call stack

Function: `fi_2nd_order_df2t_filter`

```

1 function [y,z] = fi_2nd_order_df2t_filter(b,a,k,x,y,z)
2 %FI_2ND_ORDER_DF2T_FILTER Second-order Direct-Form II Transpose Filter
3
4 % Copyright 2011 The MathWorks, Inc.
5 for j=1:length(k)
6     y[j] = b(1)*x[j] + z(1);
7     z(1) = (b(2)*x[j] + z(2)) - a(2) * y[j];
8     z(2) = b(3)*x[j] - a(3) * y[j];
9 end
10 end
11

```

Summary All Messages (0) Variables

Order	Variable	Type	Size	Class	Complex	DT Mode	Signedness	WL	FL	Proposed FL	Percent of Current Range	Always Whole Number	SimMin	SimMax
1	y	IO	296 x 1	embedded fi	No	ScaledDouble	Signed	16	15	14	110	No	-1.0811287150891327	1.045564982263348
2	z	IO	2 x 1	embedded fi	No	ScaledDouble	Signed	16	15	14	137	No	-1.0611738048108124	1.0156109861363434
3	b	Input	1 x 3	embedded fi	No	-	Signed	16	19	-	95	No	0.029954910278320312	0.059909820556640625
4	a	Input	1 x 3	embedded fi	No	-	Signed	16	14	-	73	No	-1.4542236328125	1
5	x	Input	256 x 1	embedded fi	No	-	Signed	16	15	-	100	No	-1	0.999969482421875
6	j	Local	1 x 1	double	No	-	-	-	-	-	-	Yes	1	256

Apply Proposed Fixed-Point Properties

To prevent overflow, set proposed fixed-point properties based on the proposed fraction lengths of 14-bits for `y` and `z` from the instrumented code generation report.

At this point in the workflow, you use true fixed-point types (as opposed to the scaled double types that were used in the earlier step of determining data types).

```

yi = fi(zeros(N,1),1,16,14,'fimath',F);
zi = fi(zeros(2,1),1,16,14,'fimath',F);

```

Instrument the MATLAB® Function as a Fixed-Point MEX Function

Create an instrumented fixed-point MEX function by using fixed-point inputs and the `buildInstrumentedMex` command.

```

buildInstrumentedMex fi_2nd_order_df2t_filter ...
    -o filter_fixed_point ...
    -args {B,A,x,yi,zi}

```

Validate the Fixed-Point Algorithm

After converting to fixed-point, run the test bench again with fixed-point inputs to validate the design.


Validate with Chirp Input

Run the fixed-point algorithm with a chirp input to validate the design.

```
x(:) = xchirp;  
[y,z] = filter_fixed_point(x,yi,zi);  
[ysd,zsd] = filter_scaled_double(x,yisd,zisd);  
err = double(y) - double(ysd);
```


Compare the fixed-point outputs to the scaled-double outputs to verify that they meet your design criteria.

```
clf  
subplot(211);plot(t,x,'c',t,ysd,'bo-',t,y,'mx')  
xlabel('Time (s)');  
ylabel('Amplitude')  
legend('Input','Scaled-double output','Fixed-point output');  
title('Fixed-Point Chirp')  
subplot(212);plot(t,err,'r');title('Error');xlabel('t'); ylabel('err');  
figure(gcf); drawnow;
```

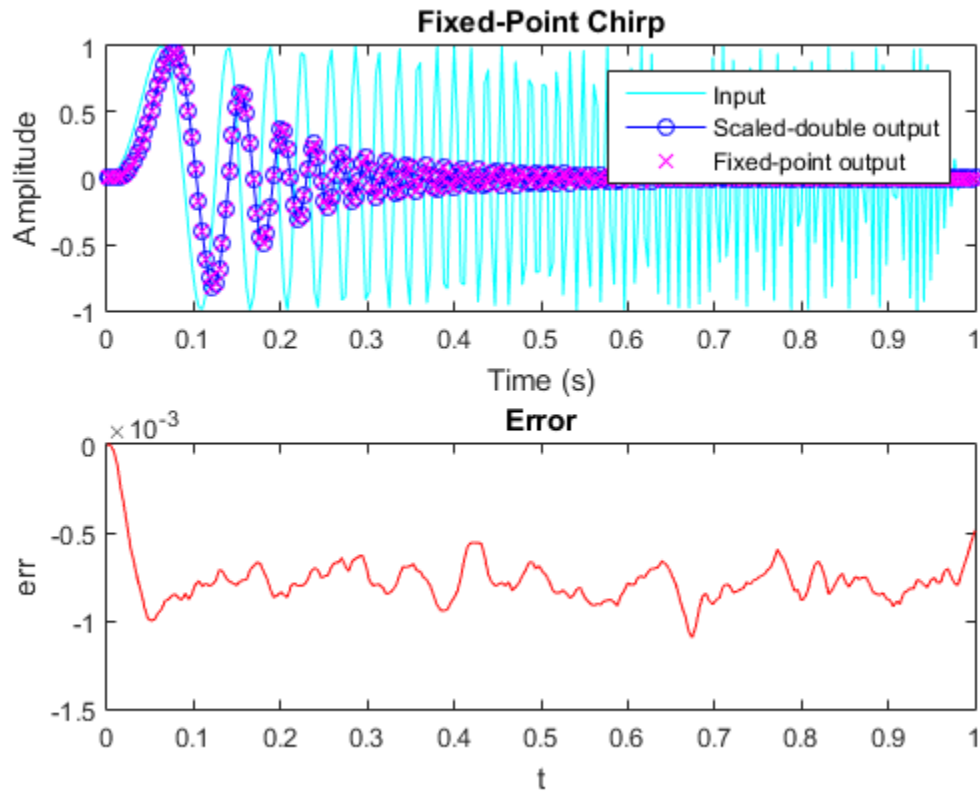

Inspect the variables and intermediate results to ensure that the min/max values are within range.

```
showInstrumentationResults filter_fixed_point
```

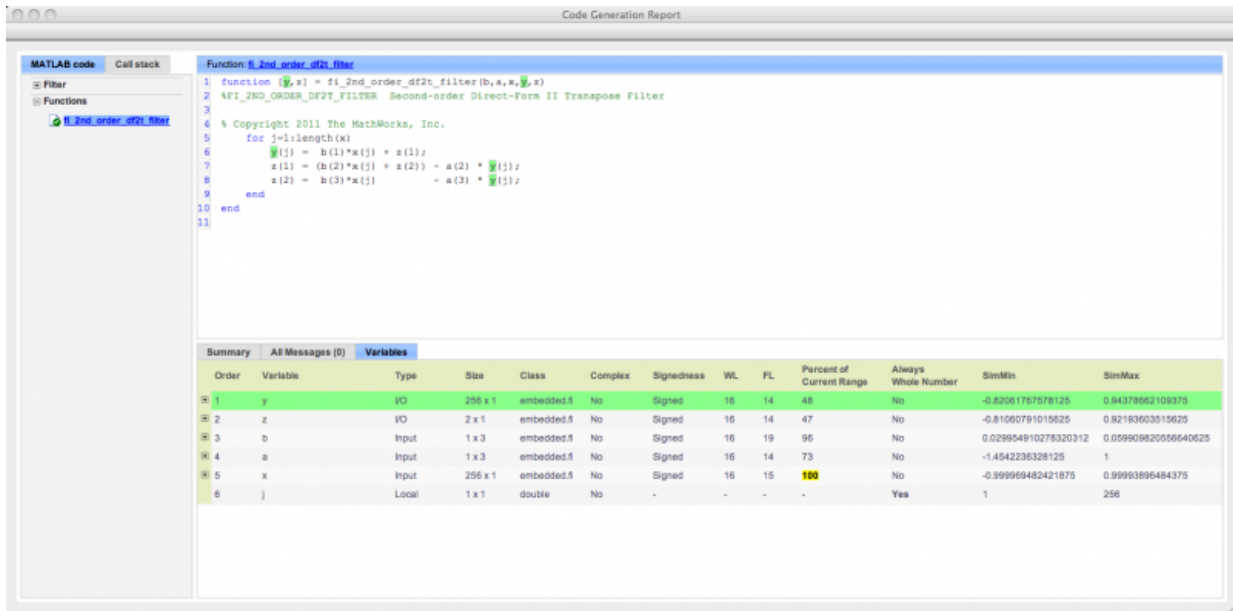

Validate with Step Inputs

Run the fixed-point algorithm with a step input to validate the design.

Run the following code to clear the previous instrumentation results to see only the effects of running the step input.

```
clearInstrumentationResults filter_fixed_point
```

Run the step input through the fixed-point filter and compare with the output of the scaled double filter.

```
x(:) = xstep;
[y,z] = filter_fixed_point(x,yi,zi);
[ysd,zsd] = filter_scaled_double(x,yisd,zisd);
err = double(y) - double(ysd);
```


Plot the fixed-point outputs against the scaled-double outputs to verify that they meet your design criteria.

```
clf
```

```


subplot(211);plot(t,x,'c',t,ysd,'bo-',t,y,'mx')
title('Fixed-Point Step');
legend('Input','Scaled-double output','Fixed-point output')
subplot(212);plot(t,err,'r');title('Error');xlabel('t'); ylabel('err');
figure(gcf); drawnow;

```

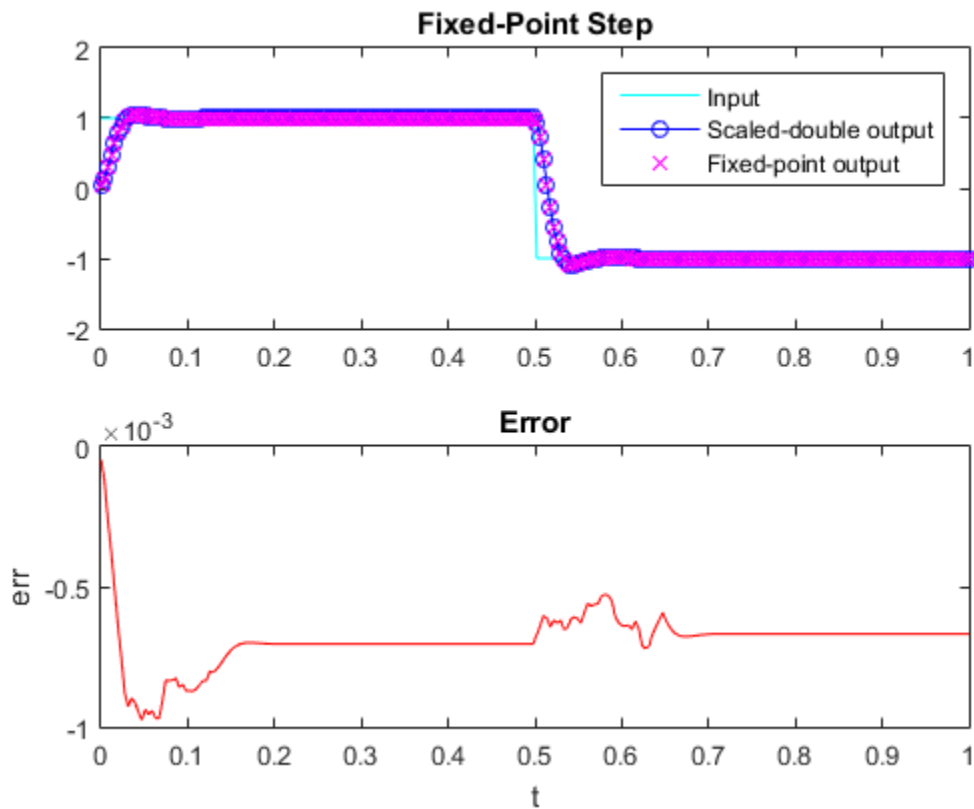

Inspect the variables and intermediate results to ensure that the min/max values are within range.

```
showInstrumentationResults filter_fixed_point
```

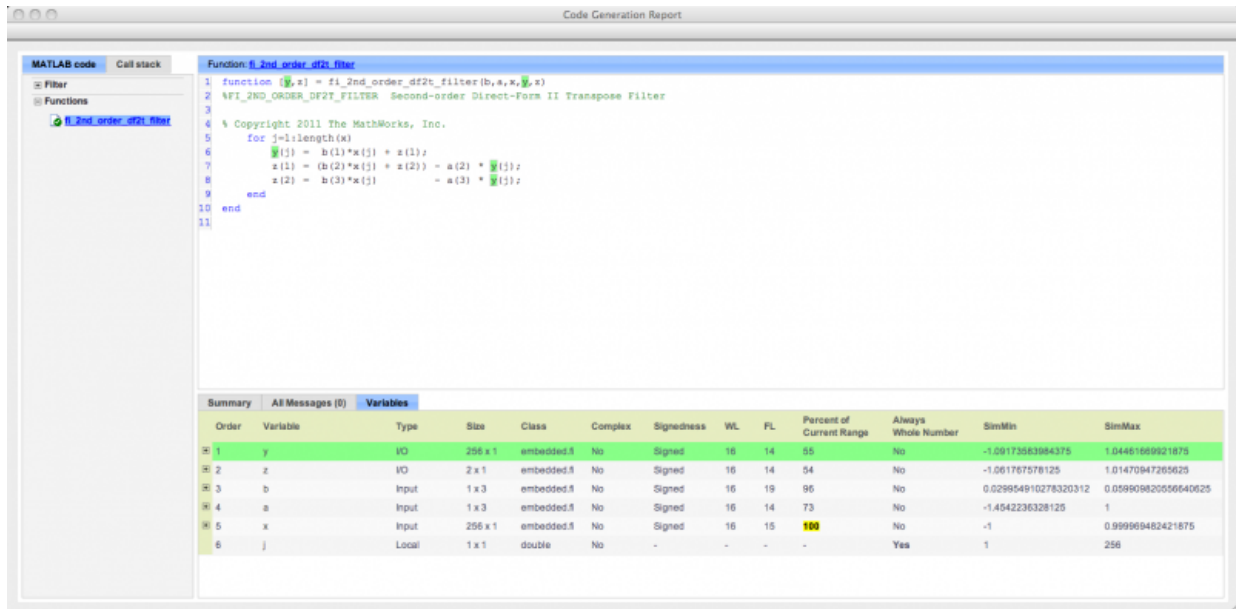

Run the following code to restore the global states.

```

fipref(FIPREF_STATE);
clearInstrumentationResults filter_fixed_point
clearInstrumentationResults filter_scaled_double
clear fi_2nd_order_df2t_filter_fixed_instrumented
clear fi_2nd_order_df2t_filter_float_instrumented

```

Run the following code to delete the temporary directory.

```
tempdirObj.cleanup;
```

Convert Fast Fourier Transform (FFT) to Fixed Point

This example shows how to convert a textbook version of the Fast Fourier Transform (FFT) algorithm into fixed-point MATLAB® code.

Run the following code to copy functions from the Fixed-Point Designer™ examples directory into a temporary directory so this example doesn't interfere with your own work.

```
tempdirObj = fidemo.fiTempdir('fi_radix2fft_demo');

copyfile(fullfile(matlabroot,'toolbox','fixedpoint','fideos','+fideo',...
    'fi_m_radix2fft_algorithm1_6_2.m'),'.','f');
copyfile(fullfile(matlabroot,'toolbox','fixedpoint','fideos',...
    'fi_m_radix2fft_withscaling.m'),'.','f');
```

Run the following code to capture current states, and reset the global states.


```
FIPREF_STATE = get(fipref);
reset(fipref)
```

Textbook FFT Algorithm

FFT is a complex-valued linear transformation from the time domain to the frequency domain. For example, if you construct a vector as the sum of two sinusoids and transform it with the FFT, you can see the peaks of the frequencies in the FFT magnitude plot.

```
n = 64; % Number of points
Fs = 4; % Sampling frequency in Hz
t = (0:(n-1))/Fs; % Time vector
f = linspace(0,Fs,n); % Frequency vector
f0 = .2; f1 = .5; % Frequencies, in Hz
x0 = cos(2*pi*f0*t) + 0.55*cos(2*pi*f1*t); % Time-domain signal
x0 = complex(x0); % The textbook algorithm requires
% the input to be complex
y = fft(x0); % Frequency-domain transformation

figure(gcf); clf
subplot(211); plot(t,real(x0),'b.-'); xlabel('Time (s)'); ylabel('Amplitude'); legend('')
subplot(212); plot(f,abs(y),'m.-'); xlabel('Frequency (Hz)'); ylabel('Magnitude'); legend('')
```

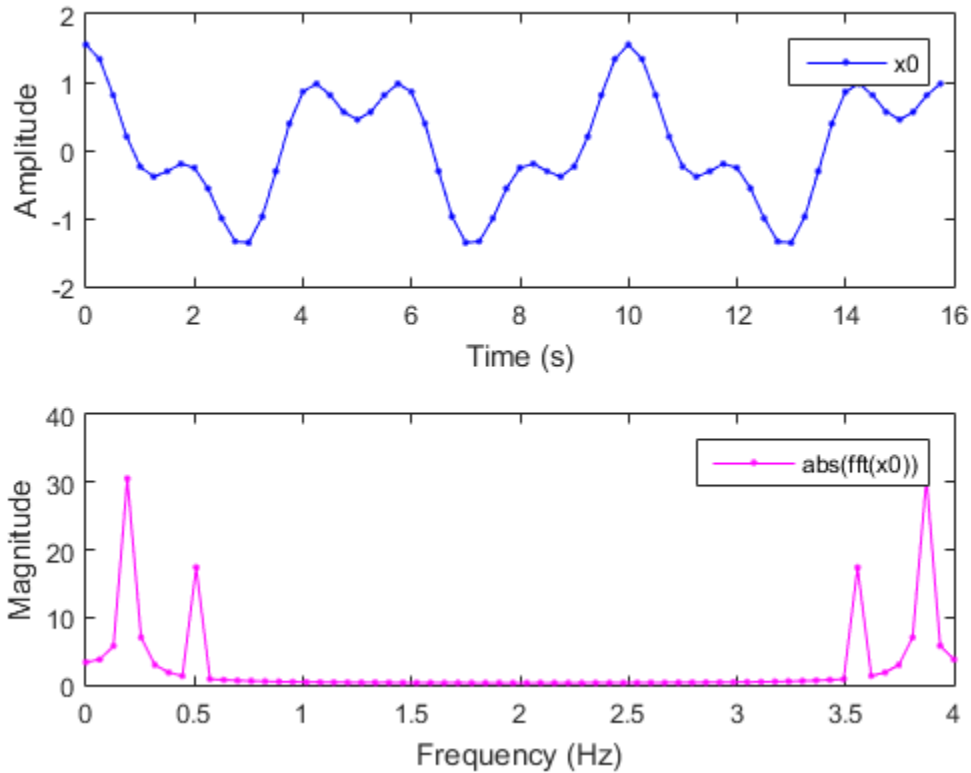

The peaks at 0.2 and 0.5 Hz in the frequency plot correspond to the two sinusoids of the time-domain signal at those frequencies.

Note the reflected peaks at 3.5 and 3.8 Hz. When the input to an FFT is real-valued, as it is in this case, then the output y is conjugate-symmetric:

$$y(k) = \text{conj}(y(N - k)).$$

There are many different implementations of the FFT, each having its own costs and benefits. You may find that a different algorithm is better for your application than the one given here. This algorithm is used to provide you with an example of how you might begin your own exploration.

This example uses the decimation-in-time unit-stride FFT shown in Algorithm 1.6.2 on page 45 of the book *Computational Frameworks for the Fast Fourier Transform* by Charles Van Loan.

In pseudo-code, the algorithm in the textbook is as follows.

Algorithm 1.6.2. If x is a complex vector of length n and $n = 2^t$, then the following algorithm overwrites x with $F_n x$.

```

 $x = P_n x$ 
 $w = w_n^{(long)}$       (See Van Loan §1.4.11.)
for  $q = 1 : t$ 
     $L = 2^q$ ;  $r = n/L$ ;  $L_* = L/2$ ;
    for  $k = 0 : r - 1$ 
        for  $j = 0 : L_* - 1$ 
             $\tau = w(L_* - 1 + j) \cdot x(kL + j + L_*)$ 
             $x(kL + j + L_*) = x(kL + j) - \tau$ 
             $x(kL + j) = x(kL + j) + \tau$ 
        end
    end
end
end

```

The textbook algorithm uses zero-based indexing. F_n is an n -by- n Fourier-transform matrix, P_n is an n -by- n bit-reversal permutation matrix, and w is a complex vector of twiddle factors. The twiddle factors, w , are complex roots of unity computed by the following algorithm:

```

function w = fi_radix2twiddles(n)
t = log2(n);
if floor(t) ~= t
    error('N must be an exact power of two. ');
end
w = zeros(n-1,1);
k=1;
L=2;
% Equation 1.4.11, p. 34
while L<=n
    theta = 2*pi/L;
    % Algorithm 1.4.1, p. 23
    for j=0:(L/2 - 1)
        w(k) = complex( cos(j*theta), -sin(j*theta) );
    end
    L=L*2;
    k=k+1;
end


```

```

    k = k + 1;
end
L = L*2;
end

figure(gcf);clf
w0 = fidemo.fi_radix2twiddles(n);
polar(angle(w0),abs(w0),'o')
title('Twiddle Factors: Complex roots of unity')

```

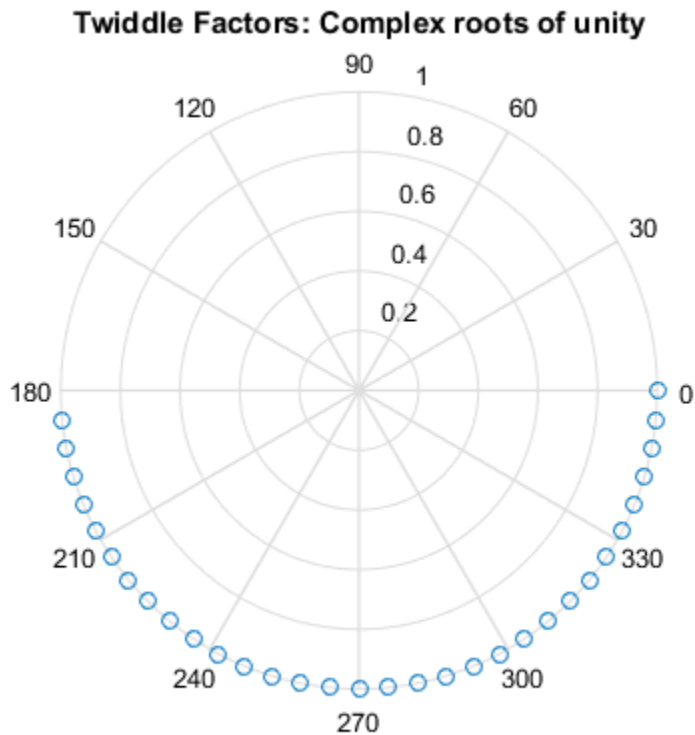

Verify Floating-Point Code

To implement the algorithm in MATLAB, you can use the `fidemo.fi_bitreverse` function to bit-reverse the input sequence, and you must add one to the indices to convert them from zero-based to one-based.

```

function x = fi_m_radix2fft_algorithm1_6_2(x, w)
n = length(x); t = log2(n);
x = fidemo.fi_bitreverse(x,n);
for q=1:t
    L = 2^q; r = n/L; L2 = L/2;
    for k=0:(r-1)
        for j=0:(L2-1)
            temp = w(L2-1+j+1) * x(k*L+j+L2+1);
            x(k*L+j+L2+1) = x(k*L+j+1) - temp;
            x(k*L+j+1) = x(k*L+j+1) + temp;
        end
    end
end
end


```

To verify that you correctly implemented the algorithm in MATLAB, run a known signal through it and compare the results to the results produced by the MATLAB FFT function.

```

y = fi_m_radix2fft_algorithm1_6_2(x0, w0);
y0 = fft(x0); % MATLAB's built-in FFT for comparison
fidemo.fi_fft_demo_plot(real(x0),y,y0,Fs, 'Double data', {'FFT Algorithm 1.6.2', 'Built-

```

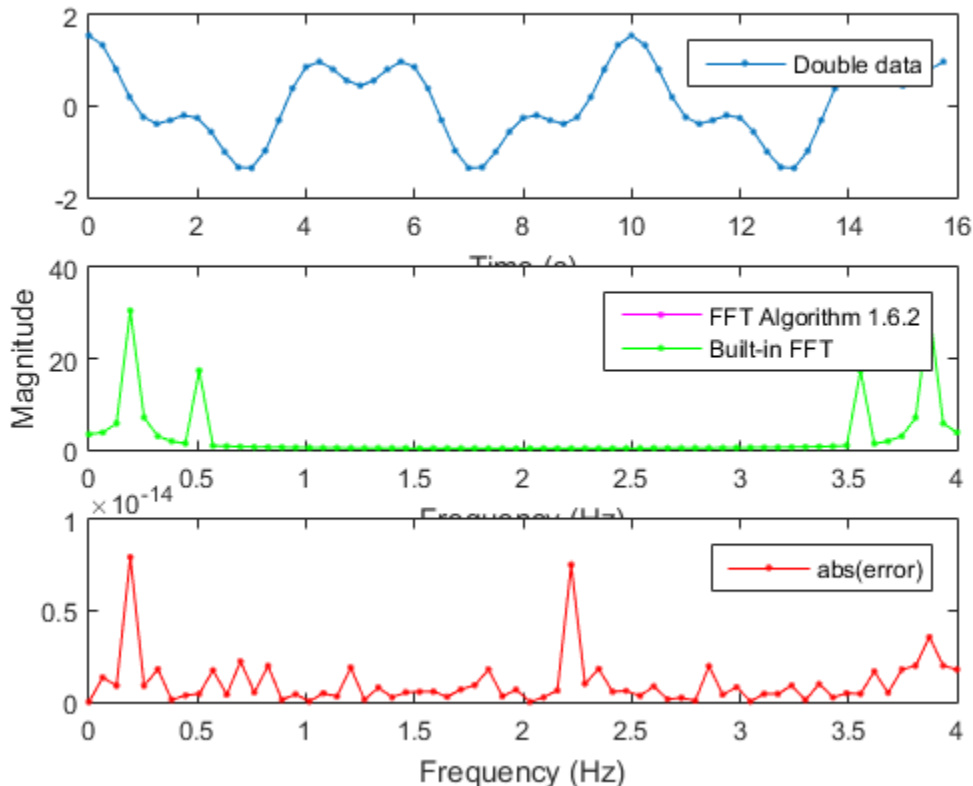

Because the error is within tolerance of the MATLAB built-in FFT function, you know you have correctly implemented the algorithm.


Identify Fixed-Point Issues

Now, try converting the data to fixed-point and see if the algorithm still looks good. In this first pass, you use all the defaults for signed fixed-point data by using the `sfi` constructor.

```
x = sfi(x0); % Convert to signed fixed-point
w = sfi(w0); % Convert to signed fixed-point

% Re-run the same algorithm with the fixed-point inputs
y = fi_m_radix2fft_algorithm1_6_2(x,w);
```

```
fidemo.fi_fft_demo_plot(real(x),y,y0,Fs,'Fixed-point data', ...
    {'Fixed-point FFT Algorithm 1.6.2','Built-in'});
```

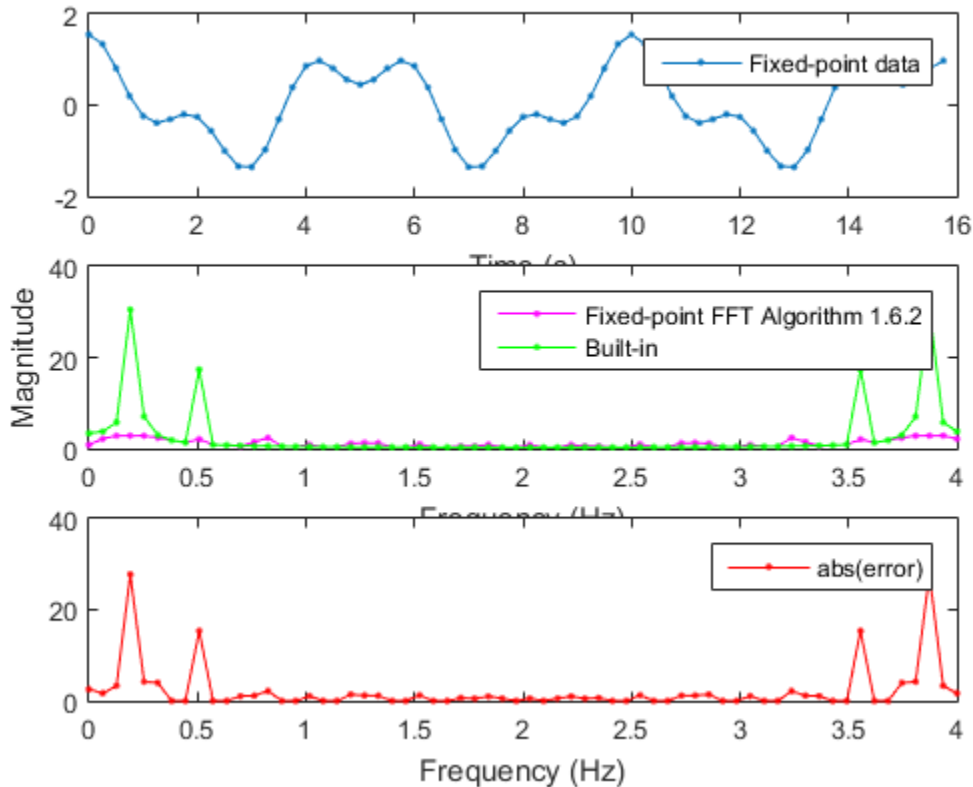

Note that the magnitude plot (center) of the fixed-point FFT does not resemble the plot of the built-in FFT. The error (bottom plot) is much larger than what you would expect to see for round off error, so it is likely that overflow has occurred.

Use Min/Max Instrumentation to Identify Overflows

To instrument the MATLAB® code, you create a MEX function from the MATLAB® function using the `buildInstrumentedMex` command. The inputs to `buildInstrumentedMex` are the same as the inputs to `fiaccel`, but `buildInstrumentedMex` has no `fi`-object restrictions. The output of

`buildInstrumentedMex` is a MEX function with instrumentation inserted, so when the MEX function is run, the simulated minimum and maximum values are recorded for all named variables and intermediate values.

The `'-o'` option is used to name the MEX function that is generated. If the `'-o'` option is not used, then the MEX function is the name of the MATLAB® function with `'_mex'` appended. You can also name the MEX function the same as the MATLAB® function, but you need to remember that MEX functions take precedence over MATLAB® functions and so changes to the MATLAB® function will not run until either the MEX function is re-generated, or the MEX function is deleted and cleared.

Create the input with a scaled double datatype so its values will attain full range and you can identify potential overflows.

```
x_scaled_double = fi(x0,'DataType','ScaledDouble');
buildInstrumentedMex fi_m_radix2fft_algorithm1_6_2 ...
    -o fft_instrumented -args {x_scaled_double w}
```

Run the instrumented MEX function to record min/max values.

```
y_scaled_double = fft_instrumented(x_scaled_double,w);
```

Show the instrumentation results.

```
showInstrumentationResults fft_instrumented
```

You can see from the instrumentation results that there were overflows when assigning into the variable `x`.

Code Generation Report

MATLAB code
Call stack
Function: `fi_m_radix2fft_algorithm1_6_2`
Calls: Select a function call:

Filter

Functions

- `fi_bitreverse`
- `fi_m_radix2fft_algorithm1`

```

1 function x = fi_m_radix2fft_algorithm1_6_2(x0, w)
2 %FI_M_RADIX2FFT_ALGORITHM1_6_2 Radix-2 FFT example.
3 % Y = FI_M_RADIX2FFT_ALGORITHM1_6_2(X, W) computes the radix-2 FFT of
4 % input vector X with twiddle-factors W.
5 %
6 % The length of vector X must be an exact power of two.
7 % Twiddle-factors W are computed via
8 % W = fidemo.fi_radix2twiddles(N)
9 % where N = length(X).
10 %
11 % This version of the algorithm has no scaling before the stages.
12 %
13 % See also FI_RADIX2FFT_DEMO, FI_M_RADIX2FFT_WITHSCALING.
14 %
15 % Reference:
16 % Charles Van Loan, Computational Frameworks for the Fast Fourier
17 % Transform, SIAM, Philadelphia, 1992, Algorithm 1.6.2, p. 45.
18 if isreal(x0)
19     x = complex(x0,0);
20 else
21     x = x0;
22 end
23 n = length(x); t = log2(n);
24 x = fi_bitreverse(x,n);
25 for q=1:t
26     L = 2^q; r = n/L; L2 = L/2;
27     for k=0:(r-1)
28         for j=0:(L2-1)
29             temp = w(L2-1+j+1) * x(k*L+j+L2+1);
30             x(k*L+j+L2+1) = x(k*L+j+1) - temp;
31             x(k*L+j+1) = x(k*L+j+1) + temp;
32         end
33     end
34 end
35
                
```

Summary | All Messages (0) | **Variables**

Order	Variable	Type	Size	Class	Complex	DT Mode	Signedness	WL	FL	Percent of Current Range	Always Whole Number	SimMin	SimMax
1	x	Output	1 x 64	embedded.fi	Yes	ScaledDouble	Signed	16	14	1267	No	-17.04581701742565	25.319950098410978
2	x0	Input	1 x 64	embedded.fi	No	ScaledDouble	Signed	16	14	78	No	-1.3590169943749477	1.55
3	w	Input	63 x 1	embedded.fi	Yes	-	Signed	16	14	51	No	-1	1
4	n	Local	1 x 1	double	No	-	-	-	-	-	Yes	64	64
5	t	Local	1 x 1	double	No	-	-	-	-	-	Yes	6	6
6	q	Local	1 x 1	double	No	-	-	-	-	-	Yes	1	6
7	L	Local	1 x 1	double	No	-	-	-	-	-	Yes	2	64
8	r	Local	1 x 1	double	No	-	-	-	-	-	Yes	1	32
9	L2	Local	1 x 1	double	No	-	-	-	-	-	Yes	1	32
10	k	Local	1 x 1	double	No	-	-	-	-	-	Yes	0	31
11	j	Local	1 x 1	double	No	-	-	-	-	-	Yes	0	31
12	temp	Local	1 x 1	embedded.fi	Yes	ScaledDouble	Signed	33	28	79	No	-12.525868366127373	12.525868366127373

Modify the Algorithm to Address Fixed-Point Issues

The magnitude of an individual bin in the FFT grows, at most, by a factor of n , where n is the length of the FFT. Hence, by scaling your data by $1/n$, you can prevent overflow from occurring for any input.

When you scale only the input to the first stage of a length- n FFT by $1/n$, you obtain a noise-to-signal ratio proportional to n^2 [Oppenheim & Schaffer 1989, equation 9.101], [Welch 1969].

However, if you scale the input to each of the stages of the FFT by $1/2$, you can obtain an overall scaling of $1/n$ and produce a noise-to-signal ratio proportional to n [Oppenheim & Schaffer 1989, equation 9.105], [Welch 1969].

An efficient way to scale by $1/2$ in fixed-point is to right-shift the data. To do this, you use the bit shift right arithmetic function `bitsra`. After scaling each stage of the FFT, and optimizing the index variable computation, your algorithm becomes:


```
function x = fi_m_radix2fft_withscaling(x, w)
n = length(x); t = log2(n);
x = fidemo.fi_bitreverse(x,n);
% Generate index variables as integer constants so they are not computed in
% the loop.
LL = int32(2^(1:t)); rr = int32(n./LL); LL2 = int32(LL./2);
for q=1:t
    L = LL(q); r = rr(q); L2 = LL2(q);
    for k=0:(r-1)
        for j=0:(L2-1)
            temp = w(L2-1+j+1) * x(k*L+j+L2+1);
            x(k*L+j+L2+1) = bitsra(x(k*L+j+1) - temp, 1);
            x(k*L+j+1) = bitsra(x(k*L+j+1) + temp, 1);
        end
    end
end
end
```

Run the scaled algorithm with fixed-point data.

```
x = sfi(x0);
w = sfi(w0);

y = fi_m_radix2fft_withscaling(x,w);

fidemo.fi_fft_demo_plot(real(x), y, y0/n, Fs, 'Fixed-point data', ...
    {'Fixed-point FFT with scaling', 'Scaled built-in'});
```

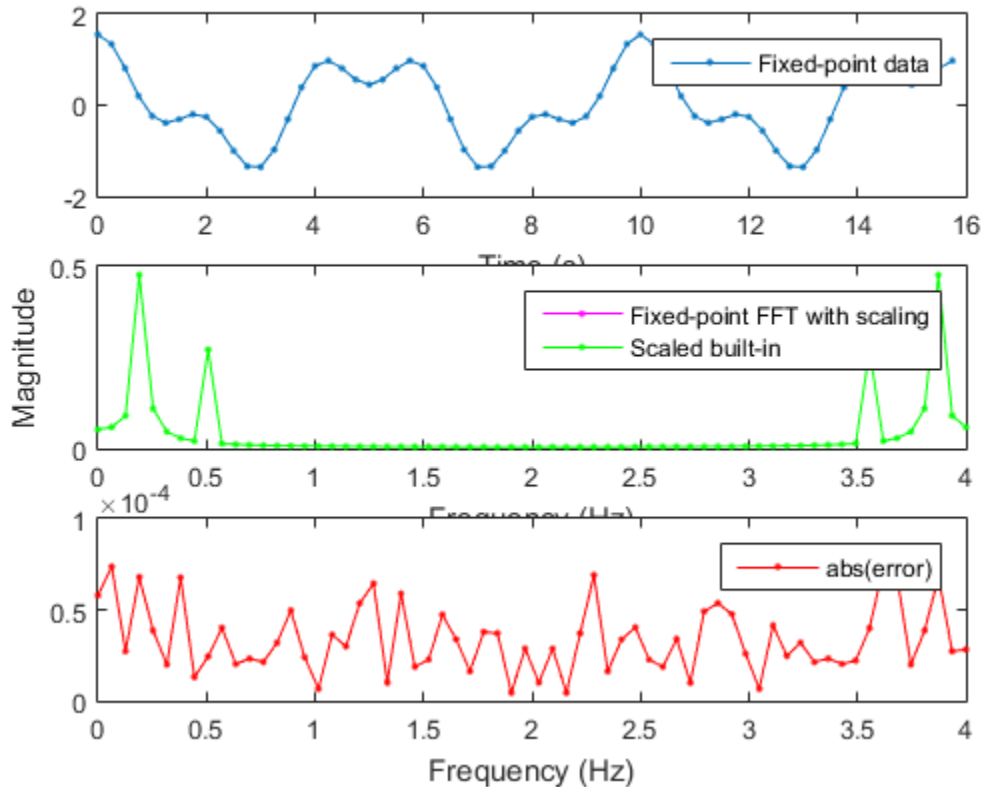You can see that the scaled fixed-point FFT algorithm now matches the built-in FFT to a tolerance that is expected for 16-bit fixed-point data.

References

Charles Van Loan, *Computational Frameworks for the Fast Fourier Transform*, SIAM, 1992.

Cleve Moler, *Numerical Computing with MATLAB*, SIAM, 2004, Chapter 8 Fourier Analysis.

Alan V. Oppenheim and Ronald W. Schaffer, *Discrete-Time Signal Processing*, Prentice Hall, 1989.

Peter D. Welch, "A Fixed-Point Fast Fourier Transform Error Analysis," IEEE® Transactions on Audio and Electroacoustics, Vol. AU-17, No. 2, June 1969, pp. 151-157.

Run the following code to restore the global states.

```
fipref(FIPREF_STATE);  
clearInstrumentationResults fft_instrumented  
clear fft_instrumented
```

Run the following code to delete the temporary directory.

```
tempdirObj.cleanUp;
```

Detect Limit Cycles in Fixed-Point State-Space Systems

This example shows how to analyze a fixed-point state-space system to detect limit cycles.

The example focuses on detecting large scale limit cycles due to overflow with zero inputs and highlights the conditions that are sufficient to prevent such oscillations.

References:

[1] Richard A. Roberts and Clifford T. Mullis, "Digital Signal Processing", Addison-Wesley, Reading, Massachusetts, 1987, ISBN 0-201-16350-0, Section 9.3.

[2] S. K. Mitra, "Digital Signal Processing: A Computer Based Approach", McGraw-Hill, New York, 1998, ISBN 0-07-042953-7.

Select a State-Space Representation of the System.

We observe that the system is stable by observing that the eigenvalues of the state-transition matrix A have magnitudes less than 1.

```
originalFormat = get(0, 'format');
format
A = [0 1; -.5 1]; B = [0; 1]; C = [1 0]; D = 0;
eig(A)
```

```
ans =
```

```
0.5000 + 0.5000i
0.5000 - 0.5000i
```

Filter Implementation

```
type(fullfile(matlabroot, 'toolbox', 'fixedpoint', 'fidemos', '+fidemo', 'fisisostatespacef
```

```
function [y,z] = fisisostatespacefilter(A,B,C,D,x,z)
%FISISOSTATESPACEFILTER Single-input, single-output statespace filter
% [Y,Zf] = FISISOSTATESPACEFILTER(A,B,C,D,X,Zi) filters data X with
% initial conditions Zi with the state-space filter defined by matrices
```


```
% A, B, C, D. Output Y and final conditions Zf are returned.  
  
% Copyright 2004-2011 The MathWorks, Inc.  
  
y = x;  
z(:,2:length(x)+1) = 0;  
for k=1:length(x)  
    y(k) = C*z(:,k) + D*x(k);  
    z(:,k+1) = A*z(:,k) + B*x(k);  
end
```

Floating-Point Filter

Create a floating-point filter and observe the trajectory of the states.

First, we choose random states within the unit square and observe where they are projected after one step of being multiplied by the state-transition matrix A.

```
rng('default');  
clf  
x1 = [-1 1 1 -1 -1];  
y1 = [-1 -1 1 1 -1];  
plot(x1,y1,'c')  
axis([-1.5 1.5 -1.5 1.5]); axis square; grid;  
hold on  
  
% Plot the projection of the square  
p = A*[x1;y1];  
plot(p(1,:),p(2:,:),'r')  
  
r = 2*rand(2,1000)-1;  
pr = A*r;  
plot(pr(1,:),pr(2:,:),'.')
```

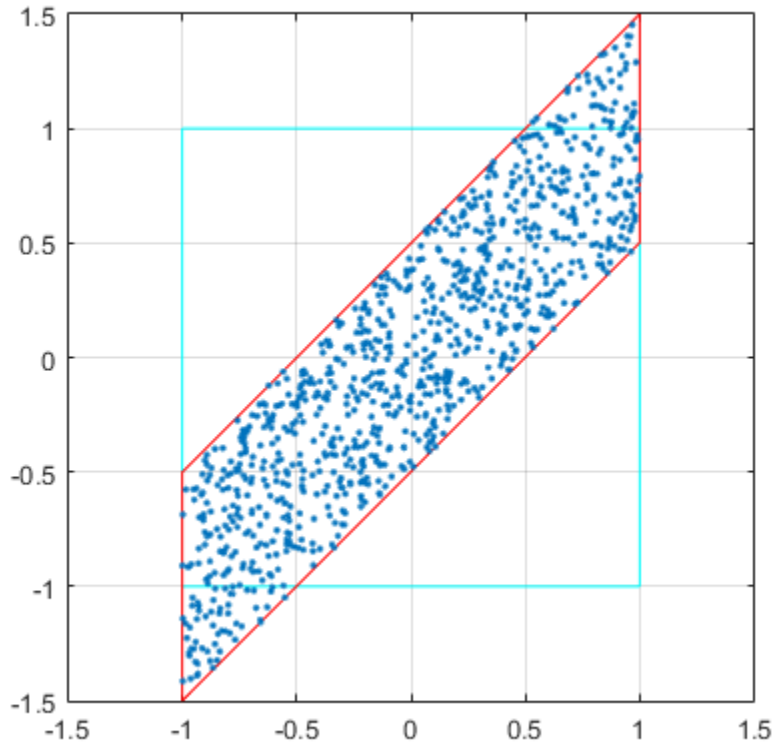

Random Initial States Followed Through Time

Drive the filter with a random initial state, normalized to be inside the unit square, with the input all zero, and run the filter.


Note that some of the states wander outside the unit square, and that they eventually wind down to the zero state at the origin, $z=[0;0]$.

```
x = zeros(10,1);  
zi = [0;0];  
q = quantizer([16 15]);  
for k=1:20  
    y = x;
```

```

zi(:) = randquant(q,size(A,1),1);
[y,zf] = fidemo.fisisostatespacefilter(A,B,C,D,x,zi);
plot(zf(1,:), zf(2,:), 'go-', 'markersize',8);
end
title('Double-Precision State Sequence Plot');
xlabel('z1'); ylabel('z2')

```

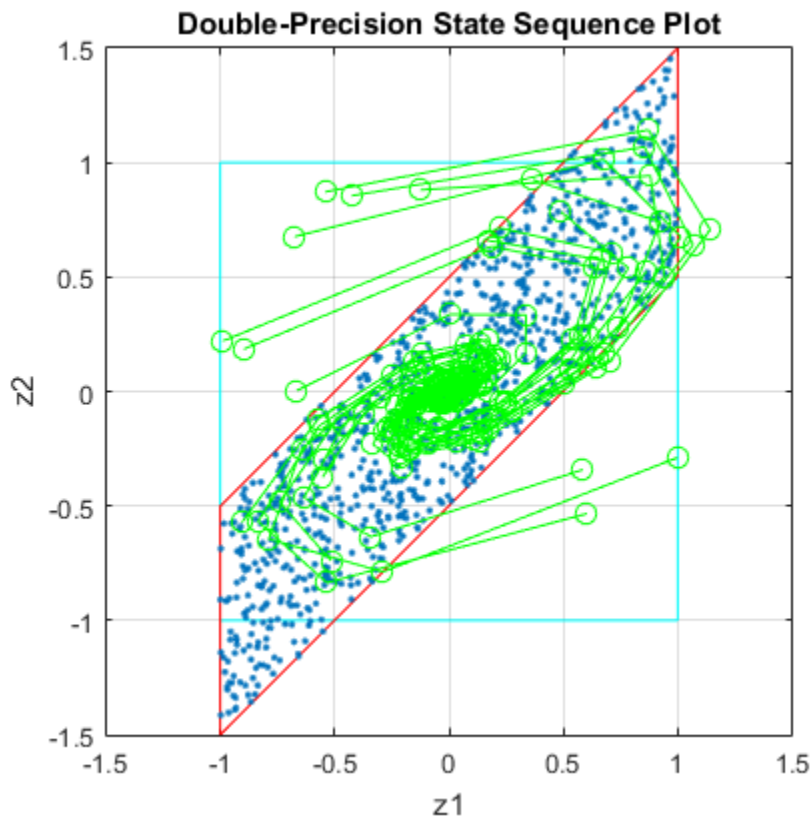

State Trajectory

Because the eigenvalues are less than one in magnitude, the system is stable, and all initial states wind down to the origin with zero input. However, the eigenvalues don't tell the whole story about the trajectory of the states, as in this example, where the states were projected outward first, before they start to contract.

The singular values of A give us a better indication of the overall state trajectory. The largest singular value is about 1.46, which indicates that states aligned with the corresponding singular vector will be projected away from the origin.

```
svd(A)
```

```
ans =
```

```
    1.4604
    0.3424
```

Fixed-Point Filter Creation

Create a fixed-point filter and check for limit cycles.

The MATLAB® code for the filter remains the same. It becomes a fixed-point filter because we drive it with fixed-point inputs.

For the sake of illustrating overflow oscillation, we are choosing product and sum data types that will overflow.

```
rng('default');
F = fimath('OverflowAction','Wrap',...
          'ProductMode','SpecifyPrecision',...
          'ProductWordLength',16,'ProductFractionLength',15,...
          'SumMode','SpecifyPrecision',...
          'SumWordLength',16,'SumFractionLength',15);

A = fi(A,'fimath',F)
B = fi(B,'fimath',F)
C = fi(C,'fimath',F)
D = fi(D,'fimath',F)
```

```
A =
```

```
    0    1.0000
 -0.5000  1.0000
```

```
    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 16
    FractionLength: 14
```

```
    RoundingMethod: Nearest
    OverflowAction: Wrap
    ProductMode: SpecifyPrecision
ProductWordLength: 16
ProductFractionLength: 15
    SumMode: SpecifyPrecision
    SumWordLength: 16
SumFractionLength: 15
    CastBeforeSum: true
```

B =

```
0
1
```

```
    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 16
FractionLength: 14
```

```
    RoundingMethod: Nearest
    OverflowAction: Wrap
    ProductMode: SpecifyPrecision
ProductWordLength: 16
ProductFractionLength: 15
    SumMode: SpecifyPrecision
    SumWordLength: 16
SumFractionLength: 15
    CastBeforeSum: true
```

C =

```
1    0
```

```
    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 16
FractionLength: 14
```

```
    RoundingMethod: Nearest
    OverflowAction: Wrap
    ProductMode: SpecifyPrecision
ProductWordLength: 16
ProductFractionLength: 15
```



```

        SumMode: SpecifyPrecision
        SumWordLength: 16
    SumFractionLength: 15
        CastBeforeSum: true

D =

    0

        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 16
    FractionLength: 15

        RoundingMethod: Nearest
    OverflowAction: Wrap
        ProductMode: SpecifyPrecision
    ProductWordLength: 16
    ProductFractionLength: 15
        SumMode: SpecifyPrecision
        SumWordLength: 16
    SumFractionLength: 15
        CastBeforeSum: true

```

Plot the Projection of the Square in Fixed-Point


Again, we choose random states within the unit square and observe where they are projected after one step of being multiplied by the state-transition matrix A. The difference is that this time matrix A is fixed-point.

Note that the triangles that projected out of the square before in floating-point, are now wrapped back into the interior of the square.

```

clf
r = 2*rand(2,1000)-1;
pr = A*r;
plot([-1 1 1 -1 -1],[-1 -1 1 1 -1],'c')
axis([-1.5 1.5 -1.5 1.5]); axis square; grid;
hold on
plot(pr(1,:),pr(2,:),'.')

```

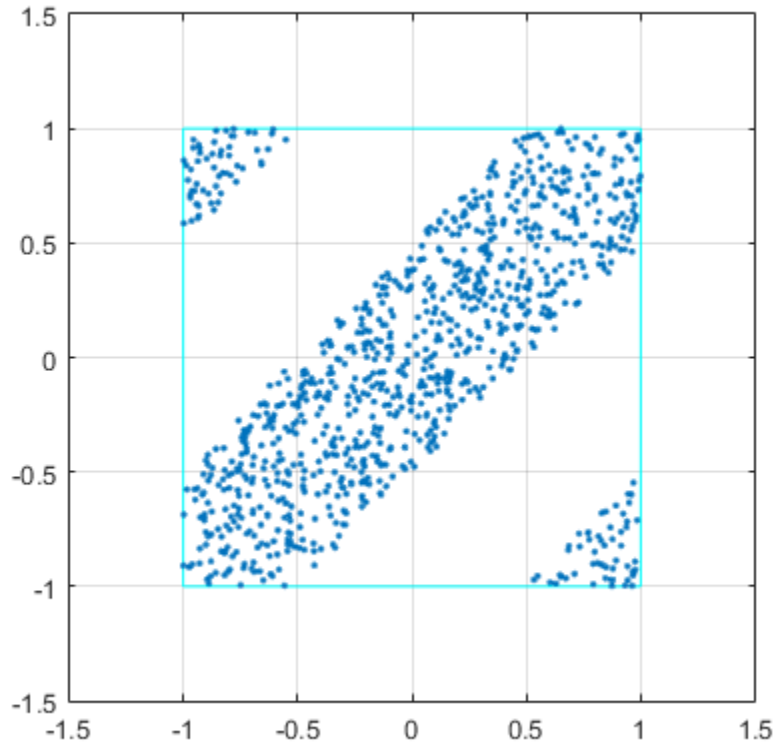

Execute the Fixed-Point Filter.


The only difference between this and the previous code is that we are driving it with fixed-point data types.

```
x = fi(zeros(10,1),1,16,15,'fimath',F);
zi = fi([0;0],1,16,15,'fimath',F);
q = assignmentquantizer(zi);
e = double(eps(zi));
rng('default');
for k=1:20
    y = x;
    zi(:) = randquant(q,size(A,1),1);
    [y,zf] = fidemo.fisisostatespacefilter(A,B,C,D,x,zi);
```

```

if abs(double(zf(end)))>0.5, c='ro-'; else, c='go-'; end
plot(zf(1,:), zf(2,:),c, 'markersize',8);
end
title('Fixed-Point State Sequence Plot');
xlabel('z1'); ylabel('z2')

```

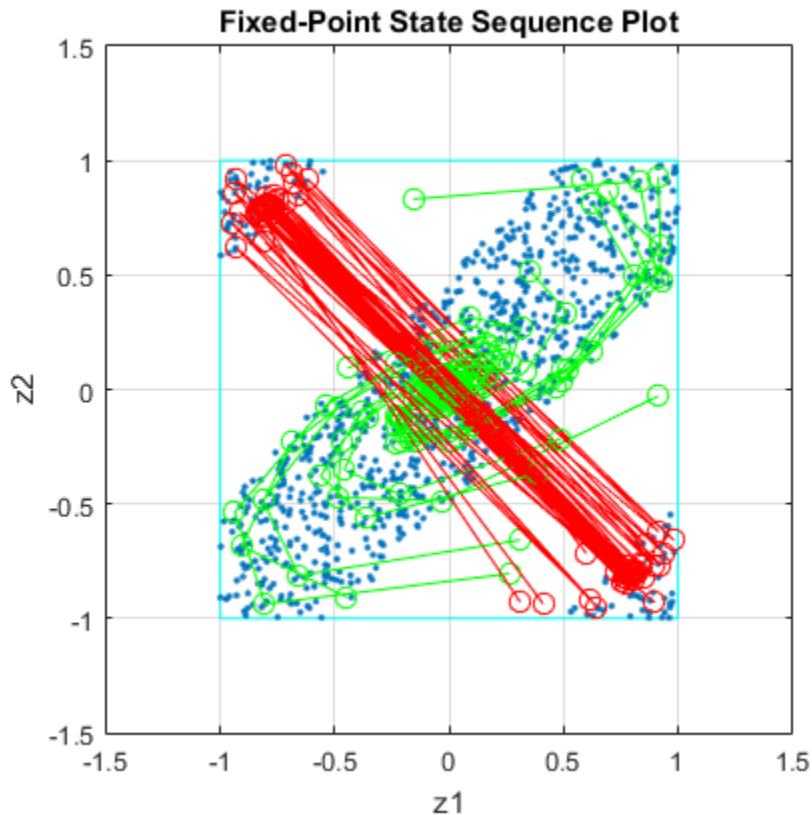

Trying this for other randomly chosen initial states illustrates that once a state enters one of the triangular regions, then it is projected into the other triangular region, and back and forth, and never escapes.

Sufficient Conditions for Preventing Overflow Limit Cycles

There are two sufficient conditions to prevent overflow limit cycles in a system:

- the system is stable i.e., $\text{abs}(\text{eig}(A)) < 1$,
- the matrix A is normal i.e., $A^*A = A^*A'$.

Note that for the current representation, the second condition does not hold.

Apply Similarity Transform to Create a Normal A

We now apply a similarity transformation to the original system that will create a normal state-transition matrix A2.

```
T = [-2 0; -1 1];  
Tinv = [-.5 0; -.5 1];  
A2 = Tinv*A*T; B2 = Tinv*B; C2 = C*T; D2 = D;
```


Similarity transformations preserve eigenvalues, as a result of which the system transfer function of the transformed system remains same as before. However, the transformed state transformation matrix A2 is normal.

Check for Limit Cycles on the Transformed System.

Plot the Projection of the Square of the Normal-Form System

Now the projection of random initial states inside the unit square all contract uniformly. This is the result of the state transition matrix A2 being normal. The states are also rotated by 90 degrees counterclockwise.

```
clf  
r = 2*rand(2,1000)-1;  
pr = A2*r;  
plot([-1 1 1 -1 -1],[-1 -1 1 1 -1], 'c')  
axis([-1.5 1.5 -1.5 1.5]); axis square; grid;  
hold on  
plot(pr(1,:),pr(2,:), '.')
```

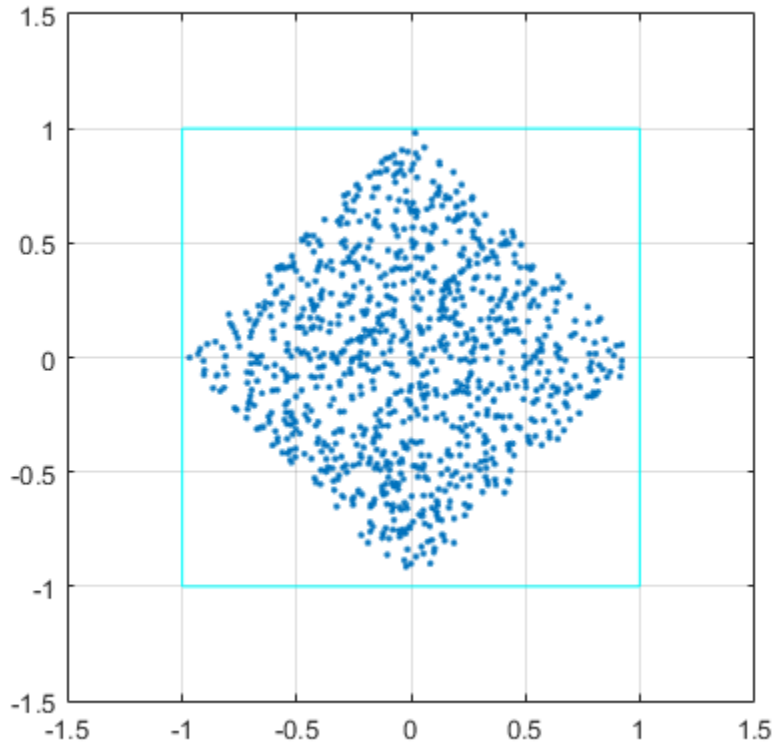

Plot the State Sequence


Plotting the state sequences again for the same initial states as before we see that the outputs now spiral towards the origin.

```
x = fi(zeros(10,1),1,16,15,'fimath',F);
zi = fi([0;0],1,16,15,'fimath',F);
q = assignmentquantizer(zi);
e = double(eps(zi));
rng('default');
for k=1:20
    y = x;
    zi(:) = randquant(q,size(A,1),1);
    [y,zf] = fidemo.fisisostatespacefilter(A2,B2,C2,D2,x,zi);
```

```

    if abs(double(zf(end)))>0.5, c='ro-'; else, c='go-'; end
    plot(zf(1,:), zf(2,:),c, 'markersize',8);
end
title('Normal-Form Fixed-Point State Sequence Plot');
xlabel('z1'); ylabel('z2')

```

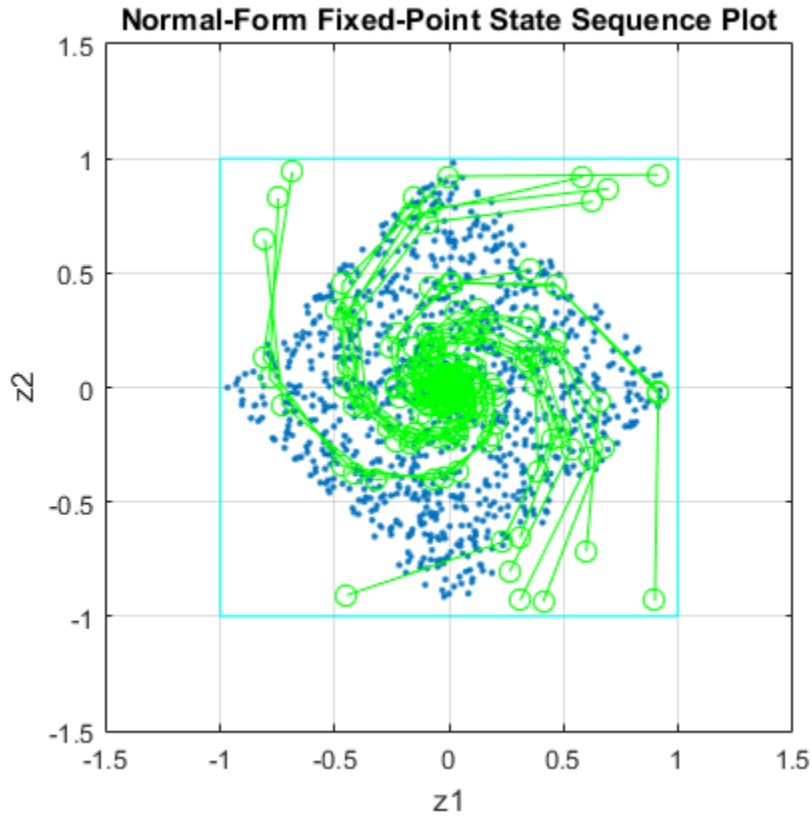

Trying this for other randomly chosen initial states illustrates that there is no region from which the filter is unable to recover.

```
set(0, 'format', originalFormat);
```

Compute Quantization Error

This example shows how to compute and compare the statistics of the signal quantization error when using various rounding methods.

First, a random signal is created that spans the range of the quantizer.

Next, the signal is quantized, respectively, with rounding methods 'fix', 'floor', 'ceil', 'nearest', and 'convergent', and the statistics of the signal are estimated.

The theoretical probability density function of the quantization error will be computed with ERRPDF, the theoretical mean of the quantization error will be computed with ERRMEAN, and the theoretical variance of the quantization error will be computed with ERRVAR.

Uniformly Distributed Random Signal

First we create a uniformly distributed random signal that spans the domain -1 to 1 of the fixed-point quantizers that we will look at.


```
q = quantizer([8 7]);
r = realmax(q);
u = r*(2*rand(50000,1) - 1);           % Uniformly distributed (-1,1)
xi=linspace(-2*eps(q),2*eps(q),256);
```

Fix: Round Towards Zero.

Notice that with 'fix' rounding, the probability density function is twice as wide as the others. For this reason, the variance is four times that of the others.

```
q = quantizer('fix',[8 7]);
err = quantize(q,u) - u;
f_t = errpdf(q,xi);
mu_t = errmean(q);
v_t = errvar(q);
% Theoretical variance = eps(q)^2 / 3
% Theoretical mean = 0
fidemo.qerrordemoplot(q,f_t,xi,mu_t,v_t,err)
```

```
Estimated error variance (dB) = -46.8586
Theoretical error variance (dB) = -46.9154
Estimated mean = 7.788e-06
Theoretical mean = 0
```

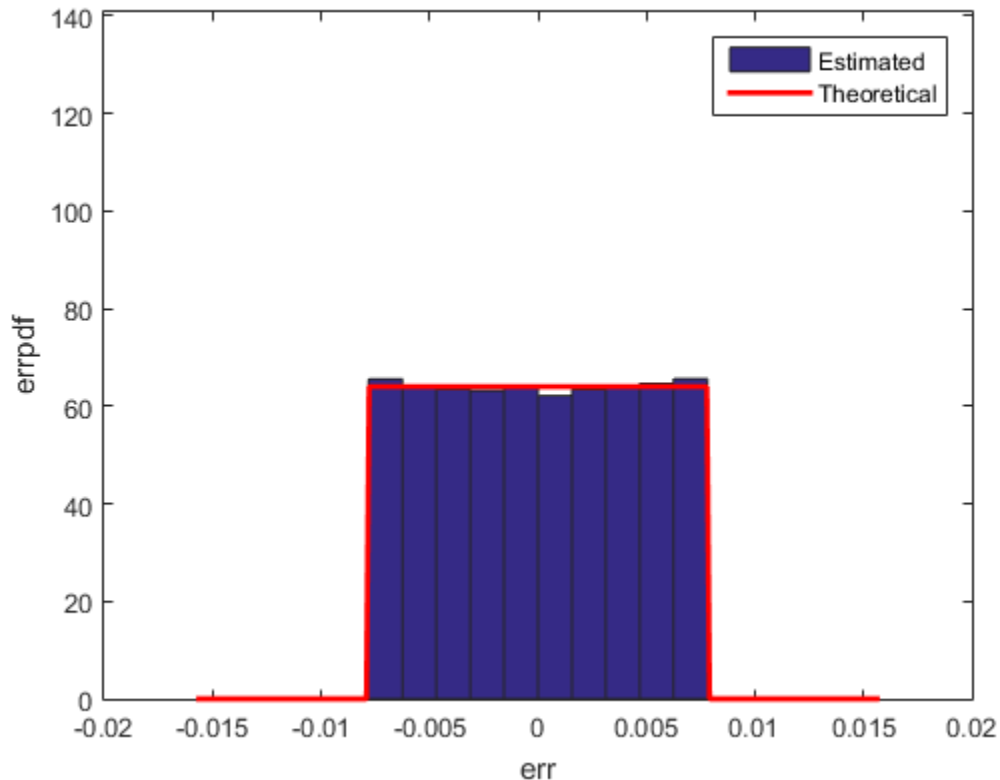

Floor: Round Towards Minus Infinity.


Floor rounding is often called truncation when used with integers and fixed-point numbers that are represented in two's complement. It is the most common rounding mode of DSP processors because it requires no hardware to implement. Floor does not produce quantized values that are as close to the true values as ROUND will, but it has the same variance, and small signals that vary in sign will be detected, whereas in ROUND they will be lost.

```
q = quantizer('floor',[8 7]);
err = quantize(q,u) - u;
f_t = errpdf(q,xi);
mu_t = errmean(q);
v_t = errvar(q);
```



```
% Theoretical variance = eps(q)^2 / 12
% Theoretical mean     = -eps(q)/2
fidemo.qerrordemoplot(q,f_t,xi,mu_t,v_t,err)
```

```
Estimated error variance (dB) = -52.9148
Theoretical error variance (dB) = -52.936
Estimated mean = -0.0038956
Theoretical mean = -0.0039063
```

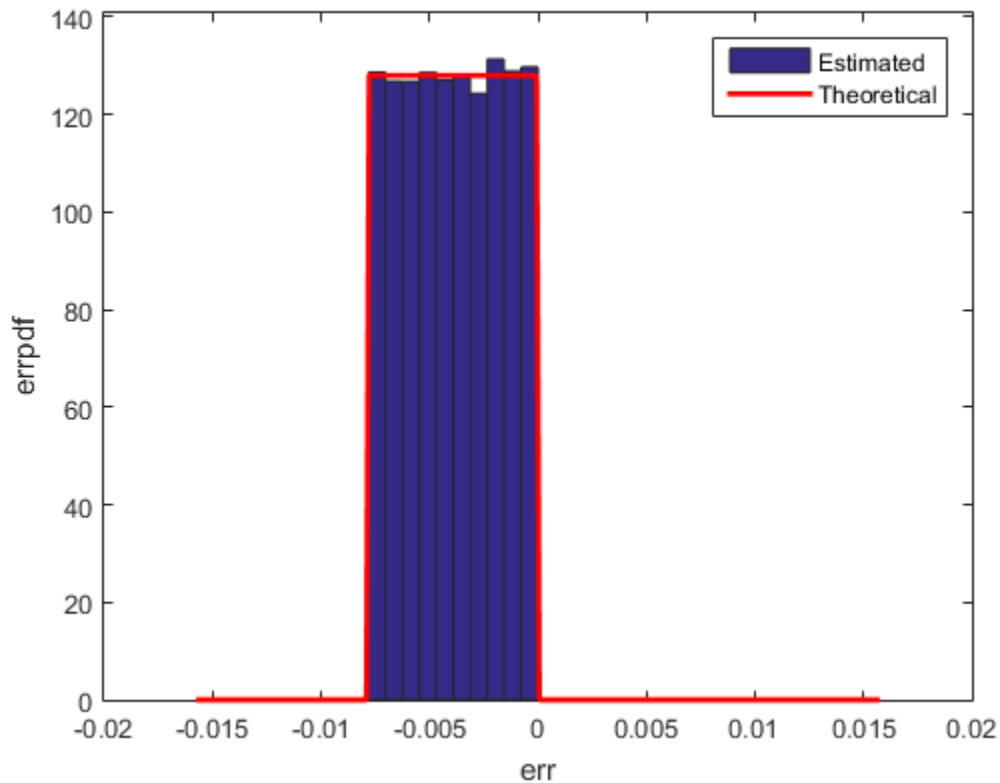

Ceil: Round Towards Plus Infinity.

```
q = quantizer('ceil',[8 7]);
err = quantize(q,u) - u;
f_t = errpdf(q,xi);
mu_t = errmean(q);
```

```


v_t = errvar(q);
% Theoretical variance = eps(q)^2 / 12
% Theoretical mean    = eps(q)/2
fidemo.qerrordemoplot(q,f_t,xi,mu_t,v_t,err)

```

```

Estimated error variance (dB) = -52.9148
Theoretical error variance (dB) = -52.936
Estimated mean = 0.0039169
Theoretical mean = 0.0039063

```

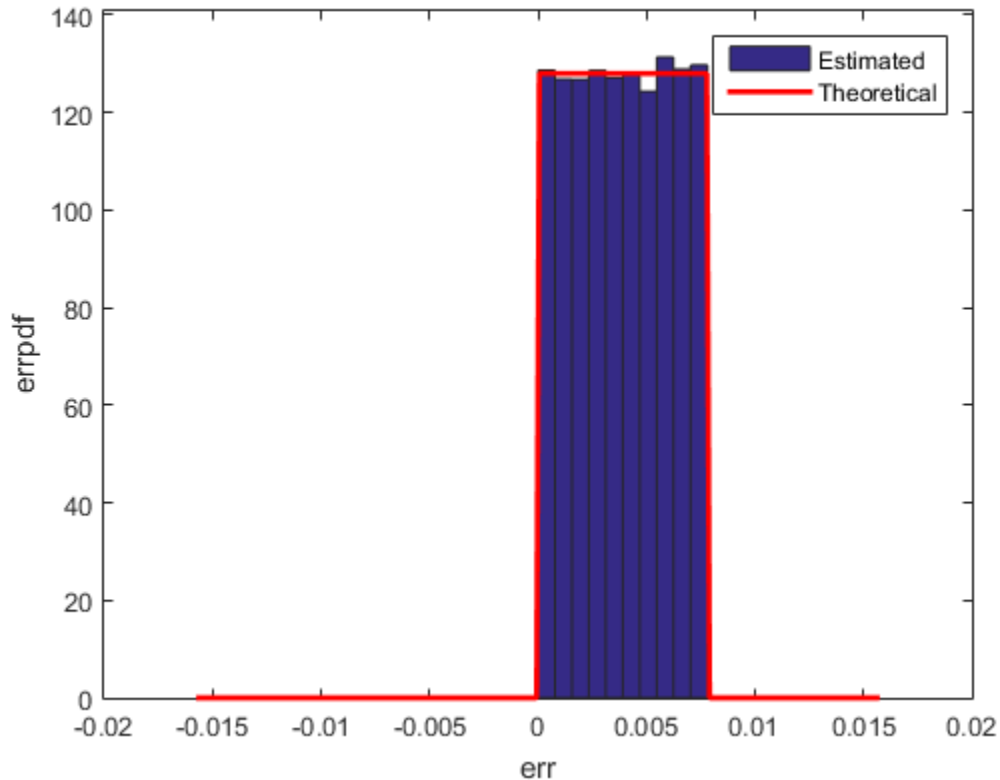


Round: Round to Nearest. In a Tie, Round to Largest Magnitude.

Round is more accurate than floor, but all values smaller than $\text{eps}(q)$ get rounded to zero and so are lost.

```
q = quantizer('nearest',[8 7]);  
err = quantize(q,u) - u;  
f_t = errpdf(q,xi);  
mu_t = errmean(q);  
v_t = errvar(q);  
% Theoretical variance = eps(q)^2 / 12  
% Theoretical mean = 0  
fidemo.qerrordemoplots(q,f_t,xi,mu_t,v_t,err)
```

```
Estimated error variance (dB) = -52.9579  
Theoretical error variance (dB) = -52.936  
Estimated mean = -2.212e-06  
Theoretical mean = 0
```

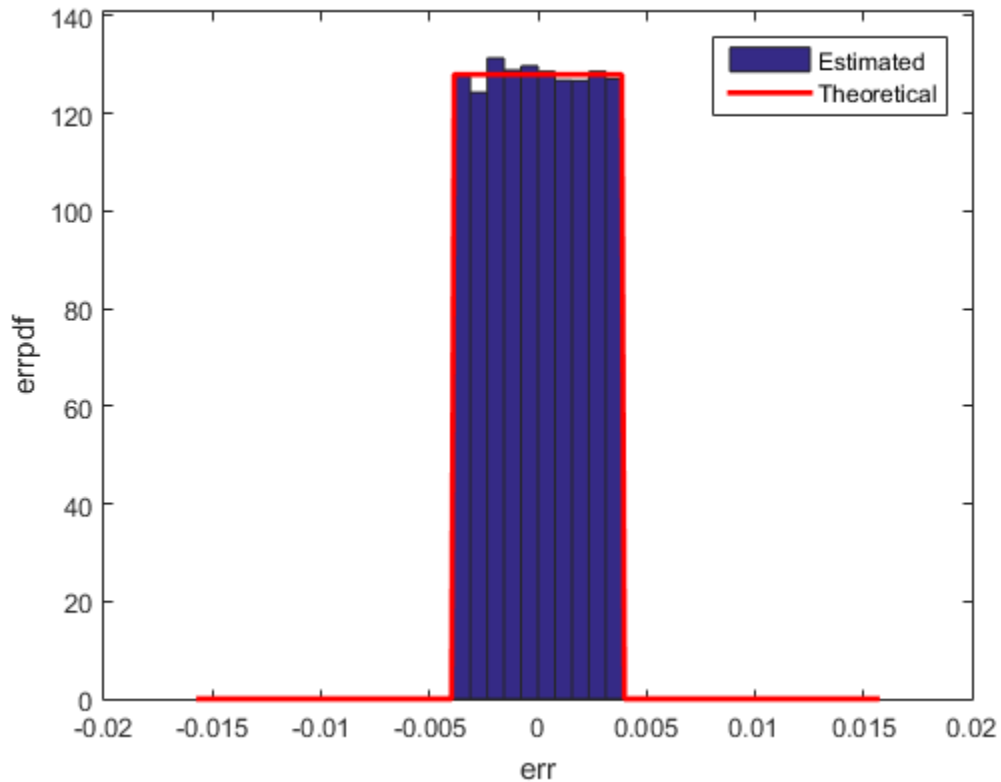


Convergent: Round to Nearest. In a Tie, Round to Even.

Convergent rounding eliminates the bias introduced by ordinary "round" caused by always rounding the tie in the same direction.

```
q = quantizer('convergent',[8 7]);
err = quantize(q,u) - u;
f_t = errpdf(q,xi);
mu_t = errmean(q);
v_t = errvar(q);
% Theoretical variance = eps(q)^2 / 12
% Theoretical mean     = 0
fidemo.qerrordemoplot(q,f_t,xi,mu_t,v_t,err)
```

```
Estimated error variance (dB) = -52.9579
Theoretical error variance (dB) = -52.936
Estimated mean = -2.212e-06
Theoretical mean = 0
```

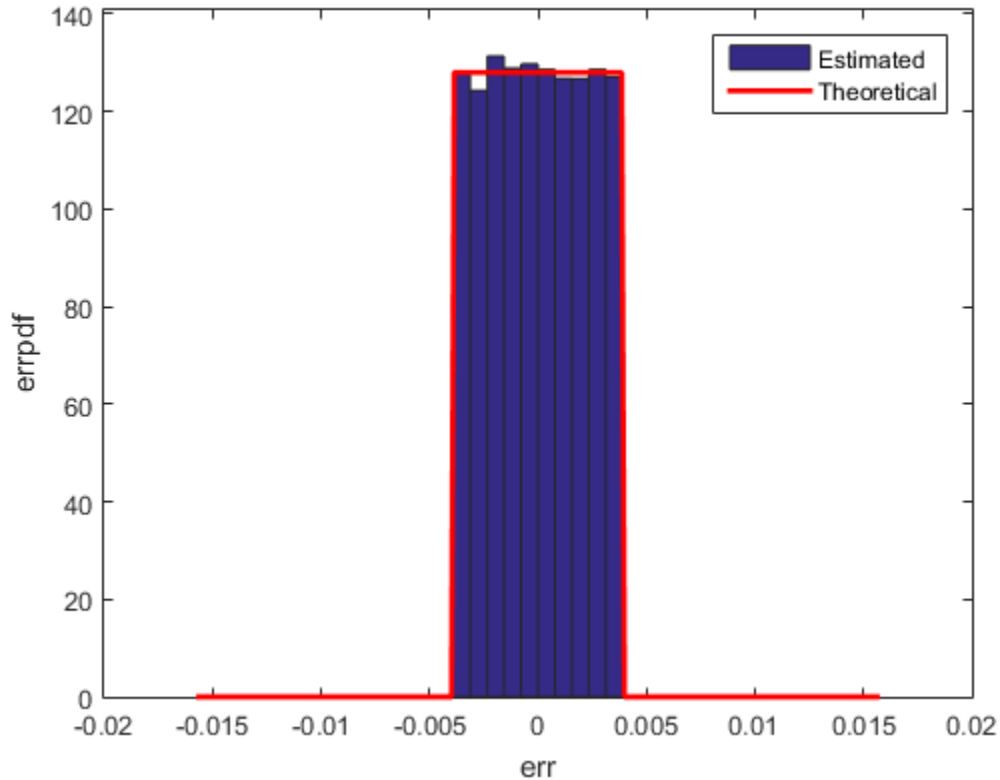

Comparison of Nearest vs. Convergent

The error probability density function for convergent rounding is difficult to distinguish from that of round-to-nearest by looking at the plot.

The error p.d.f. of convergent is

$f(\text{err}) = 1/\text{eps}(q)$, for $-\text{eps}(q)/2 \leq \text{err} \leq \text{eps}(q)/2$, and 0 otherwise

while the error p.d.f. of round is

$f(\text{err}) = 1/\text{eps}(q)$, for $-\text{eps}(q)/2 < \text{err} \leq \text{eps}(q)/2$, and 0 otherwise

Note that the error p.d.f. of convergent is symmetric, while round is slightly biased towards the positive.

The only difference is the direction of rounding in a tie.

```
x=[-3.5:3.5]';  
[x convergent(x) nearest(x)]
```

```
ans =
```

```
-3.5000  -4.0000  -3.0000  
-2.5000  -2.0000  -2.0000  
-1.5000  -2.0000  -1.0000  
-0.5000         0         0  
 0.5000         0         1.0000  
 1.5000         2.0000         2.0000  
 2.5000         2.0000         3.0000  
 3.5000         4.0000         4.0000
```

Plot Helper Function

The helper function that was used to generate the plots in this example is listed below.

```
type(fullfile(matlabroot,'toolbox','fixedpoint','fidemos','+fidemo','qerrordemoplot.m'))
```

```
function qerrordemoplot(q,f_t,xi,mu_t,v_t,err)  
%QERRORDEMO PLOT Plot function for QERRORDEMO.  
% QERRORDEMO PLOT(Q,F_T,XI,MU_T,V_T,ERR) produces the plot and display  
% used by the example function QERRORDEMO, where Q is the quantizer  
% whose attributes are being analyzed; F_T is the theoretical  
% quantization error probability density function for quantizer Q  
% computed by ERRPDF; XI is the domain of values being evaluated by  
% ERRPDF; MU_T is the theoretical quantization error mean of quantizer Q  
% computed by ERRMEAN; V_T is the theoretical quantization error  
% variance of quantizer Q computed by ERRVAR; and ERR is the error  
% generated by quantizing a random signal by quantizer Q.  
%  
% See QERRORDEMO for examples of use.  
%  
% Copyright 1999-2014 The MathWorks, Inc.  
  
v=10*log10(var(err));  
disp(['Estimated error variance (dB) = ',num2str(v)]);  
disp(['Theoretical error variance (dB) = ',num2str(10*log10(v_t))]);  
disp(['Estimated mean = ',num2str(mean(err))]);
```

```
disp(['Theoretical mean = ',num2str(mu_t)]);
[n,c]=hist(err);
figure(gcf)
bar(c,n/(length(err)*(c(2)-c(1))), 'hist');
line(xi,f_t,'linewidth',2,'color','r');
% Set the ylim uniformly on all plots
set(gca,'ylim',[0 max(errpdf(quantizer(q.format,'nearest'),xi)*1.1)])
legend('Estimated','Theoretical')
xlabel('err'); ylabel('errpdf')
```

Normalize Data for Lookup Tables

This example shows how to normalize data for use in lookup tables.

Lookup tables are a very efficient way to write computationally-intense functions for fixed-point embedded devices. For example, you can efficiently implement logarithm, sine, cosine, tangent, and square-root using lookup tables. You normalize the inputs to these functions to produce a smaller lookup table, and then you scale the outputs by the normalization factor. This example shows how to implement the normalization function that is used in examples [Implement Fixed-Point Square Root Using Lookup Table](#) and [Implement Fixed-Point Log2 Using Lookup Table](#).

Setup

To assure that this example does not change your preferences or settings, this code stores the original state, and you will restore it at the end.

```
originalFormat = get(0, 'format'); format long g
originalWarningState = warning('off','fixed:fi:underflow');
originalFiprefState = get(fipref); reset(fipref)
```

Function to Normalize Unsigned Data

This algorithm normalizes unsigned data with 8-bit bytes. Given input $u > 0$, the output x is normalized such that

$$u = x * 2^n$$

where $1 \leq x < 2$ and n is an integer. Note that n may be positive, negative, or zero.

Function `fi_normalize_unsigned_8_bit_byte` looks at the 8 most-significant-bits of the input at a time, and left shifts the bits until the most-significant bit is a 1. The number of bits to shift for each 8-bit byte is read from the number-of-leading-zeros lookup table, `NLZLUT`.

```
function [x,n] = fi_normalize_unsigned_8_bit_byte(u) %#codegen
    assert(isscalar(u), 'Input must be scalar');
    assert(all(u>0), 'Input must be positive. ');
    assert(isfi(u) && isfixed(u), 'Input must be a fi object with fixed-point data type');
    u = removefimath(u);
    NLZLUT = number_of_leading_zeros_look_up_table();
    word_length = u.WordLength;
    u_fraction_length = u.FractionLength;
    B = 8;
```



```

leftshifts=int8(0);
% Reinterpret the input as an unsigned integer.
T_unsigned_integer = numerictype(0, word_length, 0);
v = reinterpretcast(u,T_unsigned_integer);
F = fimath('OverflowAction','Wrap',...
          'RoundingMethod','Floor',...
          'SumMode','KeepLSB',...
          'SumWordLength',v.WordLength);
v = setfimath(v,F);
% Unroll the loop in generated code so there will be no branching.
for k = coder.unroll(1:ceil(word_length/B))
    % For each iteration, see how many leading zeros are in the high
    % byte of V, and shift them out to the left. Continue with the
    % shifted V for as many bytes as it has.
    %
    % The index is the high byte of the input plus 1 to make it a
    % one-based index.
    index = int32(bitsra(v, word_length - B) + uint8(1));
    % Index into the number-of-leading-zeros lookup table. This lookup
    % table takes in a byte and returns the number of leading zeros in the
    % binary representation.
    shiftamount = NLZLUT(index);
    % Left-shift out all the leading zeros in the high byte.
    v = bitsll(v,shiftamount);
    % Update the total number of left-shifts
    leftshifts = leftshifts+shiftamount;
end
% The input has been left-shifted so the most-significant-bit is a 1.
% Reinterpret the output as unsigned with one integer bit, so
% that  $1 \leq x < 2$ .
T_x = numerictype(0,word_length,word_length-1);
x = reinterpretcast(v, T_x);
x = removefimath(x);
% Let  $Q = \text{int}(u)$ . Then  $u = Q \cdot 2^{(-u\_fraction\_length)}$ ,
% and  $x = Q \cdot 2^{\text{leftshifts}} \cdot 2^{(1-\text{word\_length})}$ . Therefore,
%  $u = x \cdot 2^n$ , where  $n$  is defined as:
n = word_length - u_fraction_length - leftshifts - 1;
end

```

Number-of-Leading-Zeros Lookup Table

Function `number_of_leading_zeros_look_up_table` is used by `fi_normalize_unsigned_8_bit_byte` and returns a table of the number of leading zero bits in an 8-bit word.


```

0 0 0 0 0 0 0 0 ...
0 0 0 0 0 0 0 0 ...
0 0 0 0 0 0 0 0 ...
0 0 0 0 0 0 0 0 ...
0 0 0 0 0 0 0 0] );

```

end

Example

For example, let

```
u = fi(0.3, 1, 16, 8);
```

In binary, $u = 00000000.01001101_2 = 0.30078125$ (the fixed-point value is not exactly 0.3 because of roundoff to 8 bits). The goal is to normalize such that

```
u = 1.0011010000000000\_2 * 2^(-2) = x * 2^n.
```

Start with u represented as an unsigned integer.

```

High byte  Low byte
00000000  01001101  Start: u as unsigned integer.

```

The high byte is $0 = 00000000_2$. Add 1 to make an index out of it: $\text{index} = 0 + 1 = 1$. The number-of-leading-zeros lookup table at index 1 indicates that there are 8 leading zeros: $\text{NLZLUT}(1) = 8$. Left shift by this many bits.

```

High byte  Low byte
01001101  00000000  Left-shifted by 8 bits.

```

Iterate once more to remove the leading zeros from the next byte.

The high byte is $77 = 01001101_2$. Add 1 to make an index out of it: $\text{index} = 77 + 1 = 78$. The number-of-leading-zeros lookup table at index 78 indicates that there is 1 leading zero: $\text{NLZLUT}(78) = 1$. Left shift by this many bits.

```

High byte  Low byte
100110100  00000000  Left-shifted by 1 additional bit, for a total of 9.

```

Reinterpret these bits as unsigned fixed-point with 15 fractional bits.

```
x = 1.0011010000000000\_2 = 1.203125
```

The value for n is the word-length of u , minus the fraction length of u , minus the number of left shifts, minus 1.

```
n = 16 - 8 - 9 - 1 = -2.
```

And so your result is:

```
[x,n] = fi_normalize_unsigned_8_bit_byte(u)
```

```
x =
```

```
1.203125
```

```
DataTypeMode: Fixed-point: binary point scaling  
Signedness: Unsigned  
WordLength: 16  
FractionLength: 15
```

```
n =
```

```
-2
```

Comparing binary values, you can see that x has the same bits as u, left-shifted by 9 bits.

```
binary_representation_of_u = bin(u)  
binary_representation_of_x = bin(x)
```

```
binary_representation_of_u =
```

```
0000000001001101
```

```
binary_representation_of_x =
```

```
1001101000000000
```

Cleanup

Restore original state.

```
set(0, 'format', originalFormat);  
warning(originalWarningState);  
fipref(originalFiprefState);
```

Implement Fixed-Point Log2 Using Lookup Table

This example shows how to implement fixed-point \log_2 using a lookup table. Lookup tables generate efficient code for embedded devices.

Setup

To assure that this example does not change your preferences or settings, this code stores the original state, and you will restore it at the end.

```
originalFormat = get(0, 'format'); format long g
originalWarningState = warning('off', 'fixed:fi:underflow');
originalFiprefState = get(fipref); reset(fipref)
```

Log2 Implementation

The \log_2 algorithm is summarized here.

- 1 Declare the number of bits in a byte, B , as a constant. In this example, $B=8$.
- 2 Use function `fi_normalize_unsigned_8_bit_byte()` described in example Normalize Data for Lookup Tables to normalize the input $u>0$ such that $u = x * 2^n$ and $1 \leq x < 2$.
- 3 Extract the upper B -bits of x . Let x_B denote the upper B -bits of x .
- 4 Generate lookup table, `LOG2LUT`, such that the integer $i = x_B - 2^{(B-1)} + 1$ is used as an index to `LOG2LUT` so that $\log_2(x_B)$ can be evaluated by looking up the index $\log_2(x_B) = \text{LOG2LUT}(i)$.
- 5 Use the remainder, $r = x - x_B$, interpreted as a fraction, to linearly interpolate between `LOG2LUT(i)` and the next value in the table `LOG2LUT(i+1)`. The remainder, r , is created by extracting the lower $w - B$ bits of x , where w denotes the word length of x . It is interpreted as a fraction by using function `reinterpretpcast()`.
- 6 Finally, compute the output using the lookup table and linear interpolation:

$$\begin{aligned} \log_2(u) &= \log_2(x * 2^n) \\ &= n + \log_2(x) \\ &= n + \text{LOG2LUT}(i) + r * (\text{LOG2LUT}(i+1) - \text{LOG2LUT}(i)) \end{aligned}$$

```
function y = fi_log2lookup_8_bit_byte(u) %#codegen
    % Load the lookup table
    LOG2LUT = log2_lookup_table();
    % Remove fimath from the input to insulate this function from math
    % settings declared outside this function.
```

```

u = removefimath(u);
% Declare the output
y = coder.nullcopy(fi(zeros(size(u)), numerictype(LOG2LUT), fimath(LOG2LUT)));
B = 8; % Number of bits in a byte
w = u.WordLength;
for k = 1:numel(u)
    assert(u(k)>0, 'Input must be positive. ');
    % Normalize the input such that u = x * 2^n and 1 <= x < 2
    [x,n] = fi_normalize_unsigned_8_bit_byte(u(k));
    % Extract the high byte of x
    high_byte = storedInteger(bitsliceget(x, w, w - B + 1));
    % Convert the high byte into an index for LOG2LUT
    i = high_byte - 2^(B-1) + 1;
    % Interpolate between points.
    % The upper byte was used for the index into LOG2LUT
    % The remaining bits make up the fraction between points.
    T_unsigned_fraction = numerictype(0, w-B, w-B);
    r = reinterpretcast(bitsliceget(x,w-B,1), T_unsigned_fraction);
    y(k) = n + LOG2LUT(i) + ...
        r*(LOG2LUT(i+1) - LOG2LUT(i)) ;
end
% Remove fimath from the output to insulate the caller from math settings
% declared inside this function.
y = removefimath(y);
end

```

Log2 Lookup Table

Function `log2_lookup_table` loads the lookup table of `log2` values. You can create the table by running:

```

B = 8;
log2_table = log2((2^(B-1) : 2^(B)) / 2^(B - 1))

```

```

function LOG2LUT = log2_lookup_table()
    B = 8; % Number of bits in a byte
    % log2_table = log2((2^(B-1) : 2^(B)) / 2^(B - 1))
    log2_table = [0.000000000000000    0.011227255423254    0.022367813028454    0.033423
                  0.044394119358453    0.055282435501190    0.066089190457773    0.076815
                  0.087462841250339    0.098032082960527    0.108524456778169    0.118941
                  0.129283016944966    0.139551352398794    0.149747119504682    0.159871
                  0.169925001442312    0.179909090014934    0.189824558880017    0.199672
                  0.209453365628950    0.219168520462162    0.228818690495881    0.238404
                  0.247927513443586    0.257387842692652    0.266786540694901    0.276124
                  0.285402218862248    0.294620748891627    0.303780748177103    0.312882

```

```

0.321928094887362    0.330916878114617    0.339850002884625    0.348728...
0.357552004618084    0.366322214245816    0.375039431346925    0.383704...
0.392317422778760    0.400879436282184    0.409390936137702    0.417852...
0.426264754702098    0.434628227636725    0.442943495848728    0.451211...
0.459431618637297    0.467605550082997    0.475733430966398    0.483815...
0.491853096329675    0.499845887083205    0.507794640198696    0.515699...
0.523561956057013    0.531381460516312    0.539158811108031    0.546894...
0.554588851677637    0.562242424221073    0.569855608330948    0.577428...
0.584962500721156    0.592457037268080    0.599912842187128    0.607330...
0.614709844115208    0.622051819456376    0.629356620079610    0.636624...
0.643856189774725    0.651051691178929    0.658211482751795    0.665335...
0.672425341971496    0.679480099505446    0.686500527183218    0.693486...
0.700439718141092    0.707359132080883    0.714245517666123    0.721099...
0.727920454563199    0.734709620225838    0.741466986401147    0.748192...
0.754887502163469    0.761551232444479    0.768184324776926    0.774787...
0.781359713524660    0.787902559391432    0.794415866350106    0.800899...
0.807354922057604    0.813781191217037    0.820178962415188    0.826548...
0.832890014164742    0.839203788096944    0.845490050944375    0.851749...
0.857980995127572    0.864186144654280    0.870364719583405    0.876516...
0.882643049361841    0.888743248898259    0.894817763307943    0.900866...
0.906890595608518    0.912889336229962    0.918863237274595    0.924812...
0.930737337562886    0.936637939002571    0.942514505339240    0.948367...
0.954196310386875    0.960001932068081    0.965784284662087    0.971543...
0.977279923499916    0.982993574694310    0.988684686772166    0.994353...
1.000000000000000];


% Cast to fixed point with the most accurate rounding method
WL = 4*B; % Word length
FL = 2*B; % Fraction length
LOG2LUT = fi(log2_table,1,WL,FL,'RoundingMethod','Nearest');
% Set fimath for the most efficient math operations
F = fimath('OverflowAction','Wrap',...
'RoundingMethod','Floor',...
'SumMode','SpecifyPrecision',...
'SumWordLength',WL,...
'SumFractionLength',FL,...
'ProductMode','SpecifyPrecision',...
'ProductWordLength',WL,...
'ProductFractionLength',2*FL);
LOG2LUT = setfimath(LOG2LUT,F);
end

```

Example

```
u = fi(linspace(0.001,20,100));
```

```
y = fi_log2lookup_8_bit_byte(u);  
  
y_expected = log2(double(u));  
%%3  
clf  
subplot(211)  
plot(u,y,u,y_expected)  
legend('Output','Expected output','Location','Best')  
  
subplot(212)  
plot(u,double(y)-y_expected,'r')  
legend('Error')  
figure(gcf)
```

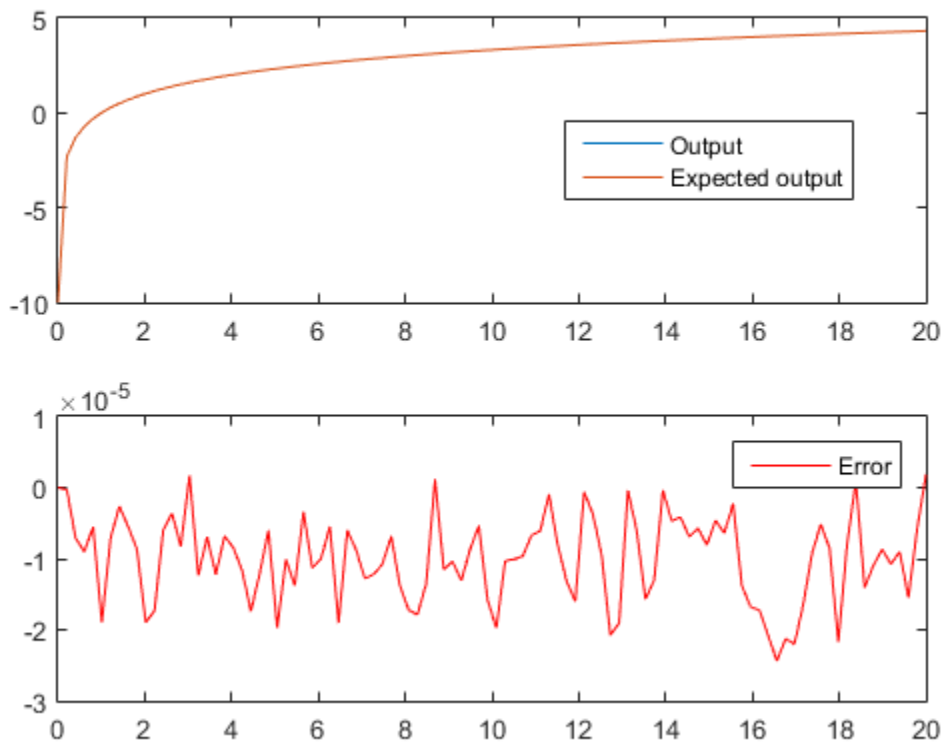

Cleanup

Restore original state.

```
set(0, 'format', originalFormat);  
warning(originalWarningState);  
fipref(originalFiprefState);
```

Implement Fixed-Point Square Root Using Lookup Table

This example shows how to implement fixed-point square root using a lookup table. Lookup tables generate efficient code for embedded devices.

Setup

To assure that this example does not change your preferences or settings, this code stores the original state, and you will restore it at the end.

```
originalFormat = get(0, 'format'); format long g
originalWarningState = warning('off', 'fixed:fi:underflow');
originalFiprefState = get(fipref); reset(fipref)
```

Square Root Implementation

The square root algorithm is summarized here.

- 1 Declare the number of bits in a byte, B , as a constant. In this example, $B=8$.
- 2 Use function `fi_normalize_unsigned_8_bit_byte()` described in example Normalize Data for Lookup Tables to normalize the input $u>0$ such that $u = x * 2^n$, $0.5 \leq x < 2$, and n is even.
- 3 Extract the upper B -bits of x . Let x_B denote the upper B -bits of x .
- 4 Generate lookup table, `SQRTLUT`, such that the integer $i = x_B - 2^{(B-2)} + 1$ is used as an index to `SQRTLUT` so that $\sqrt{x_B}$ can be evaluated by looking up the index $\sqrt{x_B} = \text{SQRTLUT}(i)$.
- 5 Use the remainder, $r = x - x_B$, interpreted as a fraction, to linearly interpolate between `SQRTLUT(i)` and the next value in the table `SQRTLUT(i+1)`. The remainder, r , is created by extracting the lower $w - B$ bits of x , where w denotes the word-length of x . It is interpreted as a fraction by using function `reinterpretpcast()`.
- 6 Finally, compute the output using the lookup table and linear interpolation:

$$\begin{aligned} \text{sqrt}(u) &= \text{sqrt}(x * 2^n) \\ &= \text{sqrt}(x) * 2^{(n/2)} \\ &= (\text{SQRTLUT}(i) + r * (\text{SQRTLUT}(i+1) - \text{SQRTLUT}(i))) * 2^{(n/2)} \end{aligned}$$

```
function y = fi_sqrtlookup_8_bit_byte(u) %#codegen
    % Load the lookup table
    SQRTLUT = sqrt_lookup_table();
    % Remove fimath from the input to insulate this function from math
    % settings declared outside this function.
```

```

u = removefimath(u);
% Declare the output
y = coder.nullcopy(fi(zeros(size(u)), numerictype(SQRTLUT), fimath(SQRTLUT)));
B = 8; % Number of bits in a byte
w = u.WordLength;
for k = 1:numel(u)
    assert(u(k)>=0, 'Input must be non-negative. ');
    if u(k)==0
        y(k)=0;
    else
        % Normalize the input such that u = x * 2^n and 0.5 <= x < 2
        [x,n] = fi_normalize_unsigned_8_bit_byte(u(k));
        isodd = storedInteger(bitand(fi(1,1,8,0),fi(n)));
        x = bitsra(x,isodd);
        n = n + isodd;
        % Extract the high byte of x
        high_byte = storedInteger(bitsliceget(x, w, w - B + 1));
        % Convert the high byte into an index for SQRTLUT
        i = high_byte - 2^(B-2) + 1;
        % The upper byte was used for the index into SQRTLUT.
        % The remainder, r, interpreted as a fraction, is used to
        % linearly interpolate between points.
        T_unsigned_fraction = numerictype(0, w-B, w-B);
        r = reinterpretcast(bitsliceget(x,w-B,1), T_unsigned_fraction);
        y(k) = bitshift((SQRTLUT(i) + r*(SQRTLUT(i+1) - SQRTLUT(i))),...
            bitsra(n,1));
    end
end
% Remove fimath from the output to insulate the caller from math settings
% declared inside this function.
y = removefimath(y);
end

```

Square Root Lookup Table

Function `sqrt_lookup_table` loads the lookup table of square-root values. You can create the table by running:

```
sqrt_table = sqrt( (2^(B-2):2^B)/2^(B-1) );
```

```
function SQRTLUT = sqrt_lookup_table()
```

```
    B = 8; % Number of bits in a byte
```

```
    % sqrt_table = sqrt( (2^(B-2):2^B)/2^(B-1) )
```

```
    sqrt_table = [0.707106781186548    0.712609640686961    0.718070330817254    0.723489
                  0.728868986855663    0.734208757779421    0.739509972887452    0.744773
```

0.750000000000000	0.755190373349661	0.760345316287277	0.7654655
0.770551750371122	0.775604602874429	0.780624749799800	0.7856128
0.790569415042095	0.795495128834866	0.800390529679106	0.8052561
0.810092587300983	0.814900300650331	0.819679815537750	0.8244316
0.829156197588850	0.833854004007896	0.838525491562421	0.8431710
0.847791247890659	0.852386356061616	0.856956825050130	0.8615033
0.866025403784439	0.870524267324007	0.875000000000000	0.8794529
0.883883476483184	0.888291900221993	0.892678553567856	0.8970433
0.901387818865997	0.905711046636840	0.910013736160065	0.9142961
0.918558653543692	0.922801441264588	0.927024810886958	0.9312290
0.935414346693485	0.939581023648307	0.943729304408844	0.9478599
0.951971638232989	0.956066158798647	0.960143218483576	0.9642033
0.968245836551854	0.972271824131503	0.976281209488332	0.9802741
0.984250984251476	0.988211768802619	0.992156741649222	0.9960860
1.000000000000000	1.003898650263063	1.007782218537319	1.0116508
1.015504800579495	1.019344151893756	1.023169096484056	1.0269797
1.030776406404415	1.034559084827928	1.038327982864759	1.0420833
1.045825033167594	1.049553476484167	1.053268721647045	1.0569709
1.060660171779821	1.064336647870400	1.068000468164691	1.0716517
1.075290658380328	1.078917281352004	1.082531754730548	1.0861341
1.089724735885168	1.093303480283494	1.096870548424015	1.1004266
1.103970108290981	1.107502821666834	1.111024302164449	1.1145346
1.118033988749895	1.121522402807898	1.125000000000000	1.1284668
1.131923142267177	1.135368882786559	1.138804197393037	1.1422299
1.145643923738960	1.149048519428140	1.152443057161611	1.1558276
1.159202311936963	1.162567202358642	1.165922381636102	1.1692679
1.172603939955857	1.175930482639174	1.179247641507075	1.1825551
1.185854122563142	1.189143599402528	1.192424001771182	1.1956954
1.198957880828180	1.202211503854459	1.205456345124119	1.2086924
1.211919964354082	1.215138880951474	1.218349293101120	1.2215512
1.224744871391589	1.227930169024281	1.231107225224513	1.2342761
1.237436867076458	1.240589577579950	1.243734296383275	1.2468710
1.250000000000000	1.253121103485214	1.256234452640111	1.2593401
1.262438117295260	1.265528545707287	1.268611445636527	1.2716868
1.274754878398196	1.277815518766305	1.280868845744950	1.2839149
1.286953767623375	1.289985465034393	1.293010054098575	1.2960279
1.299038105676658	1.302041665999979	1.305038313613819	1.3080280
1.311011060212689	1.313987252601790	1.316956719106592	1.3199199
1.322875655532295	1.325825214724777	1.328768226591831	1.3317047
1.334634781503914	1.337558409939543	1.340475661845451	1.3433863
1.346291201783626	1.349189571557681	1.352081728298996	1.3549677
1.357847561400027	1.360721316067327	1.363589014329464	1.3664500
1.369306393762915	1.372156150006259	1.375000000000000	1.3778379
1.380670127148408	1.383496476323666	1.386317063301177	1.3891319

```

        1.391941090707505    1.394744600276337    1.397542485937369    1.400334
        1.403121520040228    1.405902734900249    1.408678458698081    1.411448
        1.414213562373095];
% Cast to fixed point with the most accurate rounding method
WL = 4*B; % Word length
FL = 2*B; % Fraction length
SQRTLUT = fi(sqrt_table, 1, WL, FL, 'RoundingMethod', 'Nearest');
% Set fimath for the most efficient math operations
F = fimath('OverflowAction', 'Wrap', ...
          'RoundingMethod', 'Floor', ...
          'SumMode', 'KeepLSB', ...
          'SumWordLength', WL, ...
          'ProductMode', 'KeepLSB', ...
          'ProductWordLength', WL);
SQRTLUT = setfimath(SQRTLUT, F);
end

```

Example


```

u = fi(linspace(0,128,1000),0,16,12);
y = fi_sqrtlookup_8_bit_byte(u);
y_expected = sqrt(double(u));

clf
subplot(211)
plot(u,y,u,y_expected)
legend('Output', 'Expected output', 'Location', 'Best')

subplot(212)
plot(u,double(y)-y_expected, 'r')
legend('Error')
figure(gcf)

```

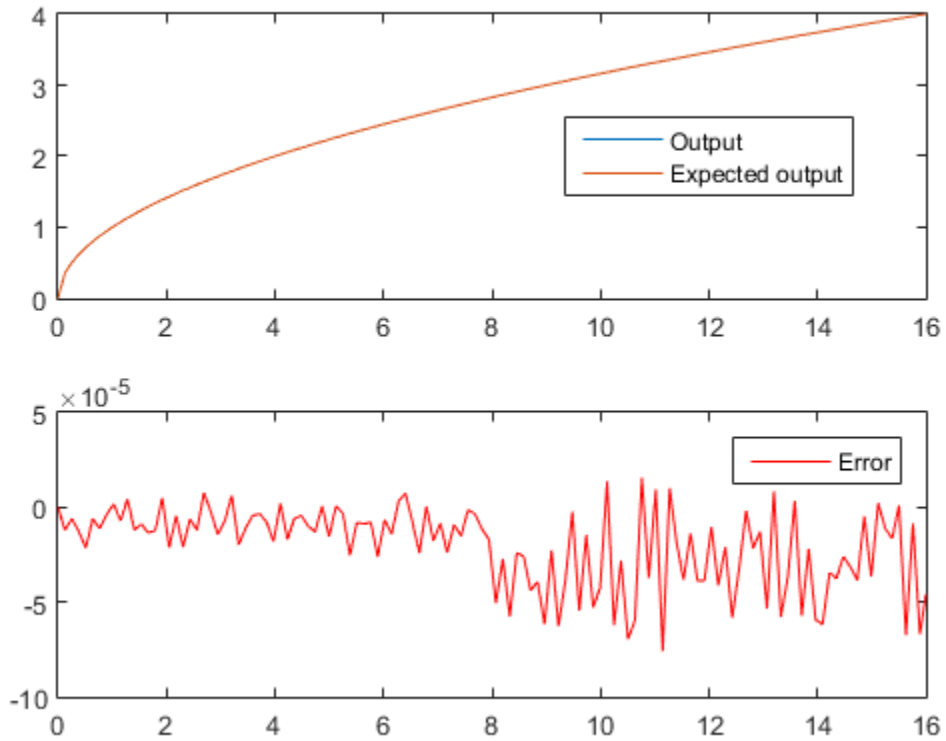

Cleanup

Restore original state.

```
set(0, 'format', originalFormat);  
warning(originalWarningState);  
fipref(originalFiprefState);
```

Set Fixed-Point Math Attributes

This example shows how to set fixed point math attributes in MATLAB® code.

You can control fixed-point math attributes for assignment, addition, subtraction, and multiplication using the `fimath` object. You can attach a `fimath` object to a `fi` object using `setfimath`. You can remove a `fimath` object from a `fi` object using `removefimath`.

You can generate C code from the examples if you have MATLAB Coder™ software.

Set and Remove Fixed Point Math Attributes

You can insulate your fixed-point operations from global and local `fimath` settings by using the `setfimath` and `removefimath` functions. You can also return from functions with no `fimath` attached to output variables. This gives you local control over fixed-point math settings without interfering with the settings in other functions.

MATLAB Code

```
function y = user_written_sum(u)
    % Setup
    F = fimath('RoundingMethod','Floor',...
             'OverflowAction','Wrap',...
             'SumMode','KeepLSB',...
             'SumWordLength',32);
    u = setfimath(u,F);
    y = fi(0,true,32,get(u,'FractionLength'),F);
    % Algorithm
    for i=1:length(u)
        y(:) = y + u(i);
    end
    % Cleanup
    y = removefimath(y);
end
```

Output has no Attached FIMATH

When you run the code, the `fimath` controls the arithmetic inside the function, but the return value has no attached `fimath`. This is due to the use of `setfimath` and `removefimath` inside the function `user_written_sum`.

```
>> u = fi(1:10,true,16,11);
>> y = user_written_sum(u)
```

```
y =
    55
      DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
      WordLength: 32
      FractionLength: 11
```

Generated C Code

If you have MATLAB Coder software, you can generate C code using the following commands.

```
>> u = fi(1:10,true,16,11);
>> codegen user_written_sum -args {u} -config:lib -launchreport
```

Functions `fimath`, `setfimath` and `removefimath` control the fixed-point math, but the underlying data contained in the variables does not change and so the generated C code does not produce any data copies.

```
int32_T user_written_sum(const int16_T u[10])
{
    int32_T y;
    int32_T i;
    /* Setup */
    y = 0;
    /* Algorithm */
    for (i = 0; i < 10; i++) {
        y += u[i];
    }
    /* Cleanup */
    return y;
}
```

Mismatched FIMATH

When you operate on `fi` objects, their `fimath` properties must be equal, or you get an error.

```
>> A = fi(pi, 'ProductMode', 'KeepLSB');
>> B = fi(2, 'ProductMode', 'SpecifyPrecision');
>> C = A * B
```

```
Error using embedded.fi/mtimes
The embedded.fimath of both operands must be equal.
```


To avoid this error, you can remove `fimath` from one of the variables in the expression. In this example, the `fimath` is removed from `B` in the context of the expression without modifying `B` itself, and the product is computed using the `fimath` attached to `A`.

```
>> C = A * removefimath(B)
```

```
C =
```

```
6.283203125
```

```

    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 32
    FractionLength: 26

    RoundingMethod: Nearest
    OverflowAction: Saturate
    ProductMode: KeepLSB
    ProductWordLength: 32
    SumMode: FullPrecision

```

Changing FIMATH on Temporary Variables

If you have variables with no attached `fimath`, but you want to control a particular operation, then you can attach a `fimath` in the context of the expression without modifying the variables.

For example, the product is computed with the `fimath` defined by `F`.

```
>> F = fimath('ProductMode','KeepLSB','OverflowAction','Wrap','RoundingMethod','Floor')
>> A = fi(pi);
>> B = fi(2);
>> C = A * setfimath(B,F)
```

```
C =
```

```
6.2832
```

```

    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 32
    FractionLength: 26

    RoundingMethod: Floor
    OverflowAction: Wrap

```

```
ProductMode: KeepLSB
ProductWordLength: 32
SumMode: FullPrecision
MaxSumWordLength: 128
```

Note that variable B is not changed.

```
>> B
```

```
B =
```

```
2
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 16
FractionLength: 13
```

Removing FIMATH Conflict in a Loop

You can compute products and sums to match the accumulator of a DSP with floor rounding and wrap overflow, and use nearest rounding and saturate overflow on the output. To avoid mismatched `fimath` errors, you can remove the `fimath` on the output variable when it is used in a computation with the other variables.

MATLAB Code

In this example, the products are 32-bits, and the accumulator is 40-bits, keeping the least-significant-bits with floor rounding and wrap overflow like C's native integer rules. The output uses nearest rounding and saturate overflow.

```
function [y,z] = setfimath_removefimath_in_a_loop(b,a,x,z)
% Setup
F_floor = fimath('RoundingMethod','Floor',...
    'OverflowAction','Wrap',...
    'ProductMode','KeepLSB',...
    'ProductWordLength',32,...
    'SumMode','KeepLSB',...
    'SumWordLength',40);
F_nearest = fimath('RoundingMethod','Nearest',...
    'OverflowAction','Wrap');
% Set fimaths that are local to this function
b = setfimath(b,F_floor);
a = setfimath(a,F_floor);
x = setfimath(x,F_floor);
```

```

z = setfimath(z,F_floor);
% Create y with nearest rounding
y = coder.nullcopy(fi(zeros(size(x)),true,16,14,F_nearest));
% Algorithm
for j=1:length(x)
    % Nearest assignment into y
    y(j) = b(1)*x(j) + z(1);
    % Remove y's fimath conflict with other fimaths
    z(1) = (b(2)*x(j) + z(2)) - a(2) * removefimath(y(j));
    z(2) = b(3)*x(j)          - a(3) * removefimath(y(j));
end
% Cleanup: Remove fimath from outputs
y = removefimath(y);
z = removefimath(z);
end

```

Code Generation Instructions

If you have MATLAB Coder software, you can generate C code with the specified hardware characteristics using the following commands.

```

N = 256;
t = 1:N;
xstep = [ones(N/2,1);-ones(N/2,1)];
num = [0.0299545822080925 0.0599091644161849 0.0299545822080925];
den = [1 -1.4542435862515900 0.5740619150839550];

b = fi(num,true,16);
a = fi(den,true,16);
x = fi(xstep,true,16,15);
zi = fi(zeros(2,1),true,16,14);

B = coder.Constant(b);
A = coder.Constant(a);

config_obj = coder.config('lib');
config_obj.GenerateReport = true;
config_obj.LaunchReport = true;
config_obj.TargetLang = 'C';
config_obj.GenerateComments = true;
config_obj.GenCodeOnly = true;
config_obj.HardwareImplementation.ProdBitPerChar=8;
config_obj.HardwareImplementation.ProdBitPerShort=16;
config_obj.HardwareImplementation.ProdBitPerInt=32;
config_obj.HardwareImplementation.ProdBitPerLong=40;

```

```
codegen -config config_obj setfimath_removefimath_in_a_loop -args {B,A,x,zi} -launchrepe
```

Generated C Code

Functions `fimath`, `setfimath` and `removefimath` control the fixed-point math, but the underlying data contained in the variables does not change and so the generated C code does not produce any data copies.

```
void setfimath_removefimath_in_a_loop(const int16_T x[256], int16_T z[2],
    int16_T y[256])
{
    int32_T j;
    int40_T i0;
    int16_T b_y;

    /* Setup */
    /* Set fimaths that are local to this function */
    /* Create y with nearest rounding */
    /* Algorithm */
    for (j = 0; j < 256; j++) {
        /* Nearest assignment into y */
        i0 = 15705 * x[j] + ((int40_T)z[0] << 20);
        b_y = (int16_T)((int32_T)(i0 >> 20) + ((i0 & 524288L) != 0L));

        /* Remove y's fimath conflict with other fimaths */
        z[0] = (int16_T)((((31410 * x[j] + ((int40_T)z[1] << 20)) - ((int40_T)(-23826
            * b_y) << 6)) >> 20);
        z[1] = (int16_T)((15705 * x[j] - ((int40_T)(9405 * b_y) << 6)) >> 20);
        y[j] = b_y;
    }

    /* Cleanup: Remove fimath from outputs */
}

```

Polymorphic Code

You can write MATLAB code that can be used for both floating-point and fixed-point types using `setfimath` and `removefimath`.

```
function y = user_written_function(u)
    % Setup
    F = fimath('RoundingMethod','Floor',...
        'OverflowAction','Wrap',...
        'SumMode','KeepLSB');
    u = setfimath(u,F);

```

```

% Algorithm
y = u + u;
% Cleanup
y = removefimath(y);
end

```

Fixed Point Inputs

When the function is called with fixed-point inputs, then `fimath F` is used for the arithmetic, and the output has no attached `fimath`.

```

>> u = fi(pi/8,true,16,15,'RoundingMethod','Convergent');
>> y = user_written_function(u)

```

y =

```

0.785400390625

```

```

DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 32
FractionLength: 15

```

Generated C Code for Fixed Point

If you have MATLAB Coder software, you can generate C code using the following commands.

```

>> u = fi(pi/8,true,16,15,'RoundingMethod','Convergent');
>> codegen user_written_function -args {u} -config:lib -launchreport

```

Functions `fimath`, `setfimath` and `removefimath` control the fixed-point math, but the underlying data contained in the variables does not change and so the generated C code does not produce any data copies.

```

int32_T user_written_function(int16_T u)
{
    /* Setup */
    /* Algorithm */
    /* Cleanup */
    return u + u;
}

```

Double Inputs

Since `setfimath` and `removefimath` are pass-through for floating-point types, the `user_written_function` example works with floating-point types, too.

```
function y = user_written_function(u)
    % Setup
    F = fimath('RoundingMethod','Floor',...
              'OverflowAction','Wrap',...
              'SumMode','KeepLSB');
    u = setfimath(u,F);
    % Algorithm
    y = u + u;
    % Cleanup
    y = removefimath(y);
end
```

Generated C Code for Double

When compiled with floating-point input, you get the following generated C code.

```
>> codegen user_written_function -args {0} -config:lib -launchreport

real_T user_written_function(real_T u)
{
    return u + u;
}
```

Where the `real_T` type is defined as a `double`:

```
typedef double real_T;
```

More Polymorphic Code

This function is written so that the output is created to be the same type as the input, so both floating-point and fixed-point can be used with it.

```
function y = user_written_sum_polymorphic(u)
    % Setup
    F = fimath('RoundingMethod','Floor',...
              'OverflowAction','Wrap',...
              'SumMode','KeepLSB',...
              'SumWordLength',32);

    u = setfimath(u,F);

    if isfi(u)
```

```

        y = fi(0,true,32,get(u,'FractionLength'),F);
    else
        y = zeros(1,1,class(u));
    end

    % Algorithm
    for i=1:length(u)
        y(:) = y + u(i);
    end

    % Cleanup
    y = removefimath(y);

```

end

Fixed Point Generated C Code

If you have MATLAB Coder software, you can generate fixed-point C code using the following commands.

```

>> u = fi(1:10,true,16,11);
>> codegen user_written_sum_polymorphic -args {u} -config:lib -launchreport

```

Functions `fimath`, `setfimath` and `removefimath` control the fixed-point math, but the underlying data contained in the variables does not change and so the generated C code does not produce any data copies.

```

int32_T user_written_sum_polymorphic(const int16_T u[10])
{
    int32_T y;
    int32_T i;

    /* Setup */
    y = 0;

    /* Algorithm */
    for (i = 0; i < 10; i++) {
        y += u[i];
    }

    /* Cleanup */
    return y;
}

```

Floating Point Generated C Code

If you have MATLAB Coder software, you can generate floating-point C code using the following commands.

```
>> u = 1:10;
>> codegen user_written_sum_polymorphic -args {u} -config:lib -launchreport

real_T user_written_sum_polymorphic(const real_T u[10])
{
    real_T y;
    int32_T i;

    /* Setup */
    y = 0.0;

    /* Algorithm */
    for (i = 0; i < 10; i++) {
        y += u[i];
    }

    /* Cleanup */
    return y;
}
```

Where the `real_T` type is defined as a `double`:

```
typedef double real_T;
```

SETFIMATH on Integer Types

Following the established pattern of treating built-in integers like `fi` objects, `setfimath` converts integer input to the equivalent `fi` with attached `fimath`.

```
>> u = int8(5);
>> codegen user_written_u_plus_u -args {u} -config:lib -launchreport

function y = user_written_u_plus_u(u)
    % Setup
    F = fimath('RoundingMethod','Floor',...
        'OverflowAction','Wrap',...
        'SumMode','KeepLSB',...
        'SumWordLength',32);
    u = setfimath(u,F);
    % Algorithm
    y = u + u;
    % Cleanup
    y = removefimath(y);
```


end

The output type was specified by the `fimath` to be 32-bit.

```
int32_T user_written_u_plus_u(int8_T u)
{
    /* Setup */
    /* Algorithm */
    /* Cleanup */
    return u + u;
}
```


Working with fimath Objects

- “fimath Object Construction” on page 4-2
- “fimath Object Properties” on page 4-5
- “fimath Properties Usage for Fixed-Point Arithmetic” on page 4-13
- “fimath for Rounding and Overflow Modes” on page 4-21
- “fimath for Sharing Arithmetic Rules” on page 4-23
- “fimath ProductMode and SumMode” on page 4-26
- “How Functions Use fimath” on page 4-32

fimath Object Construction

In this section...

“fimath Object Syntaxes” on page 4-2

“Building fimath Object Constructors in a GUI” on page 4-3

fimath Object Syntaxes

The arithmetic attributes of a `fi` object are defined by a local `fimath` object, which is attached to that `fi` object. If a `fi` object has no local `fimath`, the following default `fimath` values are used:

```
RoundingMethod: Nearest
OverflowAction: Wrap
ProductMode: FullPrecision
SumMode: FullPrecision
```

You can create `fimath` objects in Fixed-Point Designer software in one of two ways:

- You can use the `fimath` constructor function to create new `fimath` objects.
- You can use the `fimath` constructor function to copy an existing `fimath` object.

To get started, type

```
F = fimath
```

to create a `fimath` object.

```
F =
```

```
RoundingMethod: Nearest
OverflowAction: Wrap
ProductMode: FullPrecision
SumMode: FullPrecision
```

To copy a `fimath` object, simply use assignment as in the following example:

```
F = fimath;
G = F;
```

```
isequal(F,G)
```

```
ans =
```

```
1
```

The syntax


```
F = fimath(...'PropertyName',PropertyValue...)
```


allows you to set properties for a `fimath` object at object creation with property name/property value pairs. Refer to “Setting `fimath` Properties at Object Creation” on page 4-11.

Building `fimath` Object Constructors in a GUI

When you are working with files in MATLAB, you can build your `fimath` object constructors using the **Insert `fimath` Constructor** dialog box. After specifying the properties of the `fimath` object in the dialog box, you can insert the prepopulated `fimath` object constructor string at a specific location in your file.

For example, to create a `fimath` object that uses convergent rounding and wraps on overflow, perform the following steps:

- 1 On the **Home** tab, in the **File** section, click **New > Script** to open the MATLAB Editor
- 2 On the **Editor** tab, in the **Edit** section, click  in the **Insert** button group. Click the **Insert `fimath`...** to open the **Insert `fimath` Constructor** dialog box.
- 3 Use the edit boxes and drop-down menus to specify the following properties of the `fimath` object:
 - **Rounding method** = Floor
 - **Overflow action** = Wrap
 - **Product mode** = FullPrecision
 - **Sum mode** = FullPrecision

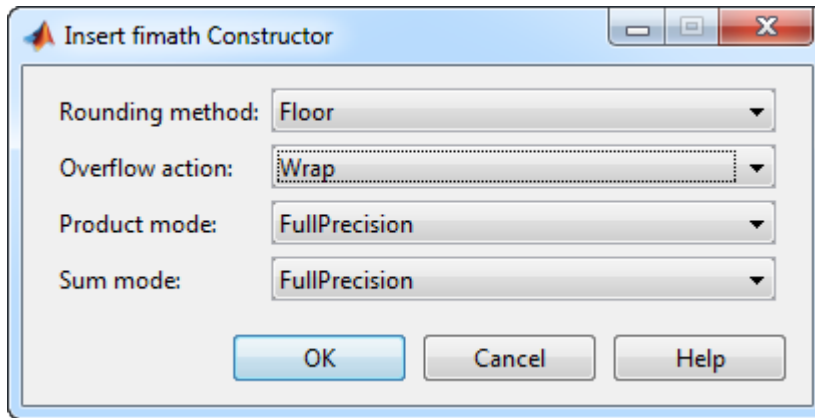

- 4 To insert the `fimath` object constructor string in your file, place your cursor at the desired location in the file. Then click **OK** on the **Insert fimath Constructor** dialog box. Clicking **OK** closes the **Insert fimath Constructor** dialog box and automatically populates the `fimath` object constructor string in your file:

```
1     fimath('RoundingMethod', 'Floor', ...  
2         'OverflowAction', 'Wrap', ...  
3         'ProductMode', 'FullPrecision', ...  
4         'SumMode', 'FullPrecision')
```

fimath Object Properties

In this section...

“Math, Rounding, and Overflow Properties” on page 4-5

“How Properties are Related” on page 4-9

“Setting fimath Object Properties” on page 4-11

Math, Rounding, and Overflow Properties

You can always write to the following properties of `fimath` objects:

Property	Description	Valid Values
<code>CastBeforeSum</code>	Whether both operands are cast to the sum data type before addition	<ul style="list-style-type: none"> 0 (default) — do not cast before sum 1 — cast before sum <p>Note: This property is hidden when the <code>SumMode</code> is set to <code>FullPrecision</code>.</p>
<code>MaxProductWordLength</code>	Maximum allowable word length for the product data type	<ul style="list-style-type: none"> 65535 (default) Any positive integer
<code>MaxSumWordLength</code>	Maximum allowable word length for the sum data type	<ul style="list-style-type: none"> 65535 (default) Any positive integer
<code>OverflowAction</code>	Action to take on overflow	<ul style="list-style-type: none"> <code>Saturate</code> (default) — Saturate to maximum or minimum value of the fixed-point range on overflow. <code>Wrap</code> — Wrap on overflow. This mode is also known as two's complement overflow.
<code>ProductBias</code>	Bias of the product data type	<ul style="list-style-type: none"> 0 (default) Any floating-point number
<code>ProductFixedExponent</code>	Fixed exponent of the product data type	<ul style="list-style-type: none"> -30 (default) Any positive or negative integer

Property	Description	Valid Values
		<p>Note: The <code>ProductFractionLength</code> is the negative of the <code>ProductFixedExponent</code>. Changing one property changes the other.</p>
<code>ProductFractionLength</code>	Fraction length, in bits, of the product data type	<ul style="list-style-type: none"> • 30 (default) • Any positive or negative integer <p>Note: The <code>ProductFractionLength</code> is the negative of the <code>ProductFixedExponent</code>. Changing one property changes the other.</p>
<code>ProductMode</code>	Defines how the product data type is determined	<ul style="list-style-type: none"> • <code>FullPrecision</code> (default) — The full precision of the result is kept. • <code>KeepLSB</code>— Keep least significant bits. Specify the product word length, while the fraction length is set to maintain the least significant bits of the product. • <code>KeepMSB</code> — Keep most significant bits. Specify the product word length, while the fraction length is set to maintain the most significant bits of the product. • <code>SpecifyPrecision</code>— specify the word and fraction lengths or slope and bias of the product.
<code>ProductSlope</code>	Slope of the product data type	<ul style="list-style-type: none"> • 9.3132e-010 (default) • Any floating-point number <p>Note:</p> $ProductSlope = ProductSlopeAdjustmentFactor \times 2^{ProductFixedExponent}$ <p>Changing one of these properties affects the others.</p>

Property	Description	Valid Values
ProductSlopeAdjustmentFactor	Slope adjustment factor of the product data type	<ul style="list-style-type: none"> • 1 (default) • Any floating-point number greater than or equal to 1 and less than 2 <hr/> <p>Note:</p> $ProductSlope = ProductSlopeAdjustmentFactor \times 2^{ProductFixedExponent}$ <p>Changing one of these properties affects the others.</p>
ProductWordLength	Word length, in bits, of the product data type	<ul style="list-style-type: none"> • 32 (default) • Any positive integer
RoundingMethod	Rounding method	<ul style="list-style-type: none"> • Nearest (default) — Round toward nearest. Ties round toward positive infinity. • Ceiling — Round toward positive infinity. • Convergent — Round toward nearest. Ties round to the nearest even stored integer (least biased). • Zero — Round toward zero. • Floor — Round toward negative infinity. • Round — Round toward nearest. Ties round toward negative infinity for negative numbers, and toward positive infinity for positive numbers.
SumBias	Bias of the sum data type	<ul style="list-style-type: none"> • 0 (default) • Any floating-point number
SumFixedExponent	Fixed exponent of the sum data type	<ul style="list-style-type: none"> • -30 (default) • Any positive or negative integer <hr/> <p>Note: The SumFractionLength is the negative of the SumFixedExponent. Changing one property changes the other.</p>

Property	Description	Valid Values
SumFractionLength	Fraction length, in bits, of the sum data type	<ul style="list-style-type: none"> • 30 (default) • Any positive or negative integer <p>Note: The SumFractionLength is the negative of the SumFixedExponent. Changing one property changes the other.</p>
SumMode	Defines how the sum data type is determined	<ul style="list-style-type: none"> • FullPrecision (default) — The full precision of the result is kept. • KeepLSB — Keep least significant bits. Specify the sum data type word length, while the fraction length is set to maintain the least significant bits of the sum. • KeepMSB — Keep most significant bits. Specify the sum data type word length, while the fraction length is set to maintain the most significant bits of the sum and no more fractional bits than necessary • SpecifyPrecision — Specify the word and fraction lengths or the slope and bias of the sum data type.
SumSlope	Slope of the sum data type	<ul style="list-style-type: none"> • 9.3132e-010 (default) • Any floating-point number <p>Note:</p> $SumSlope = SumSlopeAdjustmentFactor \times 2^{SumFixedExponent}$ <p>Changing one of these properties affects the others.</p>

Property	Description	Valid Values
SumSlopeAdjustmentFactor	Slope adjustment factor of the sum data type	<ul style="list-style-type: none"> • 1 (default) • Any floating-point number greater than or equal to 1 and less than 2 <p>Note:</p> $SumSlope = SumSlopeAdjustmentFactor \times 2^{SumFixedExponent}$ <p>Changing one of these properties affects the others.</p>
SumWordLength	Word length, in bits, of the sum data type	<ul style="list-style-type: none"> • 32 (default) • Any positive integer

For details about these properties, refer to the “fi Object Properties”. To learn how to specify properties for `fi` objects in Fixed-Point Designer software, refer to “Setting `fi` Object Properties” on page 4-11.

How Properties are Related

Sum data type properties

The slope of the sum of two `fi` objects is related to the `SumSlopeAdjustmentFactor` and `SumFixedExponent` properties by

$$SumSlope = SumSlopeAdjustmentFactor \times 2^{SumFixedExponent}$$

If any of these properties are updated, the others are modified accordingly.

In a `FullPrecision` sum, the resulting word length is represented by

$$W_s = \text{integer length} + F_s$$

where

$$\text{integer length} = \max(W_a - F_a, W_b - F_b) + \text{ceil}(\log_2(\text{NumberOfSummands}))$$

and

$$F_s = \max(F_a, F_b)$$

When the `SumMode` is set to `KeepLSB`, the resulting word length and fraction length is determined by

$$W_s = \text{specified in the } \text{SumWordLength} \text{ property}$$

$$F_s = \max(F_a, F_b)$$

When the `SumMode` is set to `KeepMSB`, the resulting word length and fraction length is determined by

$$W_s = \text{specified in the } \text{SumWordLength} \text{ property}$$

$$F_s = W_s - \text{integer length}$$

where

$$\text{integer length} = \max(W_a - F_a, W_b - F_b) + \text{ceil}(\log_2(\text{NumberOfSummands}))$$

When the `SumMode` is set to `SpecifyPrecision`, you specify both the word and fraction length or slope and bias of the sum data type with the `SumWordLength` and `SumFractionLength`, or `SumSlope` and `SumBias` properties respectively.

Product data type properties

The slope of the product of two `fi` objects is related to the `ProductSlopeAdjustmentFactor` and `ProductFixedExponent` properties by

$$\text{ProductSlope} = \text{ProductSlopeAdjustmentFactor} \times 2^{\text{ProductFixedExponent}}$$

If any of these properties are updated, the others are modified accordingly.

In a `FullPrecision` multiply, the resulting word length and fraction length are represented by

$$W_p = W_a + W_b$$

$$F_p = F_a + F_b$$

When the `ProductMode` is `KeepLSB` the word length and fraction length are determined by

W_p = specified in the `ProductWordLength` property

$$F_p = F_a + F_b$$

When the `ProductMode` is `KeepMSB` the word length and fraction length are

W_p = specified in the `ProductWordLength` property

$$F_p = W_p - \text{integer length}$$

where

$$\text{integer length} = (W_a + W_b) - (F_a - F_b)$$

When the `ProductMode` is set to `SpecifyPrecision`, you specify both the word and fraction length or slope and bias of the product data type with the `ProductWordLength` and `ProductFractionLength`, or `ProductSlope` and `ProductBias` properties respectively.

For more information about how certain functions use the `fimath` properties, see

Setting fimath Object Properties

- “Setting fimath Properties at Object Creation” on page 4-11
- “Using Direct Property Referencing with fimath” on page 4-12

Setting fimath Properties at Object Creation

You can set properties of `fimath` objects at the time of object creation by including properties after the arguments of the `fimath` constructor function.

For example, to set the overflow action to `Saturate` and the rounding method to `Convergent`,

```
F = fimath('OverflowAction','Saturate','RoundingMethod','Convergent')
```

```
F =
```

```
RoundingMethod: Convergent
OverflowAction: Saturate
ProductMode: FullPrecision
SumMode: FullPrecision
```

In addition to creating a `fimath` object at the command line, you can also set `fimath` properties using the **Insert fimath Constructor** dialog box. For an example of this approach, see “Building fimath Object Constructors in a GUI” on page 4-3.

Using Direct Property Referencing with fimath

You can reference directly into a property for setting or retrieving `fimath` object property values using MATLAB structure-like referencing. You do so by using a period to index into a property by name.

For example, to get the `RoundingMethod` of `F`,

```
F.RoundingMethod
```

```
ans =
```

```
Convergent
```

To set the `OverflowAction` of `F`,

```
F.OverflowAction = 'Wrap'
```

```
F =
```

```
RoundingMethod: Convergent
OverflowAction: Wrap
ProductMode: FullPrecision
SumMode: FullPrecision
```

fimath Properties Usage for Fixed-Point Arithmetic

In this section...

“fimath Rules for Fixed-Point Arithmetic” on page 4-13

“Binary-Point Arithmetic” on page 4-15

“[Slope Bias] Arithmetic” on page 4-18

fimath Rules for Fixed-Point Arithmetic

`fimath` properties define the rules for performing arithmetic operations on `fi` objects. The `fimath` properties that govern fixed-point arithmetic operations can come from a local `fimath` object or the `fimath` default values.

To determine whether a `fi` object has a local `fimath` object, use the `isfimathlocal` function.

The following sections discuss how `fi` objects with local `fimath` objects interact with `fi` objects without local `fimath`.

Binary Operations

In binary fixed-point operations such as $c = a + b$, the following rules apply:

- If both `a` and `b` have no local `fimath`, the operation uses default `fimath` values to perform the fixed-point arithmetic. The output `fi` object `c` also has no local `fimath`.
- If either `a` or `b` has a local `fimath` object, the operation uses that `fimath` object to perform the fixed-point arithmetic. The output `fi` object `c` has the same local `fimath` object as the input.

Unary Operations

In unary fixed-point operations such as $b = \text{abs}(a)$, the following rules apply:

- If `a` has no local `fimath`, the operation uses default `fimath` values to perform the fixed-point arithmetic. The output `fi` object `b` has no local `fimath`.
- If `a` has a local `fimath` object, the operation uses that `fimath` object to perform the fixed-point arithmetic. The output `fi` object `b` has the same local `fimath` object as the input `a`.

When you specify a `fimath` object in the function call of a unary fixed-point operation, the operation uses the `fimath` object you specify to perform the fixed-point arithmetic. For example, when you use a syntax such as `b = abs(a,F)` or `b = sqrt(a,F)`, the `abs` and `sqrt` operations use the `fimath` object `F` to compute intermediate quantities. The output `fi` object `b` always has no local `fimath`.

Concatenation Operations

In fixed-point concatenation operations such as `c = [a b]`, `c = [a;b]` and `c = bitconcat(a,b)`, the following rule applies:

- The `fimath` properties of the leftmost `fi` object in the operation determine the `fimath` properties of the output `fi` object `c`.

For example, consider the following scenarios for the operation `d = [a b c]`:

- If `a` is a `fi` object with no local `fimath`, the output `fi` object `d` also has no local `fimath`.
- If `a` has a local `fimath` object, the output `fi` object `d` has the same local `fimath` object.
- If `a` is not a `fi` object, the output `fi` object `d` inherits the `fimath` properties of the next leftmost `fi` object. For example, if `b` is a `fi` object with a local `fimath` object, the output `fi` object `d` has the same local `fimath` object as the input `fi` object `b`.

fimath Object Operations: `add`, `mpy`, `sub`

The output of the `fimath` object operations `add`, `mpy`, and `sub` always have no local `fimath`. The operations use the `fimath` object you specify in the function call, but the output `fi` object never has a local `fimath` object.

MATLAB Function Block Operations

Fixed-point operations performed with the MATLAB Function block use the same rules as fixed-point operations performed in MATLAB.

All input signals to the MATLAB Function block that you treat as `fi` objects associate with whatever you specify for the **MATLAB Function block `fimath`** parameter. When you set this parameter to `Same as MATLAB`, your `fi` objects do not have local `fimath`. When you set the **MATLAB Function block `fimath`** parameter to `Specify other`, you can define your own set of `fimath` properties for all `fi` objects in the MATLAB Function block to associate with. You can choose to treat only fixed-point input signals as `fi` objects or both fixed-point and integer input signals as `fi` objects. See “Using `fimath` Objects in MATLAB Function Blocks” on page 13-65.

Binary-Point Arithmetic

The `fimath` object encapsulates the math properties of Fixed-Point Designer software.

`fi` objects only have a local `fimath` object when you explicitly specify `fimath` properties in the `fi` constructor. When you use the `sfi` or `ufi` constructor or do not specify any `fimath` properties in the `fi` constructor, the resulting `fi` object does not have any local `fimath` and uses default `fimath` values.

```
a = fi(pi)
a =
    3.1416

    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 16
    FractionLength: 13

a.fimath
isfimathlocal(a)

ans =

    RoundingMethod: Nearest
    OverflowAction: Saturate
    ProductMode: FullPrecision
    SumMode: FullPrecision

ans =
    0
```

To perform arithmetic with `+`, `-`, `.*`, or `*` on two `fi` operands with local `fimath` objects, the local `fimath` objects must be identical. If one of the `fi` operands does not have a local `fimath`, the `fimath` properties of the two operands need not be identical. See “`fimath` Rules for Fixed-Point Arithmetic” on page 4-13 for more information.

```
a = fi(pi);
b = fi(8);
isequal(a.fimath, b.fimath)

ans =
```

```
1
a + b
ans =
    11.1416
    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 19
    FractionLength: 13
```

To perform arithmetic with `+`, `-`, `.*`, or `*`, two `fi` operands must also have the same data type. For example, you can add two `fi` objects with data type `double`, but you can not add an object with data type `double` and one with data type `single`:

```
a = fi(3, 'DataType', 'double')
a =
    3
    DataTypeMode: Double
b = fi(27, 'DataType', 'double')
b =
    27
    DataTypeMode: Double
a + b
ans =
    30
    DataTypeMode: Double
c = fi(12, 'DataType', 'single')
c =
    12
```

```
DataTypeMode: Single
```

```
a + c
```

Math operations are not allowed on FI objects with different data types.

Fixed-point `fi` object operands do not have to have the same scaling. You can perform binary math operations on a `fi` object with a fixed-point data type and a `fi` object with a scaled doubles data type. In this sense, the scaled double data type acts as a fixed-point data type:

```
a = fi(pi)
```

```
a =
```

```
3.1416
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 16
FractionLength: 13
```

```
b = fi(magic(2), ...
'DataTypeMode', 'Scaled double: binary point scaling')
```

```
b =
```

```
1    3
4    2
```

```
DataTypeMode: Scaled double: binary point scaling
Signedness: Signed
WordLength: 16
FractionLength: 12
```

```
a + b
```

```
ans =
```

```
4.1416    6.1416
7.1416    5.1416
```

```
DataTypeMode: Scaled double: binary point scaling
```

```
Signedness: Signed
WordLength: 18
FractionLength: 13
```

Use the `divide` function to perform division with doubles, singles, or binary point-only scaling `fi` objects.

[Slope Bias] Arithmetic

Fixed-Point Designer software supports fixed-point arithmetic using the local `fimath` object or default `fimath` for all binary point-only signals. The toolbox also supports arithmetic for [Slope Bias] signals with the following restrictions:

- [Slope Bias] signals must be real.
- You must set the `SumMode` and `ProductMode` properties of the governing `fimath` to `'SpecifyPrecision'` for sum and multiply operations, respectively.
- You must set the `CastBeforeSum` property of the governing `fimath` to `'true'`.
- Fixed-Point Designer does not support the `divide` function for [Slope Bias] signals.

```
f = fimath('SumMode', 'SpecifyPrecision', ...
          'SumFractionLength', 16)
```

```
f =
```

```
RoundingMethod: Nearest
OverflowAction: Saturate
  ProductMode: FullPrecision
    SumMode: SpecifyPrecision
SumWordLength: 32
SumFractionLength: 16
CastBeforeSum: true
```

```
a = fi(pi, 'fimath', f)
```

```
a =
```

```
3.1416
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 16
```

```
FractionLength: 13

RoundingMethod: Nearest
OverflowAction: Saturate
  ProductMode: FullPrecision
    SumMode: SpecifyPrecision
  SumWordLength: 32
SumFractionLength: 16
CastBeforeSum: true

b = fi(22, true, 16, 2^-8, 3, 'fimath', f)
b =
    22

    DataTypeMode: Fixed-point: slope and bias scaling
      Signedness: Signed
      WordLength: 16
      Slope: 0.00390625
      Bias: 3

    RoundingMethod: Nearest
    OverflowAction: Saturate
      ProductMode: FullPrecision
        SumMode: SpecifyPrecision
      SumWordLength: 32
    SumFractionLength: 16
    CastBeforeSum: true

a + b
ans =
    25.1416

    DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
      WordLength: 32
    FractionLength: 16

    RoundingMethod: Nearest
    OverflowAction: Saturate
      ProductMode: FullPrecision
        SumMode: SpecifyPrecision
```

```
SumWordLength: 32  
SumFractionLength: 16  
CastBeforeSum: true
```

Setting the `SumMode` and `ProductMode` properties to `SpecifyPrecision` are mutually exclusive except when performing the `*` operation between matrices. In this case, you must set both the `SumMode` and `ProductMode` properties to `SpecifyPrecision` for [Slope Bias] signals. Doing so is necessary because the `*` operation performs both sum and multiply operations to calculate the result.

fimath for Rounding and Overflow Modes

Only rounding methods and overflow actions set prior to an operation with `fi` objects affect the outcome of those operations. Once you create a `fi` object in MATLAB, changing its rounding or overflow settings does not affect its value. For example, consider the `fi` objects `a` and `b`:

```
p = fipref('NumberDisplay', 'RealWorldValue',...
'NumericTypeDisplay', 'none', 'FimathDisplay', 'none');
T = numerictype('WordLength',8,'FractionLength',7);
F = fimath('RoundingMethod','Floor','OverflowAction','Wrap');
a = fi(1,T,F)

a =

    -1

b = fi(1,T)

b =

    0.9922
```

Because you create `a` with a `fimath` object `F` that has `OverflowAction` set to `Wrap`, the value of `a` wraps to `-1`. Conversely, because you create `b` with the default `OverflowAction` value of `Saturate`, its value saturates to `0.9922`.

Now, assign the `fimath` object `F` to `b`:

```
b.fimath = F

b =

    0.9922
```

Because the assignment operation and corresponding overflow and saturation happened when you created `b`, its value does not change when you assign it the new `fimath` object `F`.

Note: `fi` objects with no local `fimath` and created from a floating-point value always get constructed with a `RoundingMethod` of `Nearest` and an `OverflowAction` of `Saturate`. To construct `fi` objects with different `RoundingMethod` and

OverflowAction properties, specify the desired RoundingMethod and OverflowAction properties in the `fi` constructor.

For more information about the `fi` object and its properties, see “`fi` Object Properties” on page 4-5

fimath for Sharing Arithmetic Rules

There are two ways of sharing `fimath` properties in Fixed-Point Designer software:

- “Default `fimath` Usage to Share Arithmetic Rules” on page 4-23
- “Local `fimath` Usage to Share Arithmetic Rules” on page 4-23

Sharing `fimath` properties across `fi` objects ensures that the `fi` objects are using the same arithmetic rules and helps you avoid “mismatched `fimath`” errors.

Default `fimath` Usage to Share Arithmetic Rules

You can ensure that your `fi` objects are all using the same `fimath` properties by not specifying any local `fimath`. To assure no local `fimath` is associated with a `fi` object, you can:

- Create a `fi` object using the `fi` constructor without specifying any `fimath` properties in the constructor call. For example:

```
a = fi(pi)
```

- Create a `fi` object using the `sfi` or `ufi` constructor. All `fi` objects created with these constructors have no local `fimath`.

```
b = sfi(pi)
```

- Use `removefimath` to remove a local `fimath` object from an existing `fi` object.

Local `fimath` Usage to Share Arithmetic Rules

You can also use a `fimath` object to define common arithmetic rules that you would like to use for multiple `fi` objects. You can then create your `fi` objects, using the same `fimath` object for each. To do so, you must also create a `numericType` object to define a common data type and scaling. Refer to “`numericType` Object Construction” for more information on `numericType` objects. The following example shows the creation of a `numericType` object and `fimath` object, and then uses those objects to create two `fi` objects with the same `numericType` and `fimath` attributes:

```
T = numericType('WordLength',32,'FractionLength',30)
```

```
T =
```

```
        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 32
        FractionLength: 30

F = fimath('RoundingMethod','Floor',...
          'OverflowAction','Wrap')

F =

        RoundingMethod: Floor
        OverflowAction: Wrap
        ProductMode: FullPrecision
        SumMode: FullPrecision

a = fi(pi, T, F)

a =

    -0.8584

        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 32
        FractionLength: 30

        RoundingMethod: Floor
        OverflowAction: Wrap
        ProductMode: FullPrecision
        SumMode: FullPrecision

b = fi(pi/2, T, F)

b =

    1.5708

        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 32
        FractionLength: 30
```

```
RoundingMethod: Floor  
OverflowAction: Wrap  
  ProductMode: FullPrecision  
    SumMode: FullPrecision
```

fimath ProductMode and SumMode

In this section...

“Example Setup” on page 4-26

“FullPrecision” on page 4-27

“KeepLSB” on page 4-28

“KeepMSB” on page 4-29

“SpecifyPrecision” on page 4-30

Example Setup

The examples in the sections of this topic show the differences among the four settings of the ProductMode and SumMode properties:

- FullPrecision
- KeepLSB
- KeepMSB
- SpecifyPrecision

To follow along, first set the following preferences:

```
p = fipref;  
p.NumericTypeDisplay = 'short';  
p.FimathDisplay = 'none';  
p.LoggingMode = 'on';  
F = fimath('OverflowAction','Wrap',...  
          'RoundingMethod','Floor',...  
          'CastBeforeSum',false);  
warning off  
format compact
```

Next, define `fi` objects `a` and `b`. Both have signed 8-bit data types. The fraction length gets chosen automatically for each `fi` object to yield the best possible precision:

```
a = fi(pi, true, 8)  
  
a =  
    3.1563  
    s8,5
```

```
b = fi(exp(1), true, 8)
```

```
b =
    2.7188
    s8,5
```

FullPrecision

Now, set ProductMode and SumMode for a and b to FullPrecision and look at some results:

```
F.ProductMode = 'FullPrecision';
F.SumMode = 'FullPrecision';
a.fimath = F;
b.fimath = F;
```

```
a
```

```
a =
    3.1563    %011.00101
    s8,5
```

```
b
```

```
b =
    2.7188    %010.10111
    s8,5
```

```
a*b
```

```
ans =
    8.5811    %001000.1001010011
    s16,10
```

```
a+b
```

```
ans =
    5.8750    %0101.11100
    s9,5
```

In FullPrecision mode, the product word length grows to the sum of the word lengths of the operands. In this case, each operand has 8 bits, so the product word length is 16 bits. The product fraction length is the sum of the fraction lengths of the operands, in this case $5 + 5 = 10$ bits.

The sum word length grows by one most significant bit to accommodate the possibility of a carry bit. The sum fraction length aligns with the fraction lengths of the operands, and

all fractional bits are kept for full precision. In this case, both operands have 5 fractional bits, so the sum has 5 fractional bits.

KeepLSB

Now, set `ProductMode` and `SumMode` for `a` and `b` to `KeepLSB` and look at some results:

```
F.ProductMode = 'KeepLSB';
F.ProductWordLength = 12;
F.SumMode = 'KeepLSB';
F.SumWordLength = 12;
a.fimath = F;
b.fimath = F;
a
a =
    3.1563    %011.00101
      s8,5

b
b =
    2.7188    %010.10111
      s8,5

a*b
ans =
    0.5811    %00.1001010011
      s12,10

a+b
ans =
    5.8750    %0000101.11100
      s12,5
```

In `KeepLSB` mode, you specify the word lengths and the least significant bits of results are automatically kept. This mode models the behavior of integer operations in the C language.

The product fraction length is the sum of the fraction lengths of the operands. In this case, each operand has 5 fractional bits, so the product fraction length is 10 bits. In this mode, all 10 fractional bits are kept. Overflow occurs because the full-precision result requires 6 integer bits, and only 2 integer bits remain in the product.

The sum fraction length aligns with the fraction lengths of the operands, and in this model all least significant bits are kept. In this case, both operands had 5 fractional bits, so the sum has 5 fractional bits. The full-precision result requires 4 integer bits, and 7 integer bits remain in the sum, so no overflow occurs in the sum.

KeepMSB

Now, set ProductMode and SumMode for a and b to KeepMSB and look at some results:

```
F.ProductMode = 'KeepMSB';
F.ProductWordLength = 12;
F.SumMode = 'KeepMSB';
F.SumWordLength = 12;
a.fimath = F;
b.fimath = F;
a
a =
    3.1563    %011.00101
      s8,5

b
b =
    2.7188    %010.10111
      s8,5

a*b
ans =
    8.5781    %001000.100101
      s12,6

a+b
ans =
    5.8750    %0101.11100000
      s12,8
```

In **KeepMSB** mode, you specify the word lengths and the most significant bits of sum and product results are automatically kept. This mode models the behavior of many DSP devices where the product and sum are kept in double-wide registers, and the programmer chooses to transfer the most significant bits from the registers to memory after each operation.

The full-precision product requires 6 integer bits, and the fraction length of the product is adjusted to accommodate all 6 integer bits in this mode. No overflow occurs. However, the full-precision product requires 10 fractional bits, and only 6 are available. Therefore, precision is lost.

The full-precision sum requires 4 integer bits, and the fraction length of the sum is adjusted to accommodate all 4 integer bits in this mode. The full-precision sum requires only 5 fractional bits; in this case there are 8, so there is no loss of precision.

This example shows that, in `KeepMSB` mode the fraction length changes regardless of whether an overflow occurs. The fraction length is set to the amount needed to represent the product in case both terms use the maximum possible value ($18+18-16=20$ in this example).

```
F = fimath('SumMode','KeepMSB','ProductMode','KeepMSB',...
          'ProductWordLength',16,'SumWordLength',16);
a = fi(100,1,16,-2,'fimath',F);
a*a
```

```
ans =
```

```
0
```

```
      DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
      WordLength: 16
      FractionLength: -20

      RoundingMethod: Nearest
      OverflowAction: Saturate
      ProductMode: KeepMSB
      ProductWordLength: 16
      SumMode: KeepMSB
      SumWordLength: 16
      CastBeforeSum: true
```

SpecifyPrecision

Now set `ProductMode` and `SumMode` for `a` and `b` to `SpecifyPrecision` and look at some results:

```
F.ProductMode = 'SpecifyPrecision';
F.ProductWordLength = 8;
```



```

F.ProductFractionLength = 7;
F.SumMode = 'SpecifyPrecision';
F.SumWordLength = 8;
F.SumFractionLength = 7;
a.fimath = F;
b.fimath = F;

```

```
a
```

```
a =
    3.1563    %011.00101
      s8,5
```

```
b
```

```
b =
    2.7188    %010.10111
      s8,5
```

```
a*b
```

```
ans =
    0.5781    %0.1001010
      s8,7
```

```
a+b
```

```
ans =
   -0.1250    %1.1110000
      s8,7
```

In **SpecifyPrecision** mode, you must specify both word length and fraction length for sums and products. This example unwisely uses fractional formats for the products and sums, with 8-bit word lengths and 7-bit fraction lengths.

The full-precision product requires 6 integer bits, and the example specifies only 1, so the product overflows. The full-precision product requires 10 fractional bits, and the example only specifies 7, so there is precision loss in the product.

The full-precision sum requires 4 integer bits, and the example specifies only 1, so the sum overflows. The full-precision sum requires 5 fractional bits, and the example specifies 7, so there is no loss of precision in the sum.

For more information about the `fimath` object and its properties, see “`fimath` Object Properties” on page 4-5

How Functions Use fimath

In this section...
“Functions that use then discard attached fimath” on page 4-32
“Functions that ignore and discard attached fimath” on page 4-32
“Functions that do not perform math” on page 4-33

Functions that use then discard attached fimath

Functions	Note
conv, filter	Error if attached fimaths differ.
mean, median	—

Functions that ignore and discard attached fimath

Functions	Note
accumneg, accumpos	<ul style="list-style-type: none"> By default, use Floor rounding method and Wrap overflow
add, sub, mpy	<ul style="list-style-type: none"> Override and discard any fimath objects attached to the input fi objects Uses the fimath from input, F, as in add(F, a, b)
CORDIC functions — cordicabs, cordicangle, cordicatan2, cordiccart2pol, cordiccexp, cordicccos, cordicpol2cart, cordicrotate, cordicsin, cordicsincos, cordicsqrt	CORDIC functions use their own internal fimath: <ul style="list-style-type: none"> Rounding Mode – Floor Overflow Action – Wrap
mod	—
qr	—
quantize	Uses the math settings on the quantizer object, ignores and discards any fimath settings on the input

Functions	Note
Trigonometric functions — <code>atan2</code> , <code>cos</code> , <code>sin</code>	—

Functions that do not perform math

Functions	Note
Built-in Types— <code>int32</code> , <code>int64</code> , <code>int8</code> , <code>uint16</code> , <code>uint32</code> , <code>uint64</code> , <code>uint8</code>	Ignore any <code>fimath</code> settings on the input. Always use the rounding method <code>Round</code> when casting to the new data type. The output is not a <code>fi</code> object so it has no attached <code>fimath</code> .
<code>bitshift</code> , <code>bitsra</code> , <code>bitsrl</code>	<code>OverflowAction</code> and <code>RoundingMethod</code> are ignored — bits drop off the end.
<code>bitshift</code>	<code>RoundingMethod</code> is ignored, but <code>OverflowAction</code> property is obeyed.

Working with fipref Objects

- “fipref Object Construction” on page 5-2
- “fipref Object Properties” on page 5-3
- “fi Object Display Preferences Using fipref” on page 5-5
- “Underflow and Overflow Logging Using fipref” on page 5-7
- “Data Type Override Preferences Using fipref” on page 5-12

fipref Object Construction

The `fipref` object defines the display and logging attributes for all `fi` objects. You can use the `fipref` constructor function to create a new object.

To get started, type

```
P = fipref
```

to create a default `fipref` object.

```
P =  
    NumberDisplay: 'RealWorldValue'  
    NumericTypeDisplay: 'full'  
    FimathDisplay: 'full'  
    LoggingMode: 'Off'  
    DataTypeOverride: 'ForceOff'
```

The syntax

```
P = fipref(... 'PropertyName', 'PropertyValue' ...)
```

allows you to set properties for a `fipref` object at object creation with property name/property value pairs.

Your `fipref` settings persist throughout your MATLAB session. Use `reset(fipref)` to return to the default settings during your session. Use `savefipref` to save your display preferences for subsequent MATLAB sessions.

fipref Object Properties

In this section...

“Display, Data Type Override, and Logging Properties” on page 5-3

“fipref Object Properties Setting” on page 5-3

Display, Data Type Override, and Logging Properties

The following properties of `fipref` objects are always writable:

- `FimathDisplay` — Display options for the local `fimath` attributes of a `fi` object
- `DataTypeOverride` — Data type override options
- `LoggingMode` — Logging options for operations performed on `fi` objects
- `NumericTypeDisplay` — Display options for the numeric type attributes of a `fi` object
- `NumberDisplay` — Display options for the value of a `fi` object

These properties are described in detail in the “fi Object Properties”. To learn how to specify properties for `fipref` objects in Fixed-Point Designer software, refer to “fipref Object Properties Setting” on page 5-3.

fipref Object Properties Setting

Setting fipref Properties at Object Creation

You can set properties of `fipref` objects at the time of object creation by including properties after the arguments of the `fipref` constructor function. For example, to set `NumberDisplay` to `bin` and `NumericTypeDisplay` to `short`,

```
P = fipref('NumberDisplay', 'bin', ...
        'NumericTypeDisplay', 'short')
```

```
P =
    NumberDisplay: 'bin'
 NumericTypeDisplay: 'short'
    FimathDisplay: 'full'
    LoggingMode: 'Off'
  DataTypeOverride: 'ForceOff'
```

Using Direct Property Referencing with fipref

You can reference directly into a property for setting or retrieving `fipref` object property values using MATLAB structure-like referencing. You do this by using a period to index into a property by name.

For example, to get the `NumberDisplay` of `P`,

```
P.NumberDisplay
```

```
ans =
```

```
bin
```

To set the `NumericTypeDisplay` of `P`,

```
P.NumericTypeDisplay = 'full'
```

```
P =
```

```
    NumberDisplay: 'bin'  
 NumericTypeDisplay: 'full'  
    FimathDisplay: 'full'  
    LoggingMode: 'Off'  
    DataTypeOverride: 'ForceOff'
```


fi Object Display Preferences Using fipref

You use the `fipref` object to specify three aspects of the display of `fi` objects: the object value, the local `fimath` properties, and the `numericType` properties.

For example, the following code shows the default `fipref` display for a `fi` object with a local `fimath` object:

```
a = fi(pi, 'RoundingMethod', 'Floor', 'OverflowAction', 'Wrap')
a =
    3.1415

        DataTypeMode: Fixed-point: binary point scaling
           Signedness: Signed
          WordLength: 16
    FractionLength: 13

        RoundingMethod: Floor
        OverflowAction: Wrap
           ProductMode: FullPrecision
           SumMode: FullPrecision
```

The default `fipref` display for a `fi` object with no local `fimath` is as follows:

```
a = fi(pi)
a =
    3.1416

        DataTypeMode: Fixed-point: binary point scaling
           Signedness: Signed
          WordLength: 16
    FractionLength: 13
```

Next, change the `fipref` display properties:

```
P = fipref;
P.NumberDisplay = 'bin';
P.NumericTypeDisplay = 'short';
P.FimathDisplay = 'none'
```

```
P =  
    NumberDisplay: 'bin'  
    NumericTypeDisplay: 'short'  
    FimathDisplay: 'none'  
    LoggingMode: 'Off'  
    DataTypeOverride: 'ForceOff'
```

a

```
a =  
0110010010000111  
    s16,13
```

For more information on the default `fipref` display, see “View Fixed-Point Data”.

Underflow and Overflow Logging Using `fipref`

In this section...

“Logging Overflows and Underflows as Warnings” on page 5-7

“Accessing Logged Information with Functions” on page 5-9

Logging Overflows and Underflows as Warnings

Overflows and underflows are logged as warnings for all assignment, plus, minus, and multiplication operations when the `fipref` `LoggingMode` property is set to `on`. For example, try the following:

- 1 Create a signed `fi` object that is a vector of values from 1 to 5, with 8-bit word length and 6-bit fraction length.

```
a = fi(1:5,1,8,6);
```

- 2 Define the `fimath` object associated with `a`, and indicate that you will specify the sum and product word and fraction lengths.

```
F = a.fimath;  
F.SumMode = 'SpecifyPrecision';  
F.ProductMode = 'SpecifyPrecision';  
a.fimath = F;
```

- 3 Define the `fipref` object and turn on overflow and underflow logging.

```
P = fipref;  
P.LoggingMode = 'on';
```

- 4 Suppress the `numericType` and `fimath` displays.

```
P.NumericTypeDisplay = 'none';  
P.FimathDisplay = 'none';
```

- 5 Specify the sum and product word and fraction lengths.

```
a.SumWordLength = 16;  
a.SumFractionLength = 15;  
a.ProductWordLength = 16;  
a.ProductFractionLength = 15;
```

- 6 Warnings are displayed for overflows and underflows in assignment operations. For example, try:

```
a(1) = pi
Warning: 1 overflow occurred in the fi assignment operation.
```

```
a =
    1.9844    1.9844    1.9844    1.9844    1.9844
```

```
a(1) = double(eps(a))/10
Warning: 1 underflow occurred in the fi assignment operation.
```

```
a =
    0    1.9844    1.9844    1.9844    1.9844
```

- 7** Warnings are displayed for overflows and underflows in addition and subtraction operations. For example, try:

```
a+a
Warning: 12 overflows occurred in the fi + operation.
```

```
ans =
    0    1.0000    1.0000    1.0000    1.0000
```

```
a-a
Warning: 8 overflows occurred in the fi - operation.
```

```
ans =
    0    0    0    0    0
```

- 8** Warnings are displayed for overflows and underflows in multiplication operations. For example, try:

```
a.*a
Warning: 4 product overflows occurred in the fi .* operation.
```

```
ans =
    0    1.0000    1.0000    1.0000    1.0000
```

```
a*a'
Warning: 4 product overflows occurred in the fi * operation.
Warning: 3 sum overflows occurred in the fi * operation.
```

```
ans =  
1.0000
```

The final example above is a complex multiplication that requires both multiplication and addition operations. The warnings inform you of overflows and underflows in both.

Because overflows and underflows are logged as warnings, you can use the `dbstop` MATLAB function with the syntax

```
dbstop if warning
```

to find the exact lines in a file that are causing overflows or underflows.

Use

```
dbstop if warning fi:underflow
```

to stop only on lines that cause an underflow. Use

```
dbstop if warning fi:overflow
```

to stop only on lines that cause an overflow.

Accessing Logged Information with Functions

When the `fipref LoggingMode` property is set to `on`, you can use the following functions to return logged information about assignment and creation operations to the MATLAB command line:

- `maxlog` — Returns the maximum real-world value
- `minlog` — Returns the minimum value
- `noverflows` — Returns the number of overflows
- `nunderflows` — Returns the number of underflows

`LoggingMode` must be set to `on` before you perform any operation in order to log information about it. To clear the log, use the function `resetlog`.

For example, consider the following. First turn logging on, then perform operations, and then finally get information about the operations:

```
fipref('LoggingMode', 'on');
```

```
x = fi([-1.5 eps 0.5], true, 16, 15);
x(1) = 3.0;
maxlog(x)

ans =

    1.0000

minlog(x)

ans =

    -1

noverflows(x)

ans =

     2

nunderflows(x)

ans =

     1
```

Next, reset the log and request the same information again. Note that the functions return empty [], because logging has been reset since the operations were run:

```
resetlog(x)
maxlog(x)

ans =

    []

minlog(x)

ans =

    []

noverflows(x)

ans =
```

```
    []  
nunderflows(x)  
ans =  
    []
```

Data Type Override Preferences Using fipref

In this section...

“Overriding the Data Type of fi Objects” on page 5-12

“Data Type Override for Fixed-Point Scaling” on page 5-13

Overriding the Data Type of fi Objects

Use the `fipref` `DataTypeOverride` property to override `fi` objects with singles, doubles, or scaled doubles. Data type override only occurs when the `fi` constructor function is called. Objects that are created while data type override is on have the overridden data type. They maintain that data type when data type override is later turned off. To obtain an object with a data type that is not the override data type, you must create an object when data type override is off:

```
p = fipref('DataTypeOverride', 'TrueDoubles')
```

```
p =
```

```
    NumberDisplay: 'RealWorldValue'  
    NumericTypeDisplay: 'full'  
    FimathDisplay: 'full'  
    LoggingMode: 'Off'  
    DataTypeOverride: 'TrueDoubles'
```

```
a = fi(pi)
```

```
a =
```

```
    3.1416
```

```
    DataTypeMode: Double
```

```
p = fipref('DataTypeOverride', 'ForceOff')
```

```
p =
```

```
    NumberDisplay: 'RealWorldValue'  
    NumericTypeDisplay: 'full'  
    FimathDisplay: 'full'
```



```
        LoggingMode: 'Off'
        DataTypeOverride: 'ForceOff'

a
a =
    3.1416
        DataTypeMode: Double

b = fi(pi)
b =
    3.1416
        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 16
        FractionLength: 13
```

Tip To reset the `fipref` object to its default values use `reset(fipref)` or `reset(p)`, where `p` is a `fipref` object. This is useful to ensure that data type override and logging are off.

Data Type Override for Fixed-Point Scaling

Choosing the scaling for the fixed-point variables in your algorithms can be difficult. In Fixed-Point Designer software, you can use a combination of data type override and `min/max` logging to help you discover the numerical ranges that your fixed-point data types need to cover. These ranges dictate the appropriate scalings for your fixed-point data types. In general, the procedure is

- 1 Implement your algorithm using fixed-point `fi` objects, using initial “best guesses” for word lengths and scalings.
- 2 Set the `fipref` `DataTypeOverride` property to `ScaledDoubles`, `TrueSingles`, or `TrueDoubles`.
- 3 Set the `fipref` `LoggingMode` property to `on`.
- 4 Use the `maxlog` and `minlog` functions to log the maximum and minimum values achieved by the variables in your algorithm in floating-point mode.

- 5 Set the `fipref DataTypeOverride` property to `ForceOff`.
- 6 Use the information obtained in step 4 to set the fixed-point scaling for each variable in your algorithm such that the full numerical range of each variable is representable by its data type and scaling.

A detailed example of this process is shown in the Fixed-Point Designer Setting Fixed-Point Data Types Using Min/Max Instrumentation example.

Working with numerictype Objects

- “numerictype Object Construction” on page 6-2
- “numerictype Object Properties” on page 6-6
- “numerictype of Fixed-Point Objects” on page 6-12
- “numerictype Objects Usage to Share Data Type and Scaling Settings of fi objects” on page 6-15

numerictype Object Construction

In this section...

“numerictype Object Syntaxes” on page 6-2

“Example: Construct a numerictype Object with Property Name and Property Value Pairs” on page 6-3

“Example: Copy a numerictype Object” on page 6-4

“Example: Build numerictype Object Constructors in a GUI” on page 6-4

numerictype Object Syntaxes

numerictype objects define the data type and scaling attributes of `fi` objects, as well as Simulink signals and model parameters. You can create numerictype objects in Fixed-Point Designer software in one of two ways:

- You can use the `numerictype` constructor function to create a new object.
- You can use the `numerictype` constructor function to copy an existing numerictype object.

To get started, type

```
T = numerictype
```

to create a default numerictype object.

```
T =
```

```
      DataTypeMode: Fixed-point: binary point scaling  
      Signedness: Signed  
      WordLength: 16  
      FractionLength: 15
```

To see all of the numerictype object syntaxes, refer to the numerictype constructor function reference page.

The following examples show different ways of constructing numerictype objects. For more examples of constructing numerictype objects, see the “Examples” on the numerictype constructor function reference page.

Example: Construct a numerictype Object with Property Name and Property Value Pairs

When you create a `numerictype` object using property name and property value pairs, Fixed-Point Designer software first creates a default `numerictype` object, and then, for each property name you specify in the constructor, assigns the corresponding value.

This behavior differs from the behavior that occurs when you use a syntax such as `T = numerictype(s,w)`, where you only specify the property values in the constructor. Using such a syntax results in no default `numerictype` object being created, and the `numerictype` object receives only the assigned property values that are specified in the constructor.

The following example shows how the property name/property value syntax creates a slightly different `numerictype` object than the property values syntax, even when you specify the same property values in both constructors.

To demonstrate this difference, suppose you want to create an unsigned `numerictype` object with a word length of 32 bits.

First, create the `numerictype` object using property name/property value pairs.

```
T1 = numerictype('Signed',0,'WordLength',32)
```

```
T1 =
```

```

    DataTypeMode: Fixed-point: binary point scaling
        Signedness: Unsigned
        WordLength: 32
    FractionLength: 15

```

The `numerictype` object `T1` has the same `DataTypeMode` and `FractionLength` as a default `numerictype` object, but the `WordLength` and `Signed` properties are overwritten with the values you specified.

Now, create another unsigned 32 bit `numerictype` object, but this time specify only property values in the constructor.

```
T2 = numerictype(0,32)
```

```
T2 =
```

```
DataTypeMode: Fixed-point: unspecified scaling
Signedness: Unsigned
WordLength: 32
```

Unlike T1, T2 only has the property values you specified. The `DataTypeMode` of T2 is `Fixed-Point: unspecified scaling`, so no fraction length is assigned.

`fi` objects cannot have unspecified `numerictype` properties. Thus, all unspecified `numerictype` object properties become specified at the time of `fi` object creation.

Example: Copy a numerictype Object

To copy a `numerictype` object, simply use assignment as in the following example:

```
T = numerictype;
U = T;
isequal(T,U)
```


```
ans =
```

```
1
```


Example: Build numerictype Object Constructors in a GUI

When you are working with files in MATLAB, you can build your `numerictype` object constructors using the **Insert numerictype Constructor** dialog box. After specifying the properties of the `numerictype` object in the dialog box, you can insert the prepopulated `numerictype` object constructor string at a specific location in your file.

For example, to create a signed `numerictype` object with binary-point scaling, a word length of 32 bits and a fraction length of 30 bits, perform the following steps:

- 1 On the **Home** tab, in the **File** section, click **New > Script** to open the MATLAB Editor
- 2 On the **Editor** tab, in the **Edit** section, click  in the **Insert** button group. Click the **Insert numerictype...** to open the **Insert numerictype Constructor** dialog box.
- 3 Use the edit boxes and drop-down menus to specify the following properties of the `numerictype` object:

- **Data type mode** = Fixed-point: binary point scaling
- **Signedness** = Signed
- **Word length** = 32
- **Fraction length** = 30

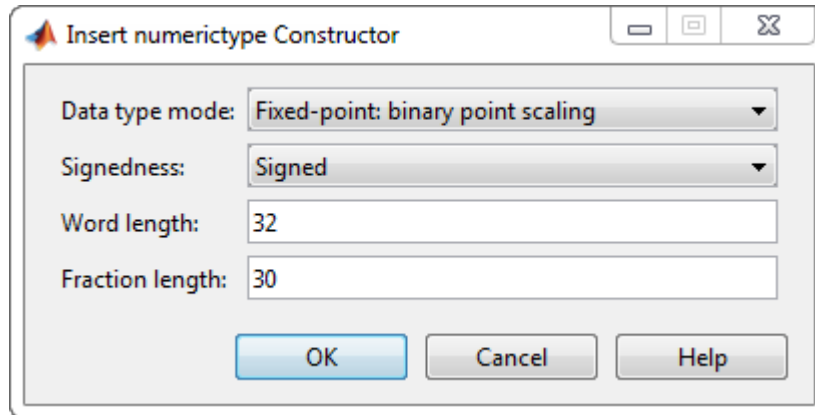

- 4 To insert the `numerictype` object constructor string in your file, place your cursor at the desired location in the file, and click **OK** on the **Insert numerictype Constructor** dialog box. Clicking **OK** closes the **Insert numerictype Constructor** dialog box and automatically populates the `numerictype` object constructor string in your file:

```
5 T numerictype(1, 32, 30)
```

numerictype Object Properties

In this section...

“Data Type and Scaling Properties” on page 6-6

“How Properties are Related” on page 6-9

“Set numerictype Object Properties” on page 6-10

Data Type and Scaling Properties

All properties of a `numerictype` object are writable. However, the `numerictype` properties of a `fi` object become read only after the `fi` object has been created. Any `numerictype` properties of a `fi` object that are unspecified at the time of `fi` object creation are automatically set to their default values. The properties of a `numerictype` object are:

Property	Description	Valid Values
Bias	Bias associated with the object. Along with the slope, the bias forms the scaling of a fixed-point number.	<ul style="list-style-type: none"> Any floating-point number
DataType	Data type category	<ul style="list-style-type: none"> Fixed (default) — Fixed-point or integer data type boolean — Built-in MATLAB boolean data type double — Built-in MATLAB double data type ScaledDouble — Scaled double data type single — Built-in MATLAB single data type
DataTypeMod	Data type and scaling associated with the object	<ul style="list-style-type: none"> Fixed-point: binary point scaling (default) — Fixed-point data type and scaling defined by the word length and fraction length Boolean — Built-in boolean Double — Built-in double

Property	Description	Valid Values
		<ul style="list-style-type: none"> • Fixed-point: slope and bias scaling — Fixed-point data type and scaling defined by the slope and bias • Fixed-point: unspecified scaling — Fixed-point data type with unspecified scaling • Scaled double: binary point scaling — Double data type with fixed-point word length and fraction length information retained • Scaled double: slope and bias scaling — Double data type with fixed-point slope and bias information retained • Scaled double: unspecified scaling — Double data type with unspecified fixed-point scaling • Single — Built-in single
FixedExponent	Fixed-point exponent associated with the object	<ul style="list-style-type: none"> • Any integer <hr/> <p>Note: The FixedExponent property is the negative of the FractionLength. Changing one property changes the other.</p>
FractionLength	Fraction length of the stored integer value, in bits	<ul style="list-style-type: none"> • Best precision fraction length based on value of the object and the word length (default) • Any integer <hr/> <p>Note: The FractionLength property is the negative of the FixedExponent. Changing one property changes the other.</p>

Property	Description	Valid Values
Scaling	Scaling mode of the object	<ul style="list-style-type: none"> • BinaryPoint (default) — Scaling for the <code>fi</code> object is defined by the fraction length. • SlopeBias — Scaling for the <code>fi</code> object is defined by the slope and bias. • Unspecified — A temporary setting that is only allowed at <code>fi</code> object creation, to allow for the automatic assignment of a binary point best-precision scaling.
Signed	<p>Whether the object is signed</p> <hr/> <p>Note: Although the Signed property is still supported, the Signedness property always appears in the numerictype object display. If you choose to change or set the signedness of your numerictype objects using the Signed property, MATLAB updates the corresponding value of the Signedness property.</p>	<ul style="list-style-type: none"> • true (default) — signed • false — unsigned • 1 — signed • 0 — unsigned • [] — auto
Signedness	Whether the object is signed, unsigned, or has an unspecified sign	<ul style="list-style-type: none"> • Signed (default) • Unsigned • Auto — unspecified sign
Slope	<p>Slope associated with the object</p> <p>Along with the bias, the slope forms the scaling of a fixed-point number.</p>	<ul style="list-style-type: none"> • Any floating-point number <hr/> <p>Note:</p> $slope = slope\ adjustment\ factor \times 2^{fixed\ exponent}$ <p>Changing one of these properties changes the other.</p>

Property	Description	Valid Values
Slope AdjustmentFactor	Slope adjustment associated with the object	<ul style="list-style-type: none"> Any number greater than or equal to 1 and less than 2
	The slope adjustment is equivalent to the fractional slope of a fixed-point number.	<p>Note:</p> $slope = slope\ adjustment\ factor \times 2^{fixed\ exponent}$ <p>Changing one of these properties changes the other.</p>
WordLength	Word length of the stored integer value, in bits	<ul style="list-style-type: none"> 16 (default) Any positive integer

These properties are described in detail in the “fi Object Properties”. To learn how to specify properties for `numerictype` objects in Fixed-Point Designer software, refer to “Set numerictype Object Properties” on page 6-10.

How Properties are Related

Properties that affect the slope

The **Slope** field of the `numerictype` object is related to the `SlopeAdjustmentFactor` and `FixedExponent` properties by

$$slope = slope\ adjustment\ factor \times 2^{fixed\ exponent}$$

The `FixedExponent` and `FractionLength` properties are related by

$$fixed\ exponent = -fraction\ length$$

If you set the `SlopeAdjustmentFactor`, `FixedExponent`, or `FractionLength` property, the **Slope** field is modified.

Stored integer value and real world value

In binary point scaling the `numerictype` `StoredIntegerValue` and `RealWorldValue` properties are related according to

$$\text{real-world value} = \text{stored integer value} \times 2^{\text{fraction length}}$$

In [Slope Bias] scaling the `RealWorldValue` can be represented by

$$\begin{aligned} \text{real-world value} = \\ \text{stored integer value} \times (\text{slope adjustment factor} \times 2^{\text{fixed exponent}}) + \text{bias} \end{aligned}$$

which is equivalent to

$$\text{real-world value} = (\text{slope} \times \text{stored integer}) + \text{bias}$$

If any of these properties are updated, the others are modified accordingly.

Set numerictype Object Properties

Setting numerictype Properties at Object Creation

You can set properties of `numerictype` objects at the time of object creation by including properties after the arguments of the `numerictype` constructor function.

For example, to set the word length to 32 bits and the fraction length to 30 bits,

```
T = numerictype('WordLength', 32, 'FractionLength', 30)
T =
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 32
FractionLength: 30
```

In addition to creating a `numerictype` object at the command line, you can also set `numerictype` properties using the **Insert numerictype Constructor** dialog box. For an example of this approach, see “Example: Build numerictype Object Constructors in a GUI” on page 6-4.

Use Direct Property Referencing with numerictype Objects

You can reference directly into a property for setting or retrieving `numerictype` object property values using MATLAB structure-like referencing. You do this by using a period to index into a property by name.

For example, to get the word length of T,

```
T.WordLength
```

```
ans =
```

```
32
```

To set the fraction length of T,

```
T.FractionLength = 31
```

```
T =
```

```
    DataTypeMode: Fixed-point: binary point scaling  
    Signedness: Signed  
    WordLength: 32  
    FractionLength: 31
```

numerictype of Fixed-Point Objects

In this section...

“Valid Values for numerictype Object Properties” on page 6-12

“Properties That Affect the Slope” on page 6-14

“Stored Integer Value and Real World Value” on page 6-14

Valid Values for numerictype Object Properties

The `numerictype` object contains all the data type and scaling attributes of a fixed-point object. The `numerictype` object behaves like any MATLAB object, except that it only lets you set valid values for defined fields. The following table shows the possible settings of each field of the object.

Note When you create a `fi` object, any unspecified field of the `numerictype` object reverts to its default value. Thus, if the `DataTypeMode` is set to `unspecified` scaling, it defaults to `binary point` scaling when the `fi` object is created. If the `Signedness` property of the `numerictype` object is set to `Auto`, it defaults to `Signed` when the `fi` object is created.

<code>DataTypeMode</code>	<code>DataType</code>	<code>Scaling</code>	<code>Signedness</code>	<code>Word- Length</code>	<code>Fraction- Length</code>	<code>Slope</code>	<code>Bias</code>
<i>Fixed-point data types</i>							
Fixed-point: binary point scaling	Fixed	BinaryPoint	Signed Unsigned Auto	Positive integer from 1 to 65,536	Positive or negative integer	$2^{(-}$ fraction length)	0
Fixed-point: slope and bias scaling	Fixed	SlopeBias	Signed Unsigned Auto	Positive integer from 1 to 65,536	N/A	Any floating- point number	Any floating- point number

DataTypeMode	DataType	Scaling	Signedness	Word- Length	Fraction- Length	Slope	Bias
Fixed-point: unspecified scaling	Fixed	Unspecified	Signed Unsigned Auto	Positive integer from 1 to 65,536	N/A	N/A	N/A
<i>Scaled double data types</i>							
Scaled double: binary point scaling	ScaledDoub1	BinaryPoint	Signed Unsigned Auto	Positive integer from 1 to 65,536	Positive or negative integer	2 ^(- fraction length)	0
Scaled double: slope and bias scaling	ScaledDoub1	SlopeBias	Signed Unsigned Auto	Positive integer from 1 to 65,536	N/A	Any floating- point number	Any floating- point number
Scaled double: unspecified scaling	ScaledDoub1	Unspecified	Signed Unsigned Auto	Positive integer from 1 to 65,536	N/A	N/A	N/A
<i>Built-in data types</i>							
Double	double	N/A	1 true	64	0	1	0
Single	single	N/A	1 true	32	0	1	0
Boolean	boolean	N/A	0 false	1	0	1	0

You cannot change the numericType properties of a fi object after fi object creation.

Properties That Affect the Slope

The **Slope** field of the numerictype object is related to the SlopeAdjustmentFactor and FixedExponent properties by

$$\text{slope} = \text{slope adjustment factor} \times 2^{\text{fixed exponent}}$$

The FixedExponent and FractionLength properties are related by

$$\text{fixed exponent} = -\text{fraction length}$$

If you set the SlopeAdjustmentFactor, FixedExponent, or FractionLength property, the **Slope** field is modified.

Stored Integer Value and Real World Value

In binary point scaling the numerictype StoredIntegerValue and RealWorldValue properties are related according to

$$\text{real-world value} = \text{stored integer value} \times 2^{\text{fraction length}}$$

In [Slope Bias] scaling the RealWorldValue can be represented by

$$\text{real-world value} = \text{stored integer value} \times (\text{slope adjustment factor} \times 2^{\text{fixed exponent}}) + \text{bias}$$

which is equivalent to

$$\text{real-world value} = (\text{slope} \times \text{stored integer}) + \text{bias}$$

If any of these properties are updated, the others are modified accordingly.

For more detail on these properties see “numerictype Object Properties” on page 6-6.

For more information on scaling see “Data Types and Scaling”

numerictype Objects Usage to Share Data Type and Scaling Settings of fi objects

You can use a `numerictype` object to define common data type and scaling rules that you would like to use for many `fi` objects. You can then create multiple `fi` objects, using the same `numerictype` object for each.

Example 1

In the following example, you create a `numerictype` object `T` with word length 32 and fraction length 28. Next, to ensure that your `fi` objects have the same `numerictype` attributes, create `fi` objects `a` and `b` using your `numerictype` object `T`.

```
format long g
T = numerictype('WordLength',32, 'FractionLength',28)

T =

    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 32
    FractionLength: 28

a = fi(pi,T)

a =

    3.1415926553309

    DataTypeMode: Fixed-point: binary point scaling
    Signedness: Signed
    WordLength: 32
    FractionLength: 28

b = fi(pi/2, T)

b =

    1.5707963258028
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 32
FractionLength: 28
```

Example 2

In this example, start by creating a `numerictype` object `T` with [Slope Bias] scaling. Next, use that object to create two `fi` objects, `c` and `d` with the same `numerictype` attributes:

```
T = numerictype('Scaling','slopebias','Slope', 2^2, 'Bias', 0)
```

```
T =
```

```
DataTypeMode: Fixed-point: slope and bias scaling
Signedness: Signed
WordLength: 16
Slope: 2^2
Bias: 0
```

```
c = fi(pi, T)
```

```
c =
```

```
4
```

```
DataTypeMode: Fixed-point: slope and bias scaling
Signedness: Signed
WordLength: 16
Slope: 2^2
Bias: 0
```

```
d = fi(pi/2, T)
```

```
d =
```

```
0
```

```
DataTypeMode: Fixed-point: slope and bias scaling
Signedness: Signed
WordLength: 16
Slope: 2^2
Bias: 0
```

For more detail on the properties of `numerictype` objects see “`numerictype` Object Properties” on page 6-6.

Working with quantizer Objects

- “Constructing quantizer Objects” on page 7-2
- “quantizer Object Properties” on page 7-3
- “Quantizing Data with quantizer Objects” on page 7-4
- “Transformations for Quantized Data” on page 7-6

Constructing quantizer Objects

You can use `quantizer` objects to quantize data sets. You can create `quantizer` objects in Fixed-Point Designer software in one of two ways:

- You can use the `quantizer` constructor function to create a new object.
- You can use the `quantizer` constructor function to copy a `quantizer` object.

To create a `quantizer` object with default properties, type

```
q = quantizer

q =

    DataMode = fixed
  RoundingMethod = Floor
  OverflowAction = Saturate
    Format = [16 15]
```

To copy a `quantizer` object, simply use assignment as in the following example:

```
q = quantizer;
r = q;
isequal(q,r)

ans =

    1
```

A listing of all the properties of the `quantizer` object `q` you just created is displayed along with the associated property values. All property values are set to defaults when you construct a `quantizer` object this way. See “`quantizer` Object Properties” on page 7-3 for more details.

quantizer Object Properties

The following properties of `quantizer` objects are always writable:

- `DataMode` — Type of arithmetic used in quantization
- `Format` — Data format of a `quantizer` object
- `OverflowAction` — Action to take on overflow
- `RoundingMethod` — Rounding method

See the “fi Object Properties” for more details about these properties, including their possible values.

For example, to create a fixed-point `quantizer` object with

- The `Format` property value set to `[16,14]`
- The `OverflowAction` property value set to `'Saturate'`
- The `RoundingMethod` property value set to `'Ceiling'`

type

```
q = quantizer('datamode','fixed','format',[16,14],...  
             'OverflowMode','saturate','RoundMode','ceil')
```

You do not have to include `quantizer` object property names when you set `quantizer` object property values.

For example, you can create `quantizer` object `q` from the previous example by typing

```
q = quantizer('fixed',[16,14],'saturate','ceil')
```

Note You do not have to include default property values when you construct a `quantizer` object. In this example, you could leave out `'fixed'` and `'saturate'`.

Quantizing Data with quantizer Objects

You construct a `quantizer` object to specify the quantization parameters to use when you quantize data sets. You can use the `quantize` function to quantize data according to a `quantizer` object's specifications.

Once you quantize data with a `quantizer` object, its state values might change.

The following example shows

- How you use `quantize` to quantize data
 - How quantization affects `quantizer` object states
 - How you reset `quantizer` object states to their default values using `reset`
- 1 Construct an example data set and a `quantizer` object.

```
format long g
rng('default');
x = randn(100,4);
q = quantizer([16,14]);
```

- 2 Retrieve the values of the `maxlog` and `noverflows` states.

```
q.maxlog
ans =
    -1.79769313486232e+308

q.noverflows
ans =
     0
```

Note that `maxlog` is equal to `-realmax`, which indicates that the quantizer `q` is in a reset state.

- 3 Quantize the data set according to the `quantizer` object's specifications.

```
y = quantize(q,x);
Warning: 626 overflow(s) occurred in the fi quantize operation.
```

- 4 Check the values of `maxlog` and `noverflows`.


```
q.maxlog
```

```
ans =
```

```
1.99993896484375
```

```
q.noverflows
```

```
ans =
```

```
626
```

Note that the maximum logged value was taken after quantization, that is, `q.maxlog == max(y)`.

- 5 Reset the quantizer states and check them.

```
reset(q)
```

```
q.maxlog
```

```
ans =
```

```
-1.79769313486232e+308
```

```
q.noverflows
```

```
ans =
```

```
0
```

Transformations for Quantized Data

You can convert data values from numeric to hexadecimal or binary according to a `quantizer` object's specifications.

Use

- `num2bin` to convert data to binary
- `num2hex` to convert data to hexadecimal
- `hex2num` to convert hexadecimal data to numeric
- `bin2num` to convert binary data to numeric

For example,

```
q = quantizer([3 2]);
x = [0.75  -0.25
     0.50  -0.50
     0.25  -0.75
     0     -1  ];
b = num2bin(q,x)
```

```
b =
011
010
001
000
111
110
101
100
```

produces all two's complement fractional representations of 3-bit fixed-point numbers.

Automated Fixed-Point Conversion

- “Fixed-Point Conversion Workflows” on page 8-2
- “Automated Fixed-Point Conversion” on page 8-4
- “Best Practices for Debugging Out-of-the-Box Conversion by the Fixed-Point Converter” on page 8-25
- “MATLAB Language Features Supported for Automated Fixed-Point Conversion” on page 8-47
- “Generated Fixed-Point Code” on page 8-50
- “Fixed-Point Code for MATLAB Classes” on page 8-56
- “Automated Fixed-Point Conversion Best Practices” on page 8-59
- “Replacing Functions Using Lookup Table Approximations” on page 8-67
- “Custom Plot Functions” on page 8-68
- “Generate Fixed-Point MATLAB Code for Multiple Entry-Point Functions” on page 8-70
- “Convert Code Containing Global Data to Fixed Point” on page 8-74
- “Convert Code Containing Global Variables to Fixed-Point” on page 8-79
- “Data Type Issues in Generated Code” on page 8-82
- “Using the Fixed-Point Converter App with System Objects” on page 8-84
- “Use the Fixed-Point Converter App with a System object” on page 8-85

Fixed-Point Conversion Workflows

In this section...
“Choosing a Conversion Workflow” on page 8-2
“Automated Workflow” on page 8-2
“Manual Workflow” on page 8-3

Choosing a Conversion Workflow

MathWorks® provides a number of solutions for fixed-point conversion. Which conversion method you use depends on your end goal and your level of fixed-point expertise.

Goal	Conversion Method	See Also
Use generated fixed-point MATLAB code for simulation purposes.	If you are new to fixed-point modeling, use the Fixed-Point Converter app.	“Automated Workflow” on page 8-2
	If you are familiar with fixed-point modeling, and want to quickly explore design tradeoffs, convert your code manually.	“Manual Workflow” on page 8-3
Generate fixed-point C code (requires MATLAB Coder™)	MATLAB Coder Fixed-Point Conversion tool	Convert MATLAB Code to Fixed-Point C Code
Generated HDL code (requires HDL Coder™)	HDL Coder Workflow Advisor	Floating-Point to Fixed-Point Conversion
Integrate fixed-point MATLAB code in larger applications for system-level simulation.	Generate a MEX function from the fixed-point algorithm and call the MEX function instead of the original MATLAB function.	“Propose Data Types Based on Simulation Ranges” and “Propose Data Types Based on Derived Ranges”

Automated Workflow

If you are new to fixed-point modeling and you are looking for a direct path from floating-point MATLAB to fixed-point MATLAB code, use the automated workflow. Using this

automated workflow, you can obtain data type proposals based on simulation ranges, static ranges, or both. For more information, see “Automated Fixed-Point Conversion”, “Propose Data Types Based on Simulation Ranges”, and “Propose Data Types Based on Derived Ranges”.

Manual Workflow

If you have a baseline understanding of fixed-point implementation details and an interest in exploring design tradeoffs to achieve optimized results, use the separate algorithm/data type workflow. Separating algorithmic code from data type specifications allows you to quickly explore design tradeoffs. This approach provides readable, portable fixed-point code that you can easily integrate into other projects. For more information, see “Manual Fixed-Point Conversion Workflow” and “Implement FIR Filter Algorithm for Floating-Point and Fixed-Point Types using cast and zeros”.

Automated Fixed-Point Conversion

In this section...

“Automated Fixed-Point Conversion Capabilities” on page 8-4

“Code Coverage” on page 8-5

“Proposing Data Types” on page 8-8

“Locking Proposed Data Types” on page 8-10

“Viewing Functions” on page 8-11

“Viewing Variables” on page 8-18

“Log Data for Histogram” on page 8-20

“Function Replacements” on page 8-22

“Validating Types” on page 8-23

“Testing Numerics” on page 8-23

“Detecting Overflows” on page 8-23

Automated Fixed-Point Conversion Capabilities

You can convert floating-point MATLAB code to fixed-point code using the Fixed-Point Converter app or at the command line using the `fiaccel` function -`float2fixed` option. You can choose to propose data types based on simulation range data, derived (also known as static) range data, or both.

You can manually enter static ranges. These manually entered ranges take precedence over simulation ranges and the app uses them when proposing data types. In addition, you can modify and lock the proposed type so that the app cannot change it. For more information, see “Locking Proposed Data Types” on page 8-10.

For a list of supported MATLAB features and functions, see “MATLAB Language Features Supported for Automated Fixed-Point Conversion”.

During fixed-point conversion, you can:

- Verify that your test files cover the full intended operating range of your algorithm using code coverage results.
- Propose fraction lengths based on default word lengths.

- Propose word lengths based on default fraction lengths.
- Optimize whole numbers.
- Specify safety margins for simulation min/max data.
- Validate that you can build your project with the proposed data types.
- Test numerics by running the test file with the fixed-point types applied.
- View a histogram of bits used by each variable.
- Detect overflows.

Code Coverage

By default, the app shows code coverage results. Your test files must exercise the algorithm over its full operating range so that the simulation ranges are accurate. The quality of the proposed fixed-point data types depends on how well the test files cover the operating range of the algorithm with the accuracy that you want.

Reviewing code coverage results helps you verify that your test file is exercising the algorithm adequately. If the code coverage is inadequate, modify the test file or add more test files to increase coverage. If you simulate multiple test files in one run, the tool displays cumulative coverage. However, if you specify multiple test files but run them one at a time, the tool displays the coverage of the file that ran last.

Code coverage is on by default. Turn it off only after you have verified that you have adequate test file coverage. Turning off code coverage might speed up simulation.

The app covers basic MATLAB control constructs and shows statement coverage for basic blocks of code. The app displays a color-coded coverage bar to the left of the code.

Coverage Bar Color	How Often Code is Executed During Test File Simulation
Dark green	Always
Light green	Sometimes
Orange	Once
Red	Never

```
15 persistent current_state;
16 if isempty(current_state)
17     current_state = S1;
18 end
19
20 % switch to new state based on the value state register
21 switch (current_state)
22
23     case S1,
24
25         % value of output 'Z' depends both on state and inputs
26         if (A)
27             Z = true;
28             current_state = S1;
29         else
30             Z = false;
31             current_state = S2;
32         end
33
34     case S2,
35
36         if (A)
37             Z = false;
38             current_state = S1;
39         else
40             Z = true;
41             current_state = S2;
42         end
43
44     case S3,
45
46         if (A)
47             Z = false;
48             current_state = S2;
49         else
50             Z = true;
51             current_state = S3;
52         end
```


When you position your cursor over the coverage bar, the color highlighting extends over the code and the app displays more information about how often the code is executed. For MATLAB constructs that affect control flow (if-elseif-else, switch-case, for-continue-break, return), it displays statement coverage as a percentage coverage for basic blocks inside these constructs.

15	<code>persistent current_state;</code>	
16	<code>if isempty(current_state)</code>	Executed once
17	<code> current_state = S1;</code>	
18	<code>end</code>	
19	<code>% switch to new state based on the value state register</code>	
20	<code>switch (current_state)</code>	
21	<code> case S1,</code>	Reached 58% of the time
22	<code> % value of output 'Z' depends both on state and inputs</code>	
23	<code> if (A)</code>	Reached 33% of the time
24	<code> Z = true;</code>	
25	<code> current_state = S1;</code>	
26	<code> else</code>	Reached 25% of the time
27	<code> Z = false;</code>	
28	<code> current_state = S2;</code>	
29	<code> end</code>	
30	<code> case S2,</code>	Reached 58% of the time
31	<code> if (A)</code>	Reached 42% of the time
32	<code> Z = false;</code>	
33	<code> current_state = S1;</code>	
34	<code> else</code>	Reached 17% of the time
35	<code> Z = true;</code>	
36	<code> current_state = S2;</code>	
37	<code> end</code>	Reached 25% of the time
38	<code> case S3,</code>	Reached 42% of the time
39	<code> if (A)</code>	Not reached
40	<code> Z = false;</code>	
41	<code> current_state = S2;</code>	
42	<code> else</code>	
43	<code> Z = true;</code>	
44	<code> current_state = S3;</code>	
45	<code> end</code>	

To verify that your test file is testing your algorithm over the intended operating range, review the code coverage results and take action as described in the following table.

Coverage Bar Color	Action Required
Dark green	None
Light green	Review percentage coverage and verify that it is reasonable based on your algorithm. If there are areas of code that you expect to be executed more frequently, modify your test file or add more test files to increase coverage.
Orange	This behavior is expected for initialization code, for example, the initialization of persistent variables. For other cases, verify that this behavior is reasonable for your algorithm. If there are areas of code that you expect to be executed more frequently, modify your test file or add more test files to increase coverage.
Red	If the code that is not executed is an error condition, this behavior is acceptable. If the code should be executed, modify the test file or add another test file to extend coverage. If the code is written conservatively and has upper and lower boundary limits, and you cannot modify the test file to reach this code, add static minimum and maximum values (see “Computing Derived Ranges”).

Proposing Data Types

The app proposes fixed-point data types based on computed ranges and the word length or fraction length setting. The computed ranges are based on simulation range data, derived range data (also known as static ranges), or both. If you run a simulation and compute derived ranges, the conversion tool merges the simulation and derived ranges.

Note: You cannot propose data types based on derived ranges for MATLAB classes.

You can manually enter static ranges. These manually entered ranges take precedence over simulation ranges and the tool uses them when proposing data types. In addition, you can modify and lock the proposed type so that the tool cannot change it. For more information, see “Locking Proposed Data Types” on page 8-10.

Running a Simulation

During fixed-point conversion, the app generates an instrumented MEX function for your entry-point MATLAB file. If the build completes without errors, the app displays

compiled information (type, size, complexity) for functions and variables in your code. To navigate to local functions, click the **Functions** tab. If build errors occur, the app provides error messages that link to the line of code that caused the build issues. You must address these errors before running a simulation. Use the link to navigate to the offending line of code in the MATLAB editor and modify the code to fix the issue. If your code uses functions that are not supported for fixed-point conversion, the app displays them on the **Function Replacements** tab. See “Function Replacements” on page 8-22.

Before running a simulation, specify the test file or files that you want to run. When you run a simulation, the app runs the test file, calling the instrumented MEX function. If you modify the MATLAB design code, the app automatically generates an updated MEX function before running a test file.

If the test file runs successfully, the simulation minimum and maximum values and the proposed types are displayed on the **Variables** tab. If you manually enter static ranges for a variable, the manually entered ranges take precedence over the simulation ranges. If you manually modify the proposed types by typing or using the histogram, the data types are locked so that the app cannot modify them.

If the test file fails, the errors are displayed on the **Simulation Output** tab.

Test files must exercise your algorithm over its full operating range. The quality of the proposed fixed-point data types depends on how well the test file covers the operating range of the algorithm with the accuracy that you want. You can add test files and select to run more than one test file during the simulation. If you run multiple test files, the app merges the simulation results.

Optionally, you can select to log data for histograms. After running a simulation, you can view the histogram for each variable. For more information, see “Log Data for Histogram” on page 8-20.

Computing Derived Ranges

The advantage of proposing data types based on derived ranges is that you do not have to provide test files that exercise your algorithm over its full operating range. Running such test files often takes a very long time.

To compute derived ranges and propose data types based on these ranges, provide static minimum and maximum values or proposed data types for all input variables. To improve the analysis, enter as much static range information as possible for other

variables. You can manually enter ranges or promote simulation ranges to use as static ranges. Manually entered static ranges always take precedence over simulation ranges.

If you know what data type your hardware target uses, set the proposed data types to match this type. Manually entered data types are locked so that the app cannot modify them. The app uses these data types to calculate the input minimum and maximum values and to derive ranges for other variables. For more information, see “Locking Proposed Data Types” on page 8-10.

When you select **Compute Derived Ranges**, the app runs a derived range analysis to compute static ranges for variables in your MATLAB algorithm. When the analysis is complete, the static ranges are displayed on the **Variables** tab. If the run produces $+/ -$ Inf derived ranges, consider defining ranges for all persistent variables.

Optionally, you can select **Quick derived range analysis**. With this option, the app performs faster static analysis. The computed ranges might be larger than necessary. Select this option in cases where the static analysis takes more time than you can afford.

If the derived range analysis for your project is taking a long time, you can optionally set a timeout. When the timeout is reached, the app aborts the analysis.

Locking Proposed Data Types

You can lock proposed data types against changes by the app using one of the following methods:

- Manually setting a proposed data type in the app.
- Right-clicking a type proposed by the tool and selecting **Lock computed value**.

The app displays locked data types in bold so that they are easy to identify. You can unlock a type using one of the following methods:

- Manually overwriting it.
- Right-clicking it and selecting **Undo changes**. This action unlocks only the selected type.
- Right-clicking and selecting **Undo changes for all variables**. This action unlocks all locked proposed types.

Viewing Functions

During the **Convert to Fixed Point** step of the fixed-point conversion process, you can view a list of functions in your project in the left pane. This list also includes function specializations and class methods. When you select a function from the list, the MATLAB code for that function or class method is displayed in the code window and the variables that they use are displayed on the **Variables** tab.

After conversion, the left pane also displays a list of output files including the fixed-point version of the original algorithm. If your function is not specialized, the app retains the original function name in the fixed-point file name and appends the fixed-point suffix. For example, here the fixed-point version of `fun_with_matlab.m` is `fun_with_matlab_fixpt.m`.

The screenshot shows the Fixed-Point Converter interface. The main window displays the source code for 'fun_with_matlab_fixpt.m'. The code defines a function 'y = fun_with_matlab_fixpt(x)' that uses 'fimath' for fixed-point arithmetic, initializes a filter 'butter(2, 0.25)', and processes the input 'x' in a loop. The 'Output Files' list on the left includes various generated files like 'fun_with_matlab_fixpt.m', 'fun_with_matlab_wrapper_fixpt.m', and 'fun_with_matlab_report.html'.

The 'Type Validation Output' tab is active, showing the following table:

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
Input							
x	1x 256 double	-1	1			No	numerictype(1, 16, 14)
Output							
y	1x 256 double	-0.97	1.06			No	numerictype(1, 16, 14)
Persistent							
z	2x 1 double	-0.89	0.96			No	numerictype(1, 16, 15)
Local							

Classes

The app displays information for the class and each of its methods. For example, consider a class, `Counter`, that has a static method, `MAX_VALUE`, and a method, `next`.

If you select the class, the app displays the class and its properties on the **Variables** tab.

The screenshot displays the MATLAB IDE interface. On the left, the 'Source Code' pane shows a project structure with files like 'Counter', 'next', 'MAX_VALUE', and 'use_counter'. Below it, the 'Output Files' pane lists generated files such as 'Counter_fixpt.m', 'use_counter_fixpt.m', and 'use_counter_report.html'. The main editor window shows the source code for a class named 'Counter'.

```

1 classdef Counter < handle
2     properties
3         Value
4     end
5
6     methods (Static)
7         function t = MAX_VALUE()
8             t = 128;
9         end
10    end
11
12    methods
13        function this = Counter()
14            this.Value = 0;
15        end
16
17        function v = next(this)
18            v = this.Value;
19            if this.Value == this.MAX_VALUE
20                this.Value = 0;
21            else
22                this.Value = this.Value + 1;
23            end
24        end
25    end
26 end
27

```

At the bottom of the editor, the 'Type Validation Output' tab is active, displaying a table with the following data:

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
▲ Output							
▲ this							
Value	double	0	128			Yes	numeric(0, 8, 0)

Navigation buttons 'Back' and 'Next' are visible at the bottom of the window.

If you select a method, the app displays only the variables that the method uses.

The screenshot displays the MATLAB IDE interface. On the left, the 'Source Code' pane shows a project structure with files like 'Counter', 'next', 'MAX_VALUE', and 'use_counter'. The 'Output Files' pane lists generated files such as 'Counter_fixpt.m' and 'use_counter_report.html'. The main editor shows the following MATLAB code:

```

1 classdef Counter < handle
2     properties
3         Value
4     end
5
6     methods (Static)
7         function t = MAX_VALUE()
8             t = 128;
9         end
10    end
11
12    methods
13        function this = Counter()
14            this.Value = 0;
15        end
16
17        function v = next(this)
18            v = this.Value;
19            if this.Value == this.MAX_VALUE
20                this.Value = 0;
21            else
22                this.Value = this.Value + 1;
23            end
24        end
25    end
26 end
27

```

Below the code editor, the 'Type Validation Output' table is visible, showing the following data:

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
▲ Output							
t	double	128	128			Yes	numerictype(0, 8, 0)

Specializations

If a function is specialized, the app lists each specialization and numbers them sequentially. For example, consider a function, `dut`, that calls subfunctions, `foo` and `bar`, multiple times with different input types.

```
function y = dut(u, v)
```

```
tt1 = foo(u);
tt2 = foo([u v]);
tt3 = foo(complex(u,v));
```

```
ss1 = bar(u);
ss2 = bar([u v]);
ss3 = bar(complex(u,v));
```

```
y = (tt1 + ss1) + sum(tt2 + ss2) + real(tt3) + real(ss3);
```



```
end
```

```
function y = foo(u)
    y = u * 2;
end
```

```
function y = bar(u)
    y = u * 4;
end
```

If you select the top-level function, the app displays all the variables on the **Variables** tab.

The screenshot shows a software interface with a source code editor on the left and a variables table on the right. The source code editor displays the following code:

```

1 function y = dut(u, v)
2
3     tt1 = foo(u);
4     tt2 = foo([u v]);
5     tt3 = foo(complex(u,v));
6
7     ss1 = bar(u);
8     ss2 = bar([u v]);
9     ss3 = bar(complex(u,v));
10
11     y = (tt1 + ss1) + sum(tt2 + ss2) + real(tt3) + real(ss3);
12
13 end
14
15 function y = foo(u)
16     y = u * 2;
17 end
18
19 function y = bar(u)
20     y = u * 4;
21 end

```

The variables table below the code shows the following data:

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
Input							
u	double	10	10			Yes	numericity(0, 4, 0)
v	double	20	20			Yes	numericity(0, 5, 0)
Output							
y	double	300	300			Yes	numericity(0, 9, 0)
Local							
tt1	double	20	20			Yes	numericity(0, 5, 0)

The interface includes a "Source Code" tab on the left, a "Simulation Output" tab, and a "Variables" tab. The "Variables" tab is currently selected, showing the table above. Navigation buttons "Back" and "Next" are visible at the bottom of the interface.

If you select the tree view, the app also displays the line numbers for the call to each specialization.

Source Code

```

1 function y = dut(u, v)
2
3     tt1 = foo(u);
4     tt2 = foo([u v]);
5     tt3 = foo(complex(u,v));
6
7
8     ss1 = bar(u);
9     ss2 = bar([u v]);
10    ss3 = bar(complex(u,v));
11
12    y = (tt1 + ss1) + sum(tt2 + ss2) + real(tt3) + real(ss3);
13
14
15 function y = foo(u)
16     y = u * 2;
17 end
18
19 function y = bar(u)
20     y = u * 4;
21 end

```

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
Input							
u	double	10	10			Yes	numerictype(0, 4, 0)
v	double	20	20			Yes	numerictype(0, 5, 0)
Output							
y	double	300	300			Yes	numerictype(0, 9, 0)
Local							
tt1	double	20	20			Yes	numerictype(0, 5, 0)

Back Next

If you select a specialization, the app displays only the variables that the specialization uses.

The screenshot displays a software interface for automated fixed-point conversion. On the left, a 'Source Code' tree shows a function 'dut' with six conditional branches: 'foo > 1', 'foo > 2', 'foo > 3', 'bar > 1', 'bar > 2', and 'bar > 3'. The 'foo > 3' branch is currently selected. The main window shows the corresponding MATLAB code for the 'dut' function, with lines 15-17 highlighted in blue, corresponding to the selected branch. Below the code is a 'Function Replacements' table.

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
Input							
u	complex double					No	
Output							
y	complex double					No	

In the generated fixed-point code, the number of each fixed-point specialization matches the number in the **Source Code** list, which makes it easy to trace between the floating-point and fixed-point versions of your code. For example, the generated fixed-point function for `foo > 1` is named `foo_s1`.

The screenshot displays the MATLAB IDE interface. On the left, the 'Source Code' pane shows a list of files including 'dut', 'dut_wrapper_fixpt.m', 'dut_report.html', 'dut_fixpt_args.mat', 'dut_float_mex.mexv64', and 'dut_wrapper_fixpt_mex.mexv64'. The main editor shows the MATLAB code for the function 'dut_fixpt' and its sub-functions 'foo_s1', 'foo_s2', and 'foo_s3'. The 'Variables' tab is active, showing a table with the following data:

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
u	double	10	10			Yes	numericType(0, 4, 0)
v	double	20	20			Yes	numericType(0, 5, 0)

Viewing Variables

The **Variables** tab provides the following information for each variable in the function selected in the **Navigation** pane:

- **Type** — The original data type of the variable in the MATLAB algorithm.
- **Sim Min** and **Sim Max** — The minimum and maximum values assigned to the variable during simulation.

You can edit the simulation minimum and maximum values. Edited fields are shown in bold. Editing these fields does not trigger static range analysis, but the tool uses the edited values in subsequent analyses. You can revert to the types proposed by the app.

- **Static Min** and **Static Max** — The static minimum and maximum values.

To compute derived ranges and propose data types based on these ranges, provide static minimum and maximum values for all input variables. To improve the analysis, enter as much static range information as possible for other variables.

When you compute derived ranges, the app runs a static analysis to compute static ranges for variables in your code. When the analysis is complete, the static ranges are displayed. You can edit the computed results. Edited fields are shown in bold. Editing these fields does not trigger static range analysis, but the tool uses the edited values in subsequent analyses. You can revert to the types proposed by the app.

- **Whole Number** — Whether all values assigned to the variable during simulation are integers.

The app determines whether a variable is always a whole number. You can modify this field. Edited fields are shown in bold. Editing these fields does not trigger static range analysis, but the app uses the edited values in subsequent analyses. You can revert to the types proposed by the app.

- The proposed fixed-point data type for the specified word (or fraction) length. Proposed data types use the `numerictype` notation. For example, `numerictype(1,16,12)` denotes a signed fixed-point type with a word length of 16 and a fraction length of 12. `numerictype(0,16,12)` denotes an unsigned fixed-point type with a word length of 16 and a fraction length of 12.

Because the app does not apply data types to expressions, it does not display proposed types for them. Instead, it displays their original data types.


You can also view and edit variable information in the code pane by placing your cursor over a variable name.

You can use `Ctrl+F` to search for variables in the MATLAB code and on the **Variables** tab. The app highlights occurrences in the code and displays only the variable with the specified name on the **Variables** tab.

Viewing Information for MATLAB Classes

The app displays:

- Code for MATLAB classes and code coverage for class methods in the code window. Use the **Source Code** list on the **Convert to Fixed Point** page to select which class or class method to view. If you select a class method, the app highlights the method in the code window.

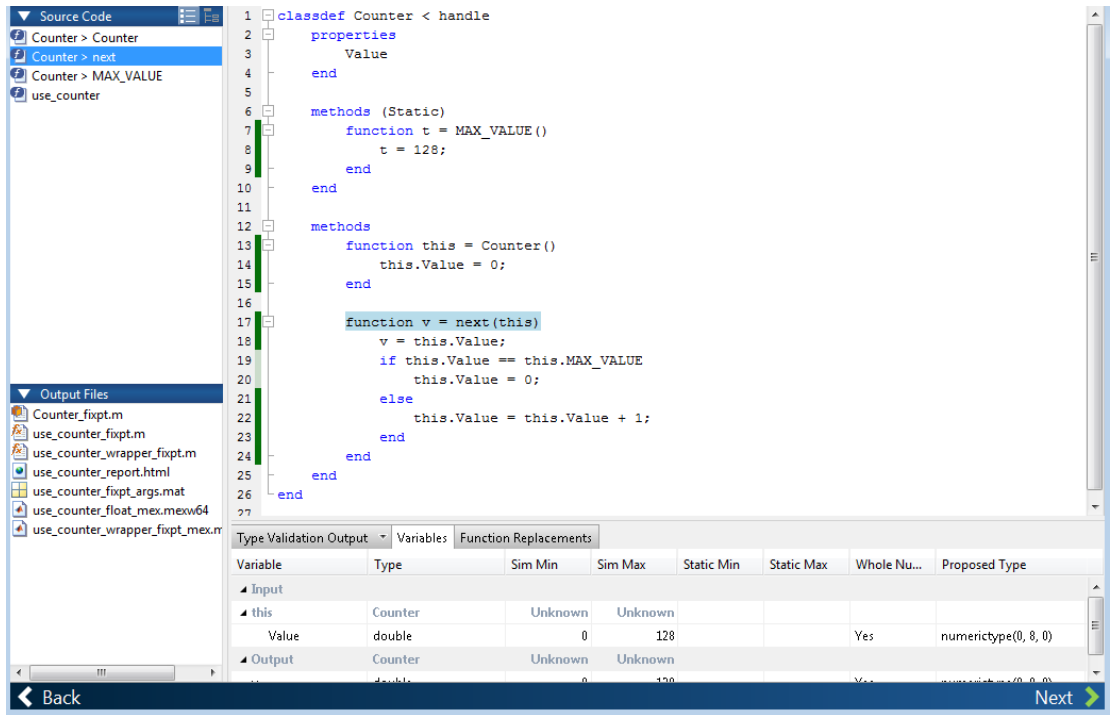


- Information about MATLAB classes on the **Variables** tab.


Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Num...	Proposed Type
Input							
this	Counter	Unknown	Unknown				
Value	double	0	128			Yes	numerictype(0, 8, 0)
Output							
v	double	0	128			Yes	numerictype(0, 8, 0)

Log Data for Histogram

To log data for histograms:

- On the **Convert to Fixed Point** page, click the **Simulate** arrow .


- Select **Log data for histogram**.



- Click **Simulate**.


After simulation, to view the histogram for a variable, on the **Variables** tab, click the **Proposed Type** field for that variable.

The histogram provides the range of the proposed data type and the percentage of simulation values that the proposed data type covers. The bit weights are displayed along the X-axis, and the percentage of occurrences along the Y-axis. Each bin in the histogram corresponds to a bit in the binary word. For example, this histogram displays the range for a variable of type `numerictype(1, 16, 14)`.

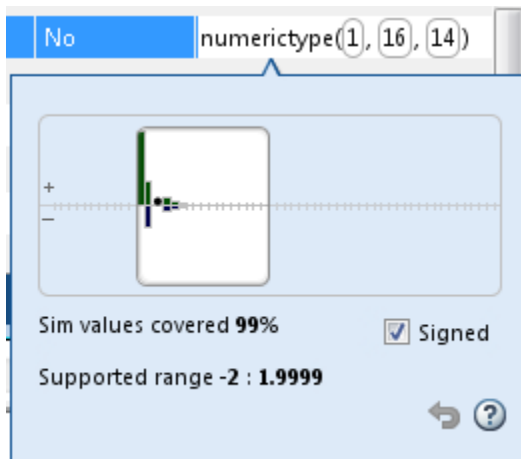


You can view the effect of changing the proposed data types by:

- Dragging the edges of the bounding box in the histogram window to change the proposed data type.

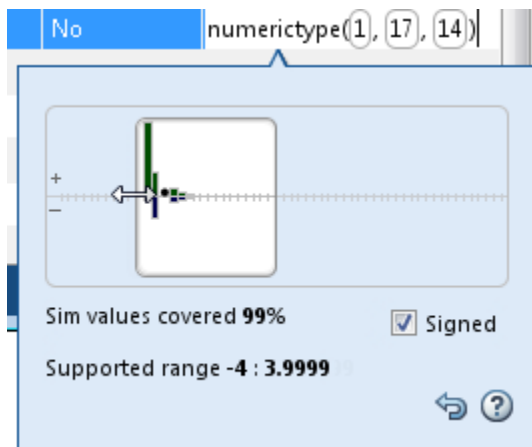

- Selecting or clearing **Signed**.

To revert to the types proposed by the automatic conversion, in the histogram window, click .

Function Replacements

If your MATLAB code uses functions that do not have fixed-point support, the app lists these functions on the **Function Replacements** tab. You can choose to replace unsupported functions with a custom function replacement or with a lookup table.

Function or Operator	Replacement
Simulation Output Variables Function Replacements	
Enter a function to replace <input type="text"/> Custom Function ▾ +	
▲ Custom Function	<i>Function Name</i>
foo	foo_fixedpoint
▲ Lookup Table	<i>Interpolation Method</i>
exp	None
	<i>Design Min</i>
	Auto
	<i>Design Max</i>
	Auto
	<i>Number of Points</i>
	1000

You can add and remove function replacements from this list. If you enter a function replacement for a function, the replacement function is used when you build the project. If you do not enter a replacement, the app uses the type specified in the original MATLAB code for the function.

Note: Using this table, you can replace the names of the functions but you cannot replace argument patterns.

Validating Types

Converting the code to fixed point validates the build using the proposed fixed-point data types. If the validation is successful, you are ready to test the numerical behavior of the fixed-point MATLAB algorithm.

If the errors or warnings occur during validation, they are displayed on the **Type Validation Output** tab. If errors or warning occur:

- On the **Variables** tab, inspect the proposed types and manually modified types to verify that they are valid.
- On the **Function Replacements** tab, verify that you have provided function replacements for unsupported functions.

Testing Numerics

After converting code to fixed point and validating the proposed fixed-point data types, click **Test** to verify the behavior of the fixed-point MATLAB algorithm. By default, if you added a test file to define inputs or run a simulation, the app uses this test file to test numerics. Optionally, you can add test files and select to run more than one test file. The app compares the numerical behavior of the generated fixed-point MATLAB code with the original floating-point MATLAB code. If you select to log inputs and outputs for comparison plots, the app generates an additional plot for each scalar output. This plot shows the floating-point and fixed-point results and the difference between them. For non-scalar outputs, only the error information is shown.

After fixed-point simulation, if the numerical results do not meet the accuracy that you want, modify fixed-point data type settings and repeat the type validation and numerical testing steps. You might have to iterate through these steps multiple times to achieve the results that you want.










Detecting Overflows

When testing numerics, selecting **Use scaled doubles to detect overflows** enables overflow detection. When this option is selected, the conversion app runs the simulation using scaled double versions of the proposed fixed-point types. Because scaled doubles

store their data in double-precision floating-point, they carry out arithmetic in full range. They also retain their fixed-point settings, so they are able to report when a computation goes out of the range of the fixed-point type. For more information, see “Scaled Doubles”.

If the app detects overflows, on its **Overflow** tab, it provides:

- A list of variables and expressions that overflowed
- Information on how much each variable overflowed
- A link to the variables or expressions in the code window

Variables	Function Replacements	Overflows	
	Function	Line	Description
	overflow_fixpt	7	Overflow error in expression 'x'.
	overflow_fixpt	7	Overflow error in expression 'y'.
	overflow_fixpt	10	Overflow error in expression 'z'.
	overflow_fixpt	10	Overflow error in expression 'z = fi(x*y, 0, 8, 0, fm)'.
	overflow_fixpt	10	Overflow error in expression 'fi(x*y, 0, 8, 0, fm)'.
	overflow_fixpt	10	Overflow error in expression 'x'.
	overflow_fixpt	10	Overflow error in expression 'x*y'.
	overflow_fixpt	10	Overflow error in expression 'y'.
	overflow_fixpt	11	Overflow error in expression 'z'.


If your original algorithm uses scaled doubles, the app also provides overflow information for these expressions.

See Also

“Detect Overflows”

Best Practices for Debugging Out-of-the-Box Conversion by the Fixed-Point Converter

This example shows some best practices for debugging your fixed-point code when you need more than out of the box conversion. This flowchart summarizes steps you can take to debug the conversion.

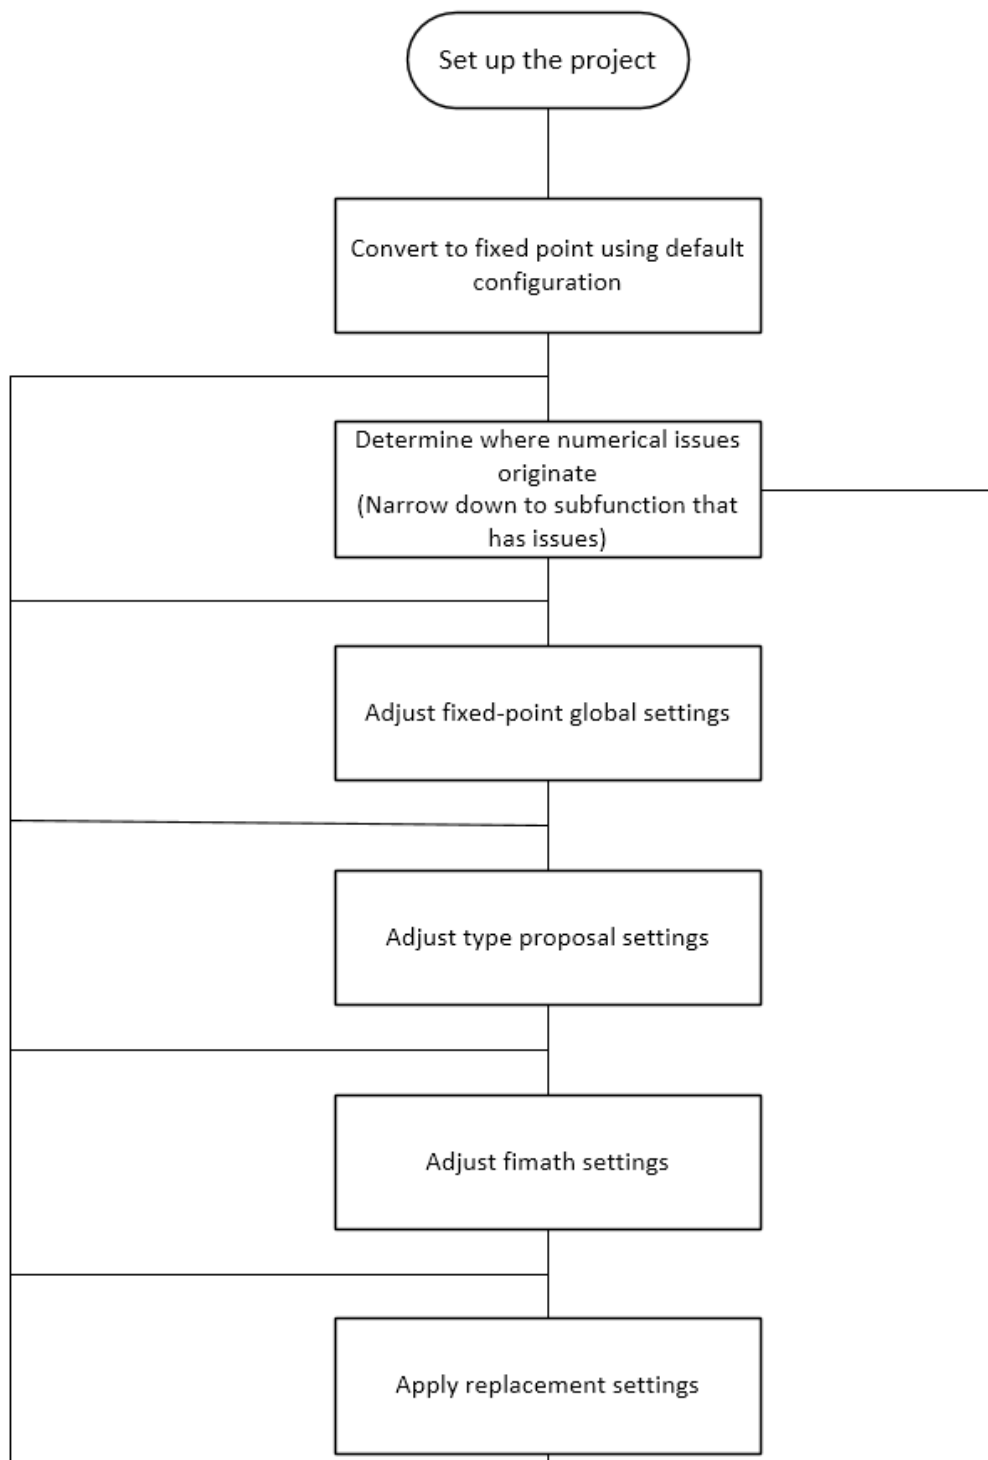

In this section...

“Prerequisites” on page 8-27

“Convert to Fixed Point Using Default Configuration” on page 8-31

“Determine Where Numerical Issues Originated” on page 8-34

“Adjust `fimath` Settings” on page 8-38

“Convert `kalman_filter` Function Using New `fimath` Settings” on page 8-41

“Adjust Word Length Settings” on page 8-42

“Replace Constant Functions” on page 8-44

Prerequisites

- 1 Create a local working folder, for example, `c:\kalman_filter`.
- 2 In your local working folder, create the following files.

- **kalman_filter function**

This is the main entry-point function for your project.

```
function [y] = kalman_filter(z,NO)
    %#codegen
    A = kalman_stm();

    % Measurement Matrix
    H = [1 0];

    % Process noise variance
    Q = 0;
    % Measurement noise variance
    R = NO ;

    persistent x_est p_est
    if isempty(x_est)
        % Estimated state
        x_est = [0; 1];
        % Estimated error covariance
        p_est = NO * eye(2, 2);
    end

    % Kalman algorithm
    % Predicted state and covariance
```

```
x_prd = A * x_est;
p_prd = A * p_est * A' + Q;

% Estimation
S = H * p_prd' * H' + R;
B = H * p_prd';
klm_gain = matrix_solve(S,B)';

% Estimated state and covariance
x_est = x_prd + klm_gain * (z - H * x_prd);
p_est = p_prd - klm_gain * H * p_prd;

% Compute the estimated measurements
y = H * x_est;
end
```

- **kalman_stm function**

This function is called by the `kalman_filter` function and computes the state transition matrix.

```
function A = kalman_stm()
    f0 = 200;
    dt = 1/1e4;
    % Kalman filter initialization
    % State transition Matrix
    A = [cos(2*pi*f0*dt), -sin(2*pi*f0*dt);
        sin(2*pi*f0*dt), cos(2*pi*f0*dt)];
end
```

- **matrix_solve function**

This function is a more efficient implementation of a matrix left divide.

```
function x = matrix_solve(a,b)
    %fixed-point conversion friendly matrix solve: a * x = b

    % initialize x
    x = zeros(size(a,1),size(b,2));
    % compute lu decomposition of a
    [l, u] = lu_replacement(a);
    % solve x = a\b for every column of b
    through forward and backward substitution
    for col = 1:size(b,2)
        bcol = b(:,col);
```

```

        y = forward_substitute(l,bcol);
        x(:,col) = back_substitute(u,y);
    end

```

```
end
```

- **lu_replacement function**

This function is called by the `matrix_solve` function.

```

function [l,A]=lu_replacement(A)
    N=size(A,1);
    l = eye(N);
    for n=1:N-1
        piv = A(n,n);
        for k=n+1:N
            mult = divide_no_zero(A(k,n),piv);
            A(k,:) = -mult*A(n,:) + A(k,:);
            l(k,n) = mult;
        end
    end
end

```

- **forward_substitute function**

This function is called by the `matrix_solve` function.

```

function y = forward_substitute(l,b)
    % forward substitution
    N = size(b,1);
    y = zeros(N,1);
    % forward substitution
    y(1) = divide_no_zero(b(1),l(1,1));
    for n = 2:N
        acc = 0;
        for k = 1:n-1
            acc(:) = acc + y(k)*l(n,k);
        end
        y(n) = divide_no_zero((b(n)-acc),l(n,n));
    end
end

```

```
end
```

- **back_substitute function**

This function is called by the `matrix_solve` function.

```
function x = back_substitute(u,y)
    % backwards substitution
    N = size(u,1);
    x = zeros(N,1);

    % backward substitution
    x(N) = divide_no_zero(y(N),u(N,N));

    for n = (N-1):(-1):(1)
        acc = 0;
        for k = n:(N)
            acc(:) = acc + x(k)*u(n,k);
        end
        x(n) = divide_no_zero((y(n) - acc),u(n,n));
    end
end
```

- **divide_no_zero function**

This function is called by the `lu_replacement`, `forward_substitute` and `back_substitute` functions.

```
function y = divide_no_zero(num, den)
    % Divide and avoid division by zero
    if den == 0
        y = 0;
    else
        y = num/den;
    end
end
```

- **kalman_filter_tb test file**

This script generates a noisy sine wave, and calls the `kalman_filter` function to filter the noisy signal. It then plots the signals for comparison.

```
%KALMAN FILTER EXAMPLE TEST BENCH
clear all
step = ((400*pi)/1000)/10;
TIME_STEPS = 400;
X = 0:step:TIME_STEPS;
rng default;
rng(1);
Orig_Signal = sin(X);
```



```
Noisy_Signal = Orig_Signal + randn(size(X));
Clean_Signal = zeros(size(X));
for i = 1:length(X)
    Clean_Signal(i) = kalman_filter(Noisy_Signal(i), 1);
end
figure
subplot(5,1,1)
plot(X,rand(size(X)))
axis([1 TIME_STEPS 0 1.25]);
title('Noise')

% Plot Noisy Signal
subplot(5,1,2)
plot(X,Noisy_Signal)
axis([1 TIME_STEPS -4 4]);
title('Noisy Signal')

% Plot Filtered Clean Signal
subplot(5,1,3)
plot(X,Clean_Signal)
axis([1 TIME_STEPS -2 2]);
title('Filtered Signal')


% Plot Original Signal
subplot(5,1,4)
plot(X,Orig_Signal)
axis([1 TIME_STEPS -2 2]);
title('Original Signal')

% Plot Error
subplot(5,1,5)
plot(X, (Clean_Signal - Orig_Signal))
axis([1 TIME_STEPS -1 1]);
title('Error')
figure(gcf)
```

Convert to Fixed Point Using Default Configuration

- 1 From the apps gallery, open the Fixed-Point Converter app.
- 2 On the **Select Source Files** page, browse to the `kalman_filter.m` file and click **Open**.
- 3 Click **Next**. On the **Define Input Types** page, browse to the `kalman_filter_tb` file. Click **Autodefine Input Types**.


The test file runs and plots the input noisy signal, the filtered signal, the ideal filtered signal, and the difference between the filtered and the ideal filtered signal.

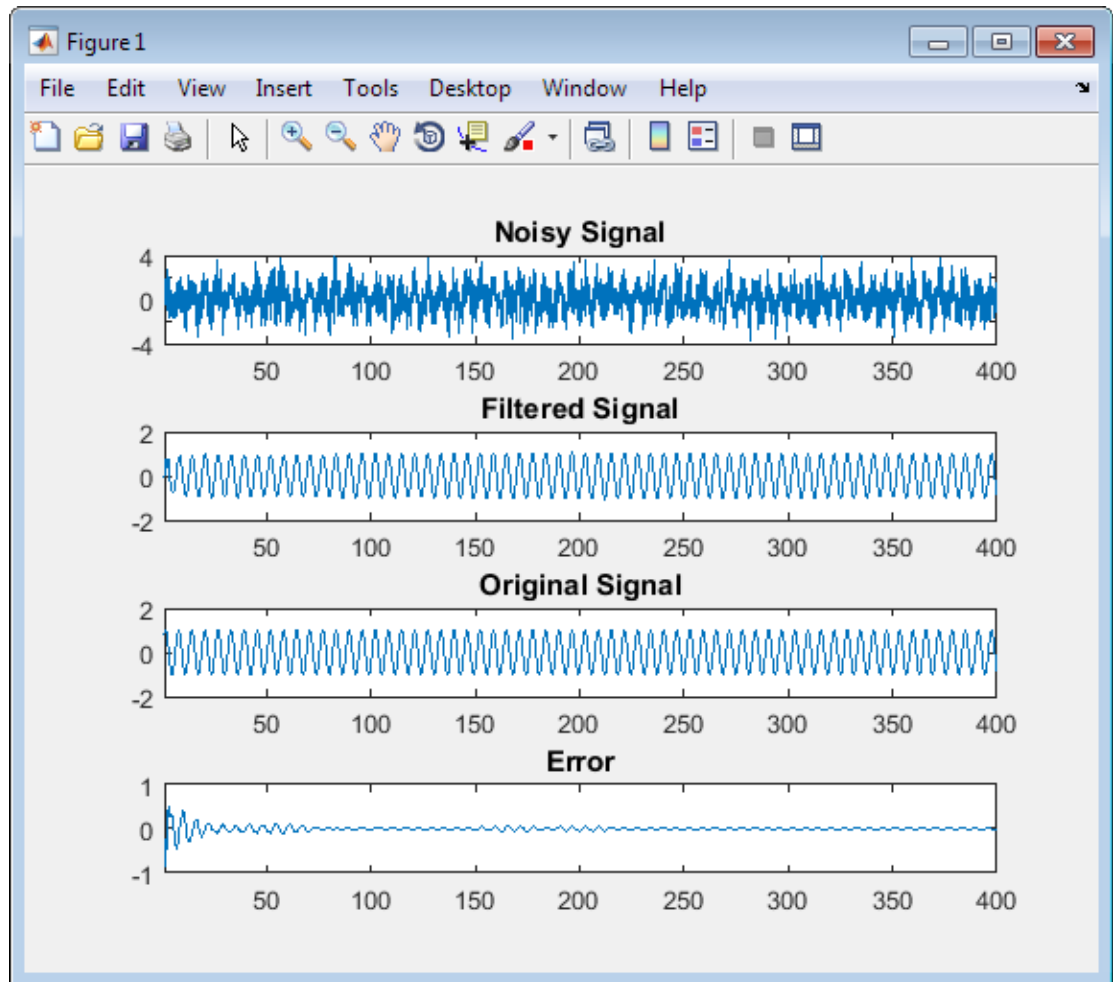


- 4 Click **Next**. On the **Check for Run-Time Issues** page, click **Check for Issues**.
- 5 Click **Next**. On the **Convert to Fixed Point** page, click **Simulate** to gather range information and data type proposals using the default settings.
- 6 Click **Convert** to apply the proposed data types.

- Click the **Test** arrow and select the **Log inputs and outputs for comparison plots** check box. Click **Test**. The Fixed-Point Converter runs the test file `kalman_filter_tb.m` to test the generated fixed-point code. Floating-point and fixed-point simulations are run, with errors calculated for the input and output variables.

The generated plots show that the current fixed-point implementation does not produce good results.

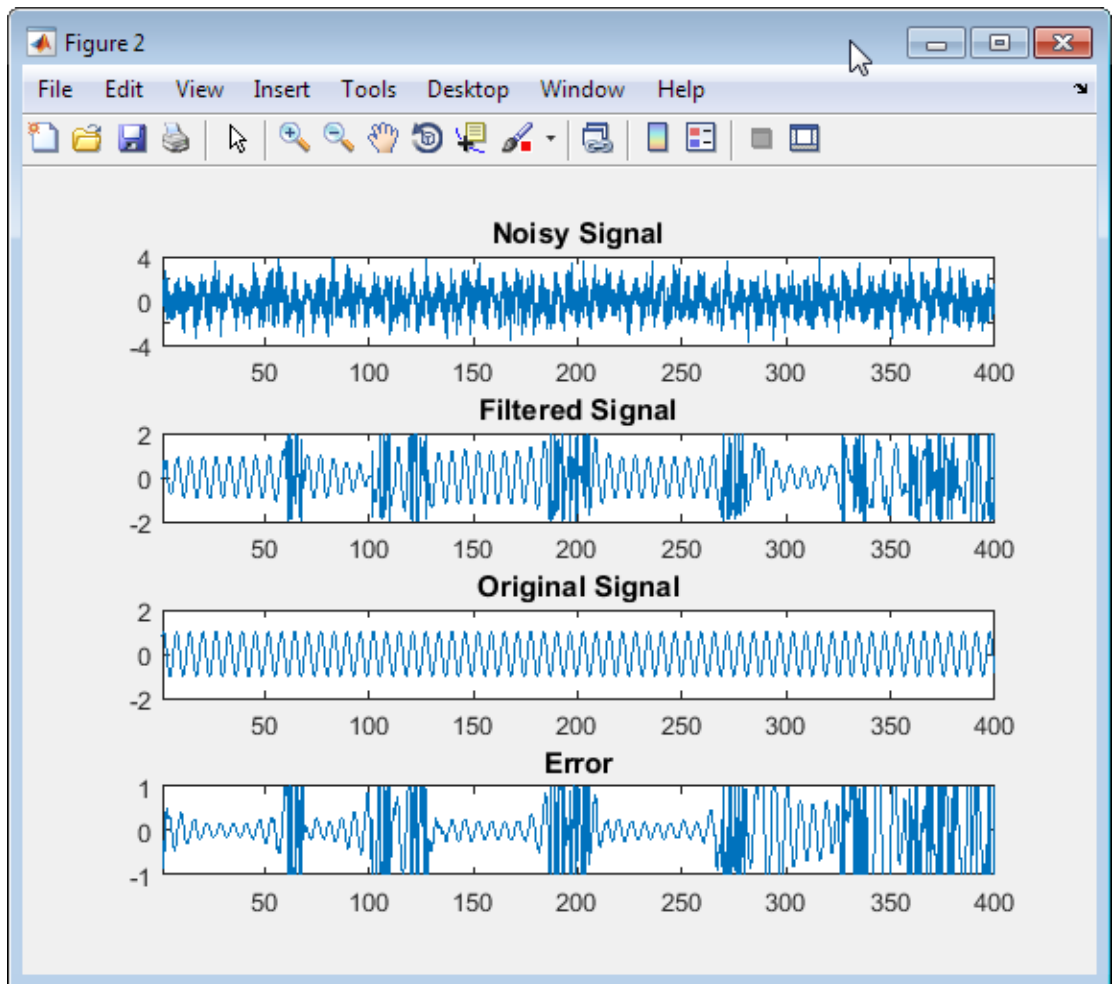

The error for the output variable y is extremely high, at over 282 percent.

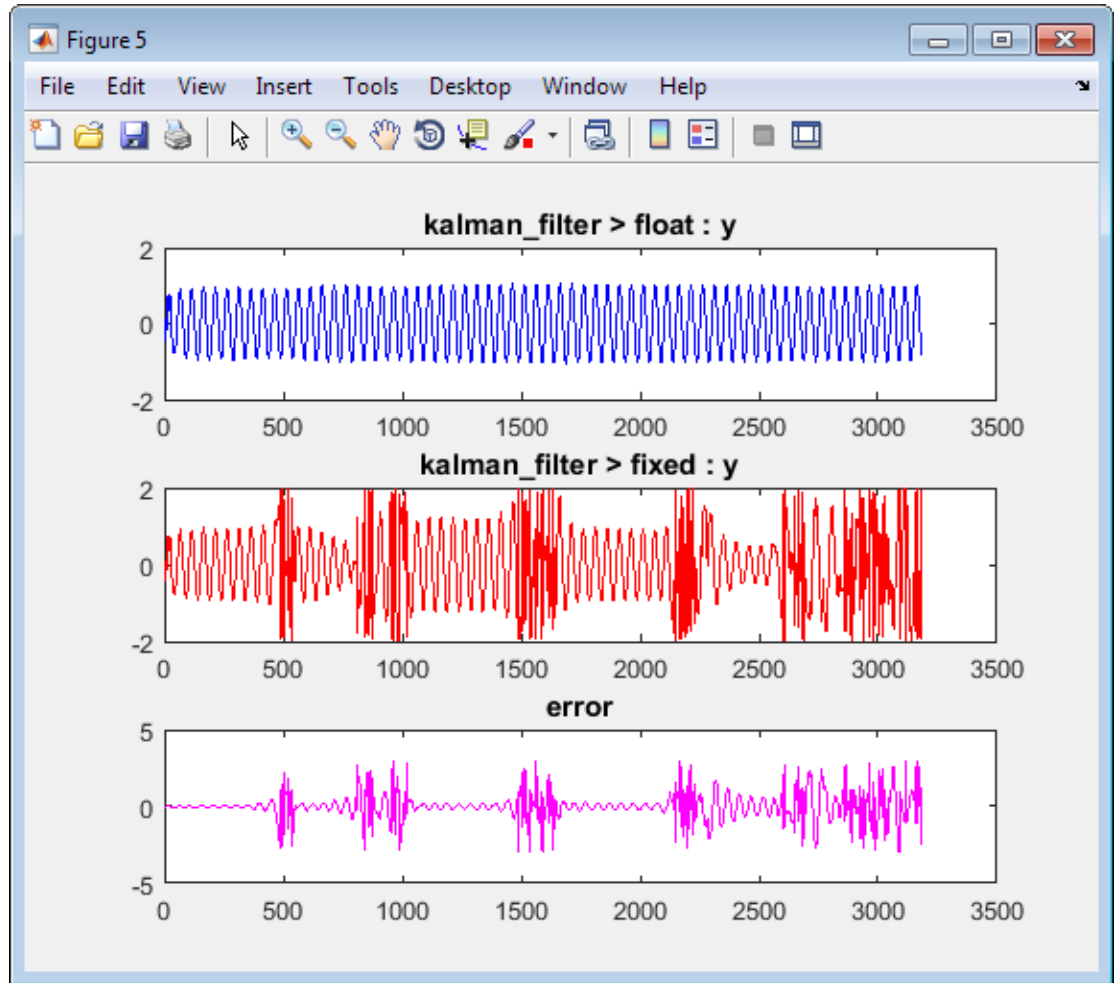

Determine Where Numerical Issues Originated

Add any variables that you suspect are the cause of numerical issues to the output arguments of your selected function. Adding these variables to the output arguments enables you to log the signals for comparison plots.


- 1 Click `kalman_filter` in the **Source Code** pane to return to the floating-point code.

The `kalman_filter` function calls the `matrix_solve` function, which contains calls to several other functions. To investigate whether numerical issues are originating in the `matrix_solve` function, within the editor, add `klm_gain`, the output variable of the `matrix_solve` function, to the output arguments of `kalman_filter`.

```
function [y, klm_gain] = kalman_filter(z,N0)
```

- 2 Click **Simulate** to refresh the results, and then click **Convert**.
- 3 Click **Test** and log all inputs and outputs. Because `klm_gain` is now an output argument, the Fixed-Point Converter logs the signal and plots the error of the `matrix_solve` function.


The generated plot shows a large error for the `klm_gain` variable. Investigate the `matrix_solve` function further.

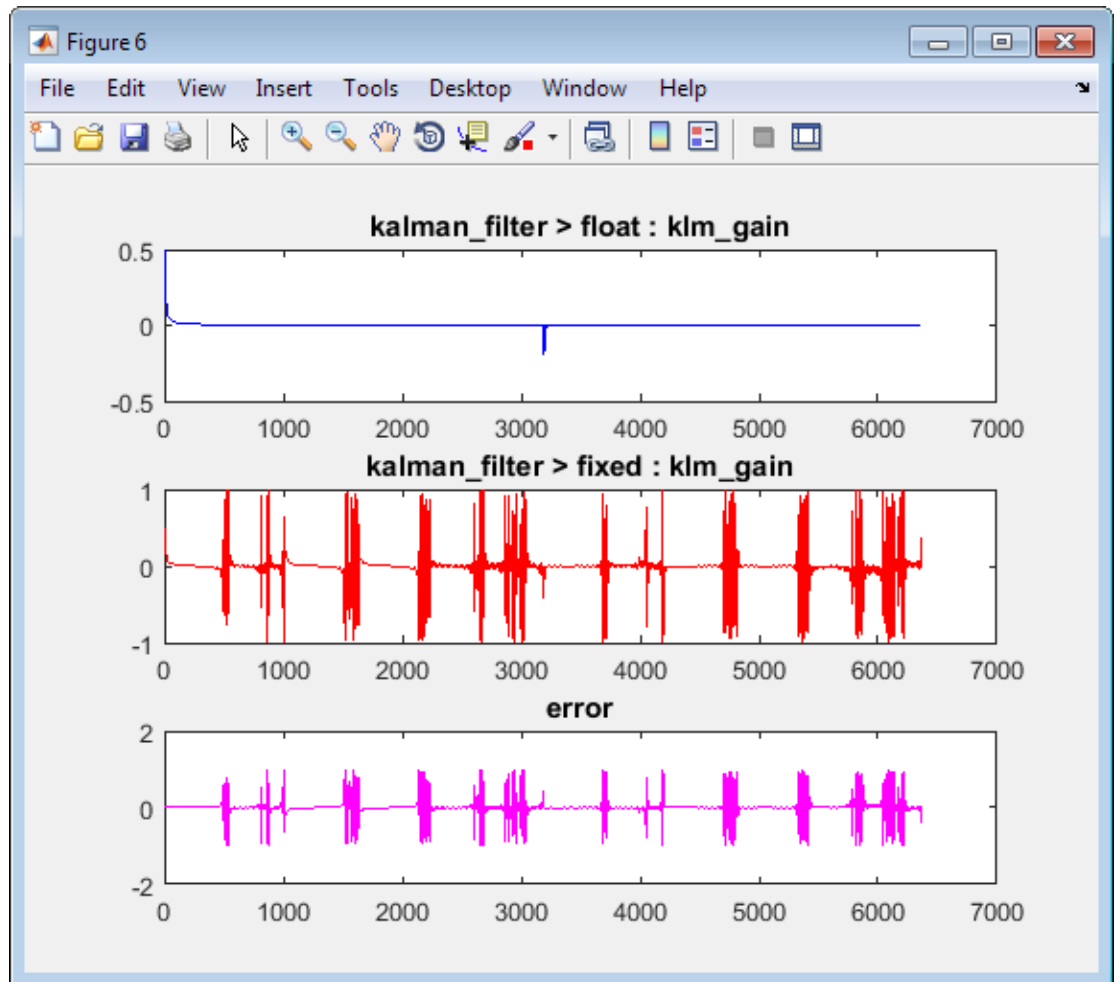


- 4 Close the Fixed-Point Converter and start a new project. On the **Select Source Files** page, browse to the `matrix_solve` file and click **Open**.
- 5 On the **Define Input Types** page, enter the `kalman_filter_tb` test file and click **Autodefine Input Types**. On the **Check for Run-Time Issues** page, click **Check for Issues**.
- 6 On the **Convert to Fixed Point** page, add `l`, `u`, and `y`, the outputs of the other functions called by `matrix_solve`, to the output arguments of the `matrix_solve` function to enable plotting during the **Test** step.

- `function [x, l, u, y] = matrix_solve(a,b)`
- 7 Click **Simulate** to gather data type proposals, and then click **Convert**.
 - 8 Click the arrow next to **Test** and ensure that **Log inputs and outputs for comparison plots** is selected. Click **Test**.

Examine the output plots.

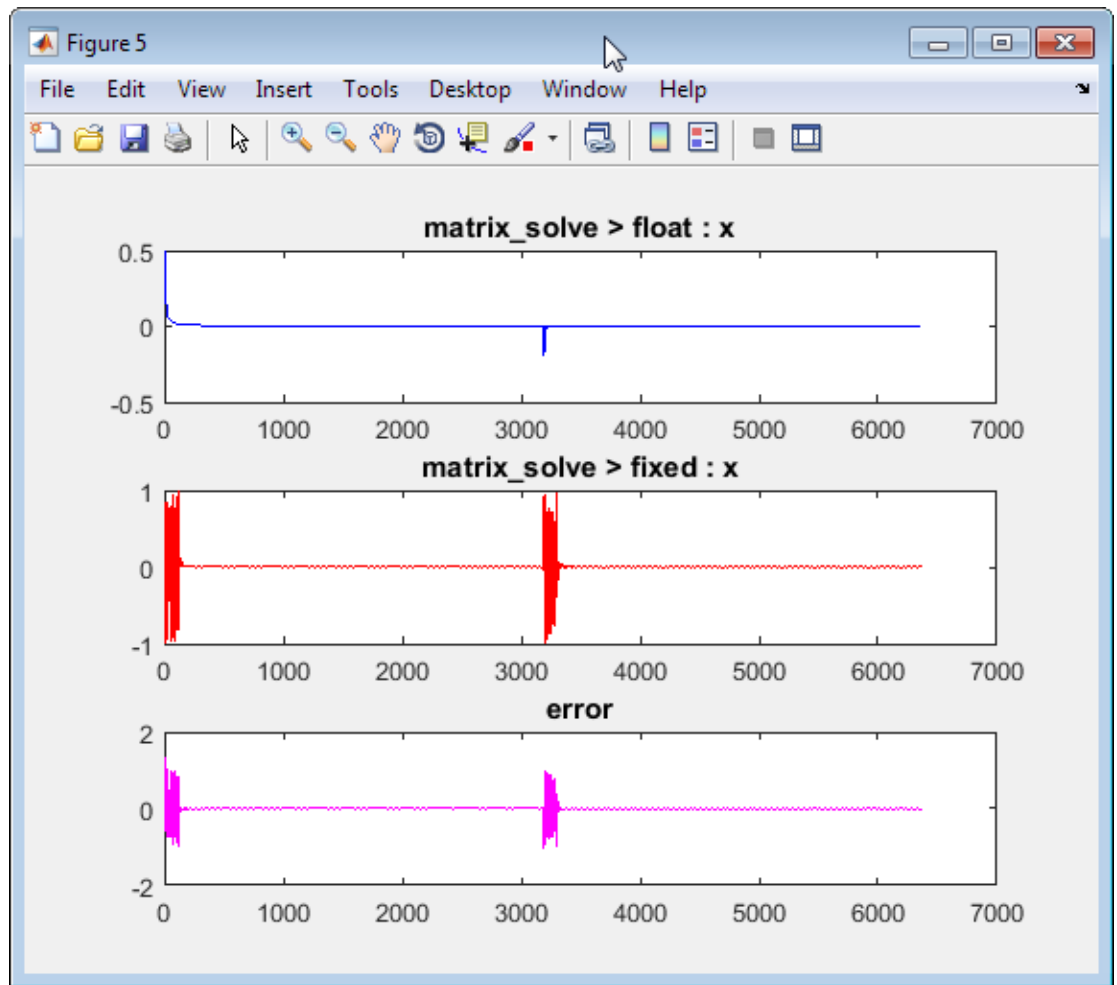

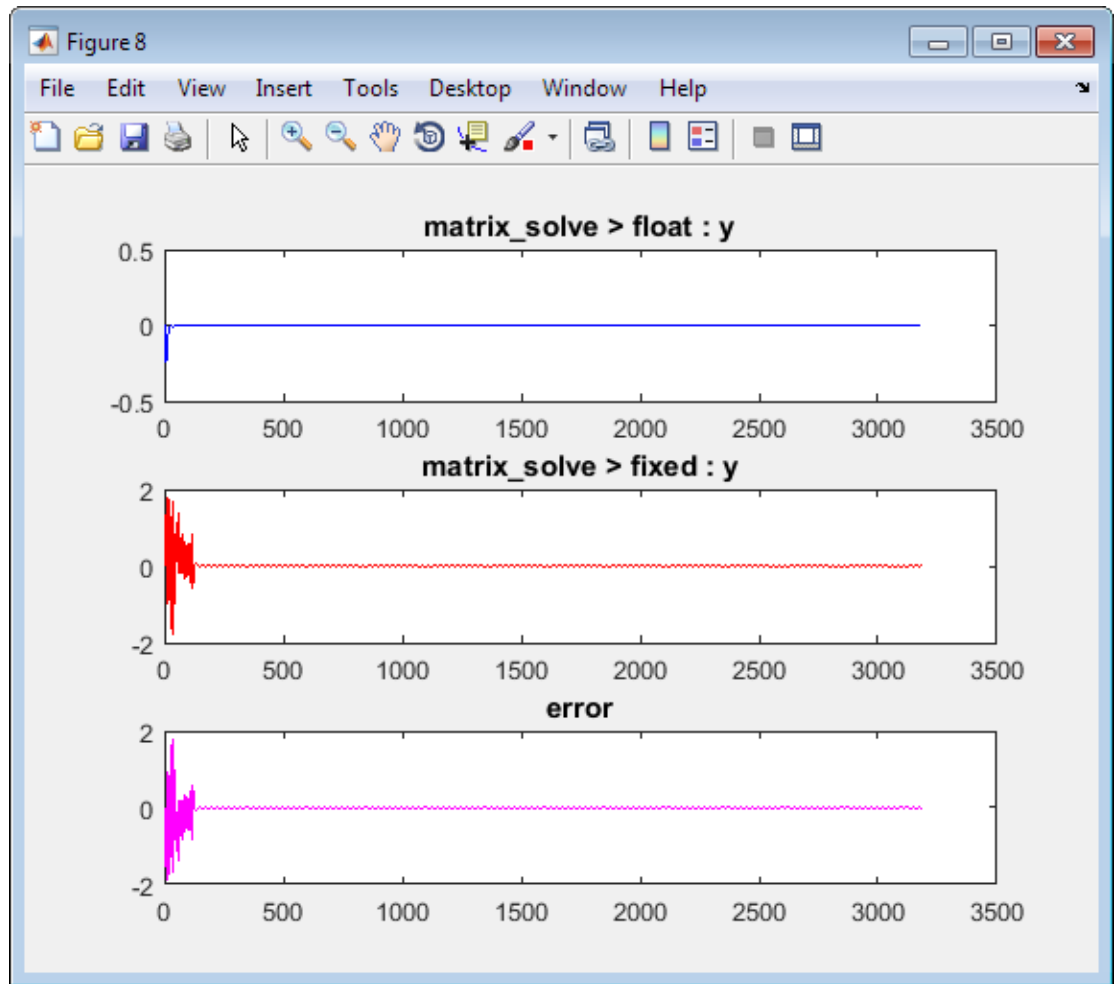



Several outputs of the `matrix_solve` function have a very high error. Adjust some of the project settings to address this error.

Adjust `fimath` Settings

Adjust the rounding method and the overflow action used in the generated fixed-point code by changing the `fimath` settings.

- 1 In the same project, click **Settings**.
- 2 Under **fimath**, set the **Rounding method** to **Nearest**. Set the **Overflow action** to **Saturate**. Click **Convert** to apply the new fimath settings.
- 3 Click **Test**. Using the new fimath settings, the error is now on the order of 10^{-5} .

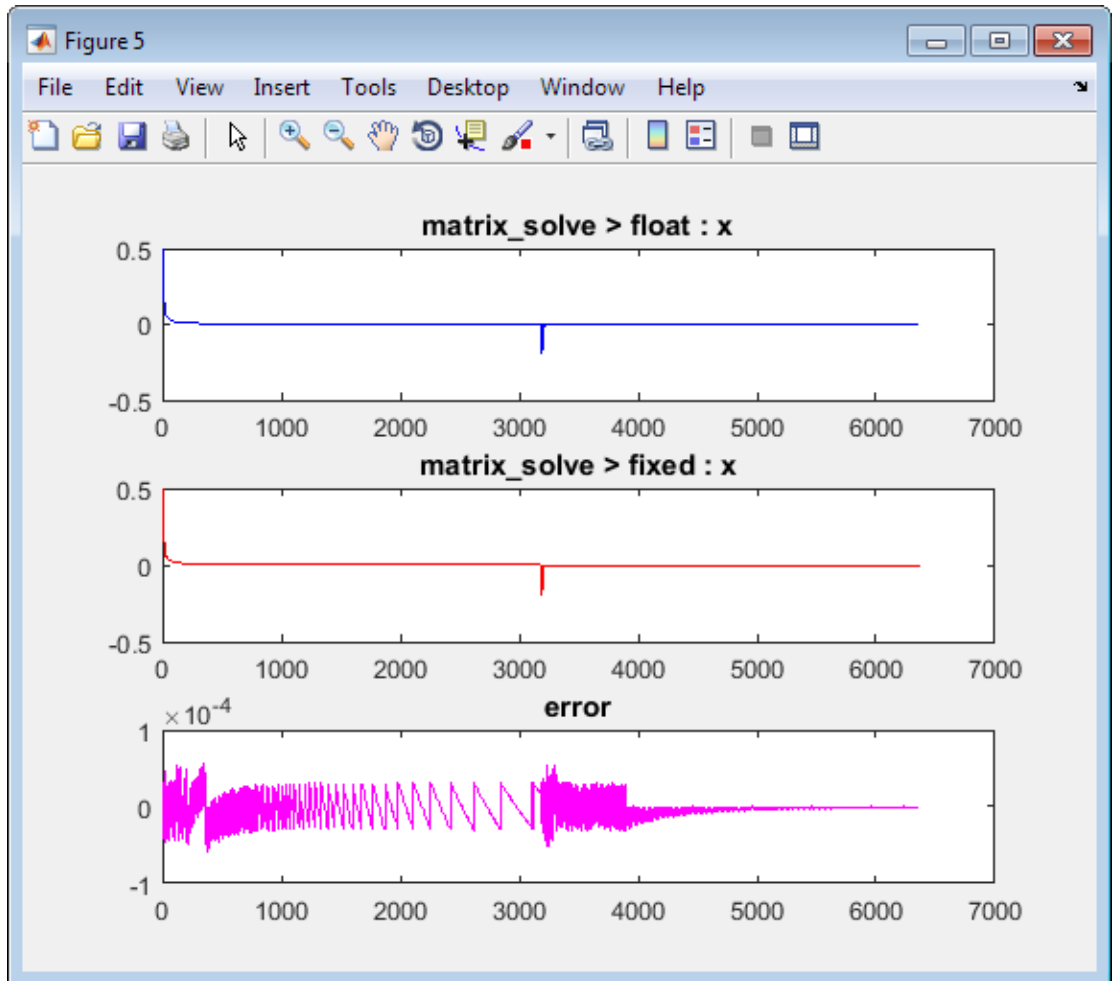

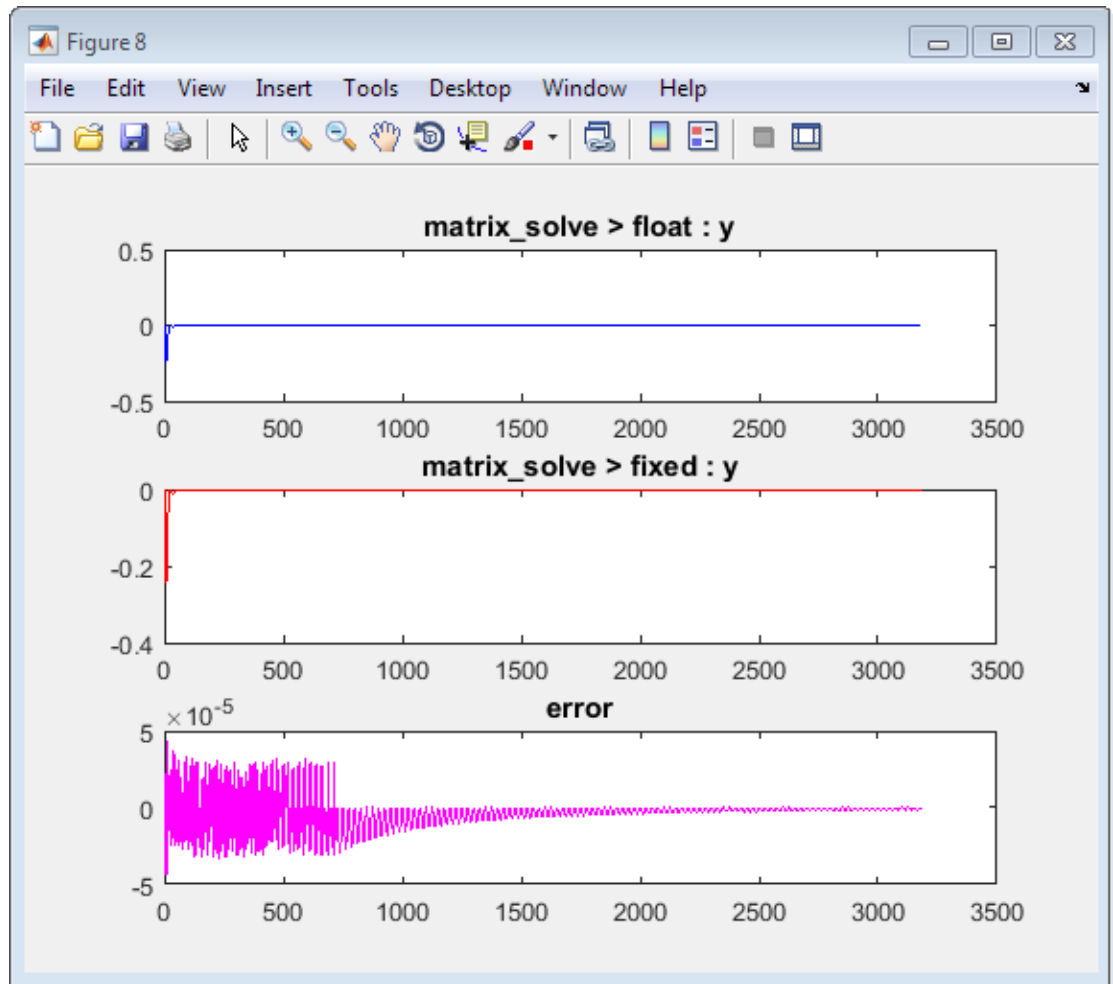

After you determine the `fimath` settings that address the issues in the `matrix_solve` function, apply these settings when converting the `kalman_filter` function.

- 4 Close the Fixed Point Converter.


Convert `kalman_filter` Function Using New `fimath` Settings

- 1 Remove the additional variables that you added to the output arguments of the `kalman_filter` and `matrix_solve` functions. Save the files.
- 2 Open the Fixed-Point Converter.
- 3 On the **Select Source Files** page, specify `kalman_filter` as the entry-point file.
- 4 On the **Define Input Types** page, add `kalman_filter_tb` as the test file, and click **Autodefine Input Types**. On the next page, click **Check for Issues**.
- 5 On the **Convert to Fixed Point** page, click **Settings**.

Use the same settings that you used when converting the `matrix_solve` function. Under **fimath**, set the **Rounding method** to **Nearest**. Set the **Overflow action** to **Saturate**.

- 6 Click **Simulate** to gather data type proposals, and then click **Convert** to apply the proposals.
- 7 Click the arrow next to **Test** and ensure that **Log inputs and outputs for comparison plots** is selected. Click **Test**.

Examine the plot for output variable, `y`.

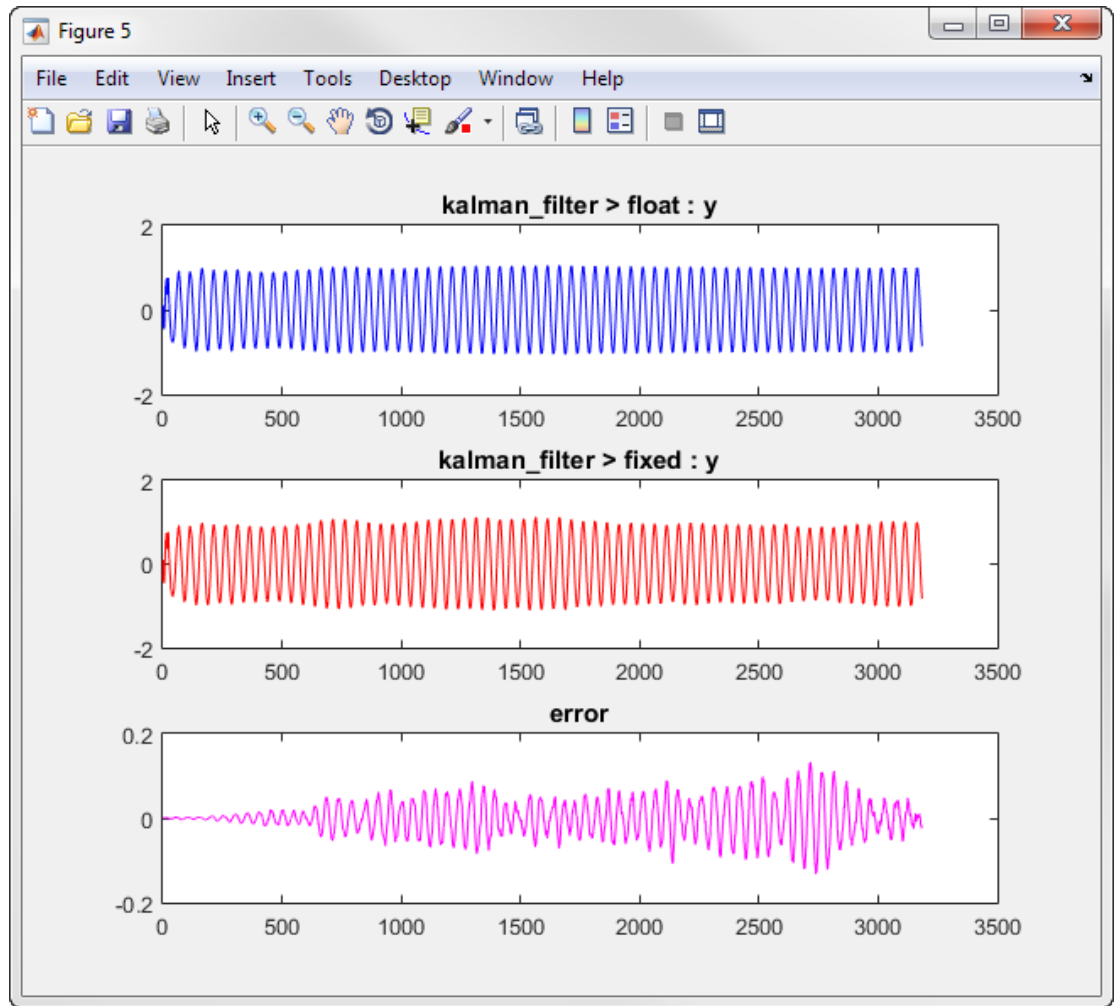


The new `fimath` settings improve the output, but some error still remains.

Adjust Word Length Settings

Adjusting the default word length improves the accuracy of the generated fixed-point design.

- 1 Click **Settings** and change the default word length to 32. Click **Convert** to apply the new settings.
- 2 Click **Test**. The error for the output variable y is accumulating.

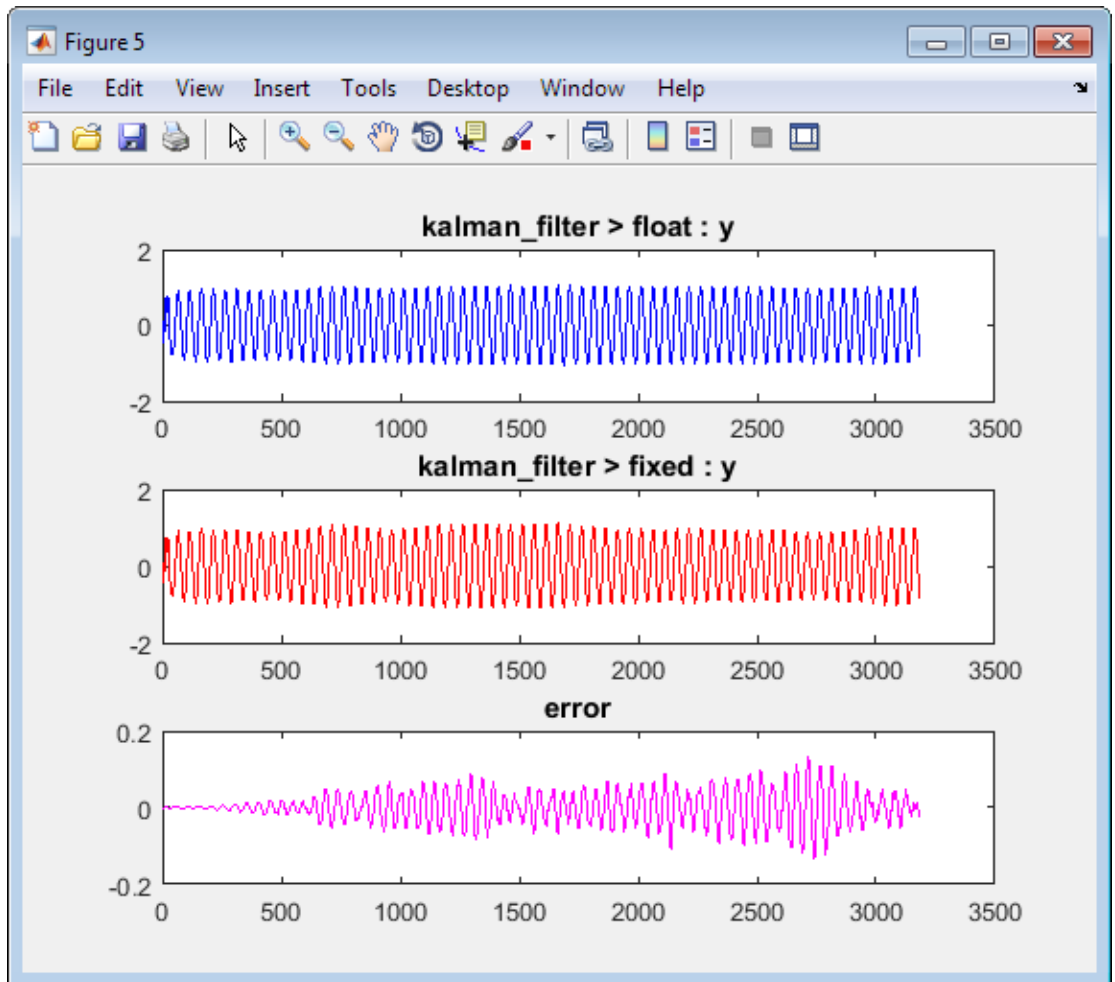

- 3 Close the Fixed-Point Converter.

Replace Constant Functions

The `kalman_stm` function computes the state transition matrix, which is a constant. You do not need to convert this function to fixed point. To avoid unnecessary quantization through computation, replace this function with a double-precision constant. By replacing the function with a constant, the state transition matrix undergoes quantization only once.

- 1 Edit the `kalman_filter` function. Replace the call to the `kalman_stm` function with the equivalent double constant.


```
A = [0.992114701314478, -0.125333233564304; ...  
     0.125333233564304, 0.992114701314478];
```


- 2 Open the Fixed-Point Converter app. On the **Select Source Files** page, select `kalman_filter`.
- 3 On the **Define Input Types** page, select `kalman_filter_tb` as the test file. On the **Check for Run-Time Issues** page, click **Check for Issues**.
- 4 On the **Convert to Fixed Point** page, click **Settings**.

Use the same settings as before. Under **fimath**, set the **Rounding method** to **Nearest**. Set the **Overflow action** to **Saturate**. Set the default word length to **32**.

- 5 Click **Simulate**, and then click **Convert**.
- 6 Click the **Test** arrow and select the **Log inputs and outputs for comparison plots** check box. Click **Test**.

The error on the plot for the functions output y is now on the order of 10^{-6} , which is acceptable for this design.

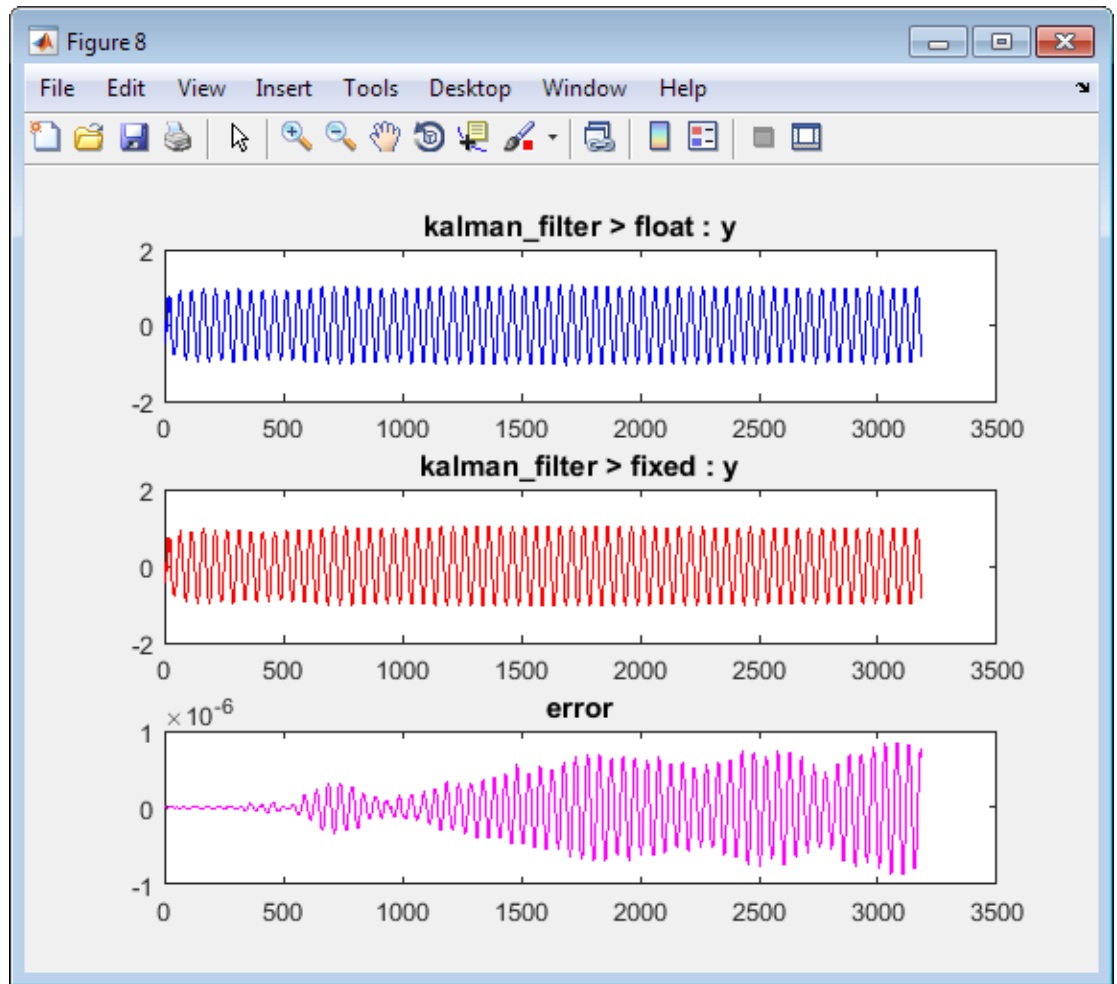

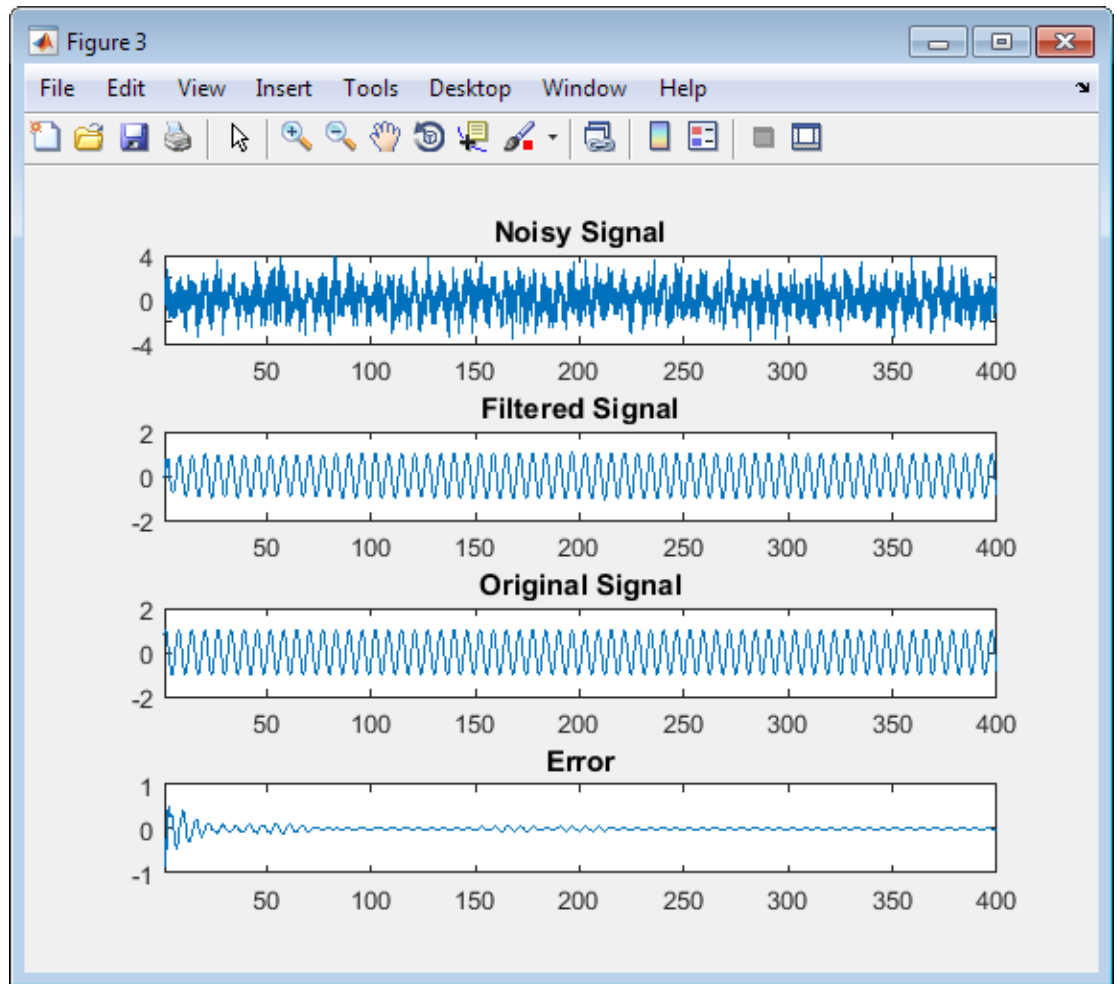

MATLAB Language Features Supported for Automated Fixed-Point Conversion

In this section...

“MATLAB Language Features Supported for Automated Fixed-Point Conversion” on page 8-47

“MATLAB Language Features Not Supported for Automated Fixed-Point Conversion” on page 8-49

MATLAB Language Features Supported for Automated Fixed-Point Conversion

Fixed-Point Designer supports the following MATLAB language features in automated fixed-point conversion:

- N-dimensional arrays
- Matrix operations, including deletion of rows and columns
- Variable-sized data (see “Generate Code for Variable-Size Data”). Range computation for variable-sized data is supported via simulation mode only. Variable-sized data is not supported for comparison plotting.
- Subscripting (see “Incompatibility with MATLAB in Matrix Indexing Operations for Code Generation”)
- Complex numbers (see “Code Generation for Complex Data”)
- Numeric classes (see “Supported Variable Types”)
- Double-precision, single-precision, and integer math
- Fixed-point arithmetic (see “Code Acceleration and Code Generation from MATLAB”)
- Program control statements `if`, `switch`, `for`, `while`, and `break`
- Arithmetic, relational, and logical operators
- Local functions
- Global variables
- Persistent variables (see “Define and Initialize Persistent Variables”)
- Structures. Range computation for structures is supported via simulation mode only.
- Characters

The complete set of Unicode® characters is not supported for code generation. Characters are restricted to 8 bits of precision in generated code. Because many mathematical operations require more than 8 bits of precision, it is recommended that you do not perform arithmetic with characters if you intend to convert your MATLAB algorithm to fixed point.

- MATLAB classes. Range computation for MATLAB classes is supported via simulation mode only.

Automated conversion supports:

- Class properties
- Constructors
- Methods
- Specializations

It does not support class inheritance or packages. For more information, see “Fixed-Point Code for MATLAB Classes”.

- Ability to call functions (see “Resolution of Function Calls for Code Generation” on page 15-2)
- Subset of MATLAB toolbox functions (see “Functions Supported for Code Acceleration or C Code Generation”).
- Subset of DSP System Toolbox™ System objects.

The DSP System Toolbox System objects supported for automated conversion are:

- `dsp.ArrayVectorAdder`
- `dsp.BiquadFilter`
- `dsp.FIRDecimator`
- `dsp.FIRInterpolator`
- `dsp.FIRFilter` (Direct Form and Direct Form Transposed only)
- `dsp.FIRRateConverter`
- `dsp.LowerTriangularSolver`
- `dsp.LUFactor`
- `dsp.UpperTriangularSolver`
- `dsp.VariableFractionalDelay`

- `dsp.Window`

MATLAB Language Features Not Supported for Automated Fixed-Point Conversion

Fixed-Point Designer does not support the following features in automated fixed-point conversion:

- Anonymous functions
- Cell arrays
- Function handles
- Java[®]
- Nested functions
- Recursion
- Sparse matrices
- `try/catch` statements
- `varargin` and `varargout`

Generated Fixed-Point Code

In this section...

“Location of Generated Fixed-Point Files” on page 8-50

“Minimizing `fi`-casts to Improve Code Readability” on page 8-51

“Avoiding Overflows in the Generated Fixed-Point Code” on page 8-51

“Controlling Bit Growth” on page 8-52

“Avoiding Loss of Range or Precision” on page 8-52

“Handling Non-Constant `mpower` Exponents” on page 8-54

Location of Generated Fixed-Point Files

By default, the fixed-point conversion process generates files in a folder named `codegen/fcn_name/fixpt` in your local working folder. `fcn_name` is the name of the MATLAB function that you are converting to fixed point.

File name	Description
<code>fcn_name_fixpt.m</code>	Generated fixed-point MATLAB code. To integrate this fixed-point code into a larger application, consider generating a MEX-function for the function and calling this MEX-function in place of the original MATLAB code.
<code>fcn_name_fixpt_exVal.mat</code>	MAT-file containing: <ul style="list-style-type: none"> • A structure for the input arguments. • The name of the fixed-point file.
<code>fcn_name_fixpt_report.html</code>	Link to the type proposal report that displays the generated fixed-point code and the proposed type information.
<code>fcn_name_report.html</code>	Link to the type proposal report that displays the original MATLAB code and the proposed type information.

File name	Description
fcn_name_wrapper_fixpt.m	File that converts the floating-point data values supplied by the test file to the fixed-point types determined for the inputs during the conversion step. These fixed-point values are fed into the converted fixed-point function, fcn_name_fixpt.

Minimizing `fi`-casts to Improve Code Readability

The conversion process tries to reduce the number of `fi`-casts by analyzing the floating-point code. If an arithmetic operation is comprised of only compile-time constants, the conversion process does not cast the operands to fixed point individually. Instead, it casts the entire expression to fixed point.

For example, here is the fixed-point code generated for the constant expression $x = 1/\sqrt{2}$ when the selected word length is 14.

Original MATLAB Code	Generated Fixed-Point Code
<code>x = 1/sqrt(2);</code>	<code>x = fi(1/sqrt(2), 0, 14, 14, fm);</code> <code>fm is the local fimath.</code>

Avoiding Overflows in the Generated Fixed-Point Code

The conversion process avoids overflows by:

- Using full-precision arithmetic unless you specify otherwise.
- Avoiding arithmetic operations that involve double and `fi` data types. Otherwise, if the word length of the `fi` data type is not able to represent the value in the double constant expression, overflows occur.
- Avoiding overflows when adding and subtracting non fixed-point variables and fixed-point variables.

The fixed-point conversion process casts non-`fi` expressions to the corresponding `fi` type.

For example, consider the following MATLAB algorithm.

```
% A = 5;
% B = ones(300, 1)
function y = fi_plus_non_fi(A, B)
    % '1024' is non-fi, cast it
    y = A + 1024;
    % 'size(B, 1)*length(A)' is a non-fi, cast it
    y = A + size(B, 1)*length(A);
end
```

The generated fixed-point code is:

```
##codegen
% A = 5;
% B = ones(300, 1)
function y = fi_plus_non_fi_fixpt(A, B)
    % '1024' is non-fi, cast it
    fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap',...
                'ProductMode', 'FullPrecision', 'MaxProductWordLength', 128,...
                'SumMode', 'FullPrecision', 'MaxSumWordLength', 128);

    y = fi(A + fi(1024, 0, 11, 0, fm), 0, 11, 0, fm);
    % 'size(B, 1)*length(A)' is a non-fi, cast it
    y(:) = A + fi(size(B, 1)*length(A), 0, 9, 0, fm);
end
```

Controlling Bit Growth

The conversion process controls bit growth by using subscripted assignments, that is, assignments that use the colon (:) operator, in the generated code. When you use subscripted assignments, MATLAB overwrites the value of the left-hand side argument but retains the existing data type and array size. Using subscripted assignment keeps fixed-point variables fixed point rather than inadvertently turning them into doubles. Maintaining the fixed-point type reduces the number of type declarations in the generated code. Subscripted assignment also prevents bit growth which is useful when you want to maintain a particular data type for the output.

Avoiding Loss of Range or Precision

Avoiding Loss of Range or Precision in Unsigned Subtraction Operations

When the result of the subtraction is negative, the conversion process promotes the left operand to a signed type.

For example, consider the following MATLAB algorithm.

```
% A = 1;
% B = 5
function [y,z] = unsigned_subtraction(A,B)
    y = A - B;

    C = -20;
    z = C - B;
end
```

In the original code, both *A* and *B* are unsigned and the result of *A*-*B* can be negative. In the generated fixed-point code, *A* is promoted to signed. In the original code, *C* is signed, so does not require promotion in the generated code.

```
 %#codegen
% A = 1;
% B = 5
function [y,z] = unsigned_subtraction_fixpt(A,B)

fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap',...
           'ProductMode', 'FullPrecision', 'MaxProductWordLength', 128,...
           'SumMode', 'FullPrecision', 'MaxSumWordLength', 128);

y = fi(fi_signed(A) - B, 1, 3, 0, fm);
C = fi(-20, 1, 6, 0, fm);
z = fi(C - B, 1, 6, 0, fm);
end

function y = fi_signed(a)
coder.inline( 'always' );
if isfi( a ) && ~(issigned( a ))
    nt = numerictype( a );
    new_nt = numerictype( 1, nt.WordLength + 1, nt.FractionLength );
    y = fi( a, new_nt, fimath( a ) );
else
    y = a;
end
end
```

Avoiding Loss of Range When Concatenating Arrays of Fixed-Point Numbers

If you concatenate matrices using `vertcat` and `horzcat`, the conversion process uses the largest numeric type among the expressions of a row and casts the leftmost element to that type. This type is then used for the concatenated matrix to avoid loss of range.

For example, consider the following MATLAB algorithm.

```
% A = 1, B = 100, C = 1000
function [y, z] = lb_node(A, B, C)
    %% single rows
    y = [A B C];
    %% multiple rows
    z = [A 5; A B; A C];
end
```

In the generated fixed-point code:

- For the expression $y = [A \ B \ C]$, the leftmost element, A , is cast to the type of C because C has the largest type in the row.
- For the expression $[A \ 5; \ A \ B; \ A \ C]$:
 - In the first row, A is cast to the type of C because C has the largest type of the whole expression.
 - In the second row, A is cast to the type of B because B has the larger type in the row.
 - In the third row, A is cast to the type of C because C has the larger type in the row.

```
##codegen
% A = 1, B = 100, C = 1000
function [y, z] = lb_node_fixpt(A, B, C)
    %% single rows
    fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap', ...
               'ProductMode', 'FullPrecision', 'MaxProductWordLength', 128, ...
               'SumMode', 'FullPrecision', 'MaxSumWordLength', 128);

    y = fi([fi(A, 0, 10, 0, fm) B C], 0, 10, 0, fm);

    %% multiple rows
    z = fi([fi(A, 0, 10, 0, fm) 5; fi(A, 0, 7, 0, fm) B; ...
           fi(A, 0, 10, 0, fm) C], 0, 10, 0, fm);
end
```

Handling Non-Constant mpower Exponents

If the function that you are converting has a scalar input, and the `mpower` exponent input is not constant, the conversion process sets the `fimath ProductMode` to

SpecifyPrecision in the generated code. With this setting, the output data type can be determined at compile time.

For example, consider the following MATLAB algorithm.

```
% a = 1
% b = 3
function y = exp_operator(a, b)
    % exponent is a constant so no need to specify precision
    y = a^3;
    % exponent is not a constant, use 'SpecifyPrecision' for 'ProductMode'
    y = b^a;
end
```

In the generated fixed-point code, for the expression $y = a^3$, the exponent is a constant, so there is no need to specify precision. For the expression, $y = b^a$, the exponent is not constant, so the ProductMode is set to SpecifyPrecision.

```
##codegen
% a = 1
% b = 3
function y = exp_operator_fixpt(a, b)
    % exponent is a constant so no need to specify precision
    fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap',...
               'ProductMode', 'FullPrecision', 'MaxProductWordLength', 128,...
               'SumMode', 'FullPrecision', 'MaxSumWordLength', 128);

    y = fi(a^3, 0, 2, 0, fm);
    % exponent is not a constant, use 'SpecifyPrecision' for 'ProductMode'
    y(:) = fi(b, 'ProductMode', 'SpecifyPrecision',...
              'ProductWordLength', 2, 'ProductFractionLength', 0)^a;
end
```

Fixed-Point Code for MATLAB Classes

In this section...
“Automated Conversion Support for MATLAB Classes” on page 8-56
“Unsupported Constructs” on page 8-56
“Coding Style Best Practices” on page 8-57

Automated Conversion Support for MATLAB Classes

The automated fixed-point conversion process:

- Proposes fixed-point data types based on simulation ranges for MATLAB classes. It does not propose data types based on derived ranges for MATLAB classes.

After simulation, the Fixed-Point Converter app:

- Function list contains class constructors, methods, and specializations.
- Code window displays the objects used in each function.
- Provides code coverage for methods.

For more information, see “Viewing Information for MATLAB Classes”.

- Supports class methods, properties, and specializations. For each specialization of a class, `class_name`, the conversion generates a separate `class_name_fixpt.m` file. For every instantiation of a class, the generated fixed-point code contains a call to the constructor of the appropriate specialization.
- Supports classes that have `get` and `set` methods such as `get.PropertyName`, `set.PropertyName`. These methods are called when properties are read or assigned. The `set` methods can be specialized. Sometimes, in the generated fixed-point code, assignment statements are transformed to function calls.

Unsupported Constructs

The automated conversion process does not support:

- Class inheritance.
- Packages.
- Constructors that use `nargin` and `varargin`.

Coding Style Best Practices

When you write MATLAB code that uses MATLAB classes:

- Initialize properties in the class constructor.
- Replace constant properties with static methods.

For example, consider the `counter` class.

```
classdef Counter < handle
    properties
        Value = 0;
    end

    properties(Constant)
        MAX_VALUE = 128
    end

    methods
        function out = next(this)
            out = this.Count;
            if this.Value == this.MAX_VALUE
                this.Value = 0;
            else
                this.Value = this.Value + 1;
            end
        end
    end
end
```

To use the automated fixed-point conversion process, rewrite the class to have a static class that initializes the constant property `MAX_VALUE` and a constructor that initializes the property `Value`.

```
classdef Counter < handle
    properties
        Value;
    end

    methods(Static)
        function t = MAX_VALUE()
            t = 128;
        end
    end
end
```

```
methods
function this = Counter()
    this.Value = 0;
end
function out = next(this)
    out = this.Value;
    if this.Value == this.MAX_VALUE
        this.Value = 0;
    else
        this.Value = this.Value + 1;
    end
end
end
end
```

Automated Fixed-Point Conversion Best Practices

In this section...

“Create a Test File” on page 8-59

“Prepare Your Algorithm for Code Acceleration or Code Generation” on page 8-60

“Check for Fixed-Point Support for Functions Used in Your Algorithm” on page 8-61

“Manage Data Types and Control Bit Growth” on page 8-61

“Convert to Fixed Point” on page 8-62

“Use the Histogram to Fine-Tune Data Type Settings” on page 8-63

“Optimize Your Algorithm” on page 8-64

“Avoid Explicit Double and Single Casts” on page 8-66

Create a Test File

A best practice for structuring your code is to separate your core algorithm from other code that you use to test and verify the results. Create a test file to call your original MATLAB algorithm and fixed-point versions of the algorithm. For example, as shown in the following table, you might set up some input data to feed into your algorithm, and then, after you process that data, create some plots to verify the results. Since you need to convert only the algorithmic portion to fixed point, it is more efficient to structure your code so that you have a test file, in which you create your inputs, call your algorithm, and plot the results, and one (or more) algorithmic files, in which you do the core processing.

Original code	Best Practice	Modified code
<pre>% TEST INPUT x = randn(100,1); % ALGORITHM y = zeros(size(x)); y(1) = x(1); for n=2:length(x) y(n)=y(n-1) + x(n); end % VERIFY RESULTS yExpected=cumsum(x); plot(y-yExpected)</pre>	<p>Issue</p> <p>Generation of test input and verification of results are intermingled with the algorithm code.</p> <p>Fix</p> <p>Create a test file that is separate from your algorithm.</p>	<p>Test file</p> <pre>% TEST INPUT x = randn(100,1); % ALGORITHM y = cumulative_sum(x); % VERIFY RESULTS yExpected = cumsum(x); plot(y-yExpected) title('Error')</pre>

Original code	Best Practice	Modified code
<code>title('Error')</code>	Put the algorithm in its own function.	Algorithm in its own function <pre>function y = cumulative_sum(x) y = zeros(size(x)); y(1) = x(1); for n=2:length(x) y(n) = y(n-1) + x(n); end end</pre>

You can use the test file to:

- Verify that your floating-point algorithm behaves as you expect before you convert it to fixed point. The floating-point algorithm behavior is the baseline against which you compare the behavior of the fixed-point versions of your algorithm.
- Propose fixed-point data types.
- Compare the behavior of the fixed-point versions of your algorithm to the floating-point baseline.
- Help you determine initial values for static ranges.

By default, the Fixed-Point Converter app shows code coverage results. Your test files should exercise the algorithm over its full operating range so that the simulation ranges are accurate. For example, for a filter, realistic inputs are impulses, sums of sinusoids, and chirp signals. With these inputs, using linear theory, you can verify that the outputs are correct. Signals that produce maximum output are useful for verifying that your system does not overflow. The quality of the proposed fixed-point data types depends on how well the test files cover the operating range of the algorithm with the accuracy that you want. Reviewing code coverage results help you verify that your test file is exercising the algorithm adequately. Review code flagged with a red code coverage bar because this code is not executed. If the code coverage is inadequate, modify the test file or add more test files to increase coverage. See “Code Coverage”.

Prepare Your Algorithm for Code Acceleration or Code Generation

The automated conversion process instruments your code and provides data type proposals to help you convert your algorithm to fixed point.

MATLAB algorithms that you want to convert to fixed point automatically must comply with code generation requirements and rules. To view the subset of the MATLAB

language that is supported for code generation, see “Functions and Objects Supported for C and C++ Code Generation — Alphabetical List”.

To help you identify unsupported functions or constructs in your MATLAB code, add the `%#codegen` pragma to the top of your MATLAB file. The MATLAB Code Analyzer flags functions and constructs that are not available in the subset of the MATLAB language supported for code generation. This advice appears in real time as you edit your code in the MATLAB editor. For more information, see “Check Code Using the MATLAB Code Analyzer”. The software provides a link to a report that identifies calls to functions and the use of data types that are not supported for code generation. For more information, see “Check Code Using the Code Generation Readiness Tool”.

Check for Fixed-Point Support for Functions Used in Your Algorithm

The app flags unsupported function calls found in your algorithm on the **Function Replacements** tab. For example, if you use the `fft` function, which is not supported for fixed point, the tool adds an entry to the table on this tab and indicates that you need to specify a replacement function to use for fixed-point operations.

Variables		Function Replacements
Enter a function to replace		
Function or Operator	Replacement	
▲ Custom Function	<i>Function Name</i>	
<code>fft</code>	Replacement required to use fixed-point	

You can specify additional replacement functions. For example, functions like `sin`, `cos`, and `sqrt` might support fixed point, but for better efficiency, you might want to consider an alternative implementation like a lookup table or CORDIC-based algorithm. The app provides an option to generate lookup table approximations for continuous and stateless single-input, single-output functions in your original MATLAB code. See “Replacing Functions Using Lookup Table Approximations”.

Manage Data Types and Control Bit Growth

The automated fixed-point conversion process automatically manages data types and controls bit growth. It controls bit growth by using subscripted assignments, that


is, assignments that use the colon (:) operator, in the generated code. When you use subscripted assignments, MATLAB overwrites the value of the left-hand side argument but retains the existing data type and array size. In addition to preventing bit growth, subscripted assignment reduces the number of casts in the generated fixed-point code and makes the code more readable.

Convert to Fixed Point

What Are Your Goals for Converting to Fixed Point?

Before you start the conversion, consider your goals for converting to fixed point. Are you implementing your algorithm in C or HDL? What are your target constraints? The answers to these questions determine many fixed-point properties such as the available word length, fraction length, and math modes, as well as available math libraries.

To set up these properties, use the **Advanced** settings.

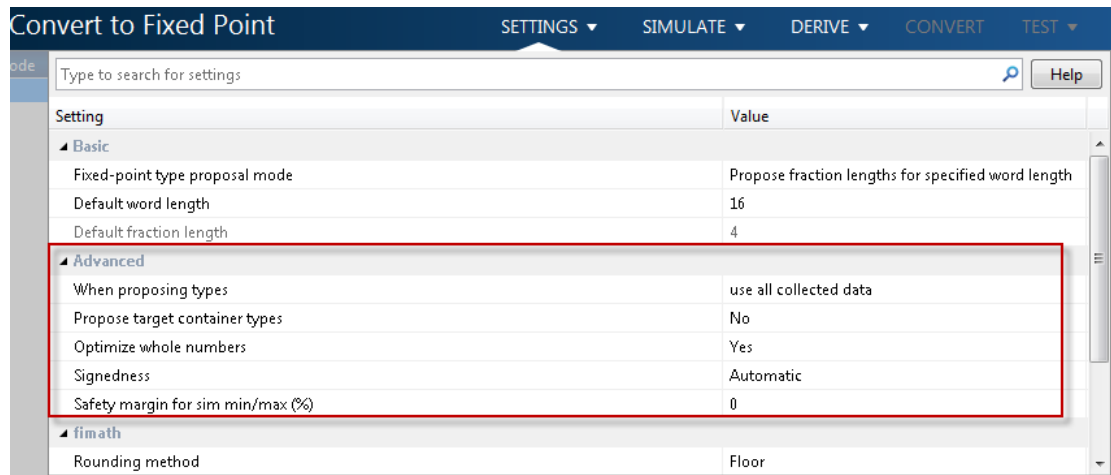


For more information, see “Specify Type Proposal Options”.


Run With Fixed-Point Types and Compare Results

Create a test file to validate that the floating-point algorithm works as expected before converting it to fixed point. You can use the same test file to propose fixed-point data types, and to compare fixed-point results to the floating-point baseline after the

conversion. For more information, see “Running a Simulation” on page 8-8 and “Log Data for Histogram” on page 8-20 .


Use the Histogram to Fine-Tune Data Type Settings

To fine-tune fixed-point type settings, use the histogram. To log data for histograms, in the app, click the **Simulate** arrow  and select **Log data for histogram**.



After simulation and static analysis:

- To view the histogram for a variable, on the **Variables** tab, click the **Proposed Type** field for that variable.

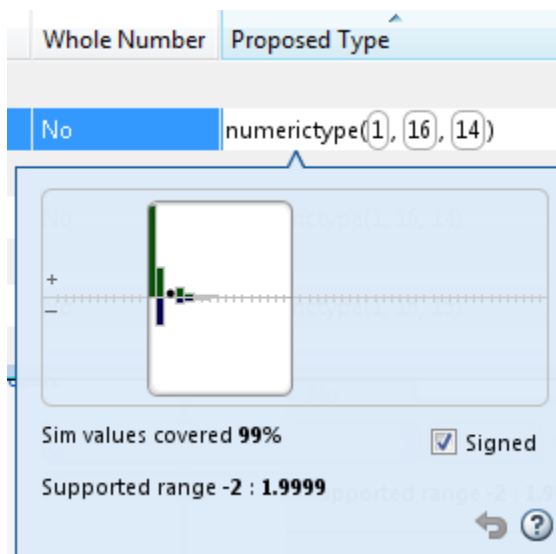

You can view the effect of changing the proposed data types by dragging the edges of the bounding box in the histogram window to change the proposed data type and selecting or clearing the **Signed** option.

- If the values overflow and the range cannot fit the proposed type, the table shows proposed types in red.

When the tool applies data types, it generates an html report that provides overflow information and highlights overflows in red. Review the proposed data types.

Optimize Your Algorithm

Use `fimath` to Get Optimal Types for C or HDL

`fimath` properties define the rules for performing arithmetic operations on `fi` objects, including math, rounding, and overflow properties. You can use the `fimath ProductMode` and `SumMode` properties to retain optimal data types for C or HDL. HDL can have arbitrary word length types in the generated HDL code whereas C requires container types (`uint8`, `uint16`, `uint32`). Use the **Advanced** settings, see “Specify Type Proposal Options”.

C

The `KeepLSB` setting for `ProductMode` and `SumMode` models the behavior of integer operations in the C language, while `KeepMSB` models the behavior of many DSP devices. Different rounding methods require different amounts of overhead code. Setting the `RoundingMethod` property to `FLOOR`, which is equivalent to two's complement truncation, provides the most efficient rounding implementation. Similarly, the standard method for handling overflows is to wrap using modulo arithmetic. Other overflow handling methods create costly logic. Whenever possible, set `OverflowAction` to `Wrap`.

MATLAB Code	Best Practice	Generated C Code
Code being compiled <pre>function y = adder(a,b) y = a + b; end</pre>	Issue With the default word length set to 16 and the default <code>fimath</code> settings, additional code is generated to implement saturation overflow, nearest rounding, and full-precision arithmetic.	<pre>int adder(short a, short b) { int y; int i0; int i1; int i2; int i3; i0 = a; i1 = b; if ((i0 & 65536) != 0) { i2 = i0 -65536; } else { i2 = i0 & 65535; } if ((i1 & 65536) != 0) { i3 = i1 -65536;</pre>
Note: In the app, set Default word length to 16.		

MATLAB Code	Best Practice	Generated C Code												
		<pre> } else { i3 = i1 & 65535; } i0 = i2 + i3; if ((i0 & 65536) != 0) { y = i0 -65536; } else { y = i0 & 65535; } return y; } </pre>												
	<p>Fix</p> <p>To make the generated C code more efficient, choose fixed-point math settings that match your processor types.</p> <p>To customize fixed-point type proposals, use the app Settings. Select fimath and then set:</p> <table border="1" data-bbox="457 999 967 1289"> <tbody> <tr> <td>Rounding method</td> <td>Floor</td> </tr> <tr> <td>Overflow action</td> <td>Wrap</td> </tr> <tr> <td>Product mode</td> <td>KeepLSB</td> </tr> <tr> <td>Sum mode</td> <td>KeepLSB</td> </tr> <tr> <td>Product word length</td> <td>32</td> </tr> <tr> <td>Sum word length</td> <td>32</td> </tr> </tbody> </table>	Rounding method	Floor	Overflow action	Wrap	Product mode	KeepLSB	Sum mode	KeepLSB	Product word length	32	Sum word length	32	<pre> int adder(short a, short b) { return a + b; } </pre>
Rounding method	Floor													
Overflow action	Wrap													
Product mode	KeepLSB													
Sum mode	KeepLSB													
Product word length	32													
Sum word length	32													

HDL

For HDL code generation, set:

- ProductMode and SumMode to FullPrecision
- Overflow action to Wrap
- Rounding method to Floor

Replace Built-in Functions with More Efficient Fixed-Point Implementations

Some MATLAB built-in functions can be made more efficient for fixed-point implementation. For example, you can replace a built-in function with a Lookup table implementation, or a CORDIC implementation, which requires only iterative shift-add operations. For more information, see “Function Replacements” on page 8-22.

Reimplement Division Operations Where Possible

Often, division is not fully supported by hardware and can result in slow processing. When your algorithm requires a division, consider replacing it with one of the following options:

- Use bit shifting when the denominator is a power of two. For example, `bitsra(x,3)` instead of $x/8$.
- Multiply by the inverse when the denominator is constant. For example, $x*0.2$ instead of $x/5$.
- If the divisor is not constant, use a temporary variable for the division. Doing so results in a more efficient data type proposal and, if overflows occur, makes it easier to see which expression is overflowing.

Eliminate Floating-Point Variables

For more efficient code, the automated fixed-point conversion process eliminates floating-point variables. The one exception to this is loop indices because they usually become integer types. It is good practice to inspect the fixed-point code after conversion to verify that there are no floating-point variables in the generated fixed-point code.

Avoid Explicit Double and Single Casts

For the automated workflow, do not use explicit double or single casts in your MATLAB algorithm to insulate functions that do not support fixed-point data types. The automated conversion tool does not support these casts.

Instead of using casts, supply a replacement function. For more information, see “Function Replacements” on page 8-22.

Replacing Functions Using Lookup Table Approximations

The Fixed-Point Designer software provides an option to generate lookup table approximations for continuous and stateless single-input, single-output functions in your original MATLAB code. These functions must be on the MATLAB path.

You can use this capability to handle functions that are not supported for fixed point and to replace your own custom functions. The fixed-point conversion process infers the ranges for the function and then uses an interpolated lookup table to replace the function. You can control the interpolation method and number of points in the lookup table. By adjusting these settings, you can tune the behavior of replacement function to match the behavior of the original function as closely as possible.

The fixed-point conversion process generates one lookup table approximation per call site of the function that needs replacement.

To use lookup table approximations in the Fixed-Point Converter app, see “Replace the exp Function with a Lookup Table” and “Replace a Custom Function with a Lookup Table”.

To use lookup table approximations in the programmatic workflow, see `coder.approximation`, “Replace the exp Function with a Lookup Table”, and “Replace a Custom Function with a Lookup Table”.

Custom Plot Functions

The Fixed-Point Converter app provides a default time series based plotting function. The conversion process uses this function at the test numerics step to show the floating-point and fixed-point results and the difference between them. However, during fixed-point conversion you might want to visualize the numerical differences in a view that is more suitable for your application domain. For example, plots that show eye diagrams and bit error differences are more suitable in the communications domain and histogram difference plots are more suitable in image processing designs.

You can choose to use a custom plot function at the test numerics step. The Fixed-Point Converter app facilitates custom plotting by providing access to the raw logged input and output data before and after fixed-point conversion. You supply a custom plotting function to visualize the differences between the floating-point and fixed-point results. If you specify a custom plot function, the fixed-point conversion process calls the function for each input and output variable, passes in the name of the variable and the function that uses it, and the results of the floating-point and fixed-point simulations.

Your function should accept three inputs:

- A structure that holds the name of the variable and the function that uses it.

Use this information to:

- Customize plot headings and axes.
- Choose which variables to plot.
- Generate different error metrics for different output variables.
- A cell array to hold the logged floating-point values for the variable.

This cell array contains values observed during floating-point simulation of the algorithm during the test numerics phase. You might need to reformat this raw data.

- A cell array to hold the logged values for the variable after fixed-point conversion.

This cell array contains values observed during fixed-point simulation of the converted design.

For example, function `customComparisonPlot(varInfo, floatVarVals, fixedPtVarVals)`.

To use a custom plot function, in the Fixed-Point Converter app, select **Advanced**, and then set **Custom plot function** to the name of your plot function. See “Visualize Differences Between Floating-Point and Fixed-Point Results”.

In the programmatic workflow, set the `coder.FixptConfig` configuration object `PlotFunction` property to the name of your plot function. See “Visualize Differences Between Floating-Point and Fixed-Point Results”.

Generate Fixed-Point MATLAB Code for Multiple Entry-Point Functions

When your end goal is to generate fixed-point C/C++ library functions, generating a single C/C++ library for more than one entry-point MATLAB function allows you to:

- Create C/C++ libraries containing multiple, compiled MATLAB files to integrate with larger C/C++ applications. Generating C/C++ code requires a MATLAB Coder license.
- Share code efficiently between library functions.
- Communicate between library functions using shared memory.

Note: If any of the entry-point functions in a project share memory (for example, persistent data), an error will occur. In this case, you should rewrite your code to avoid invoking functions with persistent data from multiple entry-points.

Convert Two Entry-Point Functions to Fixed-Point Using the Fixed-Point Converter App

In this example, you convert two entry-point functions, `ep1` and `ep2`, to fixed point.

- 1 In a local writable folder, create the functions `ep1.m` and `ep2.m`.

```
function y = ep1(u) %#codegen
y = u;
end

function y = ep2(u, v) %#codegen
y = u + v;
end
```


- 2 In the same folder, create a test file, `ep_tb.m`, that calls both functions.

```
% test file for ep1 and ep2
u = 1:100;
v = 5:104;
z = ep1(u);
y = ep2(v, z);
```

- 3 From the apps gallery, open the Fixed-Point Converter app.
- 4 To add the first entry-point function, `ep1`, to the project, on the **Select Source Files** page, browse to the `ep1` file, and click **Open**.

By default, the app uses the name of the first entry-point function as the name of the project.


- 5 Click **Add Entry-Point Function** and add the second entry-point function, `ep2`. Click **Next**.
- 6 On the **Define Input Types** page, enter a test file that exercises your two entry-point functions. Browse to select the `ep_tb` file. Click **Autodefine Input Types**.

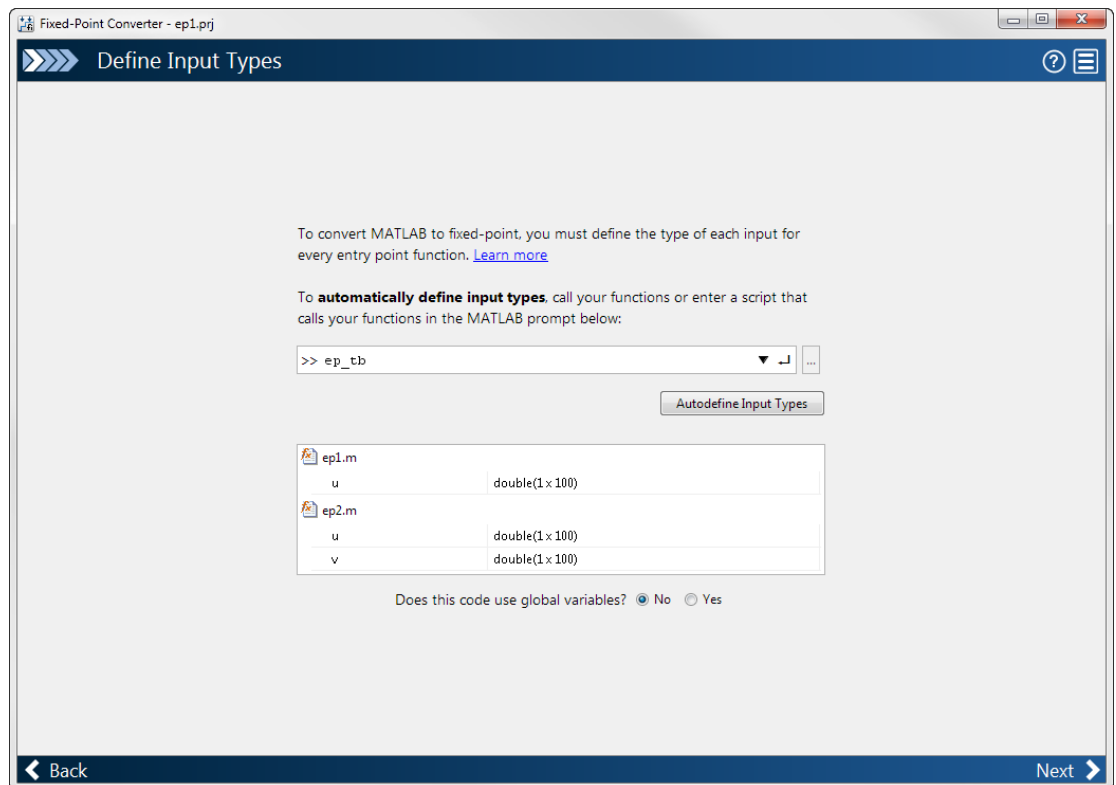

- 7 Click **Next**. On the **Check for Run-Time Issues** page, click **Check for Issues**.


The app runs the `ep_tb` test file again and detects no issues.

- 8 Click **Next**. On the **Convert to Fixed-Point** page, click **Simulate** to simulate the entry-point functions, gather range information, and get proposed data types.

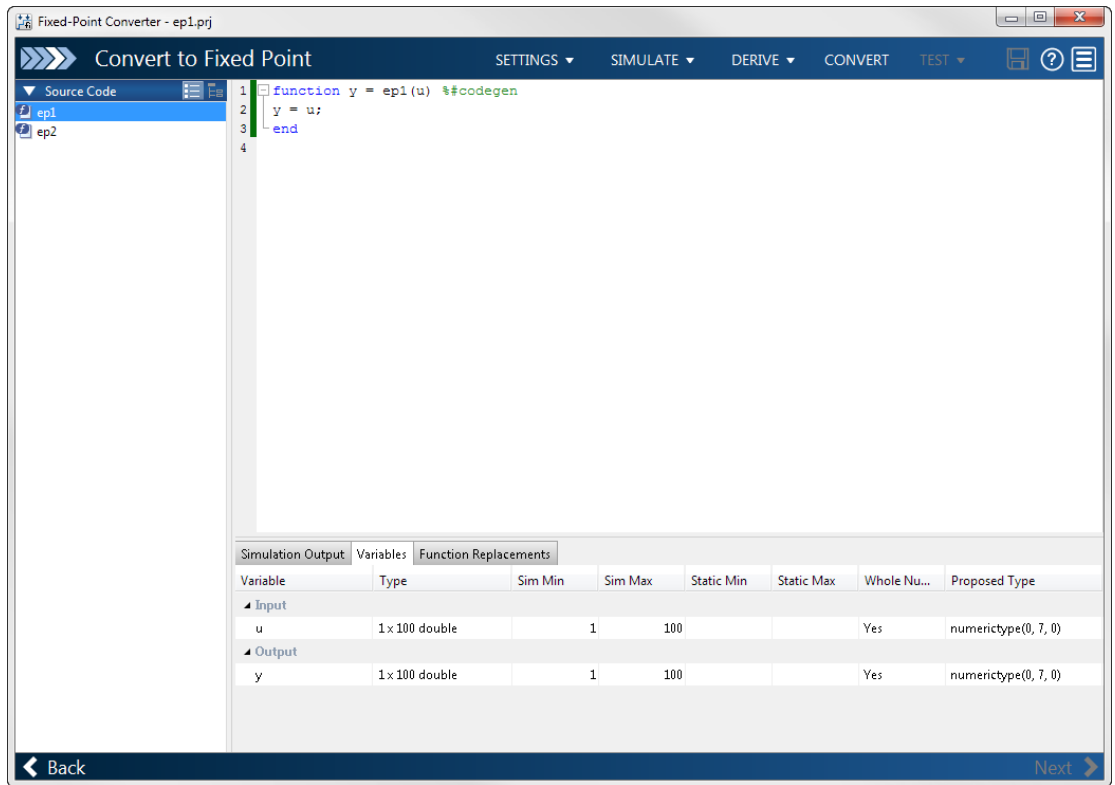

9 Click **Convert**.

The entry-point functions **ep1** and **ep2** convert to fixed point. The **Output Files** pane lists the generated fixed-point and wrapper files for both entry-point functions.

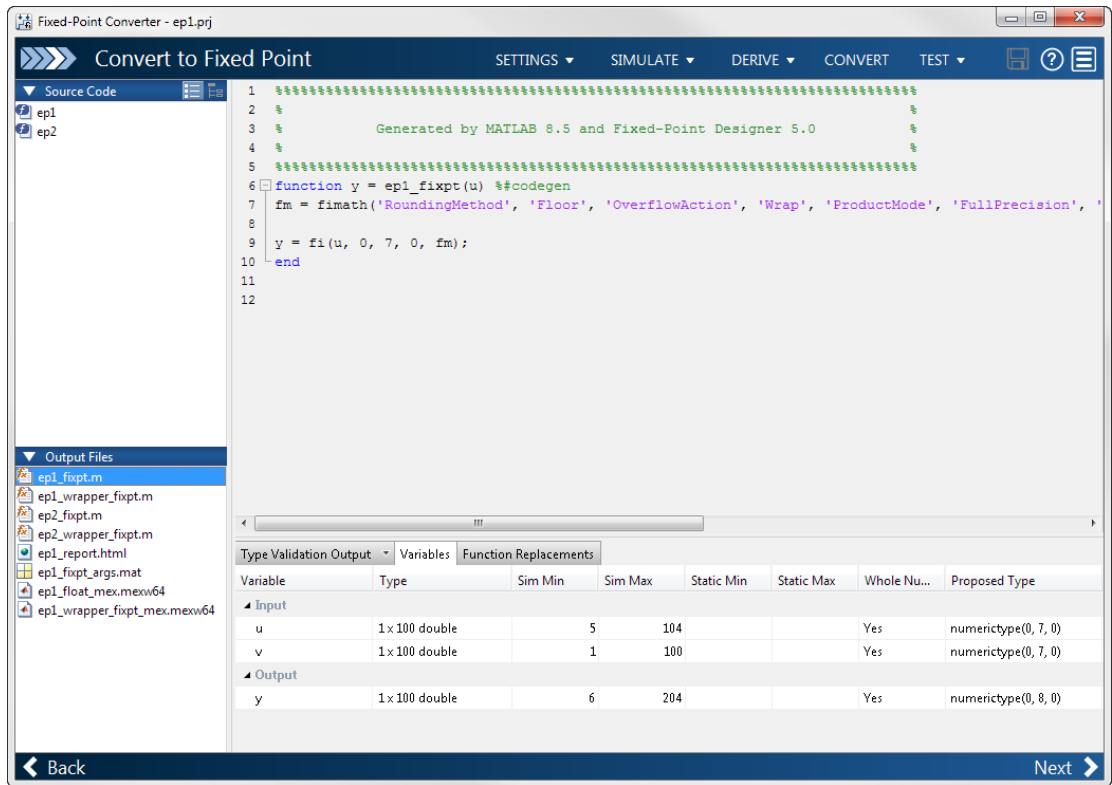

- 10 Click **Next**. The **Finish Workflow** page contains the project summary. The generated Fixed-Point Conversion Report contains the reports for both entry-point functions. The app stores the generated files in the subfolder `codegen/ep1/fixpt`.

Convert Code Containing Global Data to Fixed Point

In this section...

“Workflow” on page 8-74

“Declare Global Variables” on page 8-74

“Define Global Data” on page 8-75

“Define Constant Global Data” on page 8-76

“Limitations of Using Global Data” on page 8-78

Workflow

To convert MATLAB code that uses global data to fixed-point:

- 1 Declare the variables as global in your code.

For more information, see “Declare Global Variables” on page 8-74

- 2 Before using the global data, define and initialize it.

For more information, see “Define Global Data” on page 8-75.

- 3 Convert code to fixed-point from the Fixed-Point Converter or using `fiaccel`.

The Fixed-Point Converter always synchronizes global data between MATLAB and the generated MEX function.

Declare Global Variables

When using global data, you must first declare the global variables in your MATLAB code. This code shows the `use_globals` function, which uses two global variables, `AR` and `B`.

```
function y = use_globals(u)
%#codegen
% Declare AR and B as global variables
global AR;
global B;
AR(1) = u + B(1);
```

```
y = AR * 2;
```

Define Global Data

You can define global data in the MATLAB global workspace, in a Fixed-Point Converter project, or at the command line. If you do not initialize global data in a project or at the command line, the software looks for the variable in the MATLAB global workspace.

Define Global Data in the MATLAB Global Workspace

To convert the `use_globals` function described in “Declare Global Variables” on page 8-74, you must first define and initialize the global data.

```
global AR B;
AR = ones(4);
B=[1 2 3];
```

Define Global Data in a Fixed-Point Converter Project

- 1 On the **Define Input Types** page, after selecting and running a test file, select **Yes** next to **Does this code use global variables**.

By default, the Fixed-Point Converter names the first global variable in a project `g`.

- 2 Enter the names of the global variables used in your code. After adding a global variable, specify its type.
- 3 Click **Add global** to enter more global variables.

Note: If you do not specify the type, you must create a variable with the same name in the global workspace.

Define Global Data at the Command Line

To define global data at the command line, use the `fiaccl -globals` option. For example, to convert the `use_globals` function described in “Declare Global Variables” on page 8-74 to fixed-point, specify two global inputs, `AR` and `B`, at the command line. Use the `-args` option to specify that the input `u` is a real, scalar double.

```
fiaccl -float2fixed cfg -global {'AR',ones(4),'B',[1 2 3]} use_globals -args {0}
Alternatively, specify the type and initial value with the -globals flag using the format
-globals {'g', {type, initial_value}}.
```

To provide initial values for variable-size global data, specify the type and initial value with the `-globals` flag using the format `-globals {'g', {type, initial_value}}`. For example, to specify a global variable `g` that has an initial value `[1 1]` and upper bound `[2 2]`, enter:

```
fiaccel -float2fixed cfg -global {'g', {coder.typeof(0, [2 2],1),[1 1]}} myfunction
```


For a detailed explanation of the syntax, see `coder.typeof`.

Define Constant Global Data

If you know that the value of a global variable does not change at run time, you can reduce overhead in the fixed-point code by specifying that the global variable has a constant value. You cannot write to the constant global variable.

Define Constant Global Data in the Fixed-Point Converter

- 1 On the **Define Input Types** page, after selecting and running a test file, select **Yes** next to **Does this code use global variables**.
- 2 Enter the name of the global variables used in your code.
- 3 Click the field to the right of the global variable.
- 4 Select **Define Constant Value**.

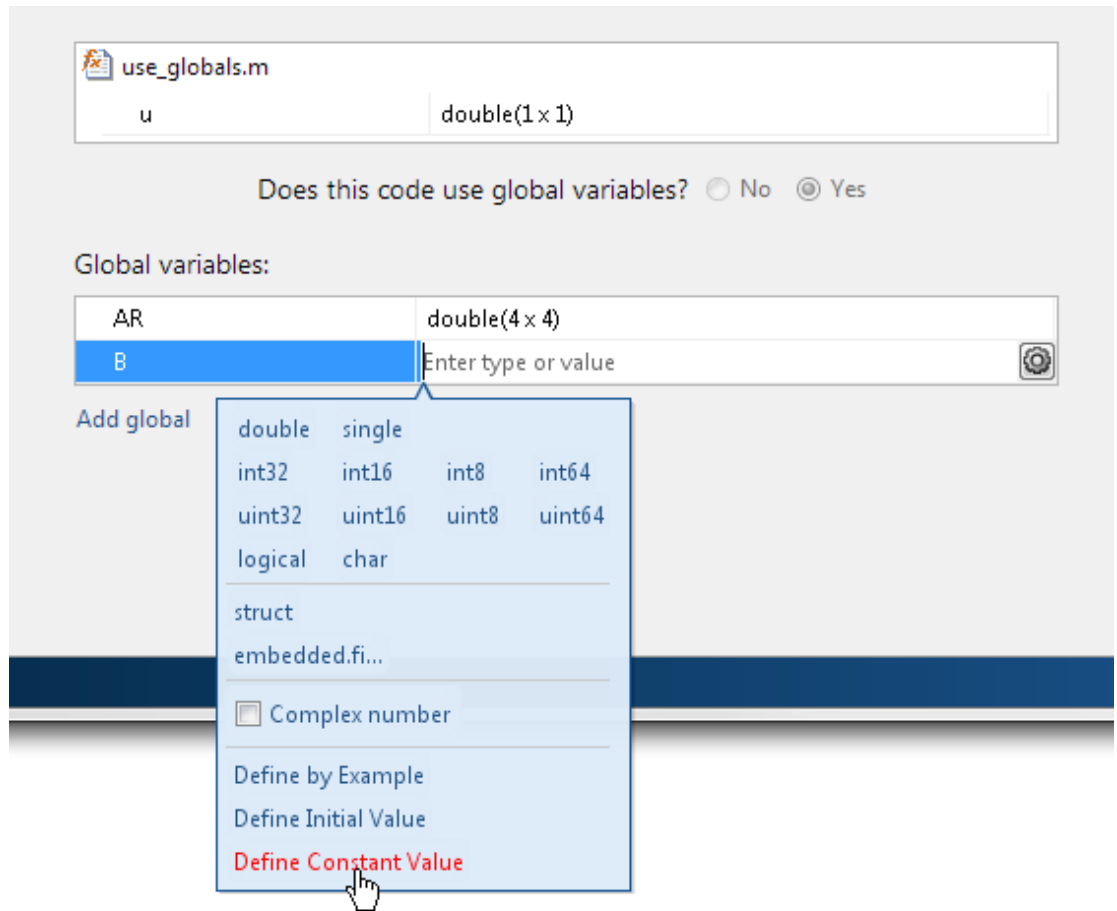

- 5 In the field to the right of the constant global variable, enter a MATLAB expression.

Define Constant Global Data at the Command Line

To specify that a global variable is constant using the `fiaccl` command, use the `-globals` option with the `coder.Constant` class.

- 1 Define a fixed-point conversion configuration object.

```
cfg = coder.config('fixpt');
```

- 2 Use `coder.Constant` to specify that a global variable has a constant value. For example, this code specifies that the global variable `g` has an initial value 4 and that global variable `gc` has the constant value 42.

```
global_values = {'g', 4, 'gc', coder.Constant(42)};
```

- 3 Convert the code to fixed-point using the `-globals` option. For example, convert `myfunction` to fixed-point, specifying that the global variables are defined in the cell array `global_values`.

```
fiaccel -float2fixed cfg -global global_values myfunction
```

Constant Global Data in a Code Generation Report

The code generation report provides this information about a constant global variable:

- Type of `Global` on the **Variables** tab.
- Highlighted variable name in the **Function** pane.

Limitations of Using Global Data

You cannot use global data with the `coder.cstructname` function.

Related Examples

- “Convert Code Containing Global Variables to Fixed-Point” on page 8-79

Convert Code Containing Global Variables to Fixed-Point

This example shows how to convert a MATLAB algorithm containing global variables to fixed-point using the Fixed-Point Converter app.

- 1 In a local writable folder, create the function `use_globals.m`.

```
function y = use_globals(u)
%#codegen
% Declare AR and B as global variables
global AR;
global B;
AR(1) = u + B(1);
y = AR * 2;
```


- 2 In the same folder, create a test file, `use_globals_tb.m` that calls the function.

```
u = 55;
global AR B;
AR = ones(4);
B=[1 2 3];
y = use_globals(u);
```

- 3 On the MATLAB toolstrip, in the **Apps** tab, under **Code Generation**, click the Fixed-Point Converter app icon.
- 4 To add the entry-point function, `use_globals.m` to the project, on the **Select Source Files** page, browse to the file, and click **Open**. Click **Next**.
- 5 On the **Define Input Types** page, add `use_globals_tb.m` as the test file. Click **Autodefine Input Types**.

The app determines from the test file that the input type of the input `u` is `double(1x1)`.

- 6 Select **Yes** next to **Does this code use global variables**. By default, the Fixed-Point Converter app names the first global variable in a project `g`.
- 7 Type in the names of the global variables in your code. In the field to the right of the global variable `AR`, specify its type as `double(4x4)`.
- 8 The global variable `B` is not assigned in the `use_globals` function. Define this variable as a global constant by clicking the field to the right of the constant and selecting **Define Constant Value**. Type in the value of `B` as it is defined in the test file, `[1 2 3]`. The app determines that `B` is a constant (`double(1x3)`).

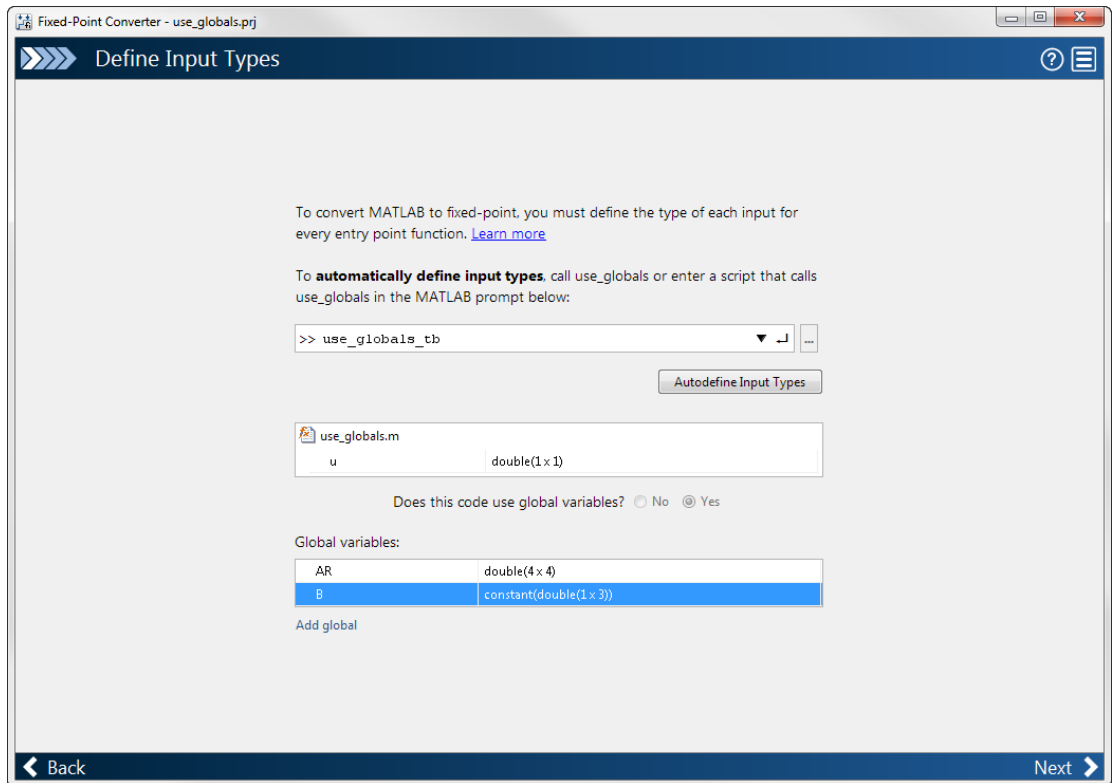


- 9 Click **Next**. On the **Check for Run-Time Issues** page, click **Check for Issues**.

No issues are detected.

- 10 Click **Next**. On the **Convert to Fixed-Point** page, click **Simulate** to simulate the function, gather range information, and get proposed data types.
- 11 Click **Convert** to accept the proposed data types and convert the function to fixed-point.

In the generated fixed-point code, the global variable AR is now AR_g.

The wrapper function contains three global variables: AR, AR_g, and B, where AR_g is set equal to a fi-casted AR, and AR is set equal to a double casted AR_g. The global variable B does not have a separate variable in the fixed-point code because it is a constant.

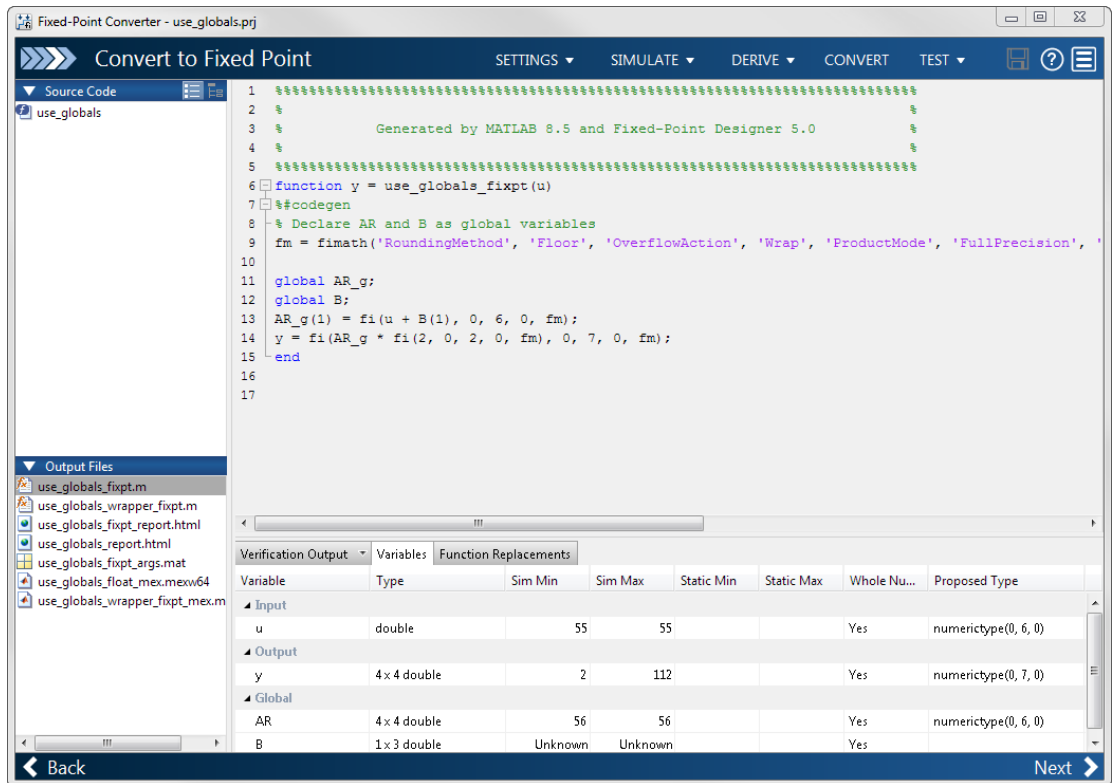

```

function y = use_globals_wrapper_fixpt(u)
    fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap', 'ProductMode', 'FullPrecision', '
    u_in = fi(u, 0, 6, 0, fm);
    global AR B AR_g
    AR_g = fi(AR, 0, 6, 0, fm);
    [y_out] = use_globals_fixpt(u_in);
    AR = double(AR_g);
    y = double(y_out);
end

```

More About


- “Convert Code Containing Global Data to Fixed Point” on page 8-74

Data Type Issues in Generated Code

Within the fixed-point conversion HTML report, you have the option to highlight MATLAB code that results in double, single, or expensive fixed-point operations. Consider enabling these checks when trying to achieve a strict single, or fixed-point design.

These checks are disabled by default.

Enable the Highlight Option in the Fixed-Point Converter App

- 1 On the **Convert to Fixed Point** page, to open the **Settings** dialog box, click the **Settings** arrow .
- 2 Under **Plotting and Reporting**, set **Highlight potential data type issues** to **Yes**.

When conversion is complete, open the fixed-point conversion HTML report to view the highlighting. Click **View report** in the **Type Validation Output** tab.

Enable the Highlight Option at the Command Line

- 1 Create a fixed-point code configuration object:

```
cfg = coder.config('fixpt');
```
- 2 Set the `HighlightPotentialDataTypeIssues` property of the configuration object to `true`.

```
cfg.HighlightPotentialDataTypeIssues = true;
```

Stowaway Doubles

When trying to achieve a strict-single or fixed-point design, manual inspection of code can be time-consuming and error prone. This check highlights all expressions that result in a double operation.

Stowaway Singles

This check highlights all expressions that result in a single operation.

Expensive Fixed-Point Operations

The expensive fixed-point operations check identifies optimization opportunities by highlighting expressions in the MATLAB code which result in cumbersome multiplication or division, or expensive rounding in generated code. For more information on optimizing generated fixed-point code, see “Tips for Making Generated Code More Efficient”.

Cumbersome Operations

Cumbersome operations most often occur due to insufficient range of output. Avoid inputs to a multiply or divide operation that has word lengths larger than the base integer type of your processor. Operations with larger word lengths can be handled in software, but this approach requires much more code and is much slower.

Expensive Rounding

Traditional handwritten code, especially for control applications, almost always uses "no effort" rounding. For example, for unsigned integers and two's complement signed integers, shifting right and dropping the bits is equivalent to rounding to floor. To get results comparable to, or better than, what you expect from traditional handwritten code, use the `FLOOR` rounding method. This check identifies expensive rounding operations in multiplication and division.

Expensive Comparison Operations

Comparison operations generate extra code when a casting operation is required to do the comparison. For example, when comparing an unsigned integer to a signed integer, one of the inputs must first be cast to the signedness of the other before the comparison operation can be performed. Consider optimizing the data types of the input arguments so that a cast is not required in the generated code.

Using the Fixed-Point Converter App with System Objects

You can use the Fixed-Point Converter app to automatically propose and apply data types for commonly used system objects. The proposed data types are based on simulation data from the System object™.

Automated conversion is available for these DSP System Toolbox System Objects:

- `dsp.ArrayVectorAdder`
- `dsp.BiquadFilter`
- `dsp.FIRDecimator`
- `dsp.FIRInterpolator`
- `dsp.FIRFilter` (Direct Form and Direct Form Transposed only)
- `dsp.FIRRateConverter`
- `dsp.LowerTriangularSolver`
- `dsp.LUFactor`
- `dsp.UpperTriangularSolver`
- `dsp.VariableFractionalDelay`
- `dsp.Window`

The Fixed-Point Converter app can display simulation minimum and maximum values, whole number information, and histogram data.

- You cannot propose data types for these System objects based on static range data.
- You must configure the System object to use 'Custom' fixed-point settings.
- The app applies the proposed data types only if the input signal is floating point, not fixed-point.

The app treats scaled doubles as fixed-point. The scaled doubles workflow for System objects is the same as that for regular variables.

- The app ignores the **Default word length** setting in the **Settings** menu. The app also ignores specified rounding and overflow modes. Data-type proposals are based on the settings of the System object.

Related Examples

- “Use the Fixed-Point Converter App with a System object”

Use the Fixed-Point Converter App with a System object

This example converts a `dsp.FIRFilter` System object, which filters a high-frequency sinusoid signal, to fixed-point using the Fixed-Point Converter app. This example requires Fixed-Point Designer and DSP System Toolbox licenses.

Create DSP Filter Function and Test Bench

Create a `myFIRFilter` function from a `dsp.FIRFilter` System object.

By default, System objects are configured to use full-precision fixed-point arithmetic. To gather range data and get data type proposals from the Fixed-Point Converter app, configure the System object to use 'Custom' settings.

Save the function to a local writable folder.

```
function output = myFIRFilter(input, num)

    persistent lowpassFIR;
    if isempty(lowpassFIR)
        lowpassFIR = dsp.FIRFilter('NumeratorSource', 'Input port', ...
            'FullPrecisionOverride', false, ...
            'ProductDataType', 'Full precision', ... % default
            'AccumulatorDataType', 'Custom', ...
            'CustomAccumulatorDataType', numericity(1,16,4), ...
            'OutputDataType', 'Custom', ...
            'CustomOutputDataType', numericity(1,8,2));
    end
    output = step(lowpassFIR, input, num);

end
```

Create a test bench, `myFIRFilter_tb`, for the filter. The test bench generates a signal that gathers range information for conversion. Save the test bench.

```
% Test bench for myFIRFilter
% Remove high-frequency sinusoid using an FIR filter.

% Initialize
f1 = 1000;
f2 = 3000;
Fs = 8000;
Fcutoff = 2000;
```

```
% Generate input
SR = dsp.SineWave('Frequency',[f1,f2],'SampleRate',Fs,...
    'SamplesPerFrame',1024);

% Filter coefficients
num = fir1(130,Fcutoff/(Fs/2));


% Visualize input and output spectra
plot = dsp.SpectrumAnalyzer('SampleRate',Fs,'PlotAsTwoSidedSpectrum',...
    false,'ShowLegend',true,'YLimits',[-120 30],...
    'Title','Input Signal (Channel 1) Output Signal (Channel 2)');

% Stream
for k = 1:100
    input = sum(step(SR),2); % Add the two sinusoids together
    filteredOutput = myFIRFilter(input, num); % Filter
    step(plot,[input,filteredOutput]); % Visualize
end
```

Convert the Function to Fixed-Point

- 1 Open the Fixed-Point Converter app.
 - MATLAB Toolstrip: On the **Apps** tab, under **Code Generation**, click the app icon.
 - MATLAB command prompt: Enter
`fixedPointConverter`
- 2 To add the entry-point function `myFIRFilter` to the project, browse to the file `myFIRFilter.m`, and then click **Open**.

By default, the app saves information and settings for this project in the current folder in a file named `myFirFilter.prj`.

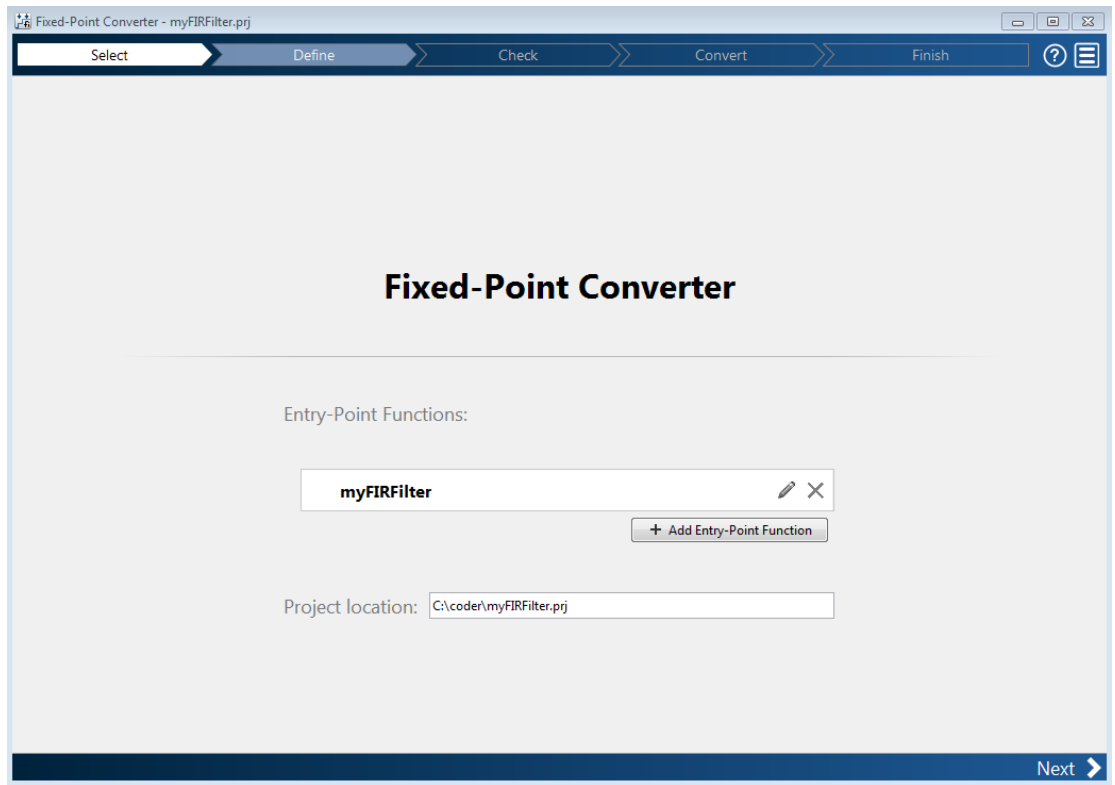


- 3 Click **Next** to go to the **Define Input Types** step.

The app screens `myFIRFilter.m` for code violations and fixed-point conversion readiness issues. The app does not find issues in `myFIRFilter.m`.

- 4 On the **Define Input Types** page, to add `myFIRFilter_tb` as a test file, browse to `myFIRFilter_tb.m`, and then click **Autodefine Input Types**.

The app determines from the test file that the type of `input` is `double(1024 x 1)` and the type of `num` is `double(1 x 131)`.

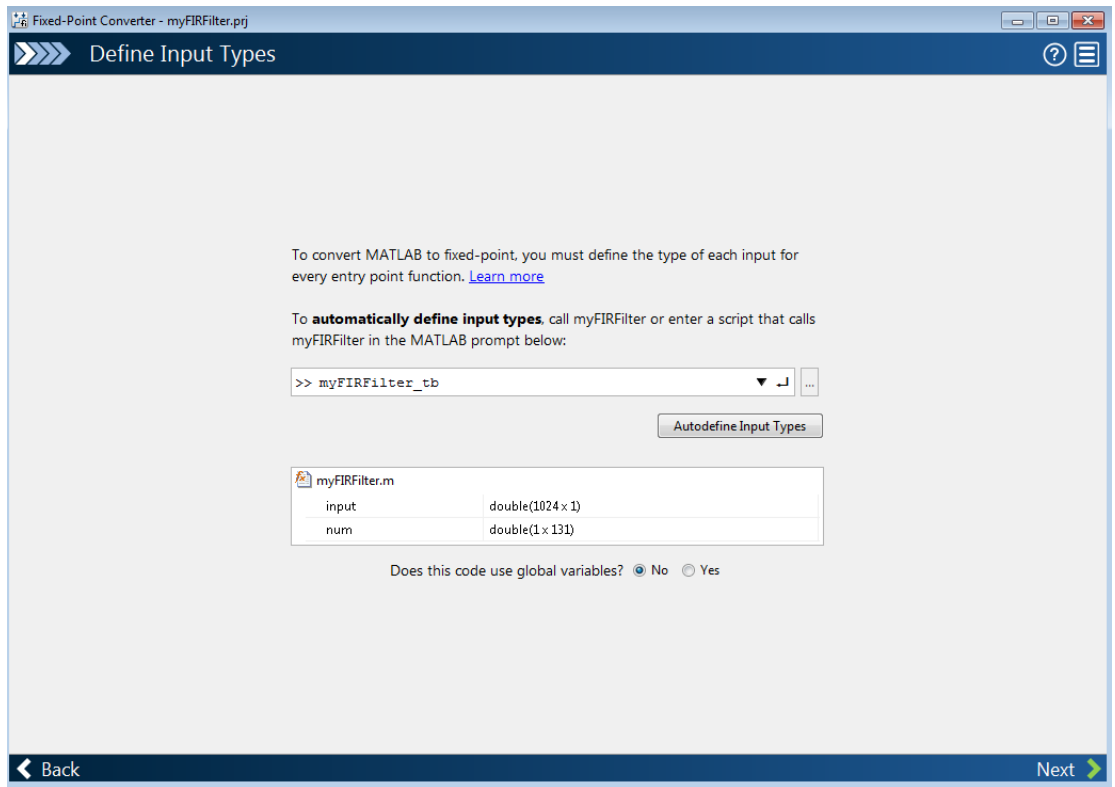

- 5 Click **Next** to go to the **Check for Run-Time Issues** step. On the **Check for Run-Time Issues** page, the app populates the test file field with `myFIRFilter_tb`, the test file that you used to define the input types.
- 6 Click **Check for Issues**. The app generates instrumented MEX function. It runs the test file `myFIRFilter_tb` replacing calls to `myFIRFilter` with calls to the generated MEX. If the app finds issues, it provides warning and error messages. You can click a message to highlight the problematic code in a window where you can edit the code. In this example, the app does not detect issues.
- 7 Click **Next** to go to the **Convert to Fixed Point** step.
- 8 On the **Convert to Fixed Point** page, click **Simulate** to collect range information.

The **Variables** tab displays the collected range information and type proposals. Manually edit the data type proposals as needed.

The screenshot shows the Fixed-Point Converter app interface. The top bar includes navigation buttons (Back, Next) and tabs (SETTINGS, SIMULATE, DERIVE, CONVERT, TEST). The main window is divided into a Source Code editor and a Simulation Output table.

Source Code:

```

1 function output = myFIRFilter(input, num)
2
3     persistent lowpassFIR;
4     if isempty(lowpassFIR)
5         lowpassFIR = dsp.FIRFilter('NumeratorSource', 'Input port', ...
6             'FullPrecisionOverride', false, ...
7             'ProductDataType', 'Full precision', ... % default
8             'AccumulatorDataType', 'Custom', ...
9             'CustomAccumulatorDataType', numericity(1,16,4), ...
10            'OutputDataType', 'Custom', ...
11            'CustomOutputDataType', numericity(1,8,2));
12     end
13     output = step(lowpassFIR, input, num);
14
15 end

```


Simulation Output - Variables Tab:

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
Input							
input	1024 x 1 double	-1.41	1.41			No	numericity(1, 16, 14)
num	1 x 131 double	-0.11	0.5			No	numericity(1, 16, 16)
Output							
output	1024 x 1 double	-1.01	1			No	numericity(1, 16, 14)
Persistent							
lowpassFIR		dspcodegen.FIRFilter					
CustomProductDataType		-0.71	0.71			No	Full precision
CustomAccumulatorDataT...		-1.1	1.1			No	numericity(1, 16, 14)
CustomOutputDataType		-1.01	1			No	numericity(1, 8, 6)

In the **Variables** tab, the **Proposed Type** field for `lowpassFIR.CustomProductDataType` is Full Precision. The Fixed-Point Converter app did not propose a data type for this field because its 'ProductDataType' setting is not set to 'Custom'.

- 9 Click **Convert** to apply the proposed data types to the function.

The Fixed-Point Converter app applies the proposed data types and generates a fixed-point function, `myFIRFilter_fixpt`.

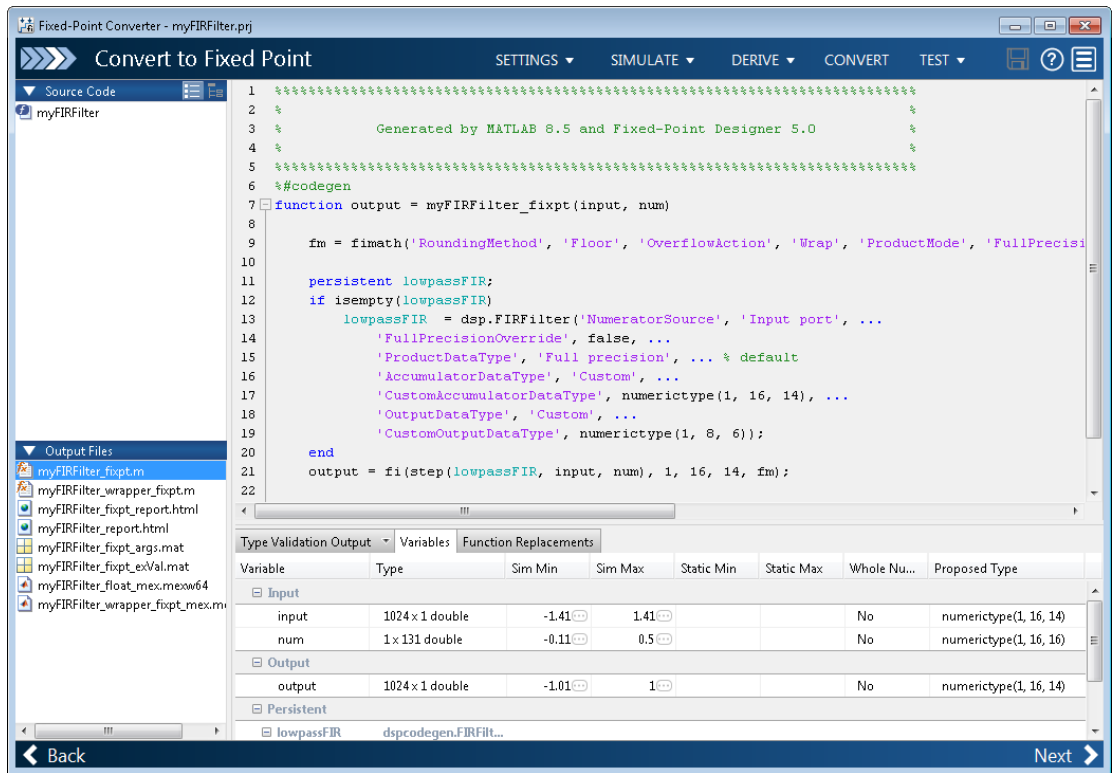

```
function output = myFIRFilter_fixpt(input,num)
```

```
    fm = fimath('RoundingMethod', 'Floor',...
               'OverflowAction', 'Wrap', 'ProductMode', 'FullPrecision',...
               'MaxProductWordLength', 128, ...
               'SumMode', 'FullPrecision', 'MaxSumWordLength', 128);
```

```
    persistent lowpassFIR
    if isempty( lowpassFIR )
```

```
        lowpassFIR = dsp.FIRFilter( 'NumeratorSource', 'Input port',...
                                     'FullPrecisionOverride', false, 'ProductDataType', 'Full precision',...
                                     'AccumulatorDataType', 'Custom',...
                                     'CustomAccumulatorDataType', numeric(1, 16, 14),...
                                     'OutputDataType', 'Custom', 'CustomOutputDataType', numeric(1, 8, 6)
                                     % default
```

```
    end
```

```
        output = fi(step( lowpassFIR, input, num ), 1, 16, 14, fm);  
end
```

More About

- “Using the Fixed-Point Converter App with System Objects”

Automated Conversion Using Fixed-Point Converter App

- “Specify Type Proposal Options” on page 9-2
- “Detect Overflows” on page 9-6
- “Propose Data Types Based on Simulation Ranges” on page 9-17
- “Propose Data Types Based on Derived Ranges” on page 9-32
- “View and Modify Variable Information” on page 9-48
- “Replace the exp Function with a Lookup Table” on page 9-52
- “Convert Fixed-Point Conversion Project to MATLAB Scripts” on page 9-62
- “Replace a Custom Function with a Lookup Table” on page 9-64
- “Visualize Differences Between Floating-Point and Fixed-Point Results” on page 9-73
- “Enable Plotting Using the Simulation Data Inspector” on page 9-84
- “Add Global Variables Using the App” on page 9-85
- “Automatically Define Input Types Using the App” on page 9-86
- “Define Constant Input Parameters Using the App” on page 9-87
- “Define or Edit Input Parameter Type Using the App” on page 9-88
- “Define Input Parameters by Example Using the App” on page 9-92
- “Specify Global Variable Type and Initial Value Using the App” on page 9-97
- “Specify Properties of Entry-Point Function Inputs Using the App” on page 9-101
- “Detect Dead and Constant-Folded Code” on page 9-102

Specify Type Proposal Options

To view type proposal options, in the Fixed-Point Converter app, on the **Convert to Fixed Point** page, click the **Settings** arrow .

The following options are available.

Basic Type Proposal Settings	Values	Description
Fixed-point type proposal mode	Propose fraction lengths for specified word length	Use the specified word length for data type proposals and propose the minimum fraction lengths to avoid overflows.
	Propose word lengths for specified fraction length (default)	Use the specified fraction length for data type proposals and propose the minimum word lengths to avoid overflows.
Default word length	16 (default)	Default word length to use when Fixed point type proposal mode is set to Propose fraction lengths for specified word lengths
Default fraction length	4 (default)	Default fraction length to use when Fixed point type proposal mode is set to Propose word lengths for specified fraction lengths

Advanced Type Proposal Settings	Values	Description
When proposing types	ignore simulation ranges	Propose data types based on derived ranges.
Note: Manually-entered static ranges always take precedence over simulation ranges.	ignore derived ranges	Propose data types based on simulation ranges.

Advanced Type Proposal Settings	Values	Description
	use all collected data (default)	Propose data types based on both simulation and derived ranges.
Propose target container types	Yes	Propose data type with the smallest word length that can represent the range and is suitable for C code generation (8,16,32, 64 ...). For example, for a variable with range [0 . . 7], propose a word length of 8 rather than 3.
	No (default)	Propose data types with the minimum word length needed to represent the value.
Optimize whole numbers	No	Do not use integer scaling for variables that were whole numbers during simulation.
	Yes (default)	Use integer scaling for variables that were whole numbers during simulation.
Signedness	Automatic (default)	Proposes signed and unsigned data types depending on the range information for each variable.
	Signed	Propose signed data types.
	Unsigned	Propose unsigned data types.

Advanced Type Proposal Settings	Values	Description
Safety margin for sim min/max (%)	0 (default)	Specify safety factor for simulation minimum and maximum values. The simulation minimum and maximum values are adjusted by the percentage designated by this parameter, allowing you to specify a range different from that obtained from the simulation run. For example, a value of 55 specifies that you want a range at least 55 percent larger. A value of -15 specifies that a range up to 15 percent smaller is acceptable.

fimath Settings	Values	Description
Rounding method	Ceiling	Specify the <code>fimath</code> properties for the generated fixed-point data types. The default fixed-point math properties use the <code>FLOOR</code> rounding and <code>Wrap</code> overflow. These settings generate the most efficient code but might cause problems with overflow.
	Convergent	
	Floor (default)	
	Nearest	
	Round	
	Zero	
Overflow action	Saturate	
	Wrap (default)	
Product mode	FullPrecision (default)	After code generation, if required, modify these settings to optimize the generated code, or example, avoid overflow or eliminate bias, and then rerun the verification.
	KeepLSB	
	KeepMSB	
	SpecifyPrecision	
Sum mode	FullPrecision (default)	
	KeepLSB	
	KeepMSB	
	SpecifyPrecision	

fimath Settings	Values	Description
Product word length	32 (default) any positive integer	Word length, in bits, of the product data type
Sum word length	32 (default) any positive integer	Word length, in bits, of the sum data type

Generated File Settings	Value	Description
Generated fixed-point file name suffix	_fixpt (default)	Specify the suffix to add to the generated fixed-point file names.

Plotting and Reporting Settings	Values	Description
Custom plot function	Empty string	Specify the name of a custom plot function to use for comparison plots.
Plot with Simulation Data Inspector	No (default)	Specify whether to use the Simulation Data Inspector for comparison plots.
	Yes	
Highlight potential data type issues	No (default)	Specify whether to highlight potential data types in the generated html report. If this option is turned on, the report highlights single-precision, double-precision, and expensive fixed-point operation usage in your MATLAB code.
	Yes	

Detect Overflows

This example shows how to detect overflows using the Fixed-Point Converter app. At the numerical testing stage in the conversion process, you choose to simulate the fixed-point code using scaled doubles. The app then reports which expressions in the generated code produce values that overflow the fixed-point data type.

Prerequisites

This example requires the following products:

- MATLAB
- Fixed-Point Designer
- C compiler (for most platforms, a default C compiler is supplied with MATLAB) See http://www.mathworks.com/support/compilers/current_release/.

You can use `mex -setup` to change the default compiler. See “Changing Default Compiler”.

Create a New Folder and Copy Relevant Files

- 1 Create a local working folder, for example, `c:\overflow`.
- 2 Change to the `docroot\toolbox\fixpoint\examples` folder. At the MATLAB command line, enter:

```
cd(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
```

- 3 Copy the `overflow.m` and `overflow_test.m` files to your local working folder.

It is a best practice is to create a separate test script to do pre- and post-processing, such as:

- Loading inputs.
- Setting up input values.
- Outputting test results.

For more information, see “Create a Test File”.

Type	Name	Description
Function code	<code>overflow.m</code>	Entry-point MATLAB function

Type	Name	Description
Test file	overflow_test.m	MATLAB script that tests overflow.m

The overflow Function

```
function y = overflow(b,x,reset)
    if nargin<3, reset = true; end
    persistent z p
    if isempty(z) || reset
        p = 0;
        z = zeros(size(b));
    end
    [y,z,p] = fir_filter(b,x,z,p);
end
function [y,z,p] = fir_filter(b,x,z,p)
    y = zeros(size(x));
    nx = length(x);
    nb = length(b);
    for n = 1:nx
        p=p+1; if p>nb, p=1; end
        z(p) = x(n);
        acc = 0;
        k = p;
        for j=1:nb
            acc = acc + b(j)*z(k);
            k=k-1; if k<1, k=nb; end
        end
        y(n) = acc;
    end
end
```

The overflow_test Function

You use this test file to define input types for **b**, **x**, and **reset**, and, later, to verify the fixed-point version of the algorithm.

```
function overflow_test
    % The filter coefficients were computed using the FIR1 function from
    % Signal Processing Toolbox.
    % b = fir1(11,0.25);
    b = [-0.004465461051254
        -0.004324228005260
        +0.012676739550326
```

```
+0.074351188907780
+0.172173206073645
+0.249588554524763
+0.249588554524763
+0.172173206073645
+0.074351188907780
+0.012676739550326
-0.004324228005260
-0.004465461051254]';

% Input signal
nx = 256;
t = linspace(0,10*pi,nx)';

% Impulse
x_impulse = zeros(nx,1); x_impulse(1) = 1;

% Max Gain
% The maximum gain of a filter will occur when the inputs line up with the
% signs of the filter's impulse response.
x_max_gain = sign(b)';
x_max_gain = repmat(x_max_gain,ceil(nx/length(b)),1);
x_max_gain = x_max_gain(1:nx);

% Sums of sines
f0=0.1; f1=2;
x_sines = sin(2*pi*t*f0) + 0.1*sin(2*pi*t*f1);

% Chirp
f_chirp = 1/16; % Target frequency
x_chirp = sin(pi*f_chirp*t.^2); % Linear chirp

x = [x_impulse, x_max_gain, x_sines, x_chirp];
titles = {'Impulse', 'Max gain', 'Sum of sines', 'Chirp'};
y = zeros(size(x));


for i=1:size(x,2)
    reset = true;
    y(:,i) = overflow(b,x(:,i),reset);
end

test_plot(1,titles,t,x,y)
```

```
end
function test_plot(fig,titles,t,x,y1)
    figure(fig)
    clf
    sub_plot = 1;
    font_size = 10;
    for i=1:size(x,2)
        subplot(4,1,sub_plot)
        sub_plot = sub_plot+1;
        plot(t,x(:,i),'c',t,y1(:,i),'k')
        axis('tight')
        xlabel('t','FontSize',font_size);
        title(titles{i},'FontSize',font_size);
        ax = gca;
        ax.FontSize = 10;
    end
    figure(gcf)
end
```

Open the Fixed-Point Converter App

- 1 Navigate to the work folder that contains the file for this example.
- 2 On the MATLAB Toolstrip **Apps** tab, under **Code Generation**, click the app icon.

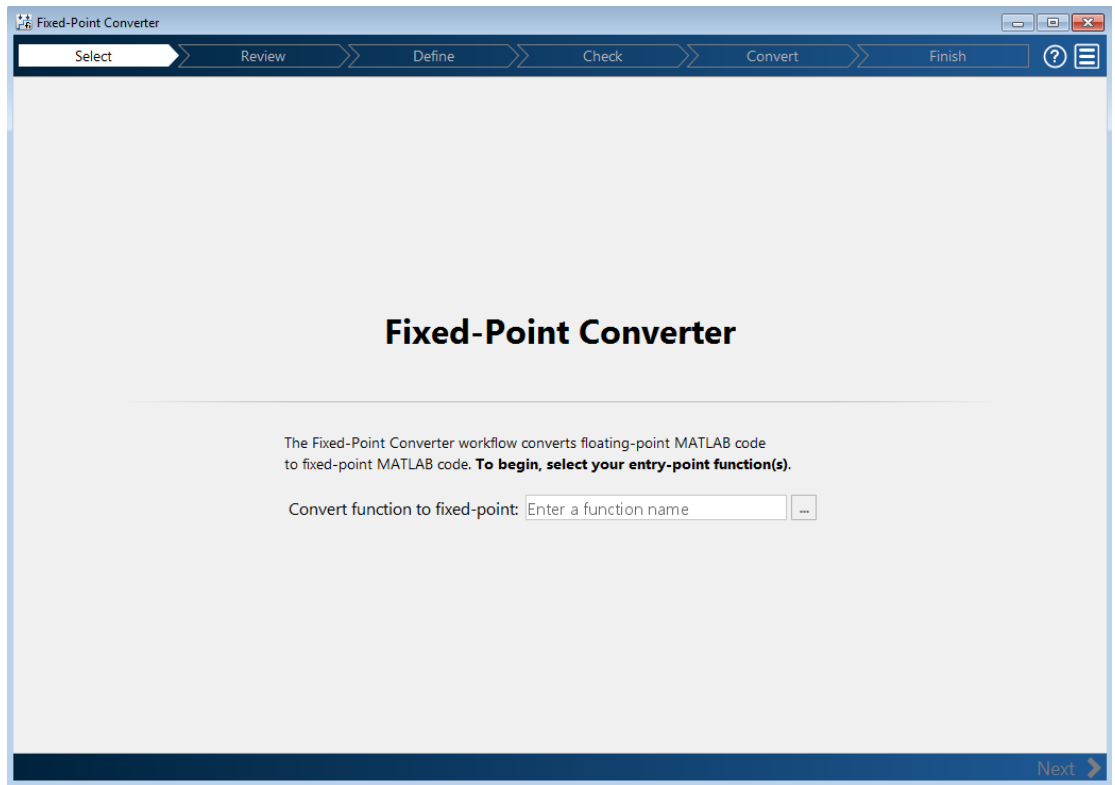

Select Source Files

- 1 To add the entry-point function `overflow` to the project, browse to the file `overflow.m`, and then click **Open**. By default, the app saves information and settings for this project in the current folder in a file named `overflow.prj`.
- 2 Click **Next** to go to the **Define Input Types** step.


The app screens `overflow.m` for code violations and fixed-point conversion readiness issues. The app does not find issues in `overflow.m`.

Define Input Types


- 1 On the **Define Input Types** page, to add `overflow_test` as a test file, browse to `overflow_test.m`, and then click **Open**.

2 Click **Autodefine Input Types**.

The test file runs and displays the outputs of the filter for each of the input signals.

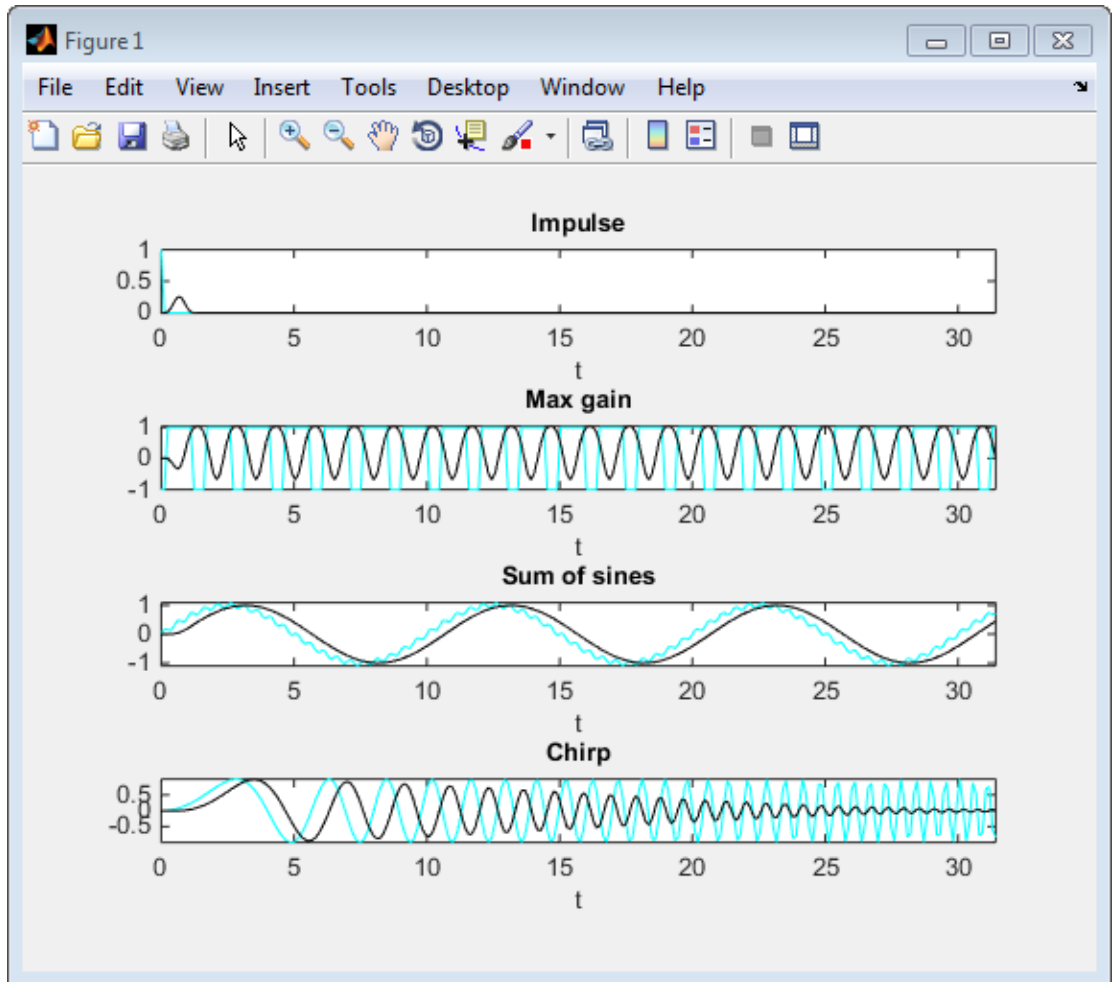

The app determines from the test file that the input type of b is `double(1x12)`, x is `double(256x1)`, and $reset$ is `logical(1x1)`.

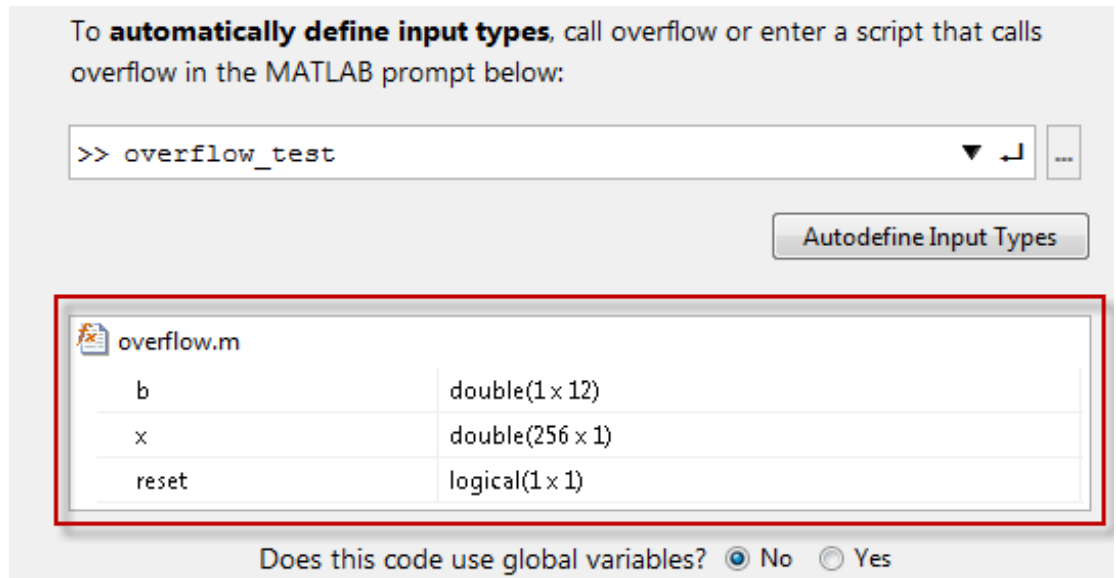

- 3 Click **Next** to go to the **Check for Run-Time Issues** step.

Check for Run-Time Issues

Before you can go to the **Convert to Fixed Point** step, you must check `overflow` for run-time issues:


- 1 On the **Check for Run-Time Issues** page, the app populates the test file field with `overflow_test`, the test file that you used to define the input types.
- 2 Click **Check for Issues**.

The app generates instrumented MEX function. It runs the test file `overflow_test` replacing calls to `overflow` with calls to the generated MEX function. If the app finds issues, it provides warning and error messages. You can click a message to highlight the problematic code in a pane where you can edit the code. In this example, the app does not detect issues.


- 3 Click **Next** to go to the **Convert to Fixed Point** step.


Convert to Fixed Point

- 1 The app displays compiled information — type, size, and complexity — for variables in your code. For more information, see “View and Modify Variable Information”.

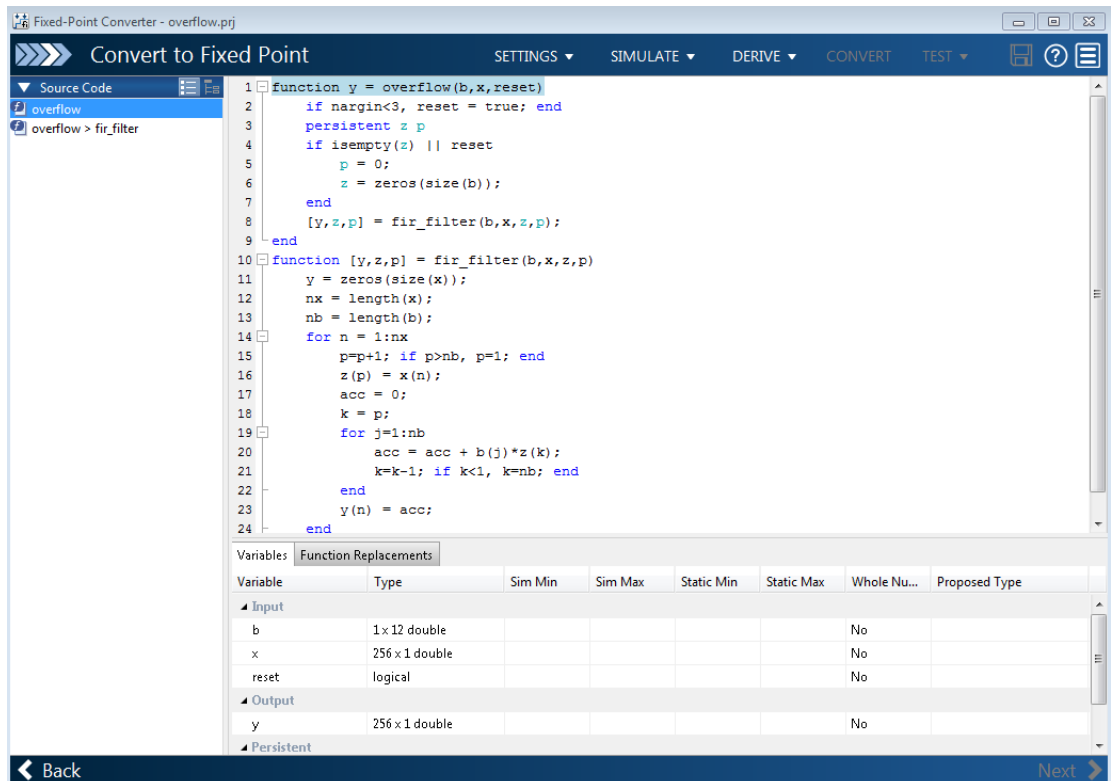

On the **Function Replacements** tab the app displays functions that are not supported for fixed-point conversion. See “Running a Simulation”.

- 2 To view the advanced settings, click the **Settings** arrow . Set the fimath **Product mode** and **Sum mode** to **KeepLSB**. These settings model the behavior of integer operations in the C language.

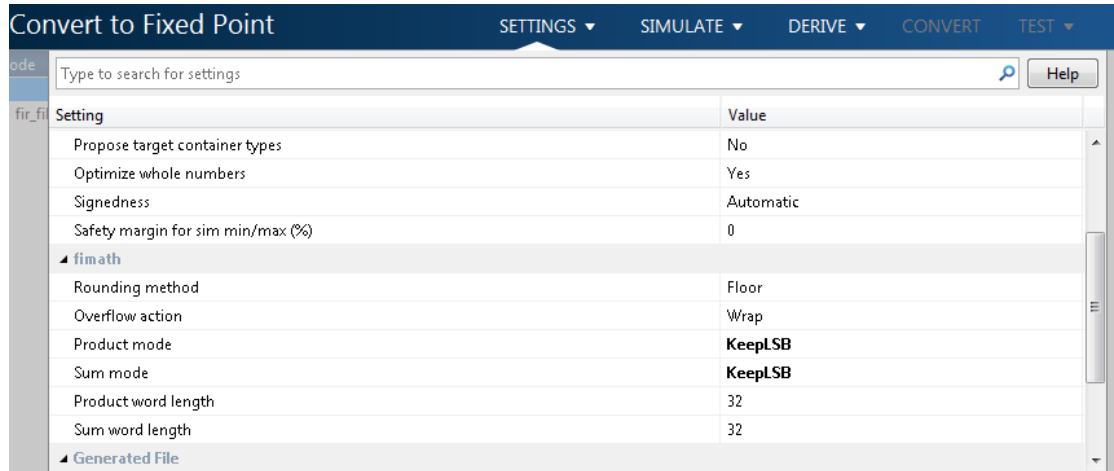

3 Click **Simulate**.

The test file, `overflow_test`, runs. The app displays simulation minimum and maximum ranges on the **Variables** tab. Using the simulation range data, the software proposes fixed-point types for each variable based on the default type proposal settings, and displays them in the **Proposed Type** column.


Simulation Output		Variables	Function Replacements				
Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Number	Proposed Type
▲ Input							
b	1 × 12 double	0	0.25			No	numerictype(1, 16, 17)
x	256 × 1 double	-1.1	1.09			No	numerictype(1, 16, 14)
▲ Output							
y	256 × 1 double	-1	1.04			No	numerictype(1, 16, 14)
▲ Input-Output							
p	double	0	13			Yes	numerictype(0, 4, 0)
z	1 × 12 double	-1.1	1.09			No	numerictype(1, 16, 14)
▲ Local							
acc	double	-1	1.04			No	numerictype(1, 16, 14)
k	double	0	12			Yes	numerictype(0, 4, 0)
nb	double	12	12			Yes	numerictype(0, 4, 0)
rx	double	256	256			Yes	numerictype(0, 9, 0)
▲ Index							
j	double		1	12		Yes	numerictype(0, 4, 0)
n	double		1	256		Yes	numerictype(0, 9, 0)

4 To convert the floating-point algorithm to fixed point, click **Convert**.

The software validates the proposed types and generates a fixed-point version of the entry-point function.


If errors and warnings occur during validation, the app displays them on the **Type Validation Output** tab. See “Validating Types”.

Test Numerics and Check for Overflows

- 1 Click the **Test** arrow . Verify that the test file is `overflow_test.m`. Select **Use scaled doubles to detect overflows**, and then click **Test**.

The app runs the test file that you used to define input types to test the fixed-point MATLAB code. Because you selected to detect overflows, it also runs the simulation using scaled double versions of the proposed fixed-point types. Scaled doubles store their data in double-precision floating-point, so they carry out arithmetic in full range. Because they retain their fixed-point settings, they can report when a computation goes out of the range of the fixed-point type.

The simulation runs. The app detects an overflow. The app reports the overflow on the **Overflow** tab. To highlight the expression that overflowed, click the overflow.

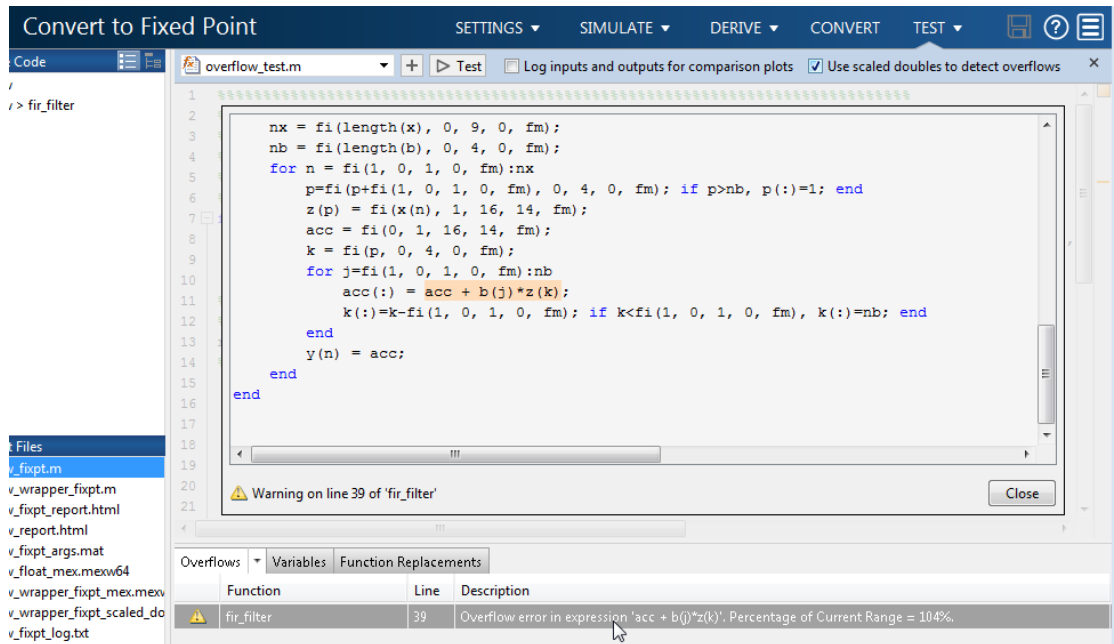

2 Determine whether it was the sum or the multiplication that overflowed.

In the **Advanced** settings, set **Product mode** to **FullPrecision**, and then repeat the conversion and test the fixed-point code again.

The overflow still occurs, indicating that it is the addition in the expression that is overflowing.

Propose Data Types Based on Simulation Ranges

This example shows how to propose fixed-point data types based on simulation range data using the Fixed-Point Converter app.

Prerequisites

This example requires the following products:

- MATLAB
- Fixed-Point Designer
- C compiler (for most platforms, a default C compiler is supplied with MATLAB). See http://www.mathworks.com/support/compilers/current_release/

You can use `mex -setup` to change the default compiler. See “Changing Default Compiler”.

Create a New Folder and Copy Relevant Files

- 1 Create a local working folder, for example, `c:\fun_with_matlab`.
- 2 Change to the `docroot\toolbox\fixpoint\examples` folder. At the MATLAB command line, enter:


```
cd(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
```
- 3 Copy the `fun_with_matlab.m` and `fun_with_matlab_test.m` files to your local working folder.

It is a best practice is to create a separate test script to do pre- and post-processing, such as:

- Loading inputs.
- Setting up input values.
- Outputting test results.

See “Create a Test File”.

Type	Name	Description
Function code	<code>fun_with_matlab.m</code>	Entry-point MATLAB function
Test file	<code>fun_with_matlab_test.m</code>	MATLAB script that tests <code>fun_with_matlab.m</code>

The fun_with_matlab Function

```
function y = fun_with_matlab(x) %#codegen
persistent z
if isempty(z)
    z = zeros(2,1);
end
% [b,a] = butter(2, 0.25)
b = [0.0976310729378175, 0.195262145875635, 0.0976310729378175];
a = [1, -0.942809041582063, 0.3333333333333333];

y = zeros(size(x));
for i = 1:length(x)
    y(i) = b(1)*x(i) + z(1);
    z(1) = b(2)*x(i) + z(2) - a(2) * y(i);
    z(2) = b(3)*x(i) - a(3) * y(i);
end
end
```

The fun_with_matlab_test Script

The test script runs the `fun_with_matlab` function with three input signals: chirp, step, and impulse to cover the full intended operating range of the system. The script then plots the outputs.

```
% fun_with_matlab_test
%
% Define representative inputs
N = 256; % Number of points
t = linspace(0,1,N); % Time vector from 0 to 1 second
f1 = N/2; % Target frequency of chirp set to Nyquist
x_chirp = sin(pi*f1*t.^2); % Linear chirp from 0 to Fs/2 Hz in 1 second
x_step = ones(1,N); % Step
x_impulse = zeros(1,N); % Impulse
x_impulse(1) = 1;

% Run the function under test
x = [x_chirp;x_step;x_impulse];
y = zeros(size(x));
for i = 1:size(x,1)
    y(i,:) = fun_with_matlab(x(i,:));
end
```




```
% Plot the results
titles = {'Chirp', 'Step', 'Impulse'}
clf
for i = 1:size(x,1)
    subplot(size(x,1),1,i)
    plot(t,x(i,:),t,y(i,:))
    title(titles{i})
    legend('Input', 'Output')
end
xlabel('Time (s)')
figure(gcf)

disp('Test complete.')
```

Open the Fixed-Point Converter App

- 1 Navigate to the work folder that contains the file for this example.
- 2 On the MATLAB Toolstrip **Apps** tab, under **Code Generation**, click the app icon.

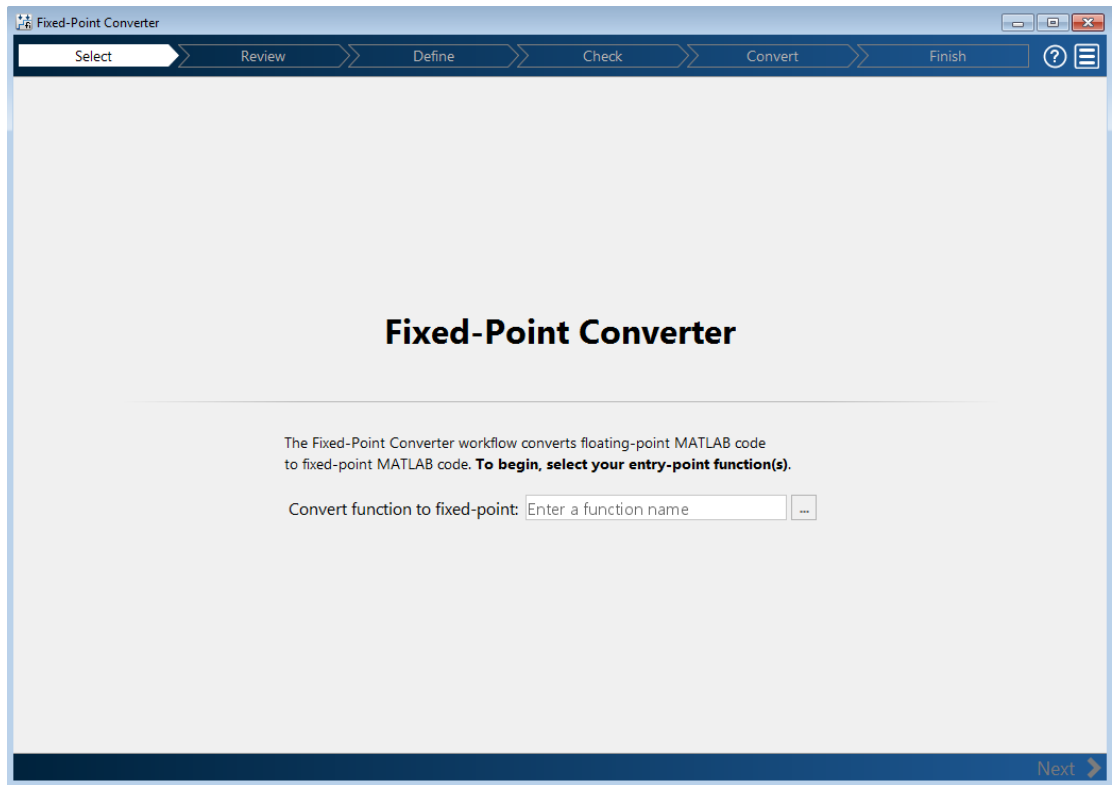

Select Source Files


- 1 To add the entry-point function `fun_with_matlab` to the project, browse to the file `fun_with_matlab.m`, and then click **Open**. By default, the app saves information and settings for this project in the current folder in a file named `fun_with_matlab.prj`.
- 2 Click **Next** to go to the **Define Input Types** step.

The app screens `fun_with_matlab.m` for code violations and fixed-point conversion readiness issues. The app does not find issues in `fun_with_matlab.m`.


Define Input Types

- 1 On the **Define Input Types** page, to add `fun_with_matlab_test` as a test file, browse to `fun_with_matlab_test`, and then click **Open**.
- 2 Click **Autodefine Input Types**.

The test file runs and displays the outputs of the filter for each of the input signals.

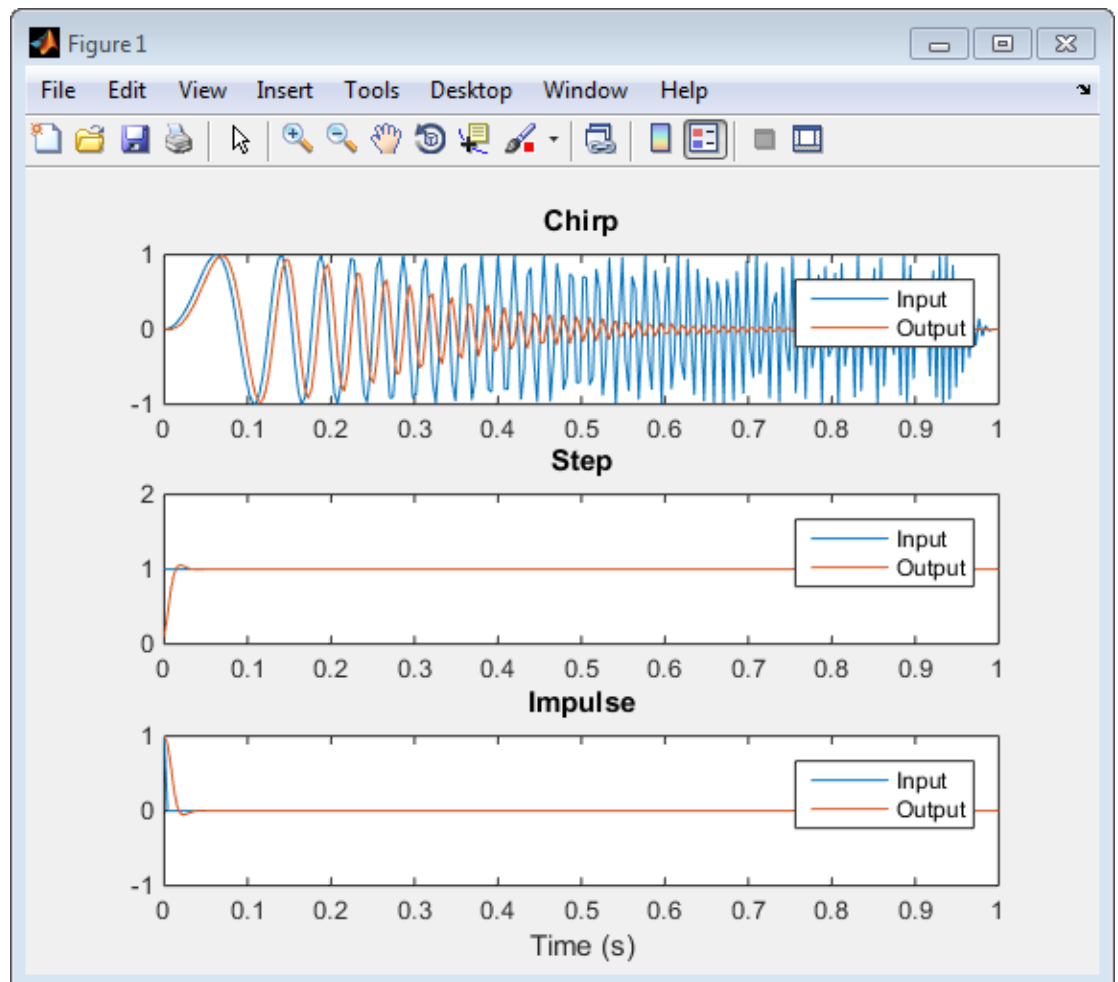

The app determines from the test file that the input type of `x` is `double(1x256)`.

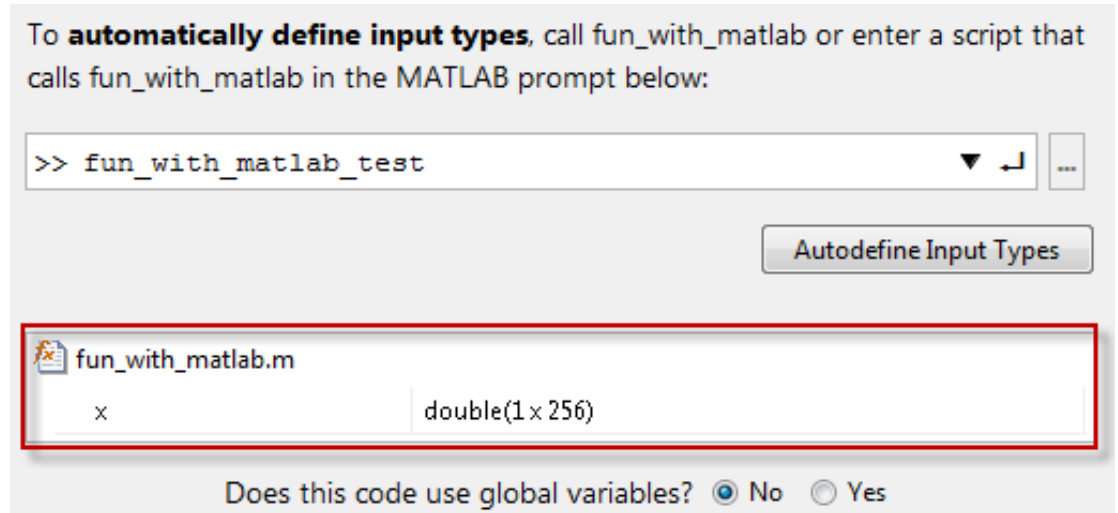

- 3 Click **Next** to go to the **Check for Run-Time Issues** step.

Check for Run-Time Issues

Before you can go to the **Convert to Fixed Point** step, you must check `fun_with_matlab` for run-time issues:


- 1 On the **Check for Run-Time Issues** page, the app populates the test file field with `fun_with_matlab_test`, the test file that you used to define the input types.
- 2 Click **Check for Issues**.

The app generates instrumented MEX. It runs the test file `fun_with_matlab_test` replacing calls to `fun_with_matlab` with calls to the generated MEX function. If the app finds issues, it provides warning and error messages. You can click a message to highlight the problematic code in a window where you can edit the code. In this example, the app does not detect issues.


- 3 Click **Next** to go to the **Convert to Fixed Point** step.


Convert to Fixed Point

- 1 The app displays compiled information—type, size, and complexity—for variables in your code. See “View and Modify Variable Information”.

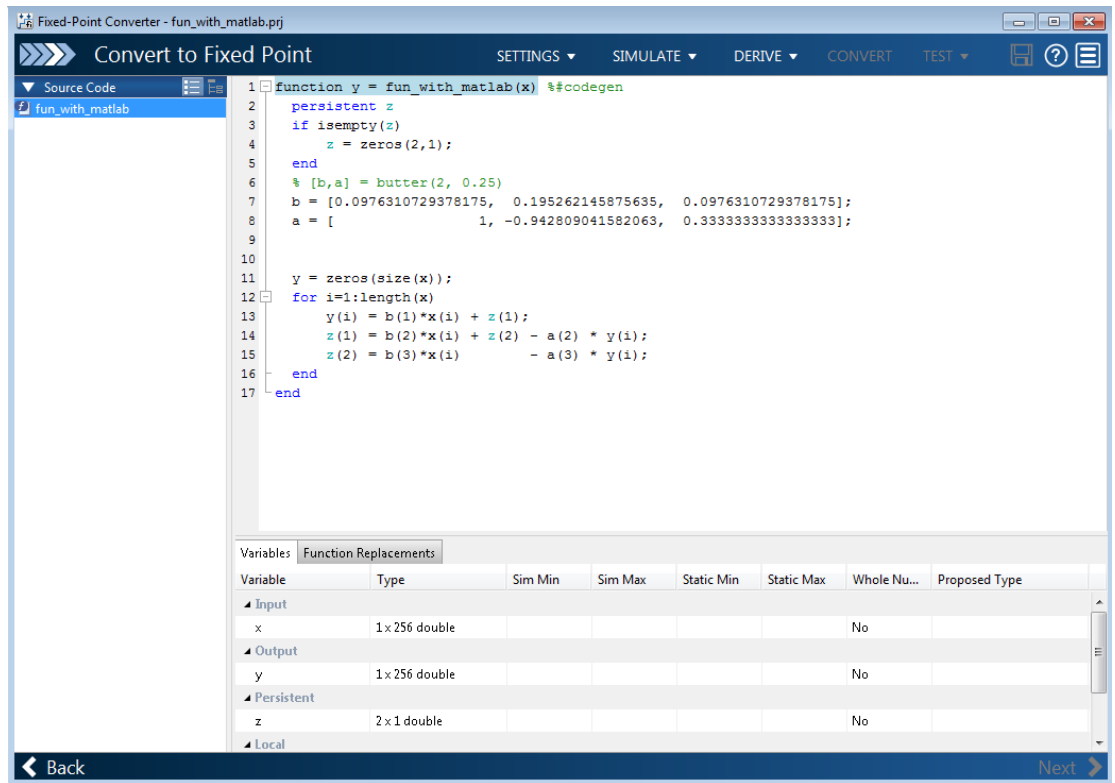


On the **Function Replacements** tab, the app displays functions that are not supported for fixed-point conversion. See “Running a Simulation”.

- Click the **Simulate** arrow . Verify that the test file is `fun_with_matlab_test`. You can add test files and select to run more than one test file during the simulation. If you run multiple test files, the app merges the simulation results.



- Select **Log data for histogram**.



By default, the **Show code coverage** option is selected. This option provides code coverage information that helps you verify that your test file is testing your algorithm over the intended operating range.

4 Click **Simulate**.

The simulation runs and the app displays a color-coded code coverage bar to the left of the MATLAB code. Review this information to verify that the test file is testing the algorithm adequately. The dark green line to the left of the code indicates that the code runs every time the algorithm executes. The orange bar indicates that the code next to it executes only once. This behavior is expected for this example because the code initializes a persistent variable. If your test file does not cover all of your code, update the test or add more test files.

Fixed-Point Converter - fun_with_matlab.prj

Convert to Fixed Point SETTINGS SIMULATE DERIVE CONVERT TEST

Source Code fun_with_matlab_test.m Run All Log data for histogram Show code coverage

```

1 function y = fun_with_matlab(x) %#codegen
2 persistent z
3 if isempty(z)
4     z = zeros(2,1);
5 end
6 % [b,a] = butter(2, 0.25)
7 b = [0.0976310729378175, 0.195262145875635, 0.0976310729378175];
8 a = [1, -0.942809041582063, 0.3333333333333333];
9
10
11 y = zeros(size(x));
12 for i=1:length(x)
13     y(i) = b(1)*x(i) + z(1);
14     z(1) = b(2)*x(i) + z(2) - a(2) * y(i);
15     z(2) = b(3)*x(i) - a(3) * y(i);
16 end
17 end

```

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
Input							
x	1 x 256 double	-1	1			No	numerictype(1, 16, 14)
Output							
y	1 x 256 double	-0.97	1.06			No	numerictype(1, 16, 14)
Persistent							
z	2 x 1 double	-0.89	0.96			No	numerictype(1, 16, 15)
Local							


Back Next

If a value has . . . next to it, the value is rounded. Place your cursor over the . . . to view the actual value.

The app displays simulation minimum and maximum ranges on the **Variables** tab. Using the simulation range data, the software proposes fixed-point types for each variable based on the default type proposal settings, and displays them in the **Proposed Type** column. The app enables the **Convert** option.

Note: You can manually enter static ranges. These manually entered ranges take precedence over simulation ranges. The app uses the manually entered ranges to propose data types. You can also modify and lock the proposed type.

- Examine the proposed types and verify that they cover the full simulation range. To view logged histogram data for a variable, click its **Proposed Type** field.

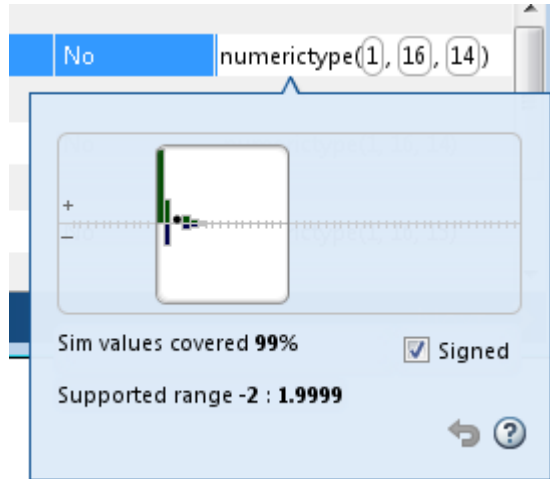

To modify the proposed data types, either enter the required type into the **Proposed Type** field or use the histogram controls. For more information about the histogram, see “Log Data for Histogram”.

- To convert the floating-point algorithm to fixed point, click **Convert**.


During the fixed-point conversion process, the software validates the proposed types and generates the following files in the `codegen\fun_with_matlab\fixpt` folder in your local working folder.

- `fun_with_matlab_fixpt.m` — the fixed-point version of `fun_with_matlab.m`.
- `fun_with_matlab_wrapper_fixpt.m` — this file converts the floating-point data values supplied by the test file to the fixed-point types determined for the inputs during conversion. These fixed-point values are fed into the converted fixed-point design, `fun_with_matlab_fixpt.m`.
- `fun_with_matlab_fixpt_report.html` — this report shows the generated fixed-point code and the fixed-point instrumentation results.
- `fun_with_matlab_report.html` — this report shows the original algorithm and the fixed-point instrumentation results.

- `fun_with_matlab_fixpt_exVal.mat` — MAT-file containing a structure for the input arguments, a structure for the output arguments and the name of the fixed-point file.

If errors or warnings occur during validation, you see them on the **Type Validation Output** tab. See “Validating Types”.


- 7 In the **Output Files** list, select `fun_with_matlab_fixpt.m`. The app displays the generated fixed-point code.

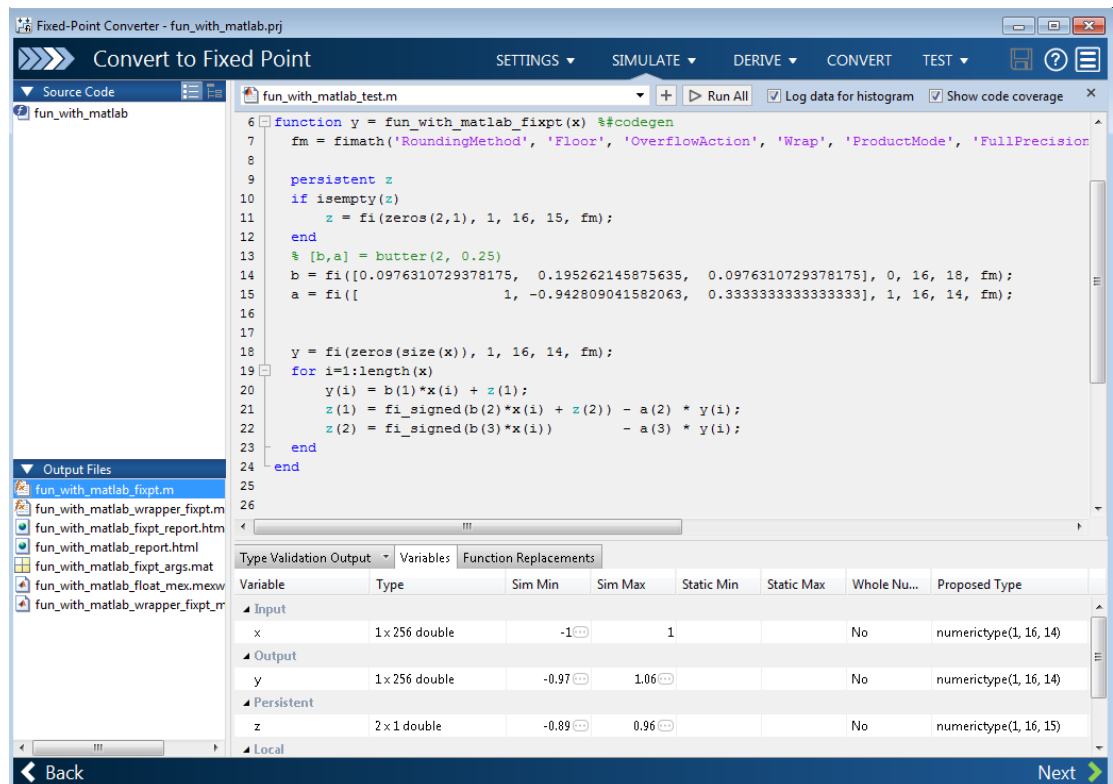


The screenshot shows the Fixed-Point Converter application window. The main editor displays the source code for `fun_with_matlab_fixpt.m`. The code defines a function `y = fun_with_matlab_fixpt(x)` that uses fixed-point arithmetic. The code includes comments for code generation and uses `fi` to create fixed-point numbers. The function calculates the output `y` based on input `x` and a persistent variable `z`.


The **Type Validation Output** table is visible at the bottom of the window. It shows the following data:

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
Input							
x	1 x 256 double	-1	1			No	numerictype(1, 16, 14)
Output							
y	1 x 256 double	-0.97	1.06			No	numerictype(1, 16, 14)
Persistent							
z	2 x 1 double	-0.89	0.96			No	numerictype(1, 16, 15)
Local							

- 8 Click the **Test** arrow . Select **Log inputs and outputs for comparison plots**, and then click **Test**.




To test the fixed-point MATLAB code, the app runs the test file that you used to define input types. Optionally, you can add test files and select to run more than one test file to test numerics. The software runs both a floating-point and a fixed-point simulation and then calculates the errors for the output variable y . Because you selected to log inputs and outputs for comparison plots, the app generates an additional plot for each input and output.

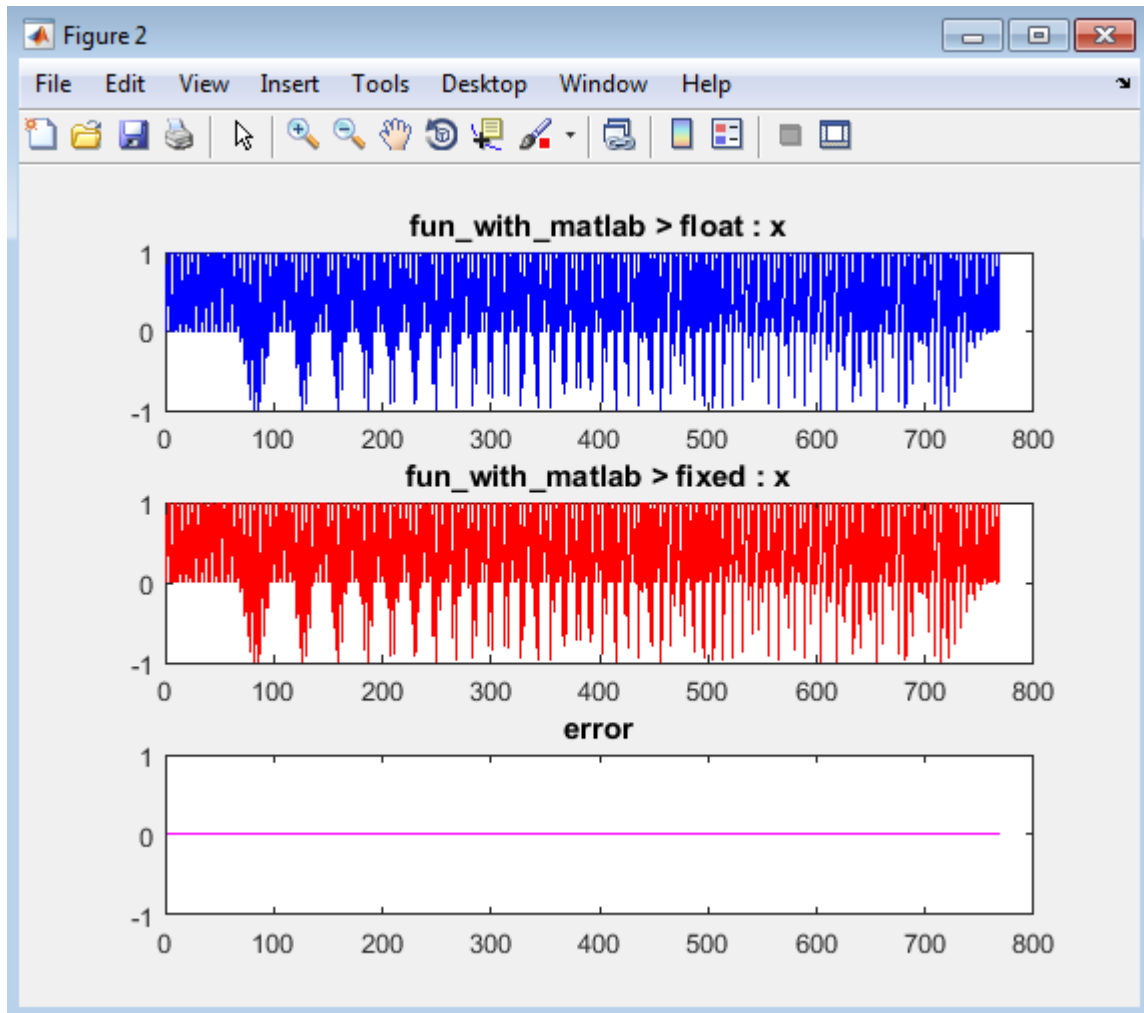

The app also reports error information on the **Verification Output** tab. The maximum error is less than 0.03%. For this example, this margin of error is acceptable.

If the difference is not acceptable, modify the fixed-point data types or your original algorithm. For more information, see “Testing Numerics”.

- 9 On the **Verification Output** tab, the app provides a link to a type proposal report. The report displays the generated fixed-point code and the proposed type information.

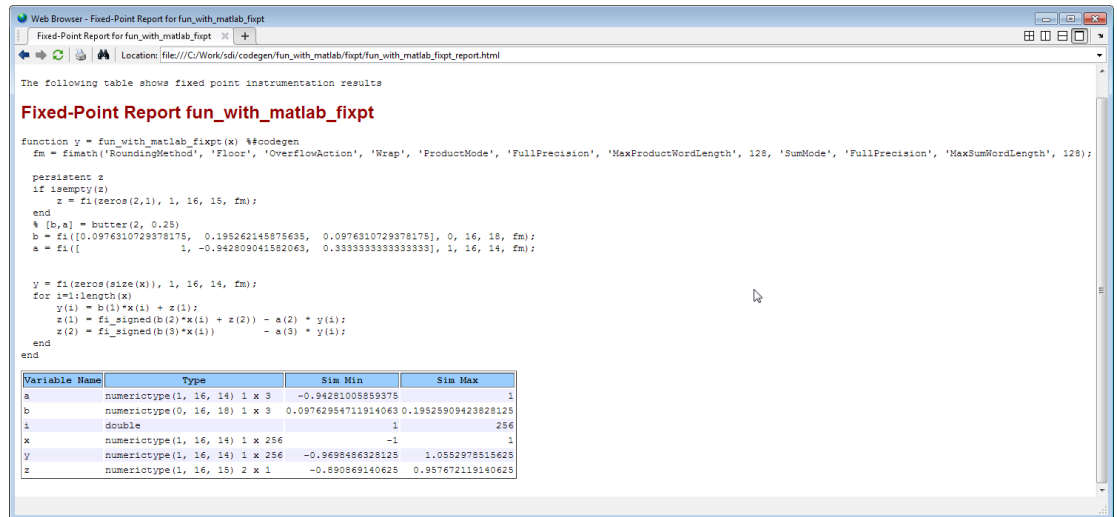

- 10 Click **Next** to go to the **Finish Workflow** page.

On the **Finish Workflow** page, the app displays a project summary and links to generated output files.

Integrate Fixed-Point Code

To integrate the fixed-point version of the code into system-level simulations, generate a MEX function to accelerate the fixed-point algorithm. Call this MEX function instead of the original MATLAB algorithm.

- 1 Copy `fun_with_matlab_fixpt.m` to your local working folder.
- 2 Generate a MEX function for `fun_with_matlab_fixpt.m`. Use the type proposal report to get the `fimath`, `fm`, and fixed-point data type for input `x`.

```
fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap', 'ProductMode', 'FullPrecision',...
           'MaxProductWordLength', 128, 'SumMode', 'FullPrecision', 'MaxSumWordLength', 128);
fiaccel fun_with_matlab_fixpt -args {fi( 0, 1, 16, 14, fm )}
```

`fiaccel` generates a MEX function, `fun_with_matlab_fixpt_mex`, in the current folder.

- 3** You can now call this MEX function in place of the original MATLAB algorithm.

Propose Data Types Based on Derived Ranges

This example shows how to propose fixed-point data types based on static ranges using the Fixed-Point Converter app. When you propose data types based on derived ranges you, do not have to provide test files that exercise your algorithm over its full operating range. Running such test files often takes a long time. You can save time by deriving ranges instead.

Prerequisites

This example requires the following products:

- MATLAB
- Fixed-Point Designer
- C compiler (for most platforms, a default C compiler is supplied with MATLAB). See http://www.mathworks.com/support/compilers/current_release/.

You can use `mex -setup` to change the default compiler. See “Changing Default Compiler”.

Create a New Folder and Copy Relevant Files

- 1 Create a local working folder, for example, `c:\dti`.
- 2 Change to the `docroot\toolbox\fixpoint\examples` folder. At the MATLAB command line, enter:

```
cd(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
```

- 3 Copy the `dti.m` and `dti_test.m` files to your local working folder.

It is a best practice is to create a separate test script to do pre- and post-processing, such as:

- Loading inputs.
- Setting up input values.
- Outputting test results.

Type	Name	Description
Function code	<code>dti.m</code>	Entry-point MATLAB function

Type	Name	Description
Test file	dti_test.m	MATLAB script that tests dti.m

The dti Function

The dti function implements a Discrete Time Integrator in MATLAB.

```
function [y, clip_status] = dti(u_in) %#codegen
% Discrete Time Integrator in MATLAB
%
% Forward Euler method, also known as Forward Rectangular, or left-hand
% approximation. The resulting expression for the output of the block at
% step 'n' is  $y(n) = y(n-1) + K * u(n-1)$ 
%
init_val = 1;
gain_val = 1;
limit_upper = 500;
limit_lower = -500;

% variable to hold state between consecutive calls to this block
persistent u_state;
if isempty(u_state)
    u_state = init_val+1;
end

% Compute Output
if (u_state > limit_upper)
    y = limit_upper;
    clip_status = -2;
elseif (u_state >= limit_upper)
    y = limit_upper;
    clip_status = -1;
elseif (u_state < limit_lower)
    y = limit_lower;
    clip_status = 2;
elseif (u_state <= limit_lower)
    y = limit_lower;
    clip_status = 1;
else
    y = u_state;
    clip_status = 0;
end
```

```
% Update State
tprod = gain_val * u_in;
u_state = y + tprod;
```

The dti_test Function

The test script runs the `dti` function with a sine wave input. The script then plots the input and output signals.

```
% dti_test
% cleanup
clear dti

% input signal
x_in = sin(2.*pi.*(0:0.001:2)).';

pause(10);

len = length(x_in);
y_out = zeros(1,len);
is_clipped_out = zeros(1,len);

for ii=1:len
    data = x_in(ii);
    % call to the dti function
    init_val = 0;
    gain_val = 1;
    upper_limit = 500;
    lower_limit = -500;

    % call to the design that does DTI
    [y_out(ii), is_clipped_out(ii)] = dti(data);
end

figure('Name', [mfilename, '_plot']);
subplot(2,1,1)
plot(1:len,x_in)
xlabel('Time')
ylabel('Amplitude')
title('Input Signal (Sin)')

subplot(2,1,2)
plot(1:len,y_out)
xlabel('Time')
```




```
ylabel('Amplitude')
title('Output Signal (DTI)')

disp('Test complete.');
```

Open the Fixed-Point Converter App

- 1 Navigate to the work folder that contains the file for this example.
- 2 On the MATLAB Toolstrip **Apps** tab, under **Code Generation**, click the app icon.

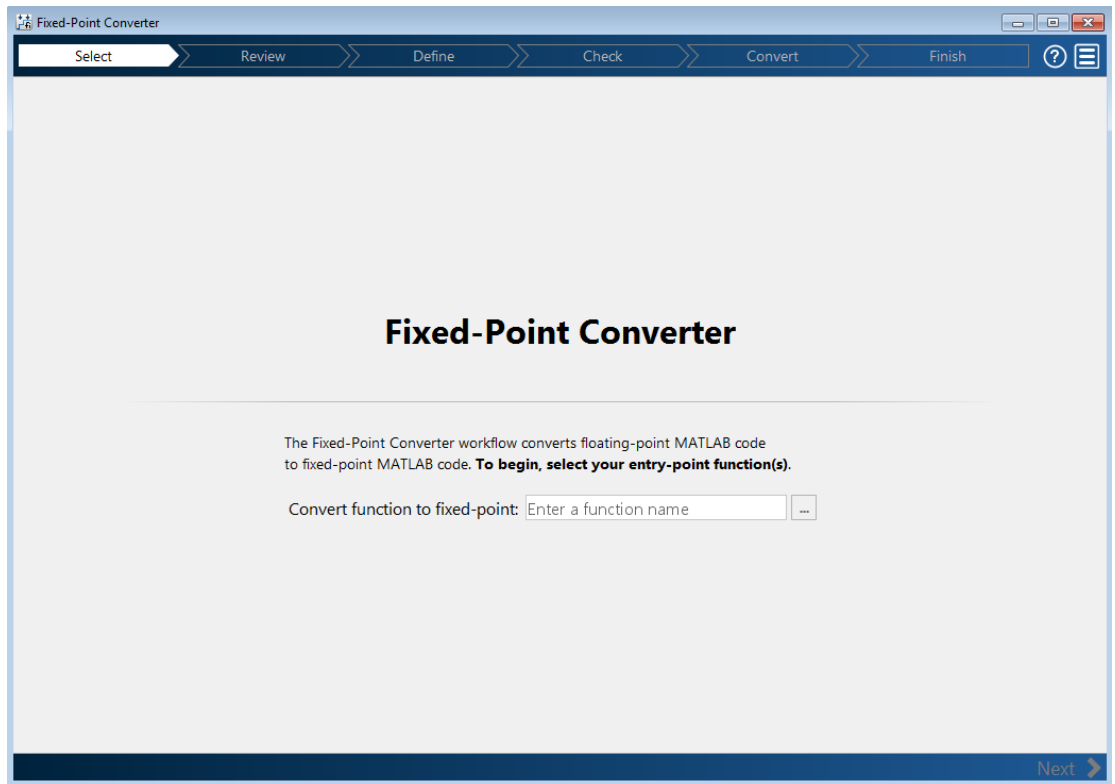

Select Source Files

- 1 To add the entry-point function `dti` to the project, browse to the file `dti.m`, and then click **Open**. By default, the app saves information and settings for this project in the current folder in a file named `dti.prj`.


- 2 Click **Next** to go to the **Define Input Types** step.

The app screens `dti.m` for code violations and fixed-point conversion readiness issues. The app does not find issues in `dti.m`.


Define Input Types

- 1 On the **Define Input Types** page, to add `dti_test` as a test file, browse to `dti_test.m`, and then click **Open**.
- 2 Click **Autodefine Input Types**.

The test file runs and displays the outputs of the filter for each of the input signals.

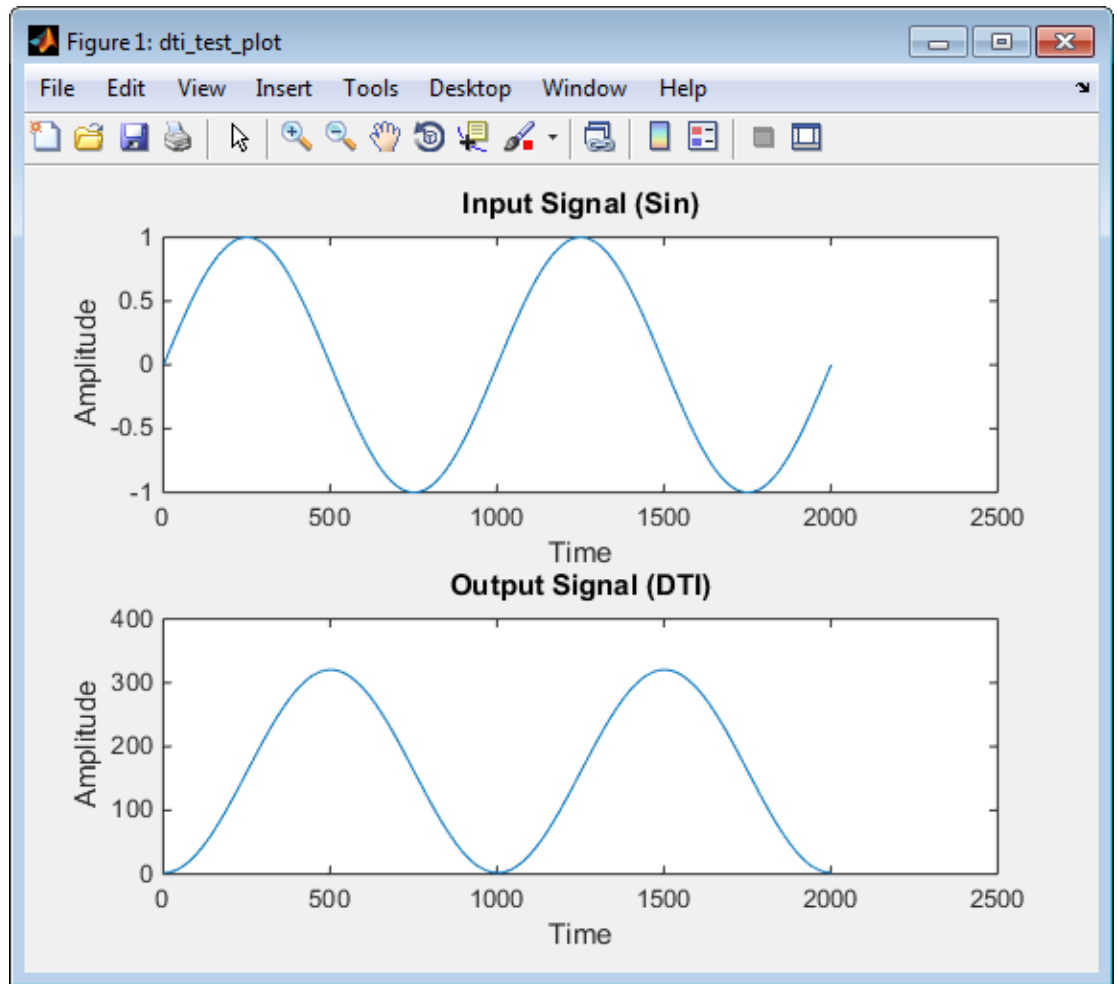

The app determines from the test file that the input type of `u_in` is `double(1x1)`.

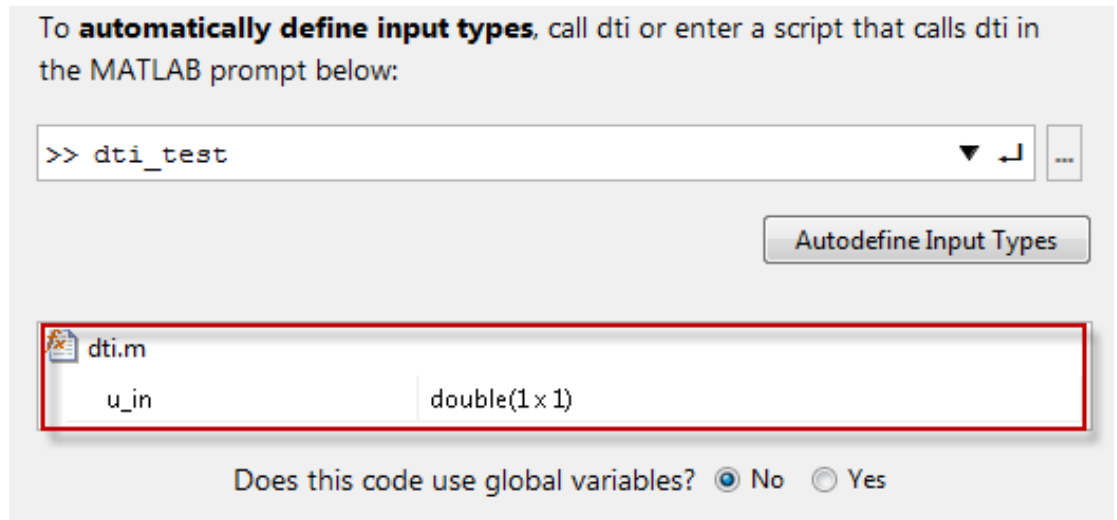

- 3 Click **Next** to go to the **Check for Run-Time Issues** step.

Check for Run-Time Issues

Before you can go to the **Convert to Fixed Point** step, you must check `dti` for run-time issues:


- 1 On the **Check for Run-Time Issues** page, the app populates the test file field with `dti_test`, the test file that you used to define the input types.
- 2 Click **Check for Issues**.

The app generates instrumented MEX function. It runs the test file `dti_test` replacing calls to `dti` with calls to the generated MEX. If the app finds issues, it provides warning and error messages. You can click a message to highlight the problematic code in a window where you can edit the code. In this example, the app does not detect issues.

- 3 Click **Next** to go to the **Convert to Fixed Point** step.

Convert to Fixed Point

- 1 The app displays compiled information—type, size, and complexity—for variables in your code. For more information, see “View and Modify Variable Information”.

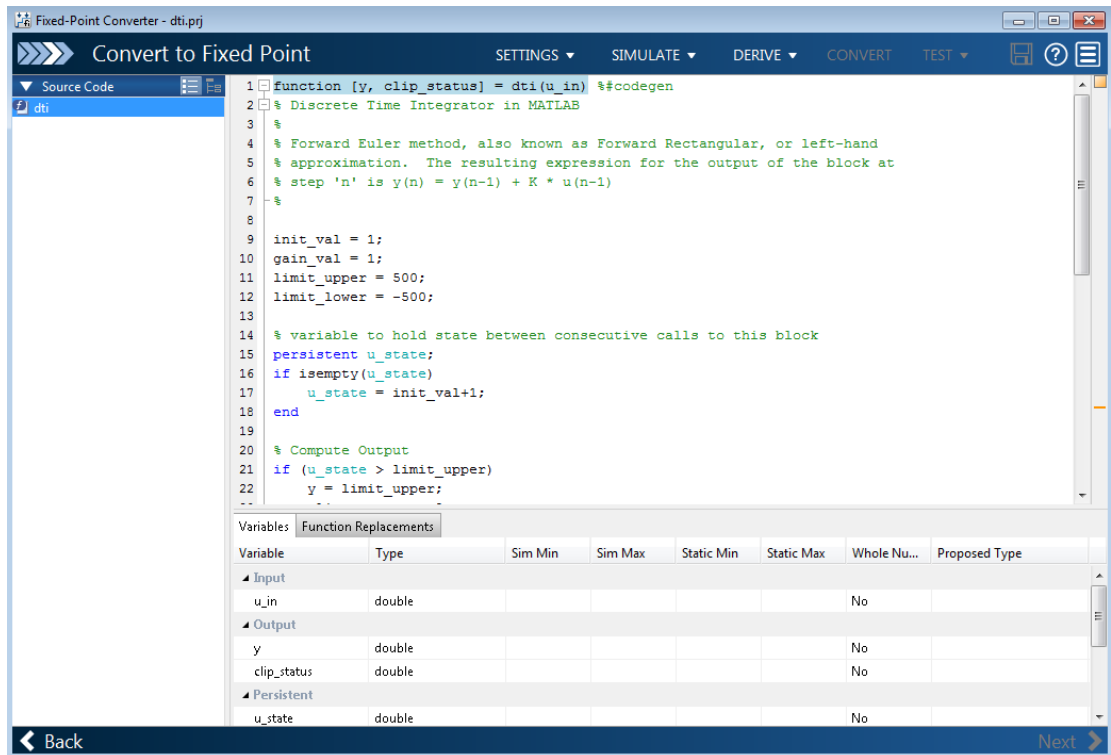

If functions are not supported for fixed-point conversion, the app displays them on the **Function Replacements** tab.

- 2 On the **Convert to Fixed Point** page, on the **Variables** tab, for input `u_in`, select **Static Min** and set it to -1. Set **Static Max** to 1.

To compute derived range information, at a minimum you must specify static minimum and maximum values or proposed data types for all input variables.

Note: If you manually enter static ranges, these manually entered ranges take precedence over simulation ranges. The app uses the manually entered ranges to propose data types. You can also modify and lock the proposed type.

- 3 Click **Derive**.

Range analysis computes the derived ranges and displays them in the **Variables** tab. Using these derived ranges, the analysis proposes fixed-point types for each variable based on the default type proposal settings. The app displays them in the **Proposed Type** column.

In the `dti` function, the `clip_status` output has a minimum value of -2 and a maximum of 2.

```
% Compute Output
if (u_state > limit_upper)
    y = limit_upper;
    clip_status = -2;
elseif (u_state >= limit_upper)
    y = limit_upper;
    clip_status = -1;
elseif (u_state < limit_lower)
    y = limit_lower;
    clip_status = 2;
elseif (u_state <= limit_lower)
    y = limit_lower;
    clip_status = 1;
else
    y = u_state;
    clip_status = 0;
end
```

When you derive ranges, the app analyzes the function and computes these minimum and maximum values for `clip_status`.

```

1 function [y, clip_status] = dti(u_in) %#codegen
2 % Discrete Time Integrator in MATLAB
3 %
4 % Forward Euler method, also known as Forward Rectangular, or left-hand
5 % approximation. The resulting expression for the output of the block at
6 % step 'n' is  $y(n) = y(n-1) + K * u(n-1)$ 
7 %
8
9 init_val = 1;
10 gain_val = 1;
11 limit_upper = 500;
12 limit_lower = -500;
13
14 % variable to hold state between consecutive calls to this block
15 persistent u_state;
16 if isempty(u_state)

```

Static Analysis Output		Variables					
Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
▲ Input							
u_in	double			-1	1	No	numerictype(1, 16, 14)
▲ Output							
y	double			-500	500	No	numerictype(1, 16, 6)
clip_status	double			-2	2	No	numerictype(1, 16, 13)
▲ Persistent							
u_state	double			-501	501	No	numerictype(1, 16, 6)
▲ Local							
init_val	double			1	1	Yes	numerictype(0, 1, 0)
gain_val	double			1	1	Yes	numerictype(0, 1, 0)
limit_upper	double			500	500	Yes	numerictype(0, 9, 0)
limit_lower	double			-500	-500	Yes	numerictype(1, 10, 0)
tprod	double			-1	1	No	numerictype(1, 16, 14)

The app provides a **Quick derived range analysis** option and the option to specify a timeout in case the analysis takes a long time. See “Computing Derived Ranges”.

4 To convert the floating-point algorithm to fixed point, click **Convert**.


During the fixed-point conversion process, the software validates the proposed types and generates the following files in the `codegen\dti\fixpt` folder in your local working folder:


- `dti_fixpt.m` — the fixed-point version of `dti.m`.
- `dti_wrapper_fixpt.m` — this file converts the floating-point data values supplied by the test file to the fixed-point types determined for the inputs during

conversion. The app feeds these fixed-point values into the converted fixed-point design, `dti_fixpt.m`.


- `dti_fixpt_report.html` — this report shows the generated fixed-point code and the fixed-point instrumentation results.
- `dti_report.html` — this report shows the original algorithm and the fixed-point instrumentation results.
- `dti_fixpt_exVal.mat` — MAT-file containing a structure for the input arguments, a structure for the output arguments and the name of the fixed-point file.

If errors or warnings occur during validation, they show on the **Validation results** tab. See “Validating Types”.


- 5 In the **Output Files** list, select `dti_fixpt.m`. The app displays the generated fixed-point code.
- 6 Use the Simulation Data Inspector to plot the floating-point and fixed-point results.
 - a Click the **Settings** arrow .
 - b Expand the **Plotting and Reporting** settings and set **Plot with Simulation Data Inspector** to Yes.

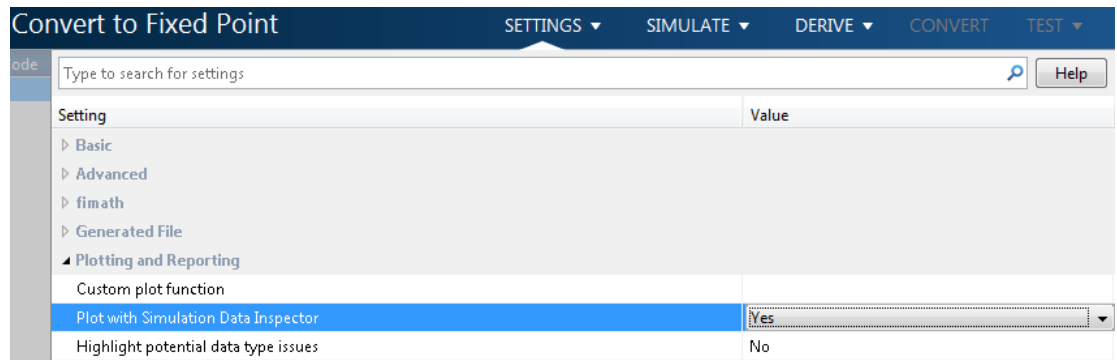

- c Click the **Test** arrow . Select **Log inputs and outputs for comparison plots**. Click **Test**.




The app runs the test file that you used to define input types to test the fixed-point MATLAB code. Optionally, you can add test files and select to run more than one test file to test numerics. The software runs both a floating-point and a fixed-point simulation and then calculates the errors for the output variable y . Because you selected to log inputs and outputs for comparison plots and to use the Simulation Data Inspector for these plots, the Simulation Data Inspector opens.

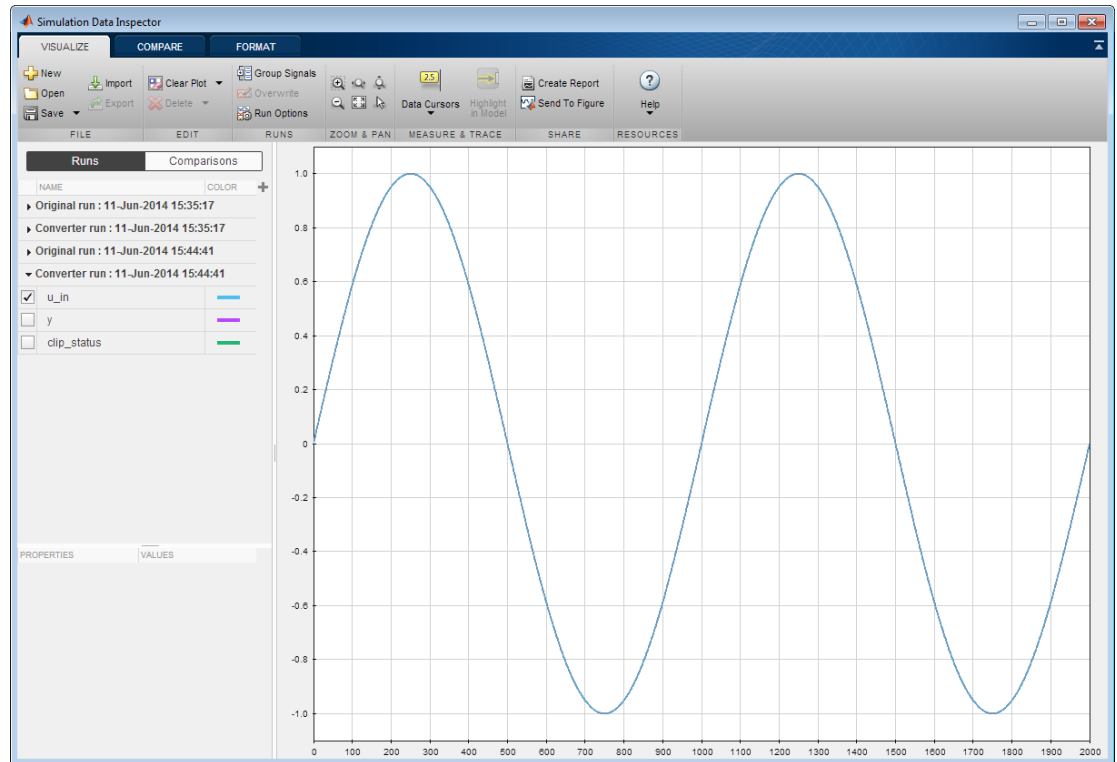

- d** You can use the Simulation Data Inspector to view floating-point and fixed-point run information and compare results. For example, to compare the floating-point

and fixed-point values for the output y , on the **Compare** tab, select y , and then click **Compare Runs**.

The Simulation Data Inspector displays a plot of the baseline floating-point run against the fixed-point run and the difference between them.

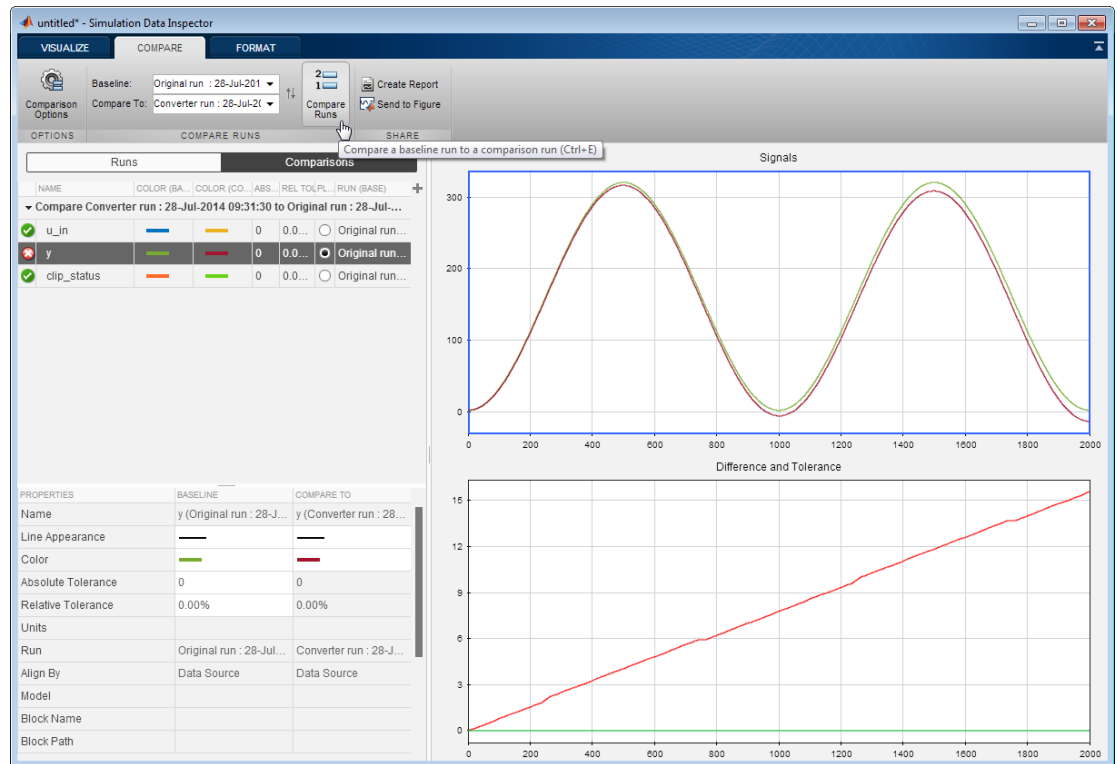

7 On the **Verification Output** tab, the app provides a link to a type proposal report.

The screenshot displays the MATLAB IDE interface. The top window shows the source code for the function `dti_fixpt`. The code is a discrete-time integrator using the Forward Euler method. It includes comments in Spanish and English, and uses the `fi` function for fixed-point arithmetic. The code is as follows:

```

6 function [y, clip_status] = dti_fixpt(u_in) %#codegen
7 %# Discrete Time Integrator in MATLAB
8 %
9 % Forward Euler method, also known as Forward Rectangular, or left-hand
10 % approximation. The resulting expression for the output of the block at
11 % step 'n' is y(n) = y(n-1) + K * u(n-1)
12 %#
13
14 fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap', 'ProductMode', 'FullPrecision',
15
16 init_val = fi(1, 0, 1, 0, fm);
17 gain_val = fi(1, 0, 1, 0, fm);
18 limit_upper = fi(500, 0, 9, 0, fm);
19 limit_lower = fi(-500, 1, 10, 0, fm);
20
21 % variable to hold state between consecutive calls to this block
22 persistent u_state;
23 if isempty(u_state)
24     u_state = fi(init_val+fi(1, 0, 1, 0, fm), 1, 16, 6, fm);
25 end
26

```

The bottom window shows the verification output for the function. It indicates that the fixed-point simulation completed in 31.1900 seconds and that a fixed-point types report was generated for the function `dti_fixpt`. The report is located at `dti_fixpt_report.html`. The elapsed time for generating the report is 42.4876 seconds.

```

Verification Output | Variables | Function Replacements
Generating comparison plot...
----- Output variable : y -----
Generating comparison plot...
----- Output variable : clip_status -----
Generating comparison plot...

### Fixed Point Simulation Completed in 31.1900 sec(s)
### Generating Fixed-point Types Report for 'dti_fixpt' dti_fixpt_report.html
### Elapsed Time:          42.4876 sec(s)

```

To open the report, click the `dti_fixpt_report.html` link.

The following table shows fixed point instrumentation results

Fixed-Point Report dti_fixpt

```

function [y, clip_status] = dti_fixpt(u_in) %codegen
% Discrete Time Integrator in MATLAB
%
% Forward Euler method, also known as Forward Rectangular, or left-hand
% approximation. The resulting expression for the output of the block at
% step 'n' is y(n) = y(n-1) + K * u(n-1)
%
fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap', 'ProductMode', 'FullPrecision', 'MaxProductWordLength', 128, 'SumMode', 'FullPrecision', 'MaxSumWordLength', 128);

init_val = fi(1, 0, 1, 0, fm);
gain_val = fi(1, 0, 1, 0, fm);
limit_upper = fi(500, 0, 9, 0, fm);
limit_lower = fi(-500, 1, 10, 0, fm);

% variable to hold state between consecutive calls to this block
persistent u_state;
if isempty(u_state)
    u_state = fi(init_val, fi(1, 0, 1, 0, fm), 1, 16, 6, fm);
end

% Compute Output
if (u_state > limit_upper)
    y = fi(limit_upper, 1, 16, 6, fm);
    clip_status = fi(-2, 1, 16, 13, fm);
elseif (u_state >= limit_upper)
    y = fi(limit_upper, 1, 16, 6, fm);
    clip_status = fi(-1, 1, 16, 13, fm);
elseif (u_state < limit_lower)
    y = fi(limit_lower, 1, 16, 6, fm);
    clip_status = fi(2, 1, 16, 13, fm);
elseif (u_state <= limit_lower)
    y = fi(limit_lower, 1, 16, 6, fm);
    clip_status = fi(1, 1, 16, 13, fm);
else
    y = fi(u_state, 1, 16, 6, fm);
    clip_status = fi(0, 1, 16, 13, fm);
end

% Update State
tprod = fi(gain_val * u_in, 1, 16, 14, fm);
u_state(1) = y + tprod;
end
    
```

Variable Name	Type	Sim Min	Sim Max
clip_status	numericType(1, 16, 13)	0	0
gain_val	numericType(0, 1, 0)	1	1
init_val	numericType(0, 1, 0)	1	1
limit_lower	numericType(1, 10, 0)	-500	-500
limit_upper	numericType(0, 9, 0)	500	500
tprod	numericType(1, 16, 14)	-1	1
u_in	numericType(1, 16, 14)	-1	1
u_state	numericType(1, 16, 6)	-13.59375	316.28125
y	numericType(1, 16, 6)	-13.578125	316.28125

8 Click **Next** to go to the **Finish Workflow** page.

On the **Finish Workflow** page, the app displays a project summary and links to generated output files.

Integrate Fixed-Point Code

To integrate the fixed-point version of the code into system-level simulations, generate a MEX function to accelerate the fixed-point algorithm. Call this MEX function instead of the original MATLAB algorithm.

- 1 Copy `dti_fixpt.m` to your local working folder.
- 2 Generate a MEX function for `dti_fixpt.m`. Use the type proposal report to get the `fimath`, `fm`, and fixed-point data type for input `u_in`.

```
fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap', 'ProductMode', 'FullPrecision',...  
           'MaxProductWordLength', 128, 'SumMode', 'FullPrecision', 'MaxSumWordLength', 128);  
fiaccel dti_fixpt -args {fi( 0, 1, 16, 14, fm )}
```

fiaccel generates a MEX function, `dti_fixpt_mex`, in the current folder.

- 3** You can now call this MEX function in place of the original MATLAB algorithm.

View and Modify Variable Information

View Variable Information

On the **Convert to Fixed Point** page of the Fixed-Point Converter app, you can view information about the variables in the MATLAB functions. To view information about the variables that you select in the **Source Code** pane, use the **Variables** tab or place your cursor over a variable in the code window. For more information, see “Viewing Variables” on page 8-18.

You can view the variable information:

- **Variable**

Variable name. Variables are classified and sorted as inputs, outputs, persistent, or local variables.

- **Type**

The original size, type, and complexity of each variable.

- **Sim Min**

The minimum value assigned to the variable during simulation.

- **Sim Max**

The maximum value assigned to the variable during simulation.

To search for a variable in the MATLAB code window and on the **Variables** tab, use Ctrl+F. The app highlights occurrences of the variable in the code.

Modify Variable Information

If you modify variable information, the app highlights the modified values using bold text. You can modify the following fields:

- **Static Min**

You can enter a value for **Static Min** into the field or promote **Sim Min** information. See “Promote Sim Min and Sim Max Values” on page 9-51.

Editing this field does not trigger static range analysis, but the app uses the edited values in subsequent analyses.

- **Static Max**

You can enter a value for **Static Max** into the field or promote **Sim Max** information. See “Promote Sim Min and Sim Max Values” on page 9-51.

Editing this field does not trigger static range analysis, but the app uses the edited values in subsequent analyses.

- **Whole Number**


The app uses simulation data to determine whether the values assigned to a variable during simulation were always integers. You can manually override this field.

Editing this field does not trigger static range analysis, but the app uses the edited value in subsequent analyses.


- **Proposed Type**

You can modify the signedness, word length, and fraction length settings individually:

- On the **Variables** tab, modify the value in the **ProposedType** field.

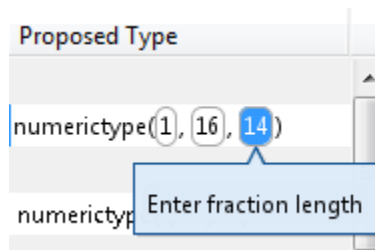

- In the code window, select a variable, and then modify the **ProposedType** field.

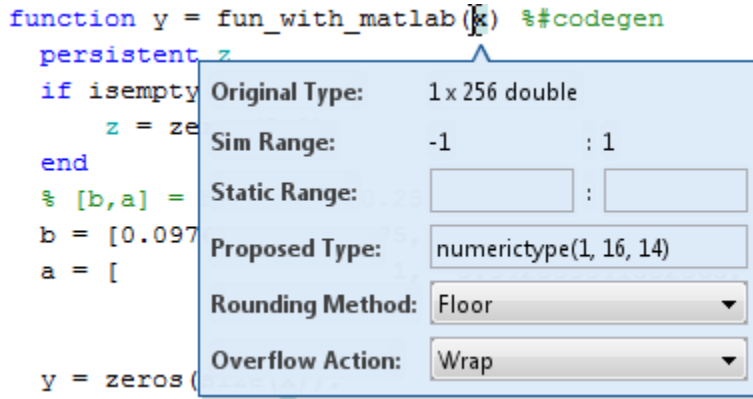

If you selected to log data for a histogram, the histogram dynamically updates to reflect the modifications to the proposed type. You can also modify the proposed type in the histogram, see “Log Data for Histogram” on page 8-20.

Revert Changes

- To clear results and revert edited values, right-click the **Variables** tab and select **Reset entire table**.

Simulation Output	Variables	Function Replacements						
Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Number	Proposed Type	
<ul style="list-style-type: none"> Input x: 1 x 256 double, Sim Min: -1, Sim Max: 1, Proposed Type: numeric(1, 16, 14) Output y: 1 x 256 double, Sim Min: -0.97, Sim Max: 1.06, Proposed Type: numeric(1, 16, 14) Persistent z: 2 x 1 double, Sim Min: -0.89, Sim Max: 0.96, Proposed Type: numeric(1, 16, 15) Local b: 1 x 3 double, Sim Min: 0.1, Sim Max: 0.2, Proposed Type: numeric(0, 16, 18) a: 1 x 3 double, Sim Min: -0.94, Sim Max: 1, Proposed Type: numeric(1, 16, 14) i: double, Sim Min: 1, Sim Max: 256, Proposed Type: numeric(0, 9, 0) 								

- To revert the type of a selected variable to the type computed by the app, right-click the field and select **Undo changes**.
- To revert changes to variables, right-click the field and select **Undo changes for all variables**.

- To clear a static range value, right-click an edited field and select **Clear this static range**.
- To clear manually entered static range values, right-click anywhere on the **Variables** tab and select **Clear all manually entered static ranges**.

Promote Sim Min and Sim Max Values

With the Fixed-Point Converter app, you can promote simulation minimum and maximum values to static minimum and maximum values. This capability is useful if you have not specified static ranges and you have simulated the model with inputs that cover the full intended operating range.

Simulation Output	Variables	Function Replacements	Static Min	Static Max	Whole Number	Decimal	Type
<div style="border: 1px solid gray; padding: 5px;"> Copy sim ranges for all top-level inputs Copy sim ranges for all persistent variables Copy sim ranges for all global variables Clear all manually entered static ranges Reset entire table </div>							
Input							
x	1x256 double		-1	1			type(1, 16, 14)
Output							
y	1x256 double		-0.97	1.06			type(1, 16, 14)
Persistent							

To copy:

- A simulation range for a selected variable, select a variable, right-click, and then select **Copy sim range**.
- Simulation ranges for top-level inputs, right-click the Static Min or Static Max column, and then select **Copy sim ranges for all top-level inputs**.
- Simulation ranges for persistent variables, right-click the Static Min or Static Max column, and then select **Copy sim ranges for all persistent variables**.

Replace the exp Function with a Lookup Table

This example shows how to replace the `exp` function with a lookup table approximation in fixed-point code generated using the Fixed-Point Converter app.

Prerequisites

To complete this example, you must install the following products:

- MATLAB
- Fixed-Point Designer
- C compiler (for most platforms, a default C compiler is supplied with MATLAB). See http://www.mathworks.com/support/compilers/current_release/.

You can use `mex -setup` to change the default compiler. See “Changing Default Compiler”.

Create Algorithm and Test Files

- 1 Create a MATLAB function, `my_fcn.m`, that calls the `exp` function.

```
function y = my_fcn(x)
    y = exp(x);
end
```


- 2 Create a test file, `my_fcn_test.m`, that uses `my_fcn.m`.

```
close all

x = linspace(-10,10,1e3);
for itr = 1e3:-1:1
    y(itr) = my_fcn( x(itr) );
end
plot( x, y );
```

Open the Fixed-Point Converter App

- 1 Navigate to the work folder that contains the file for this example.
- 2 On the MATLAB Toolstrip **Apps** tab, under **Code Generation**, click the app icon.

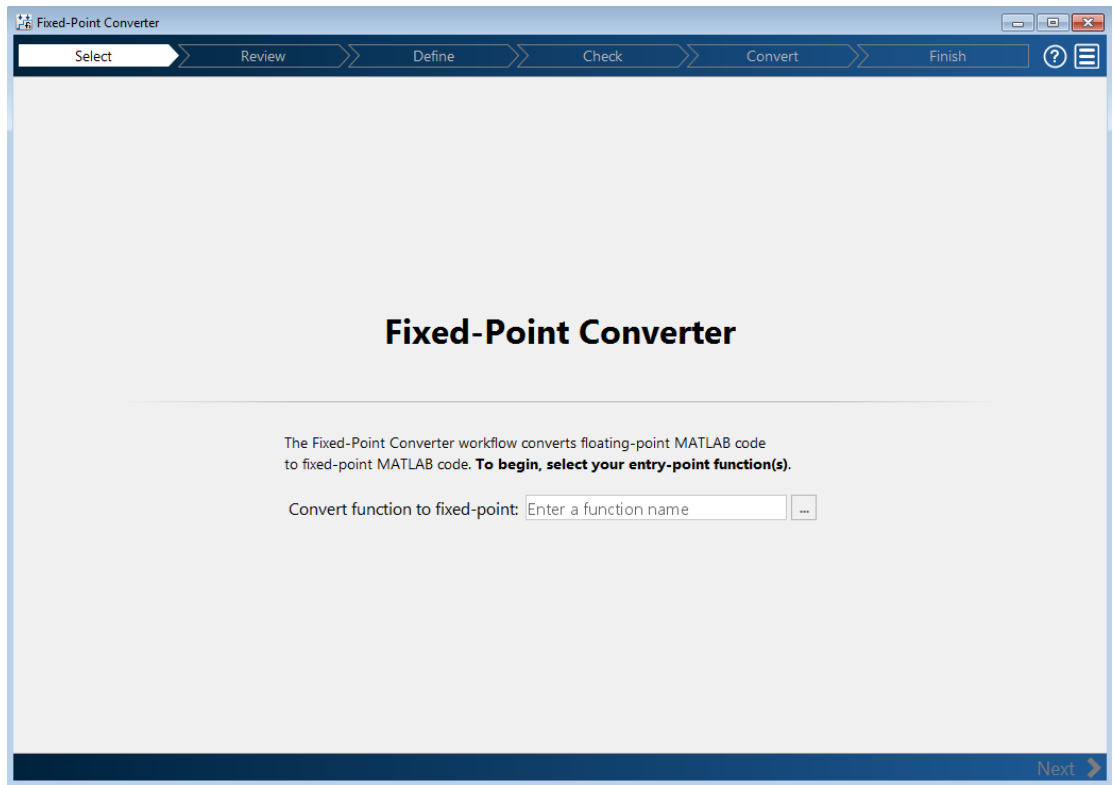


Select Source Files

- 1 To add the entry-point function `my_fcn` to the project, browse to the file `my_fcn.m`, and then click **Open**. By default, the app saves information and settings for this project in the current folder in a file named `my_fcn.prj`.
- 2 Click **Next** to go to the **Define Input Types** step.

The app screens `my_fcn.m` for code violations and fixed-point conversion readiness issues. The app opens the **Review Code Generation Readiness** page.

Review Code Generation Readiness

- 1 Click **Review Issues**. The app indicates that the `exp` function is not supported for code generation. In a later step, you specify a lookup table replacement for this function.

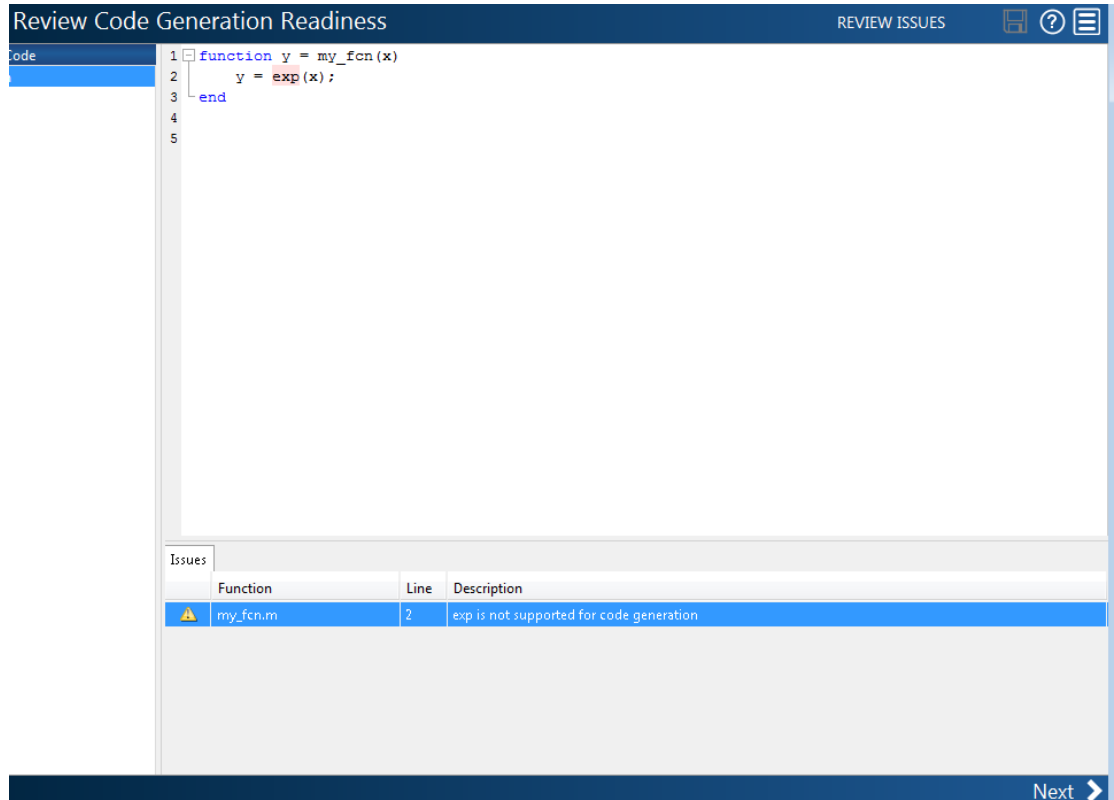


- 2 Click **Next** to go to the **Define Input Types** step.

Define Input Types

- 1 Add `my_fcn_test` as a test file and then click **Autodefine Input Types**.

The test file runs and plots the output. The app determines from the test file that `x` is a scalar double.

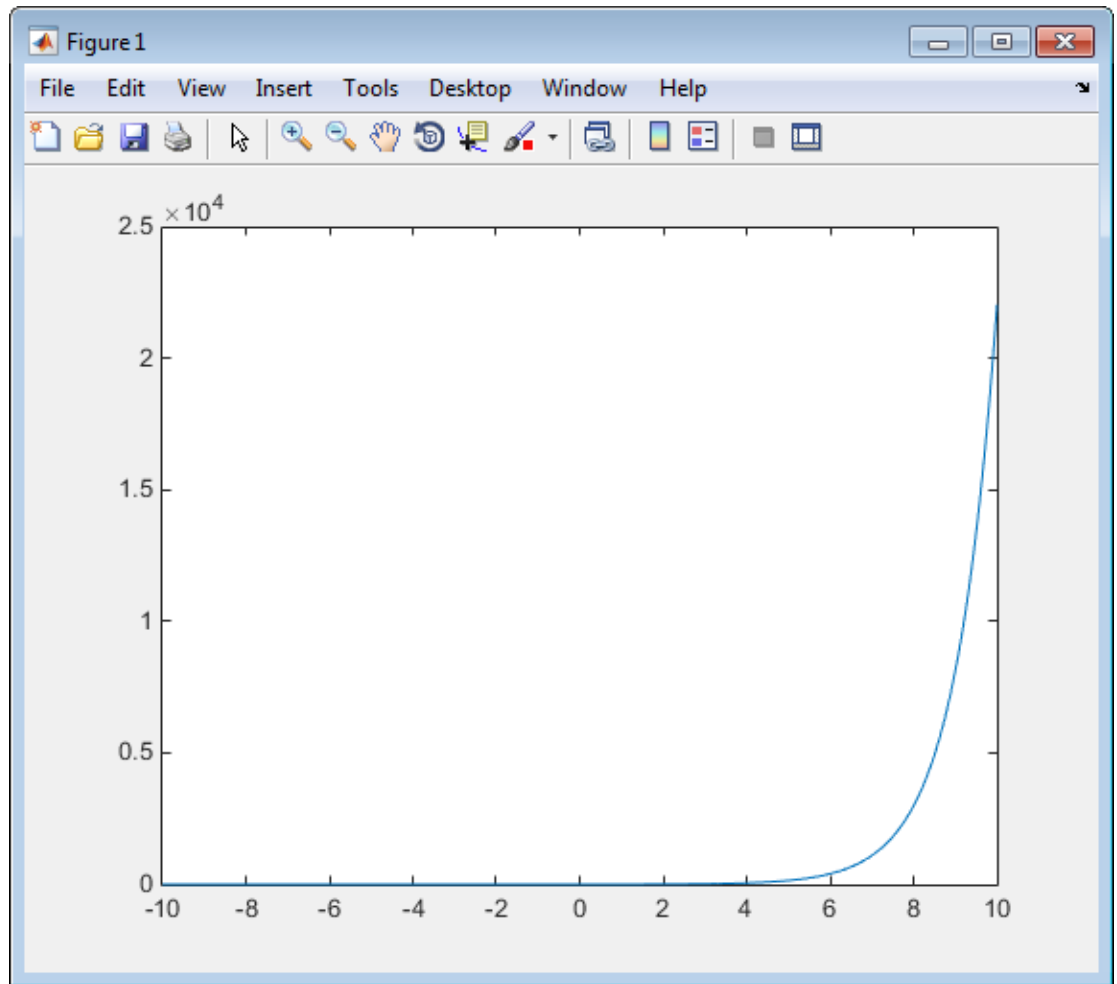

- 2 Click **Next** to go to the **Check for Run-Time Issues** step.

Check for Run-Time Issues

Before you can go to the **Convert to Fixed Point** step, you must check `my_fcn` for run-time issues:

- 1 On the **Check for Run-Time Issues** page, the app populates the test file field with `my_fcn_test`, the test file that you used to define the input types.

2 Click **Check for Issues**.


The app generates instrumented MEX function. It runs the test file `my_fcn_test` replacing calls to `my_fcn` with calls to the generated MEX function. If the app finds issues, it provides warning and error messages. You can click a message to highlight the problematic code in a pane where you can edit the code. In this example, the app does not detect issues.

3 Click **Next** to go to the **Convert to Fixed Point** step.


Replace exp Function with Lookup Table

1 Select the **Function Replacements** tab.


The app indicates that you must replace the `exp` function.

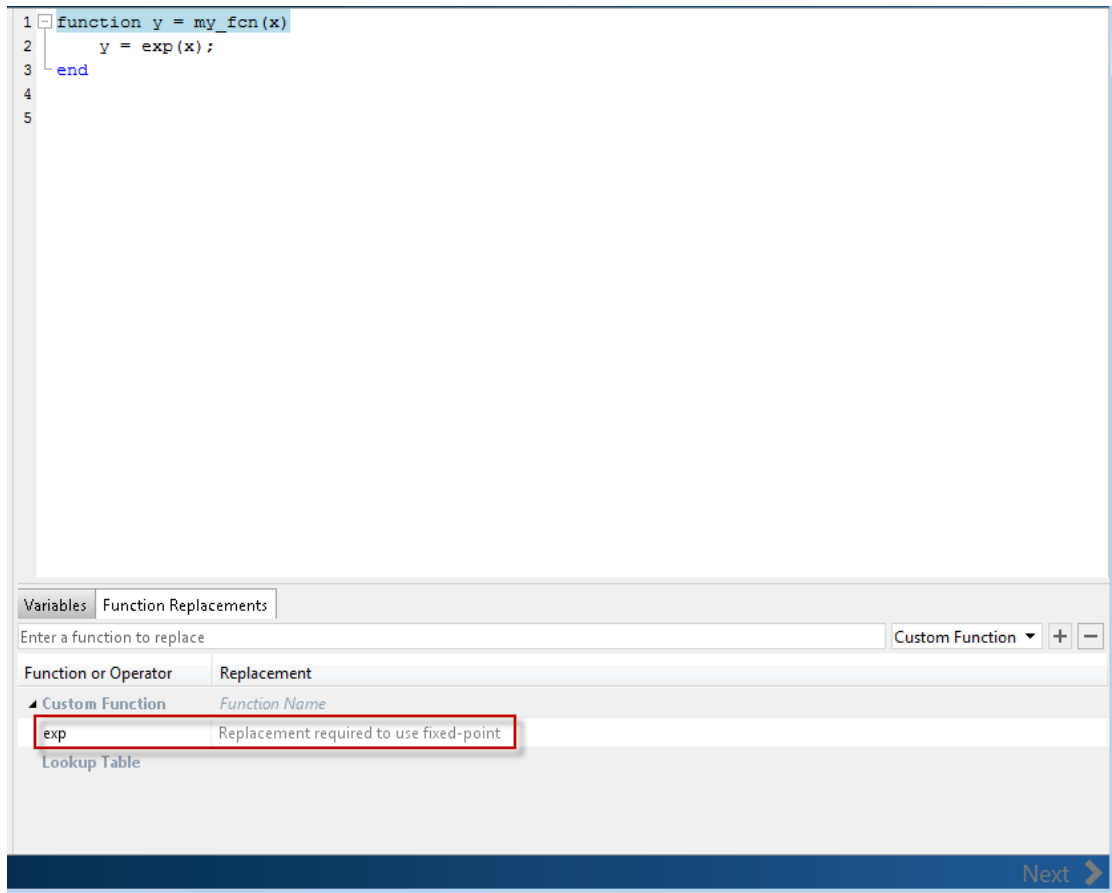


- 2 On the **Function Replacements** tab, right-click the `exp` function and select **Lookup Table**.

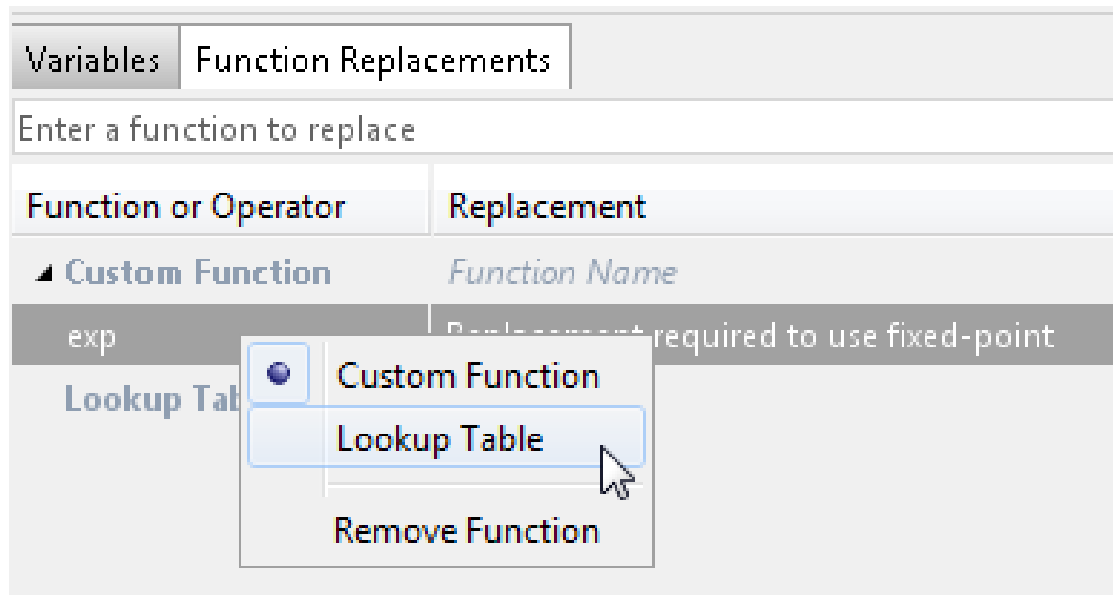

The app moves the `exp` function to the list of functions that it will replace with a Lookup Table. By default, the lookup table uses linear interpolation and 1000 points. **Design Min** and **Design Max** are set to `Auto` which means that the app uses the design minimum and maximum values that it detects by either running a simulation or computing derived ranges.

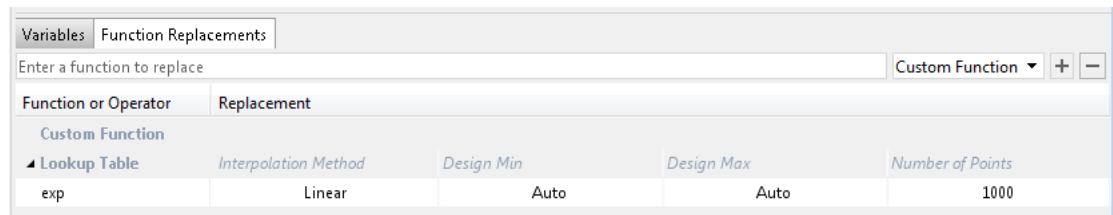


- 3 Click the **Simulate** arrow , select **Log data for histogram**, and verify that the test file is `my_fcn_test`.



4 Click **Simulate**.

The simulation runs. On the **Variables** tab, the app displays simulation minimum and maximum ranges. Using the simulation range data, the software proposes fixed-point types for each variable based on the default type proposal settings, and displays them in the **Proposed Type** column. The app enables the **Convert** option.

5 Examine the proposed types and verify that they cover the full simulation range. To view logged histogram data for a variable, click its **Proposed Type** field. The histogram provides range information and the percentage of simulation range covered by the proposed data type.

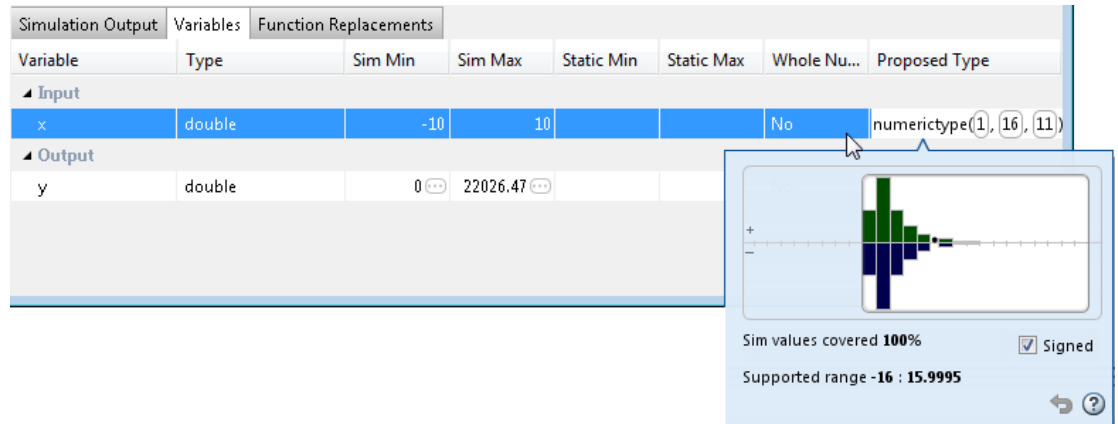

Convert to Fixed Point

1 Click **Convert**.

The app validates the proposed types, and generates a fixed-point version of the entry-point function, `my_fcn_fixpt.m`.

2 In the Output Files list, select `my_fcn_fixpt.m`.

The conversion process generates a lookup table approximation, `replacement_exp`, for the `exp` function.

The screenshot shows the 'Convert to Fixed Point' application interface. The main window displays the MATLAB function `replacement_exp(x)` with the following code:

```

18 function y = replacement_exp(x)
19     persistent LUT
20     if isempty( LUT )
21         T = numerictype( false, 14, -1 );
22         LUT = fi( [ 4.53999297624848e-05, 4.63179964587419e-05, 4.72546280836935e-05, 4.82102000
23     end
24     x_idx = fi( (x - -10)*49.95, 1, 16, 5, fimath( x ) );
25     idx_bot = floor( x_idx );
26     x_idx( : ) = x_idx + 1;
27     if (idx_bot >= fi( 1000, numerictype( idx_bot ), fimath( x ) ))
28         idx_bot = fi( (999), numerictype( idx_bot ), fimath( x ) );
29     elseif (idx_bot <= fi( 0, numerictype( idx_bot ), fimath( x ) ))
30         idx_bot = fi( 1, numerictype( idx_bot ), fimath( x ) );
31     end
32     idx_top = fi( idx_bot + 1, numerictype( idx_bot ), fimath( x ) );
33     x_bot = idx_bot;
34     x_top = idx_top;
35     y_bot = LUT( idx_bot );
36     y_top = LUT( idx_top );
37     y = y_top*(x_idx - x_bot) + y_bot*(x_top - x_idx);
38 end

```

Below the code editor, the 'Type Validation Output' table is displayed:

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
Input							
x	double	-10	10			No	numerictype(1, 16, 11)
Output							
y	double	0	22026.47			No	numerictype(0, 16, 1)

The generated fixed-point function, `my_fcn_fixpt.m`, calls this approximation instead of calling `exp`. The fixed-point conversion process infers the ranges for the function and then uses an interpolated lookup table to replace the function. By default, the lookup table uses linear interpolation, 1000 points, and the minimum and maximum values detected by running the test file.

```

function y = my_fcn_fixpt(x)
    fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap', 'ProductMode', 'FullPrecision',...
        'MaxProductWordLength', 128, 'SumMode', 'FullPrecision', 'MaxSumWordLength', 128);

    y = fi(replacement_exp(x), 0, 16, 1, fm);
end

```

You can now test the generated fixed-point code and compare the results against the original MATLAB function. If the behavior of the generated fixed-point code does

not match the behavior of the original code closely enough, modify the interpolation method or number of points used in the lookup table. Then, regenerate the code.

More About

- “Replacing Functions Using Lookup Table Approximations”

Convert Fixed-Point Conversion Project to MATLAB Scripts

This example shows how to convert a Fixed-Point Converter app project to a MATLAB script. You can use the `-tocode` option of the `fixedPointConverter` command to create a script for fixed-point conversion. You can use the script to repeat the project workflow in a command-line workflow. Before you convert the project to a script, you must complete the **Test** step of the fixed-point conversion process.

Prerequisites

This example uses the following files:

- Project file `fun_with_matlab.prj`
- Entry-point file `fun_with_matlab.m`
- Test bench file `fun_with_matlab_test.m`
- Generated fixed-point MATLAB file `fun_with_matlab_fixpt.m`

To obtain these files, complete the example “Propose Data Types Based on Simulation Ranges”, including the **Test** step.

Generate the Scripts

- 1 Change to the folder that contains the project file `fun_with_matlab.prj`.
- 2 Use the `-tocode` option of the `fixedPointConverter` command to convert the project to a script. Use the `-script` option to specify the file name for the script.

```
fixedPointConverter -tocode fun_with_matlab -script fun_with_matlab_script.m
```

The `fixedPointConverter` command generates a script in the current folder. `fun_with_matlab_script.m` contains the MATLAB commands to:

- Create a floating-point to fixed-point conversion configuration object that has the same fixed-point conversion settings as the project.
- Run the `fiaccel` command to convert the MATLAB function `fun_with_matlab` to the fixed-point MATLAB function `fun_with_matlab_fixpt`.

The `fiaccel` command overwrites existing files that have the same name as the generated script. If you omit the `-script` option, the `fiaccel` command returns the script in the Command Window.

Run Script That Generates Fixed-Point MATLAB Code

If you want to regenerate the fixed-point function, use the generated script.

- 1 Make sure that the current folder contains the entry-point function `fun_with_matlab.m` and the test bench file `fun_with_matlab_test.m`.
- 2 Run the script.

```
fun_with_matlab_script
```

The script generates `fun_with_matlab_fixpt.m` in the folder `codegen\fun_with_matlab\fixpt`. The variables `cfg` and `ARGS` appear in the base workspace.

See Also

`coder.FixptConfig` | `fiaccel`

Related Examples

- “Propose Data Types Based on Simulation Ranges”

Replace a Custom Function with a Lookup Table

This example shows how to replace a custom function with a lookup table approximation function using the Fixed-Point Converter app.

Prerequisites

This example requires the following products:

- MATLAB
- Fixed-Point Designer
- C compiler (for most platforms, a default C compiler is supplied with MATLAB). See http://www.mathworks.com/support/compilers/current_release/.

You can use `mex -setup` to change the default compiler. See “Changing Default Compiler”.

Create Algorithm and Test Files

In a local, writable folder:

- 1 Create a MATLAB function, `custom_fcn.m` which is the function that you want to replace.

```
function y = custom_fcn(x)
    y = 1./(1+exp(-x));
end
```

- 2 Create a wrapper function, `call_custom_fcn.m`, that calls `custom_fcn.m`.

```
function y = call_custom_fcn(x)
    y = custom_fcn(x);
end
```


- 3 Create a test file, `custom_test.m`, that uses `call_custom_fcn`.

```
close all
clear all

x = linspace(-10,10,1e3);
for itr = 1e3:-1:1
    y(itr) = call_custom_fcn( x(itr) );
end
plot( x, y );
```

Open the Fixed-Point Converter App

- 1 Navigate to the work folder that contains the file for this example.
- 2 On the MATLAB Toolstrip **Apps** tab, under **Code Generation**, click the app icon.

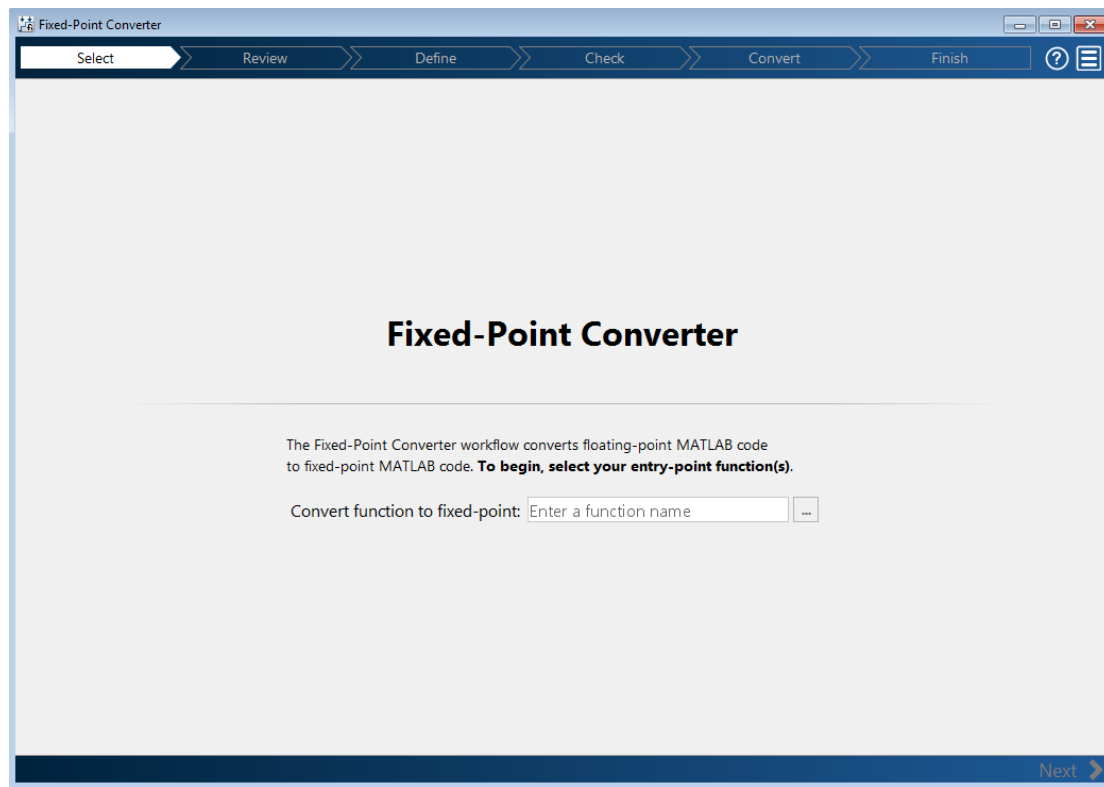


Select Source Files

- 1 To add the entry-point function `call_custom_fcn` to the project, browse to the file `call_custom_fcn.m`, and then click **Open**. By default, the app saves information and settings for this project in the current folder in a file named `call_custom_fcn.prj`.
- 2 Click **Next** to go to the **Define Input Types** step.

The app screens `call_custom_fcn.m` for code violations and fixed-point conversion issues. The app opens the **Review Code Generation Readiness** page.

Review Code Generation Readiness

- 1 Click **Review Issues**. The app indicates that the `exp` function is not supported for code generation. You can ignore this warning because you are going to replace `custom_fcn`, which is the function that calls `exp`.

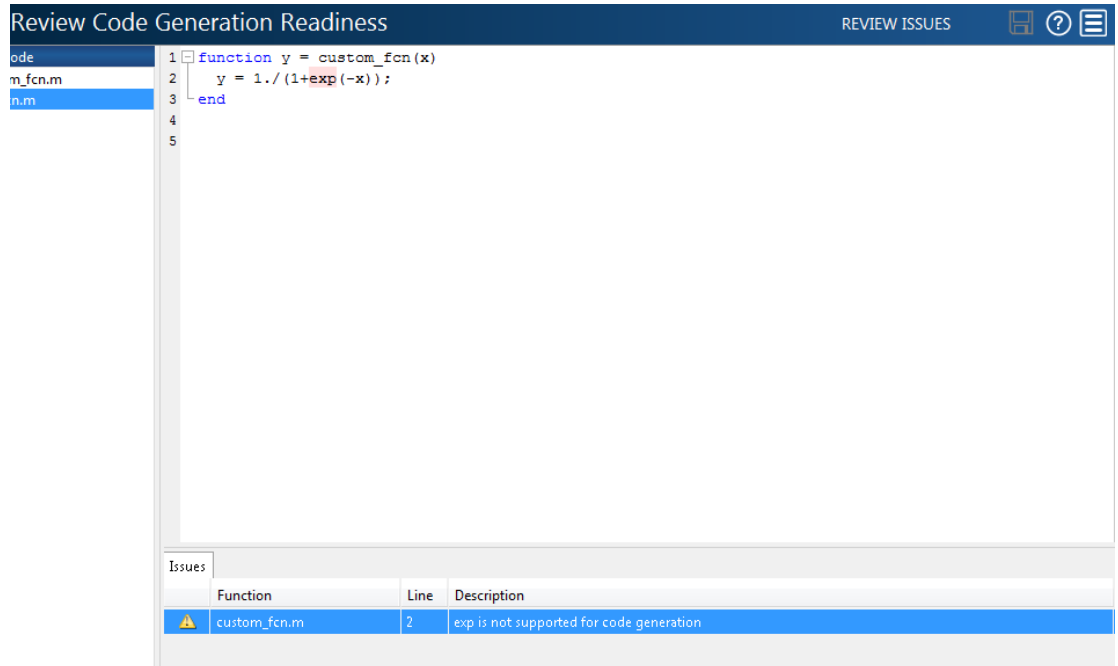


- 2 Click **Next** to go to the **Define Input Types** step.

Define Input Types

- 1 Add `custom_test` as a test file and then click **Autodefine Input Types**.

The test file runs and plots the output. The app determines from the test file that `x` is a scalar double.

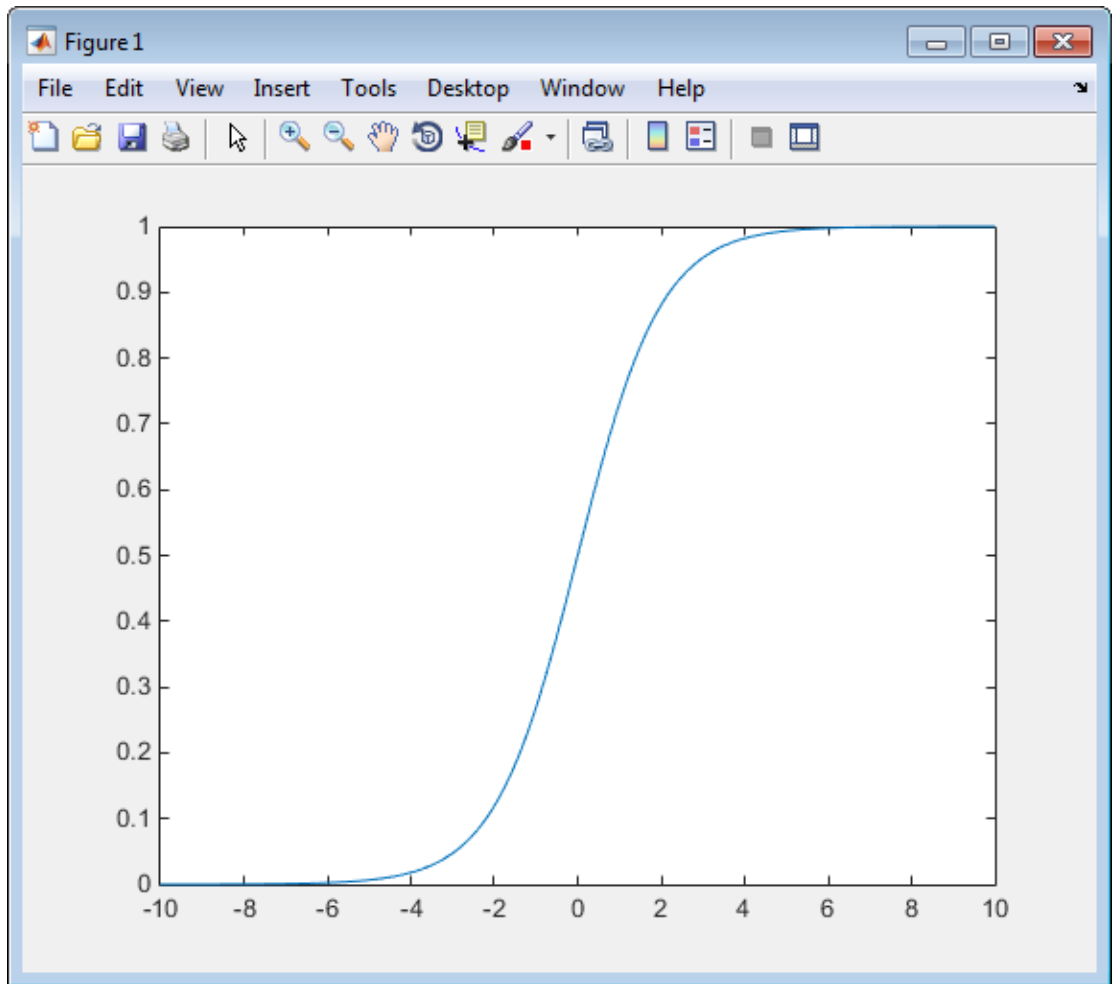

- 2 Click **Next** to go to the **Check for Run-Time Issues** step.

Check for Run-Time Issues

Before you can go to the **Convert to Fixed Point** step, you must check `call_custom_fcn` for run-time issues:

- 1 On the **Check for Run-Time Issues** page, the app populates the test file field with `custom_test`, the test file that you used to define the input types.

2 Click **Check for Issues**.


The app generates instrumented MEX function. It runs the test file `custom_test` replacing calls to `call_custom_fcn` with calls to the generated MEX function. If the app finds issues, it provides warning and error messages. You can click a message to highlight the problematic code in a pane where you can edit the code. In this example, the app does not detect issues.

3 Click **Next** to go to the **Convert to Fixed Point** step.


Replace custom_fcn with Lookup Table

1 Select the **Function Replacements** tab.

The app indicates that you must replace the `exp` function.

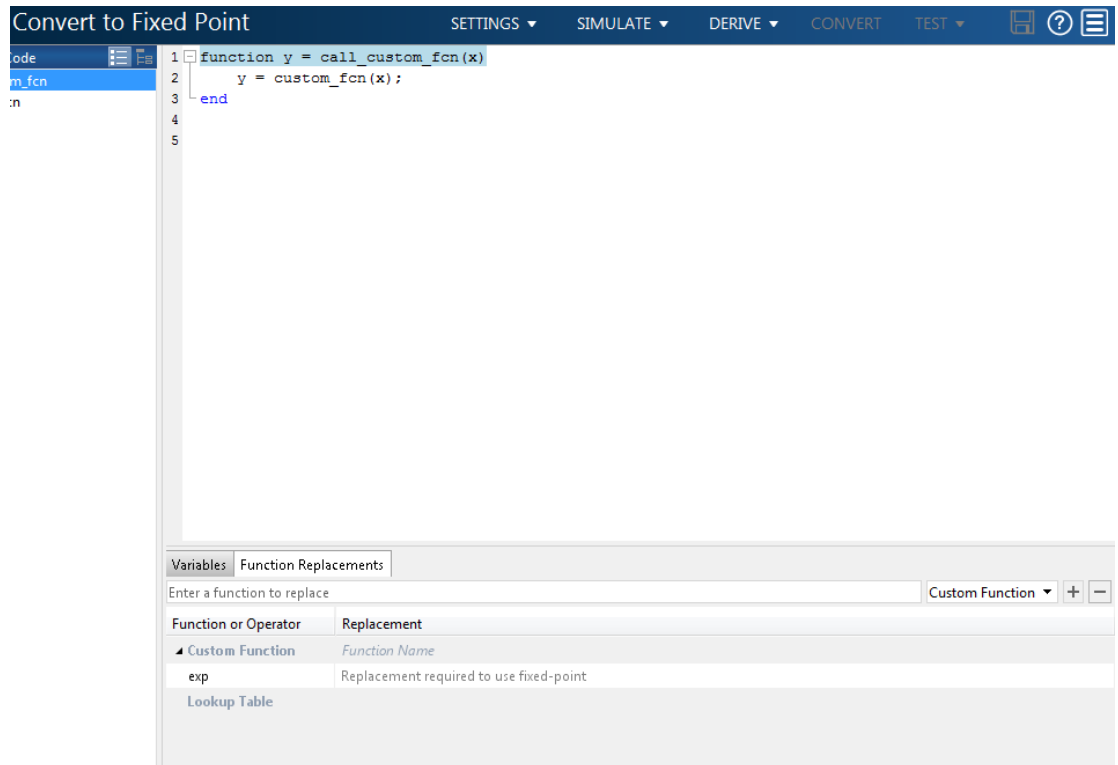



- 2 Enter the name of the function to replace, `custom_fcn`, select **Lookup Table**, and then click **+**.

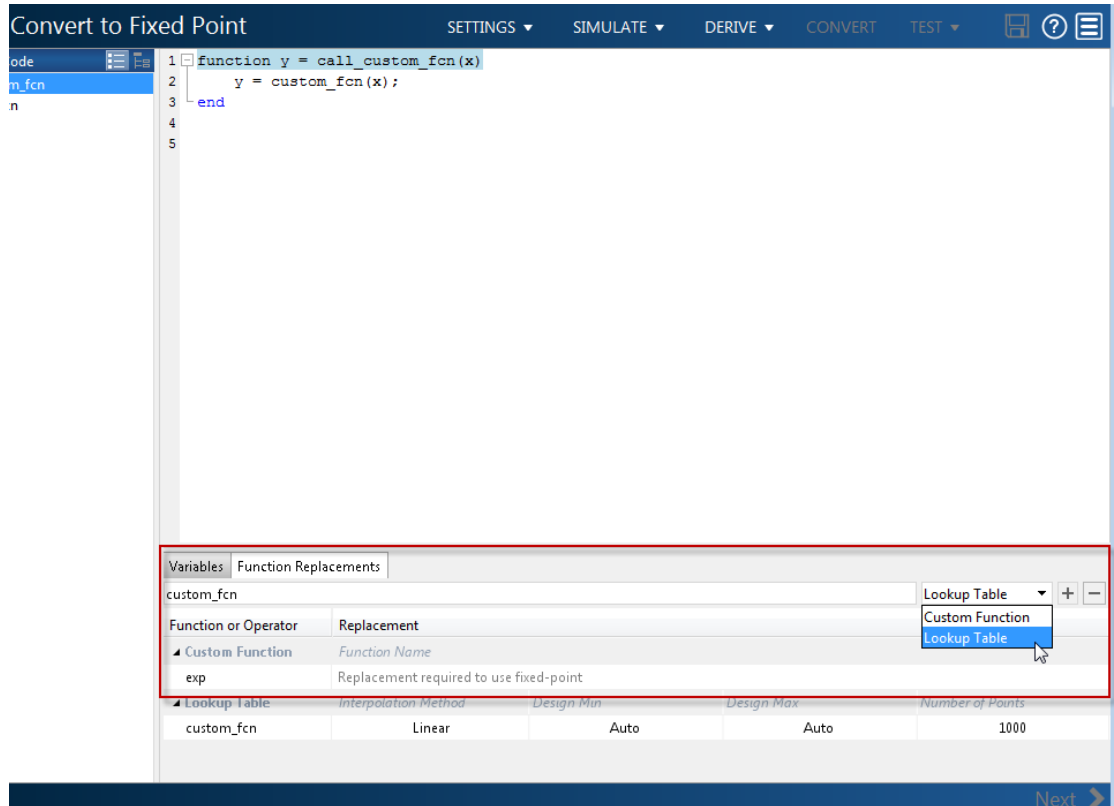

The app adds `custom_fcn` to the list of functions that it will replace with a Lookup Table. By default, the lookup table uses linear interpolation and 1000 points. The app sets **Design Min** and **Design Max** to **Auto** which means that app uses the design minimum and maximum values that it detects by either running a simulation or computing derived ranges.

Function Replacements				
Function or Operator	Replacement			
custom_fcn				
Lookup Table				
Function Name				
exp	Replacement required to use fixed-point			
Lookup Table				
Interpolation Method	Design Min	Design Max	Number of Points	
custom_fcn	Linear	Auto	Auto	1000

- Click the **Simulate** arrow , select **Log data for histogram**, and verify that the test file is `call_custom_test`.




- Click **Simulate**.

The simulation runs. The app displays simulation minimum and maximum ranges on the **Variables** tab. Using the simulation range data, the software proposes fixed-point types for each variable based on the default type proposal settings, and displays them in the **Proposed Type** column. The **Convert** option is now enabled.

- Examine the proposed types and verify that they cover the full simulation range. To view logged histogram data for a variable, click its **Proposed Type** field. The histogram provides range information and the percentage of simulation range covered by the proposed data type.

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
Input							
x	double	-10	10			No	numerictype(1, 16, 11)
Output							
y	double	0	1				



Sim values covered **100%** Signed

Supported range -16 : 15.9995

Convert to Fixed Point

- 1 Click **Convert**.

The app validates the proposed types and generates a fixed-point version of the entry-point function, `call_custom_fcn_fixpt.m`.

The screenshot displays the MATLAB IDE interface. On the left, the 'Source Code' pane shows files `call_custom_fcn` and `custom_fcn`. Below it, the 'Output Files' list includes `call_custom_fcn_fixpt.m`, which is selected. The main editor window shows the source code for `call_custom_fcn_fixpt.m` and `custom_fcn`. The code defines functions for fixed-point conversion and type validation.

```

7 function y = call_custom_fcn_fixpt(x)
8     fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap', 'ProductMode', 'FullPreci
9
10    y = fi(replacement_custom_fcn(x), 0, 16, 16, fm);
11 end
12
13 function y = custom_fcn(x)
14     fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap', 'ProductMode', 'FullPreci
15
16    y = fi(fi_dotdiv(fi(1, 0, 1, 0, fm), (fi(1, 0, 1, 0, fm)+exp(fi_uminus(x)))), 0, 16, 16, f
17 end
18
19
20
21 function ntype = divideType(a,b)
22     coder.inline( 'always' );
23     nt1 = numerictype( a );
24     nt2 = numerictype( b );
25     maxFL = max( [ min( nt1.WordLength, nt1.FractionLength ), min( nt2.WordLength, nt2.Fractio
26     FL = max( maxFL, 24 );
27     extraBits = (FL - maxFL);
28     WL = nt1.WordLength + nt2.WordLength;
29     WL = min( WL, 124 );

```

At the bottom, the 'Type Validation Output' table is visible, showing the inferred types and ranges for variables `x` and `y`.

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
Input							
x	double	-10	10			No	numeric(1, 16, 11)
Output							
y	double	0	1			No	numeric(0, 16, 16)

- 2 In the Output Files list, select `call_custom_fcn_fixpt.m`.

The conversion process generates a lookup table approximation, `replacement_custom_fcn`, for the `custom_fcn` function. The fixed-point conversion process infers the ranges for the function and then uses an interpolated lookup table to replace the function. By default, the lookup table uses linear interpolation, 1000 points, and the minimum and maximum values detected by running the test file.

The generated fixed-point function, `call_custom_fcn_fixpt.m`, calls this approximation instead of calling `custom_fcn`.

```
function y = call_custom_fcn_fixpt(x)
    fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap', 'ProductMode', 'FullPrecision', ...
        'MaxProductWordLength', 128, 'SumMode', 'FullPrecision', 'MaxSumWordLength', 128);

    y = fi(replacement_custom_fcn(x), 0, 16, 16, fm);
end
```

You can now test the generated fixed-point code and compare the results against the original MATLAB function. If the behavior of the generated fixed-point code does not match the behavior of the original code closely enough, modify the interpolation method or number of points used in the lookup table and then regenerate code.

More About

- “Replacing Functions Using Lookup Table Approximations”

Visualize Differences Between Floating-Point and Fixed-Point Results

This example shows how to configure the Fixed-Point Converter app to use a custom plot function to compare the behavior of the generated fixed-point code against the behavior of the original floating-point MATLAB code.

By default, when the **Log inputs and outputs for comparison plots** option is enabled, the conversion process uses a time series based plotting function to show the floating-point and fixed-point results and the difference between them. However, during fixed-point conversion you might want to visualize the numerical differences in a view that is more suitable for your application domain. This example shows how to customize plotting and produce scatter plots at the test numerics step of the fixed-point conversion.

Prerequisites

This example requires the following products:

- MATLAB
- Fixed-Point Designer
- C compiler (for most platforms, a default C compiler is supplied with MATLAB). See http://www.mathworks.com/support/compilers/current_release/.

You can use `mex -setup` to change the default compiler. See “Changing Default Compiler”.

Create a New Folder and Copy Relevant Files

- 1 Create a local working folder, for example, `c:\custom_plot`.
- 2 Change to the `docroot\toolbox\fixpoint\examples` folder. At the MATLAB command line, enter:

```
cd(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
```
- 3 Copy the `myFilter.m`, `myFilterTest.m`, `plotDiff.m`, and `filterData.mat` files to your local working folder.

It is a best practice is to create a separate test script to do pre- and post-processing, such as:

- Loading inputs.

- Setting up input values.
- Outputting test results.

For more information, see “Create a Test File”.

Type	Name	Description
Function code	myFilter.m	Entry-point MATLAB function
Test file	myFilterTest.m	MATLAB script that tests myFilter.m
Plotting function	plotDiff.m	Custom plot function
MAT-file	filterData.mat	Data to filter.

The myFilter Function

```
function [y, ho] = myFilter(in)

persistent b h;
if isempty(b)
    b = complex(zeros(1,16));
    h = complex(zeros(1,16));
    h(8) = 1;
end

b = [in, b(1:end-1)];
y = b*h.';

errf = 1-sqrt(real(y)*real(y) + imag(y)*imag(y));
update = 0.001*conj(b)*y*errf;

h = h + update;
h(8) = 1;
ho = h;

end
```

The myFilterTest File

```
% load data
data = load('filterData.mat');
d = data.symbols;
```



```

for idx = 1:4000
    y = myFilter(d(idx));
end

```

The plotDiff Function

```

% varInfo - structure with information about the variable. It has the following fields
%         i) name
%         ii) functionName
% floatVals - cell array of logged original values for the 'varInfo.name' variable
% fixedVals - cell array of logged values for the 'varInfo.name' variable after
%             Fixed-Point Conversion.
function plotDiff(varInfo, floatVals, fixedVals)
    varName = varInfo.name;
    fcnName = varInfo.functionName;

    % convert from cell to matrix
    floatVals = cell2mat(floatVals);
    fixedVals = cell2mat(fixedVals);

    % escape the '_'s because plot titles treat these as subscripts
    escapedVarName = regexprep(varName, '_', '\\_');
    escapedFcnName = regexprep(fcnName, '_', '\\_');

    % flatten the values
    flatFloatVals = floatVals(1:end);
    flatFixedVals = fixedVals(1:end);

    % build Titles
    floatTitle = [ escapedFcnName ' > ' 'float : ' escapedVarName ];
    fixedTitle = [ escapedFcnName ' > ' 'fixed : ' escapedVarName ];

    data = load('filterData.mat');

    switch varName
        case 'y'
            x_vec = data.symbols;

            figure('Name', 'Comparison plot', 'NumberTitle', 'off');

            % plot floating point values
            y_vec = flatFloatVals;
            subplot(1, 2, 1);
            plotScatter(x_vec, y_vec, 100, floatTitle);

```

```
        % plot fixed point values
        y_vec = flatFixedVals;
        subplot(1, 2, 2);
        plotScatter(x_vec, y_vec, 100, fixedTitle);

    otherwise
        % Plot only output 'y' for this example, skip the rest
    end

end

function plotScatter(x_vec, y_vec, n, figTitle)
    % plot the last n samples
    x_plot = x_vec(end-n+1:end);
    y_plot = y_vec(end-n+1:end);


    hold on
    scatter(real(x_plot),imag(x_plot), 'bo');

    hold on
    scatter(real(y_plot),imag(y_plot), 'rx');

    title(figTitle);
end
```

Open the Fixed-Point Converter App

- 1 Navigate to the folder that contains the files for this example.
- 2 On the MATLAB Toolstrip **Apps** tab, under **Code Generation**, click the app icon.

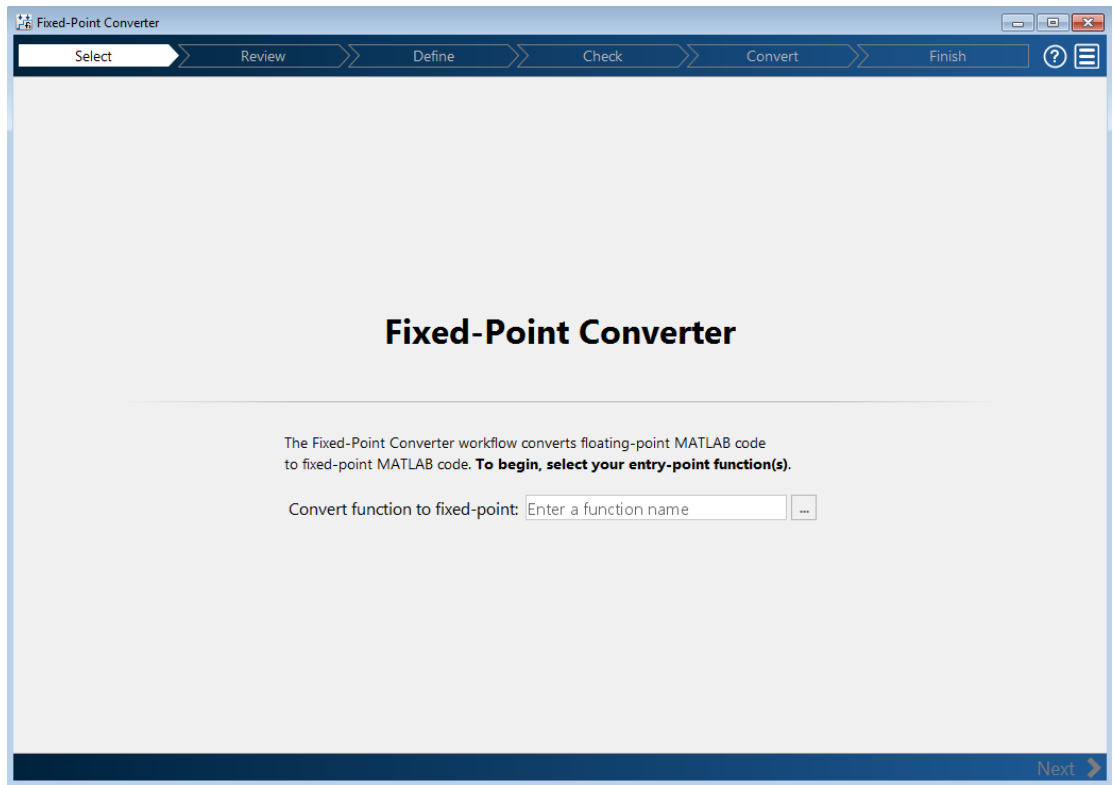

Select Source Files

- 1 To add the entry-point function `myFilter` to the project, browse to the file `myFilter.m`, and then click **Open**.

By default, the app saves information and settings for this project in the current folder in a file named `myFilter.prj`.


- 2 Click **Next** to go to the **Define Input Types** step.

The app screens `myFilter.m` for code violations and fixed-point conversion readiness issues. The app does not find issues in `myFilter.m`.

Define Input Types

- 1 On the **Define Input Types** page, to add `myFilter_test` as a test file, browse to `myFilter_test.m`, and then click **Open**.
- 2 Click **Autodefine Input Types**.

The app determines from the test file that the input type of `in` is `complex(double(1x1))`.

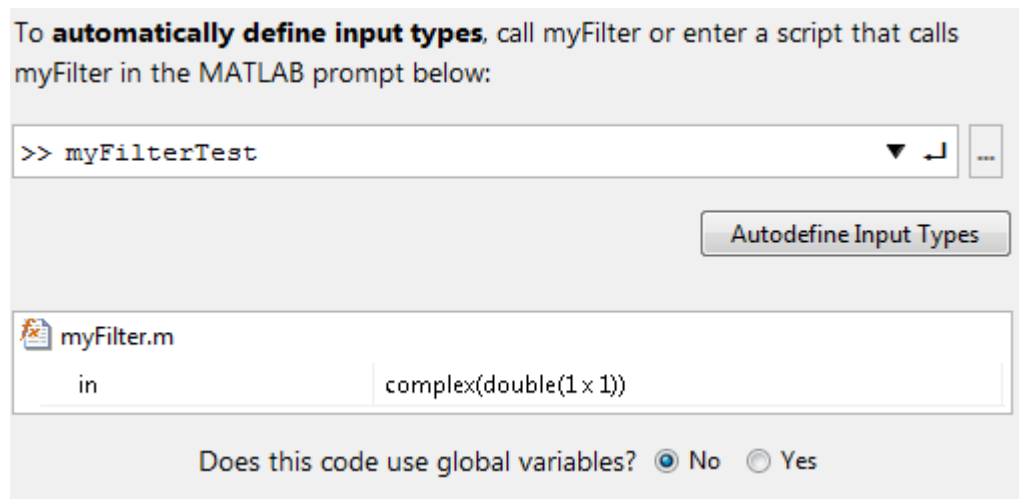

Check for Run-Time Issues

Before you can go to the **Convert to Fixed Point** step, you must check `myFilter` for run-time issues:

- 1 Browse to the test file `myFilterTest.m`.
- 2 Click **Check for Issues**.

The app generates an instrumented MEX function. It runs the test file `myFilterTest` replacing calls to `myFilter` with calls to the generated MEX. If the app finds issues, it provides warning and error messages. You can click a message to highlight the problematic code in a window where you can edit the code. In this example, the app does not detect issues.

- 3 Click **Next** to go to the **Convert to Fixed Point** step.

Convert to Fixed Point

- 1 The app displays compiled information for variables in your code. For more information, see “View and Modify Variable Information”.

The screenshot shows the 'Convert to Fixed Point' tool interface. The top part is a code editor displaying the following MATLAB code:



```

1 function [y, ho] = myFilter(in)
2
3 persistent b h;
4 if isempty(b)
5     b = complex(zeros(1,16));
6     h = complex(zeros(1,16));
7     h(8) = 1;
8 end
9
10 b = [in, b(1:end-1)];
11 y = b*h.';
12
13 errf = 1-sqrt(real(y)*real(y) + imag(y)*imag(y));
14 update = 0.001*conj(b)*y*errf;
15
16 h = h + update;
17 h(8) = 1;
18 ho = h;
19

```

The bottom part of the interface shows a table of variable information:

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
Input							
in	complex double					No	
Output							
y	complex double					No	
ho	1x16 complex double					No	
Persistent							
b	1x16 complex double					No	
h	1x16 complex double					No	
Local							
errf	double					No	
update	1x16 complex double					No	

- 2 To open the settings dialog box, click the **Settings** arrow .
 - a Verify that **Default word length** is set to 16.
 - b Under **Advanced**, set **Signedness** to Signed
 - c Under **Plotting and Reporting**, set **Custom plot function** to plotDiff.
- 3 Click the **Simulate** arrow . Verify that the test file is myFilterTest.
- 4 Click **Simulate**.

The test file, `myFilterTest`, runs and the app displays simulation minimum and maximum ranges on the **Variables** tab. Using the simulation range data, the software proposes fixed-point types for each variable based on the default type proposal settings, and displays them in the **Proposed Type** column.

The screenshot shows the 'Convert to Fixed Point' application window. The code editor displays the following MATLAB code:

```

1 function [y, ho] = myFilter(in)
2
3 persistent b h;
4 if isempty(b)
5     b = complex(zeros(1,16));
6     h = complex(zeros(1,16));
7     h(8) = 1;
8 end
9
10 b = [in, b(1:end-1)];
11 y = b*h.';
12
13 errf = 1-sqrt(real(y)*real(y) + imag(y)*imag(y));
14 update = 0.001*conj(b)*y*errf;
15
16 h = h + update;
17 h(8) = 1;
    
```

Below the code editor is a table with the following data:

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
Input							
in	complex double	-0.95	0.95			No	numerictype(1, 16, 15)
Output							
y	complex double	-0.95	0.95			No	numerictype(1, 16, 15)
ho	1 x 16 complex double	-0.13	1			No	numerictype(1, 16, 14)
Persistent							
b	1 x 16 complex double	-0.95	0.95			No	numerictype(1, 16, 15)
h	1 x 16 complex double	-0.13	1			No	numerictype(1, 16, 14)
Local							
errf	double	-0.32	1			No	numerictype(1, 16, 14)
update	1 x 16 complex double	0	0			No	numerictype(1, 16, 25)

- 5 To convert the floating-point algorithm to fixed point, click **Convert**.

The software validates the proposed types and generates a fixed-point version of the entry-point function.

The screenshot shows a MATLAB code editor window titled 'myFilterTest.m'. The code defines a function `myFilter_fixpt` that processes an input `in` to produce `y` and `ho`. The function uses fixed-point arithmetic with a floor rounding method and wrap overflow action. It includes initialization for `b` and `h`, followed by a loop that updates `h` based on the input `in` and the previous state `h`. The output `y` is calculated as `b*h`.

```

7 function [y, ho] = myFilter_fixpt(in)
8
9 fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap', 'ProductMode', 'FullPrecision',
10
11 persistent b h;
12 if isempty(b)
13     b = fi(complex(zeros(1,16)), 1, 16, 15, fm);
14     h = fi(complex(zeros(1,16)), 1, 16, 14, fm);
15     h(8) = 1;
16 end
17
18 b(:) = [fi(in, 1, 16, 15, fm), b(1:end-1)];
19 y = fi(b*h.', 1, 16, 15, fm);
20
21 errf = fi(fi_signed(fi(1, 1, 2, 0, fm))-sqrt(real(y)*real(y) + imag(y)*imag(y)), 1, 16, 14, fm);
22 update = fi(fi(0.001, 1, 16, 24, fm)*conj(b)*y*errf, 1, 16, 25, fm);
23
24 h(:) = h + update;
25 h(8) = 1;
26 ho = fi(h, 1, 16, 14, fm);
27

```

Below the code editor, the 'Type Validation Output' tab is active, showing the following generated reports:


```

### Generating Type Proposal Report for 'myFilter' myFilter\_report.html
### Generating Fixed Point MATLAB Code myFilter\_fixpt using Proposed Types
### Generating Fixed Point MATLAB Design Wrapper myFilter\_wrapper\_fixpt
### Generating Mex file for 'myFilter_wrapper_fixpt '
Code generation successful: View report


```

At the bottom right of the editor window, there is a blue bar with the text 'Next' and a right-pointing arrow.

Test Numerics and View Comparison Plots

- 1 Click **Test** arrow , select **Log inputs and outputs for comparison plots**, and then click **Test**.

The app runs the test file that you used to define input types to test the fixed-point MATLAB code. Because you selected to log inputs and outputs for comparison plots and to use the custom plotting function, `plotDiff.m`, for these plots, the app uses this function to generate the comparison plot. The plot shows that the fixed-point results do not closely match the floating-point results.

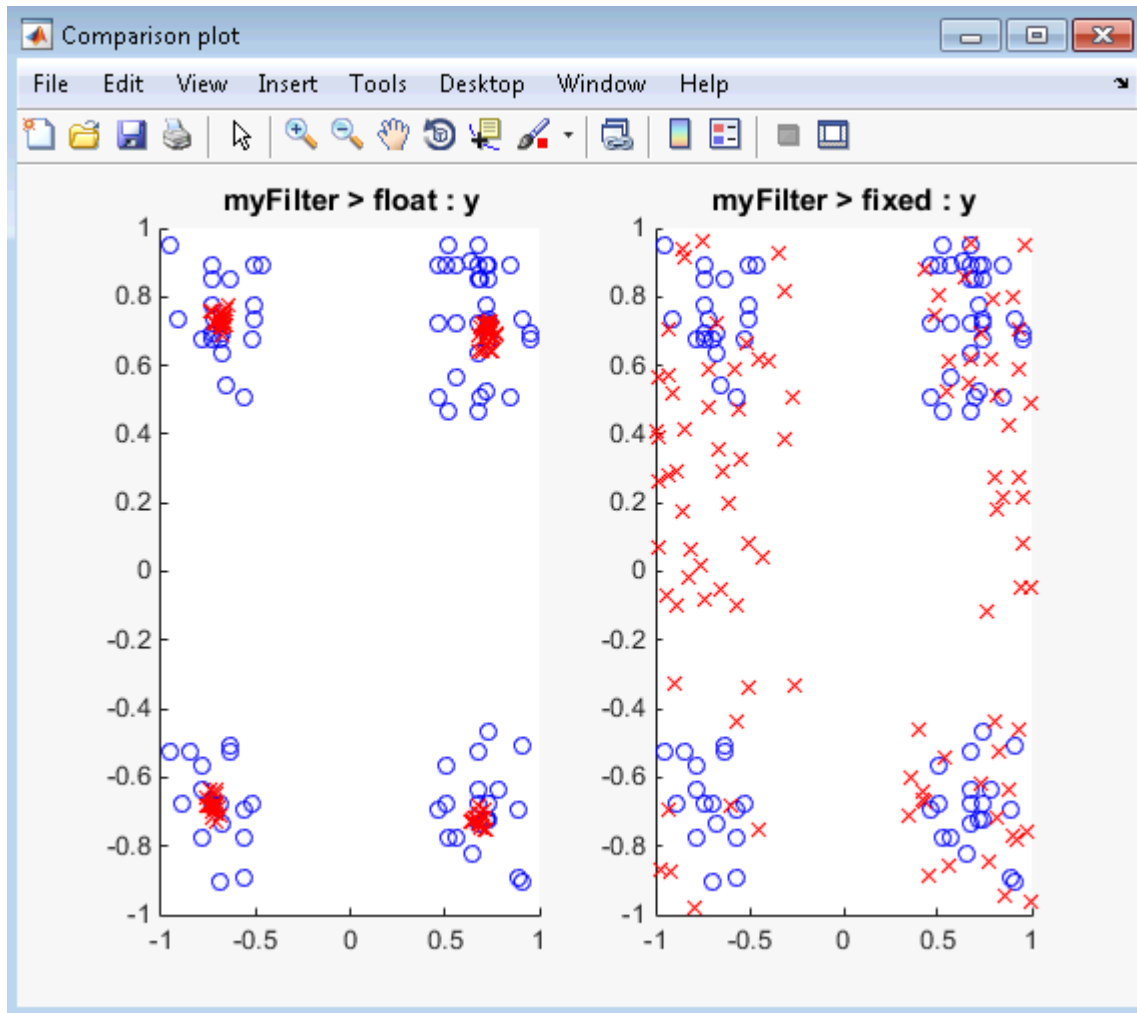


- 2 In the settings, increase the **DefaultWordLength** to 24 and then convert to fixed point again.

The app converts `myFilter.m` to fixed point and proposes fixed-point data types using the new default word length.

- 3 Run the test numerics step again.

The increased word length improves the results. This time, the plot shows that the fixed-point results match the floating-point results.

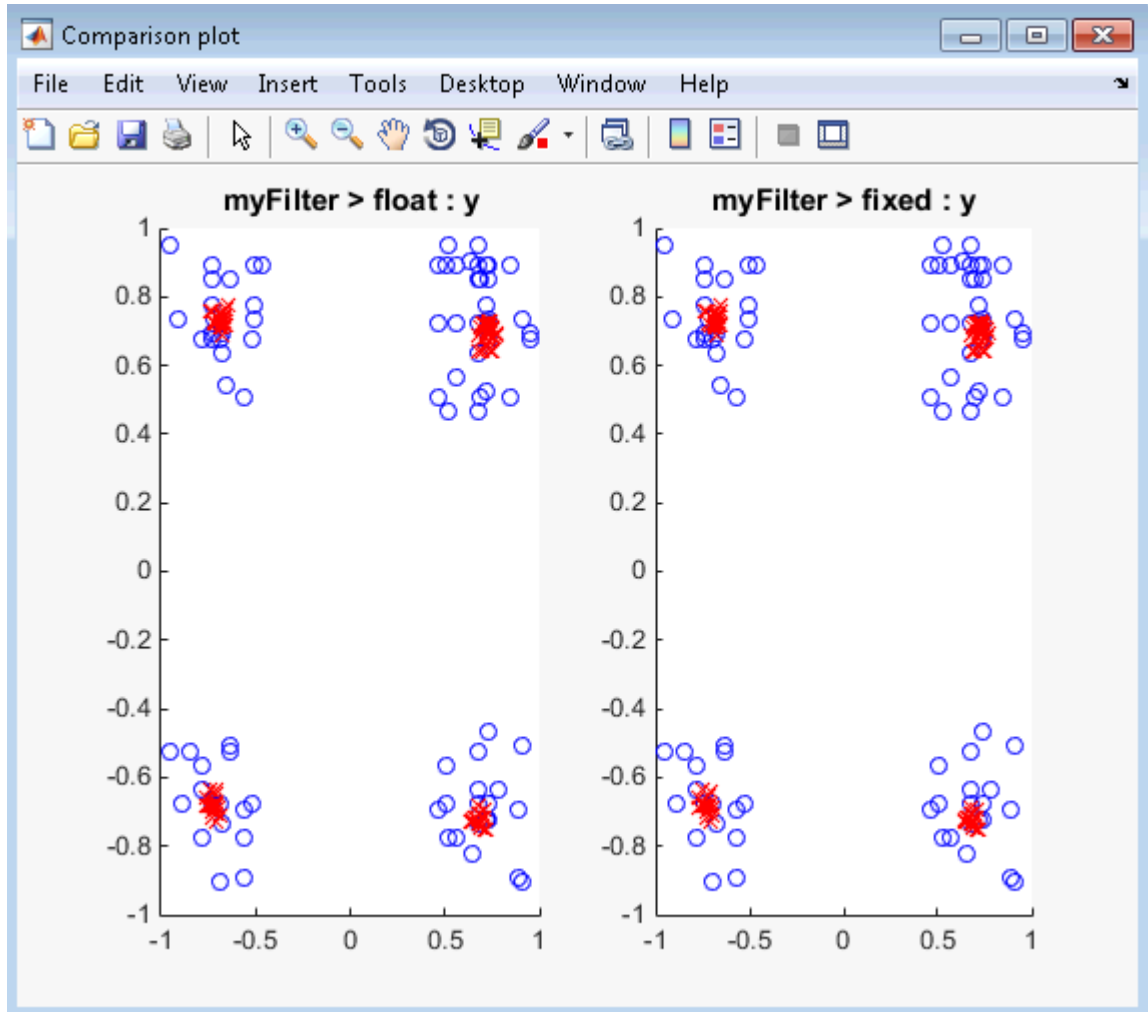


More About

- "Custom Plot Functions"


Enable Plotting Using the Simulation Data Inspector


You can use the Simulation Data Inspector with the Fixed-Point Converter app to inspect and compare floating-point and fixed-point logged input and output data.


- 1 On the **Convert to Fixed Point** page,

Click the **Settings** arrow .

- 2 Expand the **Plotting and Reporting** settings and set **Plot with Simulation Data Inspector** to **Yes**.

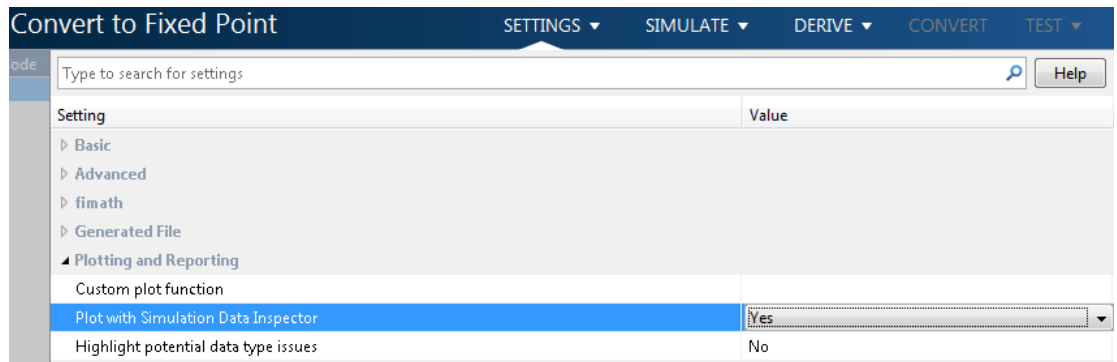

- 3 Click the **Test** arrow . Select **Log inputs and outputs for comparison plots**, and then click **Test**.



For an example, see “Propose Data Types Based on Derived Ranges”.

More About

- “Inspecting Data Using the Simulation Data Inspector”

Add Global Variables Using the App

To add global variables to the project:

- 1 On the **Define Input Types** page, set **Does this code use global variables?** to **Yes**.

By default, the app names the first global variable in a project **g**, and subsequent global variables **g1**, **g2**, etc.

- 2 Enter the name of the global variable.
- 3 After adding a global variable, but before building the project, specify its type and initial value. Otherwise, you must create a variable with the same name in the global workspace. See “Specify Global Variable Type and Initial Value Using the App” on page 9-97.

Automatically Define Input Types Using the App

If you specify a test file that calls the project entry-point functions, the Fixed-Point Converter app can infer the input parameter types by running the test file. If a test file calls an entry-point function multiple times with different size inputs, the app takes the union of the inputs. The app infers that the inputs are variable size, with an upper bound equal to the size of the largest input.

Before using the app to automatically define function input parameter types, you must add at least one entry-point file to your project. You must also specify code that calls your entry-point functions with the expected input types. It is a best practice to provide a test file that calls your entry-point functions. The test file can be either a MATLAB function or a script. The test file must call the entry-point function at least once.

To automatically define input types:

- 1 On the **Define Input Types** page, specify a test file. Alternatively, you can enter code directly.
- 2 Click **Autodefine Input Types**.

The app runs the test file and infers the types for entry-point input parameters. The app displays the inferred types.

Define Constant Input Parameters Using the App

- 1 On the **Define Input Types** page, click **Let me enter input or global types directly**.
- 2 Click the field to the right of the input parameter name.
- 3 Select **Define Constant**.
- 4 In the field to the right of the parameter name, enter the value of the constant or a MATLAB expression that represents the constant.

The app uses the value of the specified MATLAB expression as a compile-time constant.

Define or Edit Input Parameter Type Using the App

In this section...

“Define or Edit an Input Parameter Type” on page 9-88

“Specify an Enumerated Type Input Parameter by Type” on page 9-89

“Specify a Fixed-Point Input Parameter by Type” on page 9-90

“Specify Structures” on page 9-90

Define or Edit an Input Parameter Type


The following procedure is for input types `double`, `single`, `int64`, `int32`, `int16`, `int8`, `uint64`, `uint32`, `uint16`, `uint8`, `logical`, and `char`.

For more information about defining other types, see the following table.

Input Type	Link
A structure (<code>struct</code>)	“Specify Structures” on page 9-90
A fixed-point data type (embedded <code>.fi</code>)	“Specify a Fixed-Point Input Parameter by Type” on page 9-90
An input by example (Define by Example)	“Define Input Parameters by Example Using the App” on page 9-92
A constant (Define Constant)	“Define Constant Input Parameters Using the App” on page 9-87

- 1 Click the field to the right of the input parameter name to view the input options.
- 2 Optionally, for numeric types, select **Complex number** to make the parameter a complex type.
- 3 Select the input type.

The app displays the selected type. It displays the size options.

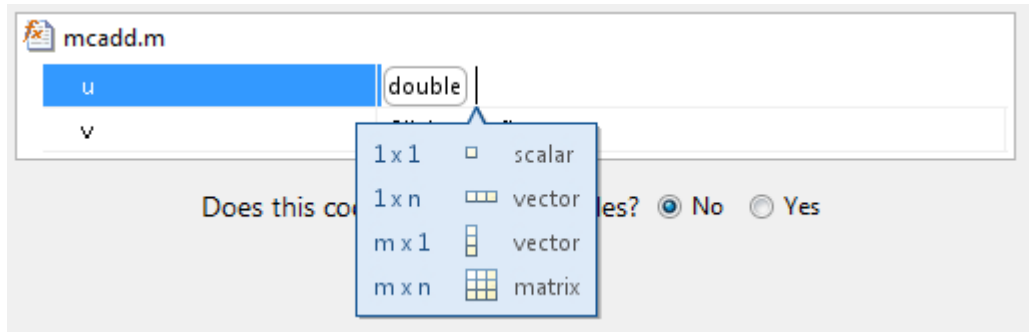

- 4 From the list, select whether your input is a scalar, a $1 \times n$ vector, a $m \times 1$ vector, or a $m \times n$ matrix. By default, if you do not select a size option, the app defines inputs as scalars.
- 5 Optionally, if your input is not scalar, enter sizes m and n . You can specify:
 - Fixed size, for example, 10.
 - Variable size, up to a specified limit, by using the `:` prefix. For example, to specify that your input can vary in size up to 10, enter `:10`.
 - Unbounded variable size by entering `:Inf`.

You can edit the size of each dimension.

Specify an Enumerated Type Input Parameter by Type

To specify that an input uses the enumerated type `MyColors`:

- 1 Suppose that the enumeration `MyColors` is on the MATLAB path.

```
classdef MyColors < int32
    enumeration
        green(1),
        red(2),
    end
end
```

- 2 On the **Define Input Types** page, click **Let me enter input or global types directly**.
- 3 In the field to the right of the input parameter, enter `MyColors`.

Specify a Fixed-Point Input Parameter by Type

To specify fixed-point inputs, Fixed-Point Designer software must be installed.

- 1 On the **Define Input Types** page, click **Let me enter input or global types directly**.
- 2 Click the field to the right of the input parameter that you want to define.
- 3 Select `embedded.fi`.
- 4 In the **Properties** dialog box, set up the input parameter `numerictype` and `fimath` properties. Close the dialog box.

If you do not specify a local `fimath`, the app uses the default `fimath`. See “Default `fimath` Usage to Share Arithmetic Rules”.

- 5 The size of the input defaults to 1×1 . Optionally, to modify the size, select the dimension that you want to change and enter a new size.

Specify Structures

When a primary input is a structure, the app treats each field as a separate input. Therefore, you must specify properties for all fields of a primary structure input in the order that they appear in the structure definition:

- For each field of an input structure, specify class, size, and complexity.
- For each field that is fixed-point class, also specify `numerictype`, and `fimath`.

Specify Structures by Type

- 1 On the **Define Input Types** page, click **Let me enter input or global types directly**.
- 2 Click the field to the right of the input parameter that you want to define.
- 3 Select `struct`.

The app displays the selected type, `struct`. The app displays the size options.


- 4 Specify that your structure is a scalar, $1 \times n$ vector, $m \times 1$ vector, or $m \times n$ matrix. By default, if you do not select a size option, the app defines inputs as scalars.
- 5 Optionally, if your input is not scalar, enter sizes `m` and `n`. You can specify:
 - Fixed size, for example, 10.

- Variable size, up to a specified limit, by using the `:` prefix. For example, to specify that your input can vary in size up to 10, enter `:10`.
 - Unbounded variable size by entering `:Inf`.
- 6 Optionally, add fields to the structure, and then set their size and complexity. See “Add a Field to a Structure” on page 9-91.

Rename a Field in a Structure

Select the name field of the structure that you want to rename and enter the new name.


Add a Field to a Structure

- 1 Select the structure.
- 2 To the right of the structure, click .
- 3 Select **Add Field**.

If the structure already contains fields, the app adds the field after the existing fields.

- 4 Enter the field name and define its type.


Insert a Field into a Structure

- 1 Select the structure field below which you want to add another field.
- 2 To the right of the structure field, click .
- 3 Select **Insert Field Below**.

The app adds the field after the field that you selected.

- 4 Enter the field name and define its type.

Remove a Field from a Structure

- 1 Select the field that you want to remove.
- 2 To the right of the structure, click .
- 3 Select **Remove Field**.

Define Input Parameters by Example Using the App

In this section...

“Define an Input Parameter by Example” on page 9-92


“Specify Input Parameters by Example” on page 9-93

“Specify an Enumerated Type Input Parameter by Example” on page 9-94

“Specify a Fixed-Point Input Parameter by Example” on page 9-95

Define an Input Parameter by Example

- 1 On the **Define Input Types** page, click **Let me enter input or global types directly**.
- 2 Click the field to the right of the input parameter that you want to define.

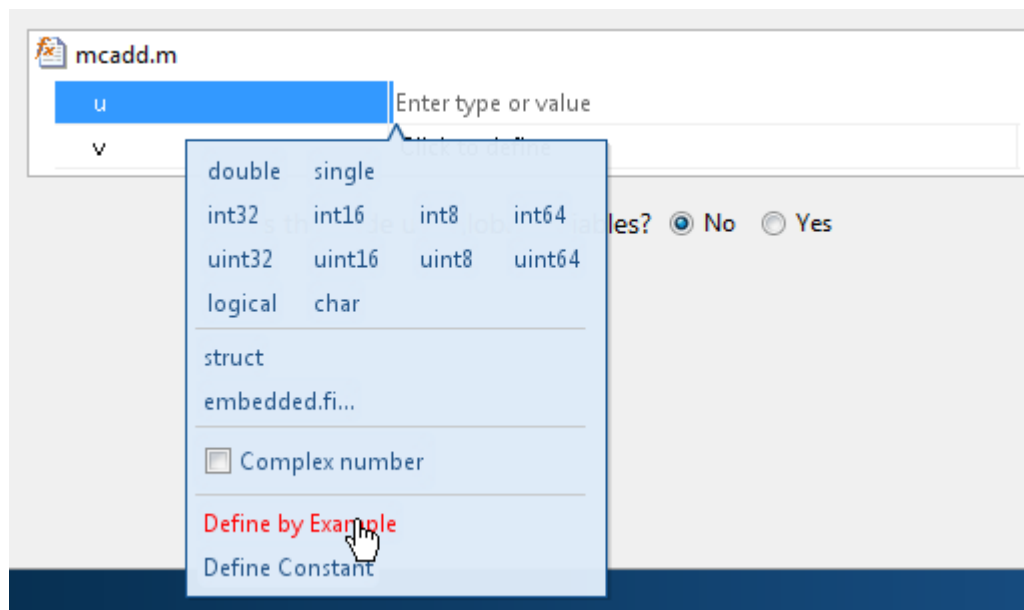


- 3 Select **Define by Example**.
- 4 In the field to the right of the parameter, enter a MATLAB expression. When the app compiles code, it uses the class, size, and complexity of the value of the variable or MATLAB expression that you specify.

Specify Input Parameters by Example

This example shows how to specify a 1-by-4 vector of unsigned 16-bit integers.


- 1 On the **Define Input Types** page, click **Let me enter input or global types directly**.
- 2 Click the field to the right of the input parameter that you want to define.

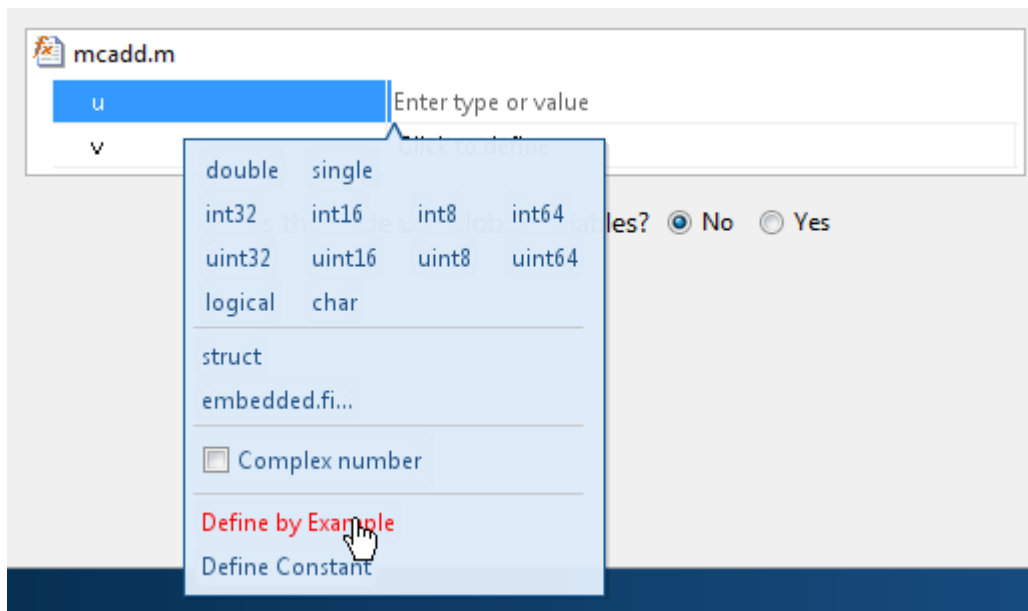

- 3 Select **Define by Example**.
- 4 In the field to the right of the parameter, enter:


```
zeros(1,4,'uint16')
```

The input type is `uint16(1x4)`.
- 5 Optionally, after specifying the input type, you can specify that the input is variable size. Select the second dimension.

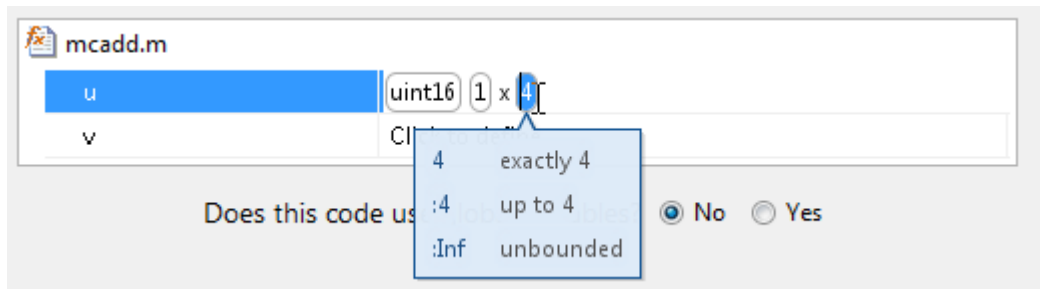

- 6 From the list of size options, select `:4` to specify that the second dimension is variable size with an upper bound of 4. Alternatively, select `:Inf` to specify that the second dimension is unbounded.

Alternatively, you can specify that the input is variable size by using the `coder.newtype` function. Enter the following MATLAB expression:

```
coder.newtype('uint16',[1 4],[0 1])
```

Note: To specify that an input is a double-precision scalar, enter 0.

Specify an Enumerated Type Input Parameter by Example


This example shows how to specify that an input uses the enumerated type `MyColors`.

Suppose that `MyColors.m` is on the MATLAB path.

```
classdef MyColors < int32
    enumeration
        green(1),
        red(2),
    end
end
```

To specify that an input has the enumerated type `MyColors`:

- 1 On the **Define Input Types** page, click **Let me enter input or global types directly**.
- 2 Click the field to the right of the input parameter that you want to define.

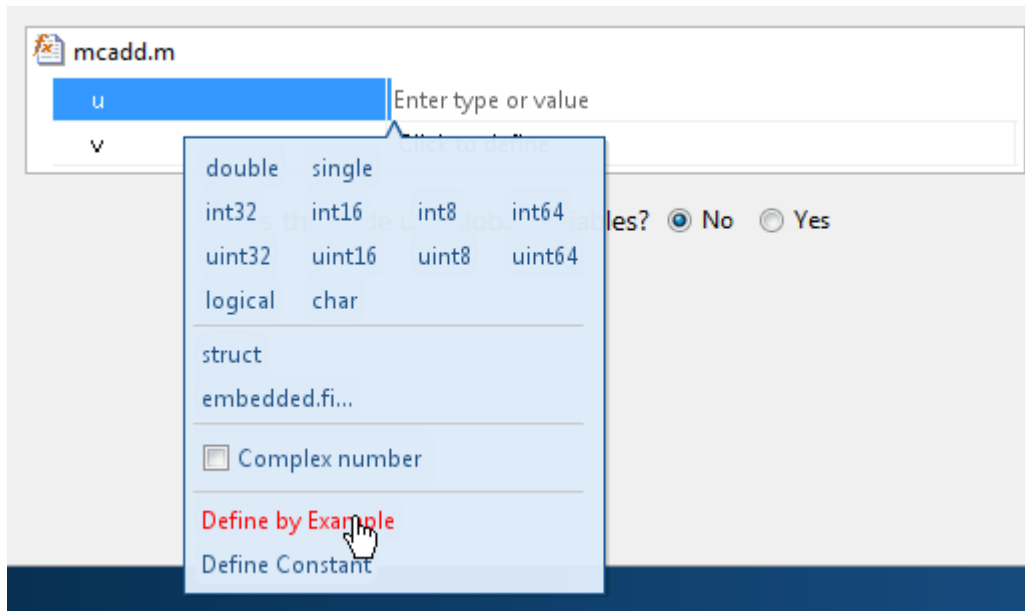


- 3 Select **Define by Example**.
- 4 In the field to the right of the parameter, enter the following MATLAB expression:
`MyColors.red`

Specify a Fixed-Point Input Parameter by Example

To specify fixed-point inputs, Fixed-Point Designer software must be installed.

This example shows how to specify a signed fixed-point type with a word length of 8 bits, and a fraction length of 3 bits.

- 1 On the **Define Input Types** page, click **Let me enter input or global types directly**.
- 2 Click the field to the right of the input parameter that you want to define.

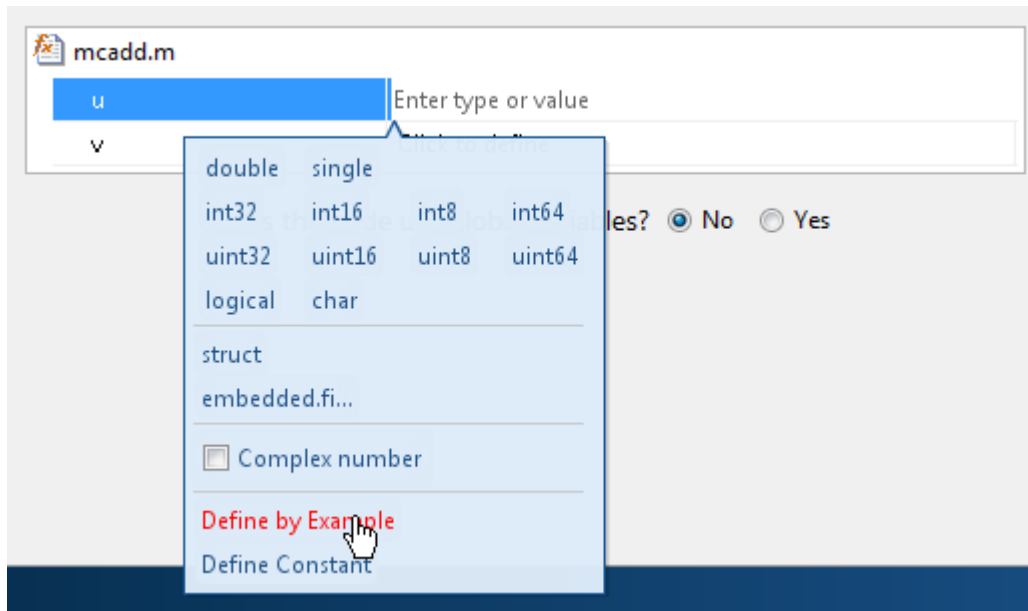

- 3 Select Define by Example.
- 4 In the field to the right of the parameter, enter:

```
fi(10, 1, 8, 3)
```

The app sets the type of input `u` to `embedded.fi(1x1)`. By default, if you have not specified a local `fimath`, the app uses the default `fimath`. See “`fimath` for Sharing Arithmetic Rules”.

Optionally, modify the fixed-point properties or the size of the input. See “Specify a Fixed-Point Input Parameter by Type” on page 9-90 and “Define or Edit Input Parameter Type Using the App” on page 9-88.

Specify Global Variable Type and Initial Value Using the App

In this section...

“Why Specify a Type Definition for Global Variables?” on page 9-97

“Specify a Global Variable Type” on page 9-97

“Define a Global Variable by Example” on page 9-97

“Define or Edit Global Variable Type” on page 9-98

“Define Global Variable Initial Value” on page 9-99

“Define Global Variable Constant Value” on page 9-100

“Remove Global Variables” on page 9-100

Why Specify a Type Definition for Global Variables?

If you use global variables in your MATLAB algorithm, before building the project, you must add a global type definition and initial value for each global variable. If you do not initialize the global data, the app looks for the variable in the MATLAB global workspace. If the variable does not exist, the app generates an error.

For MEX functions, if you use global data, you must also specify whether to synchronize this data between MATLAB and the MEX function.

Specify a Global Variable Type


- 1 Specify the type of each global variable using one of the following methods:
 - Define by example
 - Define type
- 2 Define an initial value for each global variable.

If you do not provide a type definition and initial value for a global variable, create a variable with the same name and suitable class, size, complexity, and value in the MATLAB workspace.

Define a Global Variable by Example

- 1 Click the field to the right of the global variable that you want to define.

- 2 Select **Define by Example**.
- 3 In the field to the right of the global name, enter a MATLAB expression that has the required class, size, and complexity. MATLAB Coder software uses the class, size, and complexity of the value of this expression as the type for the global variable.
- 4 Optionally, change the size of the global variable. Click the dimension that you want to change and enter the size, for example, 10.

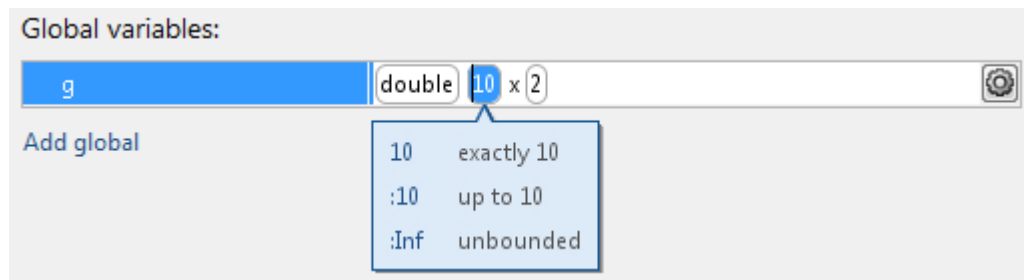

You can specify:


- Fixed size. In this example, select 10.
- Variable size, up to a specified limit, by using the **:** prefix. In this example, to specify that your input can vary in size up to 10, select **:10**.
- Unbounded variable size by selecting **:Inf**.

Define or Edit Global Variable Type

- 1 Click the field to the right of the global variable that you want to define.
- 2 Optionally, for numeric types, select **Complex** to make the parameter a complex type. By default, inputs are real.
- 3 Select the type for the global variable. For example, **double**.

By default, the global variable is a scalar.

- 4 Optionally, change the size of the global variable. Click the dimension that you want to change and enter the size, for example, 10.

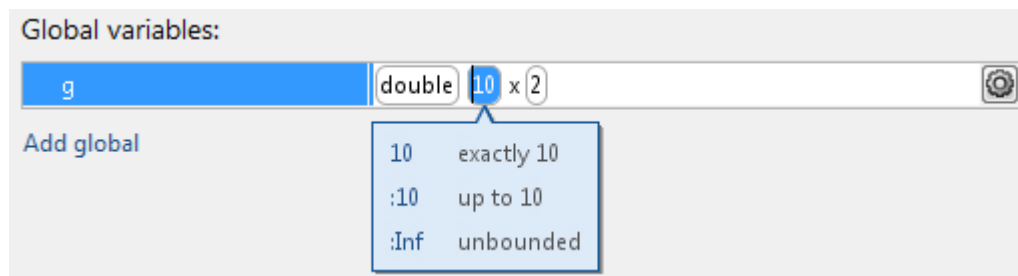

You can specify:

- Fixed size. In this example, select 10.
- Variable size, up to a specified limit, by using the `:` prefix. In this example, to specify that your input can vary in size up to 10, select `:10`.
- Unbounded variable size by selecting `:Inf`.


Define Global Variable Initial Value

- “Define Initial Value Before Defining Type” on page 9-99
- “Define Initial Value After Defining Type” on page 9-100

Define Initial Value Before Defining Type

- 1 Click the field to the right of the global variable.
- 2 Select **Define Initial Value**.
- 3 Enter a MATLAB expression. MATLAB Coder software uses the value of the specified MATLAB expression as the value of the global variable. Because you did not define the type of the global variable before you defined its initial value, MATLAB Coder uses the initial value type as the global variable type.

The project shows that the global variable is initialized.

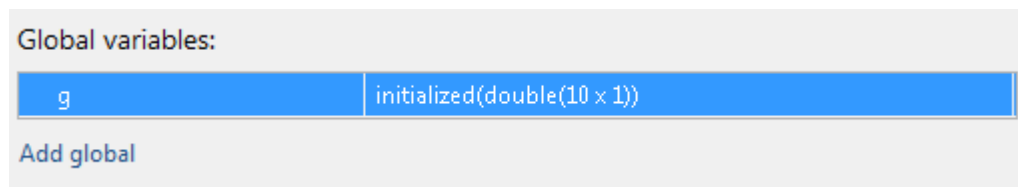


If you change the type of a global variable after defining its initial value, you must redefine the initial value.

Define Initial Value After Defining Type

- Click the type field of a predefined global variable.
- Select **Define Initial Value**.
- Enter a MATLAB expression. MATLAB Coder software uses the value of the specified MATLAB expression as the value of the global variable.


The project shows that the global variable is initialized.

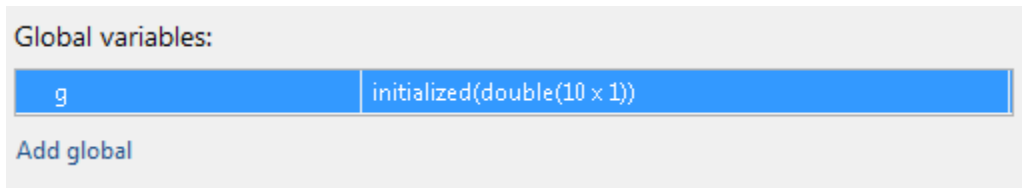

Define Global Variable Constant Value

- 1 Click the field to the right of the global variable.
- 2 Select **Define Constant Value**.
- 3 In the field to the right of the global variable, enter a MATLAB expression.

Remove Global Variables

- 1 Select the global variable that you want to remove.
- 2 To the right of the variable, click .
- 3 Select **Remove Global**.

Specify Properties of Entry-Point Function Inputs Using the App

Why Specify Input Properties?

Fixed-Point Designer must determine the properties of all variables in the MATLAB files. To infer variable properties in MATLAB files, Fixed-Point Designer must identify the properties of the inputs to the *primary* function, also known as the *top-level* or *entry-point* function. Therefore, if your primary function has inputs, you must specify the properties of these inputs to Fixed-Point Designer. If your primary function has no input parameters, you do not need to specify properties of inputs to local functions or external functions called by the primary function.

Unless you use the tilde (~) character to specify unused function inputs, you must specify the same number and order of inputs as the MATLAB function . If you use the tilde character, the inputs default to real, scalar doubles.

See Also

- “Properties to Specify”

Specify an Input Definition Using the App

Specify an input definition using one of the following methods:

- Autodefine Input Types
- Define Type
- Define by Example
- Define Constant

Detect Dead and Constant-Folded Code

The Fixed-Point Converter app detects code that is constant folded and dead code during the simulation of your test file. The app uses the code coverage information when translating your code from floating-point MATLAB code to fixed-point MATLAB code. Reviewing code coverage results helps you verify that your test file is exercising the algorithm adequately.

The app inserts inline comments in the fixed-point code to mark the dead and untranslated regions and includes the code coverage information in the generated fixed-point conversion HTML report. The app also displays a color-coded coverage bar to the left of the code within its editor.

Coverage Bar Color	How Often Code Is Executed During Test File Simulation
Dark green	Always
Light green	Sometimes
Orange	Once
Red	Never

What Is Dead Code?

Dead code is code that does not execute during simulation. Dead code can result from these scenarios:

- Defensive code containing intended corner cases that are never reached
- Human error in the code, resulting in code that cannot be reached by any execution path
- Inadequate test bench range
- Constant folding

Detect Dead Code

This example shows how to detect dead code in your algorithm using the Fixed-Point Converter .

- 1 In a local writable folder, create the function `myFunction.m`.

```
function y = myFunction(u,v)
```

```

    %#codegen
    for i = 1:length(u)
        if u(i) > v(i)
            y=bar(u,v);
        else
            tmp = u;
            v = tmp;
            y = baz(u,v);
        end
    end
end

function y = bar(u,v)
    y = u+v;
end

function y = baz(u,v)
    y = u-v;
end

```

- 2 In the same folder, create a test file, myFunction_tb.

```

u = 1:100;
v = 101:200;

```

```

myFunction(u,v);


```

- 3 From the apps gallery, open the Fixed-Point Converter .
 - 4 On the **Select Source Files** page, browse to the myFunction file, and click **Open**.
- Set
- 5 Click **Next**. On the **Define Input Types** page, browse to select the test file you created, myFunction_tb. Click **Autodefine Input Types**.
 - 6 Click **Next**. On the **Check for Run-Time Issues** page, click **Check for Issues**.

The app runs the myFunction_tb test file and detects no issues.


- 7 Click **Next**. On the **Convert to Fixed-Point** page, click **Simulate** to simulate the entry-point functions, gather range information, and get proposed data types.

The code coverage bar on the left-hand side of the edit window indicates if the code executed. The code in the first condition of the if-statement did not execute during simulation because u is never greater than v . Because the if-statement never executed, the `bar` function also never executed. These parts of the algorithm are marked with a red bar, indicating that they are dead code.

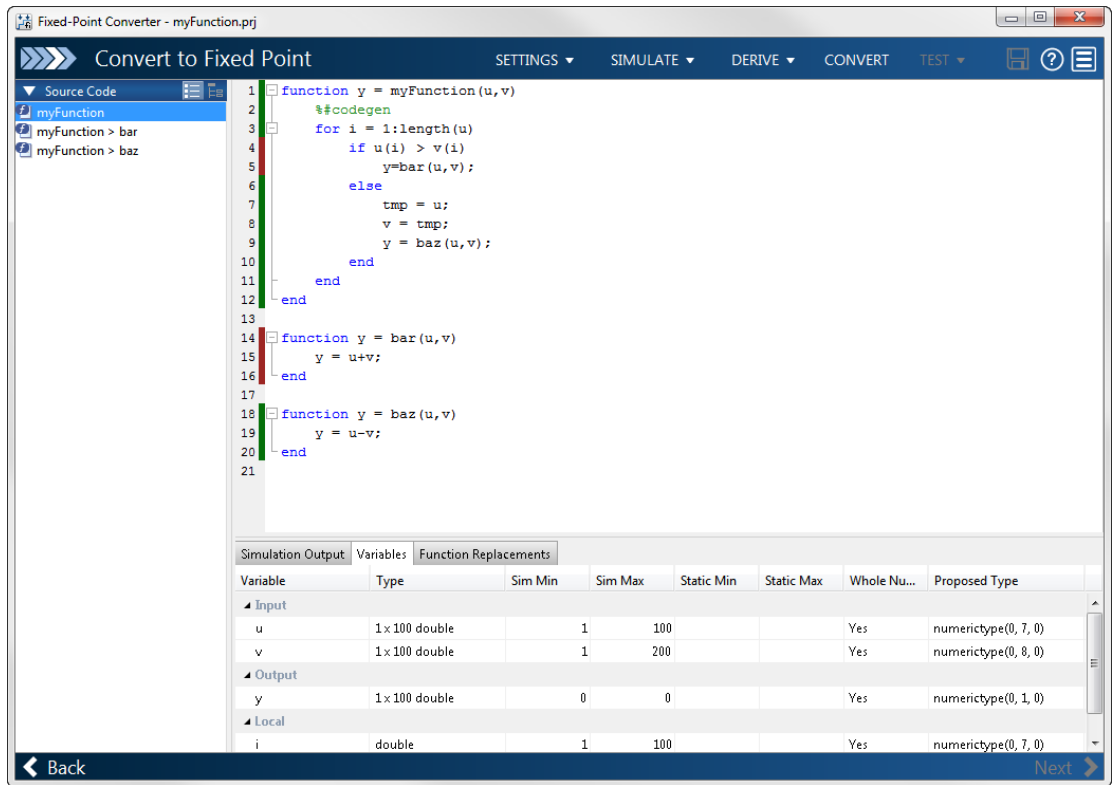

- 8 Click **Convert** to apply the proposed data types to the function.

The Fixed-Point Converter generates a fixed-point function, `myFunction_fixpt`. The generated fixed-point code contains comments around the pieces of code identified as dead code, and the **Validation Results** pane suggests that you use a more thorough test bench.

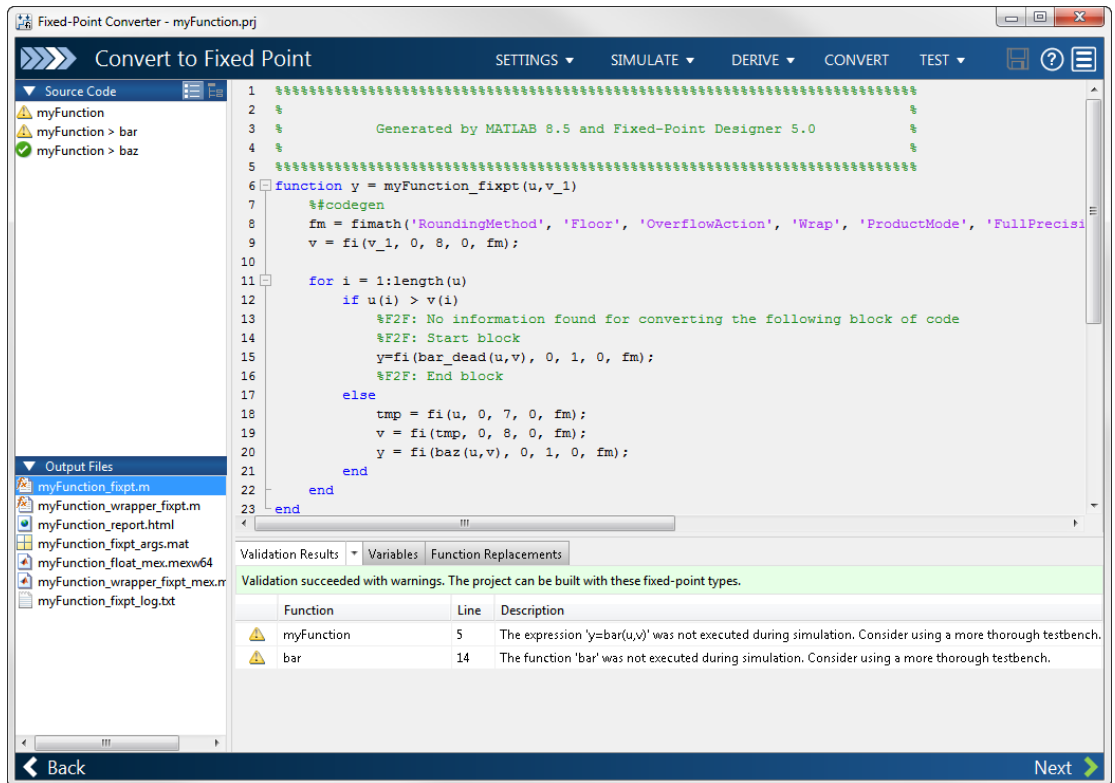

When the Fixed-Point Converter detects dead code, consider editing your test file so your algorithm is exercised over its full range. If your test file already reflects the full range of the input variables, consider editing your algorithm to eliminate the dead code.

- 9 Close the Fixed-Point Converter .

Fix Dead Code

- 1 Edit the test file `myFunction_tb.m` to include a wider range of inputs.

```
u = 1:100;
v = -50:2:149;
```

- 2 myFunction(u,v);
- 3 Open the Fixed-Point Converter again.
- 4 Using the same function and the edited test file, go through the conversion process again.
- 5 After you click **Simulate**, this time the code coverage bar shows that all parts of the algorithm were executed with the new test file input ranges.

The screenshot shows the 'Fixed-Point Converter - myFunction.prj' application window. The main area displays the source code for three functions: myFunction, bar, and baz. The 'myFunction' function includes a loop and conditional logic. Below the code, the 'Simulation Output' tab is active, showing a table of variables and their ranges.

Variable	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Nu...	Proposed Type
Input							
u	1 x 100 double	1	100			Yes	numerictype(0, 7, 0)
v	1 x 100 double	-50	148			Yes	numerictype(1, 9, 0)
Output							
y	1 x 100 double	-49	248			Yes	numerictype(1, 9, 0)
Local							
i	double	1	100			Yes	numerictype(0, 7, 0)

- 5 Click **Convert** to finish the conversion process and convert the function to fixed point.

Automated Conversion Using Programmatic Workflow

- “Propose Data Types Based on Simulation Ranges” on page 10-2
- “Propose Data Types Based on Derived Ranges” on page 10-7
- “Detect Overflows” on page 10-14
- “Replace the exp Function with a Lookup Table” on page 10-19
- “Replace a Custom Function with a Lookup Table” on page 10-22
- “Visualize Differences Between Floating-Point and Fixed-Point Results” on page 10-24
- “Enable Plotting Using the Simulation Data Inspector” on page 10-31

Propose Data Types Based on Simulation Ranges

This example shows how to propose fixed-point data types based on simulation range data using the `fiaccel` function.

Prerequisites

To complete this example, you must install the following products:

- MATLAB
- Fixed-Point Designer
- C compiler (for most platforms, a default C compiler is supplied with MATLAB) For a list of supported compilers, see http://www.mathworks.com/support/compilers/current_release/.

You can use `mex -setup` to change the default compiler. See “Changing Default Compiler”.

Create a New Folder and Copy Relevant Files

- 1 Create a local working folder, for example, `c:\fun_with_matlab`.
- 2 Change to the `docroot\toolbox\fixpoint\examples` folder. At the MATLAB command line, enter:


```
cd(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
```
- 3 Copy the `fun_with_matlab.m` and `fun_with_matlab_test.m` files to your local working folder.

It is best practice to create a separate test script to do all the pre- and post-processing such as loading inputs, setting up input values, calling the function under test, and outputting test results.

Type	Name	Description
Function code	<code>fun_with_matlab.m</code>	Entry-point MATLAB function
Test file	<code>fun_with_matlab_test.m</code>	MATLAB script that tests <code>fun_with_matlab.m</code>

The `fun_with_matlab` Function

```
function y = fun_with_matlab(x) %#codegen
```

```

persistent z
if isempty(z)
    z = zeros(2,1);
end
% [b,a] = butter(2, 0.25)
b = [0.0976310729378175, 0.195262145875635, 0.0976310729378175];
a = [1, -0.942809041582063, 0.3333333333333333];

y = zeros(size(x));
for i = 1:length(x)
    y(i) = b(1)*x(i) + z(1);
    z(1) = b(2)*x(i) + z(2) - a(2) * y(i);
    z(2) = b(3)*x(i) - a(3) * y(i);
end
end

```

The fun_with_matlab_test Script

The test script runs the `fun_with_matlab` function with three input signals: chirp, step, and impulse to cover the full intended operating range of the system. The script then plots the outputs.

```

% fun_with_matlab_test
%
% Define representative inputs
N = 256; % Number of points
t = linspace(0,1,N); % Time vector from 0 to 1 second
f1 = N/2; % Target frequency of chirp set to Nyquist
x_chirp = sin(pi*f1*t.^2); % Linear chirp from 0 to Fs/2 Hz in 1 second
x_step = ones(1,N); % Step
x_impulse = zeros(1,N); % Impulse
x_impulse(1) = 1;

% Run the function under test
x = [x_chirp;x_step;x_impulse];
y = zeros(size(x));
for i = 1:size(x,1)
    y(i,:) = fun_with_matlab(x(i,:));
end

% Plot the results
titles = {'Chirp', 'Step', 'Impulse'}
clf

```

```
for i = 1:size(x,1)
    subplot(size(x,1),1,i)
    plot(t,x(i,:),t,y(i,:))
    title(titles{i})
    legend('Input','Output')
end
xlabel('Time (s)')
figure(gcf)

disp('Test complete.')
```

Set Up the Fixed-Point Configuration Object

Create a fixed-point configuration object and configure the test file name.

```
cfg = coder.config('fixpt');
cfg.TestBenchName = 'fun_with_matlab_test';
```

Collect Simulation Ranges and Generate Fixed-Point Code

Use the `fiaccel` function to convert the floating-point MATLAB function, `fun_with_matlab`, to fixed-point MATLAB code. Set the default word length for the fixed-point data types to 16.

```
cfg.ComputeSimulationRanges = true;
cfg.DefaultWordLength = 16;

% Derive ranges and generate fixed-point code
fiaccel -float2fixed cfg fun_with_matlab
```

`fiaccel` analyzes the floating-point code. Because you did not specify the input types for the `fun_with_matlab` function, the conversion process infers types by simulating the test file. The conversion process then derives ranges for variables in the algorithm. It uses these derived ranges to propose fixed-point types for these variables. When the conversion is complete, it generates a type proposal report.

View Range Information

Click the link to the type proposal report for the `fun_with_matlab` function, `fun_with_matlab_report.html`.

The report opens in a web browser.

Fixed-Point Report fun_with_matlab

```
function y = fun_with_matlab(x) %#codegen
persistent z
if isempty( z )
    z = zeros( 2, 1 );
end
% [b,a] = butter(2, 0.25)
b = [ 0.0976310729378175, 0.195262145875635, 0.0976310729378175 ];
a = [ 1, -0.942809041582063, 0.3333333333333333 ];
y = zeros( size( x ) );
for i = 1:length( x )
    y( i ) = b( 1 )*x( i ) + z( 1 );
    z( 1 ) = b( 2 )*x( i ) + z( 2 ) - a( 2 )*y( i );
    z( 2 ) = b( 3 )*x( i ) - a( 3 )*y( i );
end
end
```

Variable Name	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Number	ProposedType (Best For WL = 16)
a	double 1 x 3	-0.942809041582063		1		No	numerictype(1, 16, 14)
b	double 1 x 3	0.0976310729378175	0.195262145875635			No	numerictype(0, 16, 18)
i	double	1	256			Yes	numerictype(0, 9, 0)
x	double 1 x 256	-0.9999756307053946		1		No	numerictype(1, 16, 14)
y	double 1 x 256	-0.9696817930434206	1.0553496057969345			No	numerictype(1, 16, 14)
z	double 2 x 1	-0.8907046852192462	0.957718532859117			No	numerictype(1, 16, 15)

View Generated Fixed-Point MATLAB Code

fiaccel generates a fixed-point version of the fun_with_matlab.m function, fun_with_matlab_fixpt.m, and a wrapper function that calls fun_with_matlab_fixpt. These files are generated in the codegen \fun_with_matlab\fixpt folder in your local working folder.

```
function y = fun_with_matlab_fixpt(x)
fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap', 'ProductMode',...
'FullPrecision', 'SumMode', 'FullPrecision');
%#codegen

persistent z
if isempty( z )
    z = fi(zeros( 2, 1 ), 1, 16, 15, fm);
end
% [b,a] = butter(2, 0.25)
b = fi([ 0.0976310729378175, 0.195262145875635, 0.0976310729378175 ], 0, 16, 18, fm);
a = fi([ 1, -0.942809041582063, 0.3333333333333333 ], 1, 16, 14, fm);
y = fi(zeros( size( x ) ), 1, 16, 14, fm);
for i = 1:length( x )
    y( i ) = b( 1 )*x( i ) + z( 1 );
    z( 1 ) = fi_signed(b( 2 )*x( i ) + z( 2 )) - a( 2 )*y( i );
    z( 2 ) = fi_signed(b( 3 )*x( i )) - a( 3 )*y( i );
end
end
```

end

```
function y = fi_signed(a)
coder.inline( 'always' );
if isfi( a ) && ~(assigned( a ))
    nt = numerictype( a );
    new_nt = numerictype( 1, nt.WordLength + 1, nt.FractionLength );
    y = fi( a, new_nt, fimath( a ) );
else
    y = a;
end
end
```

Propose Data Types Based on Derived Ranges

This example shows how to propose fixed-point data types based on static ranges using the `fiaccel` function. The advantage of proposing data types based on derived ranges is that you do not have to provide test files that exercise your algorithm over its full operating range. Running such test files often takes a very long time so you can save time by deriving ranges instead.

Prerequisites

To complete this example, you must install the following products:

- MATLAB
- Fixed-Point Designer
- C compiler (for most platforms, a default C compiler is supplied with MATLAB) For a list of supported compilers, see http://www.mathworks.com/support/compilers/current_release/

You can use `mex -setup` to change the default compiler. See “Changing Default Compiler”.

Create a New Folder and Copy Relevant Files

- 1 Create a local working folder, for example, `c:\dti`.
- 2 Change to the `docroot\toolbox\fixpoint\examples` folder. At the MATLAB command line, enter:

```
cd(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
```

- 3 Copy the `dti.m` and `dti_test.m` files to your local working folder.

It is best practice to create a separate test script to do all the pre- and post-processing such as loading inputs, setting up input values, calling the function under test, and outputting test results.

Type	Name	Description
Function code	<code>dti.m</code>	Entry-point MATLAB function
Test file	<code>dti_test.m</code>	MATLAB script that tests <code>dti.m</code>

The dti Function

The `dti` function implements a Discrete Time Integrator in MATLAB.

```
function [y, clip_status] = dti(u_in) %#codegen
% Discrete Time Integrator in MATLAB
%
% Forward Euler method, also known as Forward Rectangular, or left-hand
% approximation. The resulting expression for the output of the block at
% step 'n' is  $y(n) = y(n-1) + K * u(n-1)$ 
%
init_val = 1;
gain_val = 1;
limit_upper = 500;
limit_lower = -500;

% variable to hold state between consecutive calls to this block
persistent u_state
if isempty(u_state)
    u_state = init_val+1;
end

% Compute Output
if (u_state > limit_upper)
    y = limit_upper;
    clip_status = -2;
elseif (u_state >= limit_upper)
    y = limit_upper;
    clip_status = -1;
elseif (u_state < limit_lower)
    y = limit_lower;
    clip_status = 2;
elseif (u_state <= limit_lower)
    y = limit_lower;
    clip_status = 1;
else
    y = u_state;
    clip_status = 0;
end

% Update State
tprod = gain_val * u_in;
u_state = y + tprod;

function b = subFunction(a)
```



```
b = a*a;
```

The dti_test Function

The test script runs the `dti` function with a sine wave input. The script then plots the input and output signals.

```
% dti_test
% cleanup
clear dti

% input signal
x_in = sin(2.*pi.*(0:0.001:2)).';

pause(10)

len = length(x_in);
y_out = zeros(1,len);
is_clipped_out = zeros(1,len);

for ii=1:len
    data = x_in(ii);
    % call to the dti function
    init_val = 0;
    gain_val = 1;
    upper_limit = 500;
    lower_limit = -500;

    % call to the design that does DTI
    [y_out(ii), is_clipped_out(ii)] = dti(data);
end

figure('Name', [mfilename, '_plot'])
subplot(2,1,1)
plot(1:len,x_in)
xlabel('Time')
ylabel('Amplitude')
title('Input Signal (Sin)')

subplot(2,1,2)
plot(1:len,y_out)
xlabel('Time')
ylabel('Amplitude')
title('Output Signal (DTI)')
```

```
disp('Test complete.')
```

Set Up the Fixed-Point Configuration Object

Create a fixed-point configuration object and configure the test file name.

```
fixptcfg = coder.config('fixpt');  
fixptcfg.TestBenchName = 'dti_test';
```

Specify Design Ranges

Specify design range information for the `dti` function input parameter `u_in`.

```
fixptcfg.addDesignRangeSpecification('dti', 'u_in', -1.0, 1.0)
```

Enable Plotting Using the Simulation Data Inspector

Select to run the test file to verify the generated fixed-point MATLAB code. Log inputs and outputs for comparison plotting and select to use the Simulation Data Inspector to plot the results.

```
fixptcfg.TestNumerics = true;  
fixptcfg.LogIOForComparisonPlotting = true;  
fixptcfg.PlotWithSimulationDataInspector = true;
```

Derive Ranges and Generate Fixed-Point Code

Use the `fiaccel` function to convert the floating-point MATLAB function, `dti`, to fixed-point MATLAB code. Set the default word length for the fixed-point data types to 16.

```
fixptcfg.ComputeDerivedRanges = true;  
fixptcfg.ComputeSimulationRanges = false;  
fixptcfg.DefaultWordLength = 16;  
  
% Derive ranges and generate fixed-point code  
fiaccel -float2fixed fixptcfg dti
```

`fiaccel` analyzes the floating-point code. Because you did not specify the input types for the `dti` function, the conversion process infers types by simulating the test file. The conversion process then derives ranges for variables in the algorithm. It uses these derived ranges to propose fixed-point types for these variables. When the conversion is complete, it generates a type proposal report.

View Derived Range Information

Click the link to the type proposal report for the `dti` function, [dti_report.html](#).

The report opens in a web browser.

Fixed Point Report dti

```
function [y,clip_status] = dti(u_in) %#codegen
    % Discrete Time Integrator in MATLAB
    %
    % Forward Euler method, also known as Forward Rectangular, or left-hand
    % approximation. The resulting expression for the output of the block at
    % step 'n' is y(n) = y(n-1) + K * u(n-1)
    %
    init_val = 1;
    gain_val = 1;
    limit_upper = 500;
    limit_lower = -500;
    % variable to hold state between consecutive calls to this block
    persistent u_state
    if isempty( u_state )
        u_state = init_val + 1;
    end
    % Compute Output
    if (u_state>limit_upper)
        y = limit_upper;
        clip_status = -2;
    elseif (u_state<=limit_upper)
        y = limit_upper;
        clip_status = -1;
    elseif (u_state
```

Variable Name	Type	Sim Min	Sim Max	Static Min	Static Max	Whole Number	ProposedType (Best For WL = 16)
clip_status	double			-2	2	No	numerictype(1, 16, 13)
gain_val	double			1	1	Yes	numerictype(0, 1, 0)
init_val	double			1	1	Yes	numerictype(0, 1, 0)
limit_lower	double			-500	-500	Yes	numerictype(1, 10, 0)
limit_upper	double			500	500	Yes	numerictype(0, 9, 0)
tprod	double			-1	1	No	numerictype(1, 16, 14)
u_in	double			-1	1	No	numerictype(1, 16, 14)
u_state	double			-501	501	No	numerictype(1, 16, 6)
y	double			-500	500	No	numerictype(1, 16, 6)

View Generated Fixed-Point MATLAB Code

`fiaccl` generates a fixed-point version of the `dti` function, `dti_fxpt.m`, and a wrapper function that calls `dti_fxpt`. These files are generated in the `codegen\dti\fixpt` folder in your local working folder.

```
function [y,clip_status] = dti_fixpt(u_in)
fm = fimath( 'RoundingMethod', 'Floor', 'OverflowAction', 'Wrap', 'ProductMode',...
            'FullPrecision', 'MaxProductWordLength', 128, 'SumMode', 'FullPrecision',
            'MaxSumWordLength', 128);
%#codegen


% Discrete Time Integrator in MATLAB
%
% Forward Euler method, also known as Forward Rectangular, or left-hand
% approximation. The resulting expression for the output of the block at
% step 'n' is  $y(n) = y(n-1) + K * u(n-1)$ 
%
init_val = fi(1, 0, 1, 0, fm);
gain_val = fi(1, 0, 1, 0, fm);
limit_upper = fi(500, 0, 9, 0, fm);
limit_lower = fi(-500, 1, 10, 0, fm);
% variable to hold state between consecutive calls to this block
persistent u_state
if isempty( u_state )
    u_state = fi(init_val + fi(1, 0, 1, 0, fm), 1, 16, 6, fm);
end
% Compute Output
if (u_state>limit_upper)
    y = fi(limit_upper, 1, 16, 6, fm);
    clip_status = fi(-2, 1, 16, 13, fm);
elseif (u_state>=limit_upper)
    y = fi(limit_upper, 1, 16, 6, fm);
    clip_status = fi(-1, 1, 16, 13, fm);
elseif (u_state
```

Compare Floating-Point and Fixed-Point Runs

Because you selected to log inputs and outputs for comparison plots and to use the Simulation Data Inspector for these plots, the Simulation Data Inspector opens.

You can use the Simulation Data Inspector to view floating-point and fixed-point run information and compare results. For example, to compare the floating-point and fixed-point values for the output y , on the **Compare** tab, select y , and then click **Compare Runs**.

The Simulation Data Inspector displays a plot of the baseline floating-point run against the fixed-point run and the difference between them.

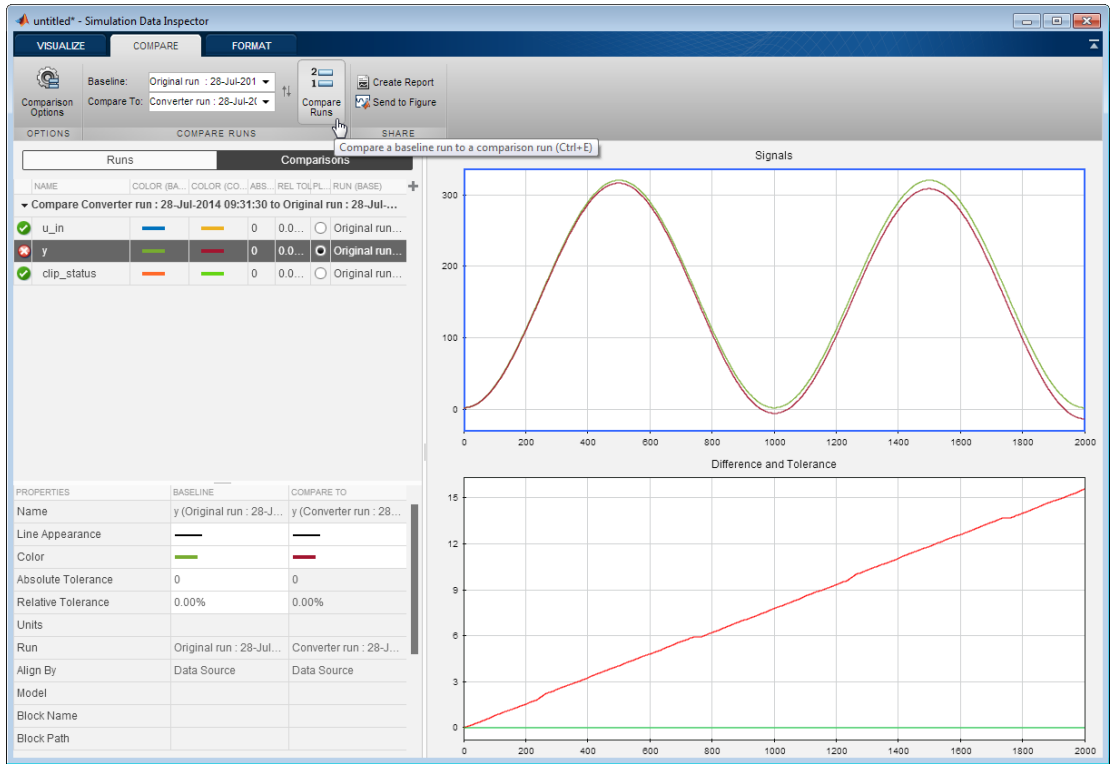

Detect Overflows

This example shows how to detect overflows using the `fiaccl` function. At the numerical testing stage in the conversion process, the tool simulates the fixed-point code using scaled doubles. It then reports which expressions in the generated code produce values that would overflow the fixed-point data type.

Prerequisites

To complete this example, you must install the following products:

- MATLAB
- Fixed-Point Designer
- C compiler (for most platforms, a default C compiler is supplied with MATLAB)
For a list of supported compilers, see http://www.mathworks.com/support/compilers/current_release/

You can use `mex -setup` to change the default compiler. See “Changing Default Compiler”.

Create a New Folder and Copy Relevant Files

- 1 Create a local working folder, for example, `c:\overflow`.
- 2 Change to the `docroot\toolbox\fixpoint\examples` folder. At the MATLAB command line, enter:

```
cd(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
```

- 3 Copy the `overflow.m` and `overflow_test.m` files to your local working folder.

It is best practice to create a separate test script to do all the pre- and post-processing such as loading inputs, setting up input values, calling the function under test, and outputting test results.

Type	Name	Description
Function code	<code>overflow.m</code>	Entry-point MATLAB function
Test file	<code>overflow_test.m</code>	MATLAB script that tests <code>overflow.m</code>

The overflow Function

```
function y = overflow(b,x,reset)
```

```

    if nargin<3, reset = true; end
    persistent z p
    if isempty(z) || reset
        p = 0;
        z = zeros(size(b));
    end
    [y,z,p] = fir_filter(b,x,z,p);
end
function [y,z,p] = fir_filter(b,x,z,p)
    y = zeros(size(x));
    nx = length(x);
    nb = length(b);
    for n = 1:nx
        p=p+1; if p>nb, p=1; end
        z(p) = x(n);
        acc = 0;
        k = p;
        for j=1:nb
            acc = acc + b(j)*z(k);
            k=k-1; if k<1, k=nb; end
        end
        y(n) = acc;
    end
end

```

The overflow_test Function

```

function overflow_test
    % The filter coefficients were computed using the FIR1 function from
    % Signal Processing Toolbox.
    % b = fir1(11,0.25);
    b = [-0.004465461051254
        -0.004324228005260
        +0.012676739550326
        +0.074351188907780
        +0.172173206073645
        +0.249588554524763
        +0.249588554524763
        +0.172173206073645
        +0.074351188907780
        +0.012676739550326
        -0.004324228005260
        -0.004465461051254]';

    % Input signal

```

```
nx = 256;
t = linspace(0,10*pi,nx)';

% Impulse
x_impulse = zeros(nx,1); x_impulse(1) = 1;

% Max Gain
% The maximum gain of a filter will occur when the inputs line up with the
% signs of the filter's impulse response.
x_max_gain = sign(b)';
x_max_gain = repmat(x_max_gain,ceil(nx/length(b)),1);
x_max_gain = x_max_gain(1:nx);

% Sums of sines
f0=0.1; f1=2;
x_sines = sin(2*pi*t*f0) + 0.1*sin(2*pi*t*f1);

% Chirp
f_chirp = 1/16; % Target frequency
x_chirp = sin(pi*f_chirp*t.^2); % Linear chirp

x = [x_impulse, x_max_gain, x_sines, x_chirp];
titles = {'Impulse', 'Max gain', 'Sum of sines', 'Chirp'};
y = zeros(size(x));

for i=1:size(x,2)
    reset = true;
    y(:,i) = overflow(b,x(:,i),reset);
end

test_plot(1,titles,t,x,y)

end
function test_plot(fig,titles,t,x,y1)
figure(fig)
clf
sub_plot = 1;
font_size = 10;
for i=1:size(x,2)
    subplot(4,1,sub_plot)
    sub_plot = sub_plot+1;
    plot(t,x(:,i),'c',t,y1(:,i),'k')
    axis('tight')
```



```

        xlabel('t','FontSize',font_size);
        title(titles{i},'FontSize',font_size);
        ax = gca;
        ax.FontSize = 10;
    end
    figure(gcf)
end

```

Set Up Configuration Object

- 1 Create a `coder.FixptConfig` object, `fixptcfg`, with default settings.


```
fixptcfg = coder.config('fixpt');
```
- 2 Set the test bench name. In this example, the test bench function name is `overflow_test`.


```
fixptcfg.TestBenchName = 'overflow_test';
```
- 3 Set the default word length to 16.


```
fixptcfg.DefaultWordLength = 16;
```

Enable Overflow Detection

```
fixptcfg.TestNumerics = true;
fixptcfg.DetectFixptOverflows = true;
```

Set `fimath` Options

Set the `fimath` `Product` mode and `Sum` mode to `KeepLSB`. These settings models the behavior of integer operations in the C language.

```
fixptcfg.fimath = ...
'fimath(''RoundingMethod'', ''Floor'', ''OverflowAction'', ''Wrap'', ...
''ProductMode'', ''KeepLSB'', ''SumMode'', ''KeepLSB'');
```

Convert to Fixed Point

Convert the floating-point MATLAB function, `overflow`, to floating-point MATLAB code. You do not need to specify input types for the `fiaccel` command because it infers the types from the test file.

```
fiaccel -float2fixed fixptcfg overflow
```

The numerics testing phase reports an overflow.

```
Overflow error in expression 'acc + b( j )*z( k )'. Percentage of Current Range = 104%.
```

Review Results

Determine if the addition or the multiplication in this expression overflowed. Set the `fimath` `ProductMode` to `FullPrecision` so that the multiplication will not overflow, and then run the `fiaccel` command again.

```
fixptcfg.fimath = ...  
'fimath(''RoundingMethod'', 'Floor', 'OverflowAction'', 'Wrap'', ...  
        ''ProductMode'', 'FullPrecision'', 'SumMode'', 'KeepLSB'');  
fiaccel -float2fixed fixptcfg overflow
```

The numerics testing phase still reports an overflow, indicating that it is the addition in the expression that is overflowing.

Replace the exp Function with a Lookup Table

This example shows how to replace the `exp` function with a lookup table approximation in the generated fixed-point code using the `fiaccel` function.

Prerequisites

To complete this example, you must install the following products:

- MATLAB
- Fixed-Point Designer
- C compiler (for most platforms, a default C compiler is supplied with MATLAB). For a list of supported compilers, see http://www.mathworks.com/support/compilers/current_release/.

You can use `mex -setup` to change the default compiler. See “Changing Default Compiler”.

Create Algorithm and Test Files

- 1 Create a MATLAB function, `my_fcn.m`, that calls the `exp` function.

```
function y = my_fcn(x)
    y = exp(x);
end
```

- 2 Create a test file, `my_fcn_test.m`, that uses `my_fcn.m`.

```
close all

x = linspace(-10,10,1e3);
for itr = 1e3:-1:1
    y(itr) = my_fcn( x(itr) );
end
plot( x, y );
```

Configure Approximation

Create a function replacement configuration object to approximate the `exp` function, using the default settings of linear interpolation and 1000 points in the lookup table.

```
q = coder.approximation('exp');
```

Set Up Configuration Object

Create a `coder.FixptConfig` object, `fixptcfg`. Specify the test file name and enable numerics testing. Associate the function replacement configuration object with the fixed-point configuration object.

```
fixptcfg = coder.config('fixpt');  
fixptcfg.TestBenchName = 'my_fcn_test';  
fixptcfg.TestNumerics = true;  
fixptcfg.DefaultWordLength = 16;  
fixptcfg.addApproximation(q);
```

Convert to Fixed Point

Generate fixed-point MATLAB code.

```
fiaccel -float2fixed fixptcfg my_fcn
```

View Generated Fixed-Point Code

To view the generated fixed-point code, click the link to `my_fcn_fixpt`.

The generated code contains a lookup table approximation, `exp1`, for the `exp` function. The fixed-point conversion process infers the ranges for the function and then uses an interpolated lookup table to replace the function. By default, the lookup table uses linear interpolation, 1000 points, and the minimum and maximum values detected by running the test file.

The generated fixed-point function, `my_fcn_fixpt`, calls this approximation instead of calling `exp`.

```
function y = my_fcn_fixpt(x)  
    fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap', ...  
        'ProductMode', 'FullPrecision', 'MaxProductWordLength', 128, ...  
        'SumMode', 'FullPrecision', 'MaxSumWordLength', 128);  
  
    y = fi(exp1(x), 0, 16,1, fm);  
end
```

You can now test the generated fixed-point code and compare the results against the original MATLAB function. If the behavior of the generated fixed-point code does not

match the behavior of the original code closely enough, modify the interpolation method or number of points used in the lookup table and then regenerate code.

More About

- “Replacing Functions Using Lookup Table Approximations”

Replace a Custom Function with a Lookup Table

This example shows how to replace a custom function with a lookup table approximation function using the `fiaccl` function.

Prerequisites

To complete this example, you must install the following products:

- MATLAB
- Fixed-Point Designer
- C compiler (for most platforms, a default C compiler is supplied with MATLAB) For a list of supported compilers, see http://www.mathworks.com/support/compilers/current_release/

You can use `mex -setup` to change the default compiler. See “Changing Default Compiler”.

Create a MATLAB function, `custom_fcn.m`. This is the function that you want to replace.

```
function y = custom_fcn(x)
    y = 1./(1+exp(-x));
end
```

Create a wrapper function that calls `custom_fcn.m`.

```
function y = call_custom_fcn(x)
    y = custom_fcn(x);
end
```

Create a test file, `custom_test.m`, that uses `call_custom_fcn.m`.

```
close all

x = linspace(-10,10,1e3);
for itr = 1e3:-1:1
    y(itr) = call_custom_fcn( x(itr) );
end
plot( x, y );
```

Create a function replacement configuration object to approximate `custom_fcn`. Specify the function handle of the custom function and set the number of points to use in the lookup table to 50.

```
q = coder.approximation('Function','custom_fcn',...
    'CandidateFunction',@custom_fcn, 'NumberOfPoints',50);
```

Create a `coder.FixptConfig` object, `fixptcfg`. Specify the test file name and enable numerics testing. Associate the function replacement configuration object with the fixed-point configuration object.

```
fixptcfg = coder.config('fixpt');
fixptcfg.TestBenchName = 'custom_test';
fixptcfg.TestNumerics = true;
fixptcfg.addApproximation(q);
```

Generate fixed-point MATLAB code.

```
fiaccel -float2fixed fixptcfg call_custom_fcn
```

`fiaccel` generates fixed-point MATLAB code in `call_custom_fcn_fixpt.m`.

To view the generated fixed-point code, click the link to `call_custom_fcn_fixpt`.

The generated code contains a lookup table approximation, `custom_fcn1`, for the `custom_fcn` function. The fixed-point conversion process infers the ranges for the function and then uses an interpolated lookup table to replace the function. The lookup table uses 50 points as specified. By default, it uses linear interpolation and the minimum and maximum values detected by running the test file.

The generated fixed-point function, `call_custom_fcn_fixpt`, calls this approximation instead of calling `custom_fcn`.

```
function y = call_custom_fcn_fixpt(x)
    fm = fimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap',...
        'ProductMode', 'FullPrecision', 'MaxProductWordLength', 128, ...
        'SumMode', 'FullPrecision', 'MaxSumWordLength', 128);

    y = fi(custom_fcn1(x), 0, 14, 14, fm);
end
```

You can now test the generated fixed-point code and compare the results against the original MATLAB function. If the behavior of the generated fixed-point code does not match the behavior of the original code closely enough, modify the interpolation method or number of points used in the lookup table and then regenerate code.

More About

- “Replacing Functions Using Lookup Table Approximations”

Visualize Differences Between Floating-Point and Fixed-Point Results

This example shows how to configure the `fiaccel` function to use a custom plot function to compare the behavior of the generated fixed-point code against the behavior of the original floating-point MATLAB code.

By default, when the `LogIOForComparisonPlotting` option is enabled, the conversion process uses a time series based plotting function to show the floating-point and fixed-point results and the difference between them. However, during fixed-point conversion you might want to visualize the numerical differences in a view that is more suitable for your application domain. This example shows how to customize plotting and produce scatter plots at the test numerics step of the fixed-point conversion.

Prerequisites

To complete this example, you must install the following products:

- MATLAB
- Fixed-Point Designer
- C compiler (for most platforms, a default C compiler is supplied with MATLAB)
For a list of supported compilers, see http://www.mathworks.com/support/compilers/current_release/

You can use `mex -setup` to change the default compiler. See “Changing Default Compiler”.

Create a New Folder and Copy Relevant Files

- 1 Create a local working folder, for example, `c:\custom_plot`.
- 2 Change to the `docroot\toolbox\fixpoint\examples` folder. At the MATLAB command line, enter:

```
cd(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
```
- 3 Copy the `myFilter.m`, `myFilterTest.m`, `plotDiff.m`, and `filterData.mat` files to your local working folder.

It is best practice to create a separate test script to do all the pre- and post-processing such as loading inputs, setting up input values, calling the function under test, and outputting test results.

Type	Name	Description
Function code	myFilter.m	Entry-point MATLAB function
Test file	myFilterTest.m	MATLAB script that tests myFilter.m
Plotting function	plotDiff.m	Custom plot function
MAT-file	filterData.mat	Data to filter.

The myFilter Function

```
function [y, ho] = myFilter(in)

persistent b h;
if isempty(b)
    b = complex(zeros(1,16));
    h = complex(zeros(1,16));
    h(8) = 1;
end

b = [in, b(1:end-1)];
y = b*h.';

errf = 1-sqrt(real(y)*real(y) + imag(y)*imag(y));
update = 0.001*conj(b)*y*errf;

h = h + update;
h(8) = 1;
ho = h;

end
```

The myFilterTest File

```
% load data
data = load('filterData.mat');
d = data.symbols;

for idx = 1:4000
    y = myFilter(d(idx));
end
```

The plotDiff Function

```
% varInfo - structure with information about the variable. It has the following fields
%         i) name
%         ii) functionName
% floatVals - cell array of logged original values for the 'varInfo.name' variable
% fixedVals - cell array of logged values for the 'varInfo.name' variable after
%             Fixed-Point conversion.
function plotDiff(varInfo, floatVals, fixedVals)
    varName = varInfo.name;
    fcnName = varInfo.functionName;

    % convert from cell to matrix
    floatVals = cell2mat(floatVals);
    fixedVals = cell2mat(fixedVals);

    % escape the '_'s because plot titles treat these as subscripts
    escapedVarName = regexp(varName, '_', '\\_');
    escapedFcnName = regexp(fcnName, '_', '\\_');

    % flatten the values
    flatFloatVals = floatVals(1:end);
    flatFixedVals = fixedVals(1:end);

    % build Titles
    floatTitle = [ escapedFcnName ' > ' 'float : ' escapedVarName ];
    fixedTitle = [ escapedFcnName ' > ' 'fixed : ' escapedVarName ];

    data = load('filterData.mat');

    switch varName
        case 'y'
            x_vec = data.symbols;

            figure('Name', 'Comparison plot', 'NumberTitle', 'off');

            % plot floating point values
            y_vec = flatFloatVals;
            subplot(1, 2, 1);
            plotScatter(x_vec, y_vec, 100, floatTitle);

            % plot fixed point values
            y_vec = flatFixedVals;
            subplot(1, 2, 2);
```

```

        plotScatter(x_vec, y_vec, 100, fixedTitle);

    otherwise
        % Plot only output 'y' for this example, skip the rest
    end

end

function plotScatter(x_vec, y_vec, n, figTitle)
    % plot the last n samples
    x_plot = x_vec(end-n+1:end);
    y_plot = y_vec(end-n+1:end);

    hold on
    scatter(real(x_plot),imag(x_plot), 'bo');

    hold on
    scatter(real(y_plot),imag(y_plot), 'rx');

    title(figTitle);
end

```

Set Up Configuration Object

- 1 Create a `coder.FixptConfig` object.


```
fxptcfg = coder.config('fixpt');
```
- 2 Specify the test file name and custom plot function name. Enable logging and numerics testing.

```

fxptcfg.TestBenchName = 'myFilterTest';
fxptcfg.PlotFunction = 'plotDiff';
fxptcfg.TestNumerics = true;
fxptcfg.LogIOForComparisonPlotting = true;
fxptcfg.DefaultWordLength = 16;

```


Convert to Fixed Point

Convert the floating-point MATLAB function, `myFilter`, to floating-point MATLAB code. You do not need to specify input types for the `fiaccl` command because it infers the types from the test file.

```
fiaccl -args {complex(0, 0)} -float2fixed fxptcfg myFilter
```

The conversion process generates fixed-point code using a default word length of 16 and then runs a fixed-point simulation by running the `myFilterTest.m` function and calling the fixed-point version of `myFilter.m`.

Because you selected to log inputs and outputs for comparison plots and to use the custom plotting function, `plotDiff.m`, for these plots, the conversion process uses this function to generate the comparison plot.

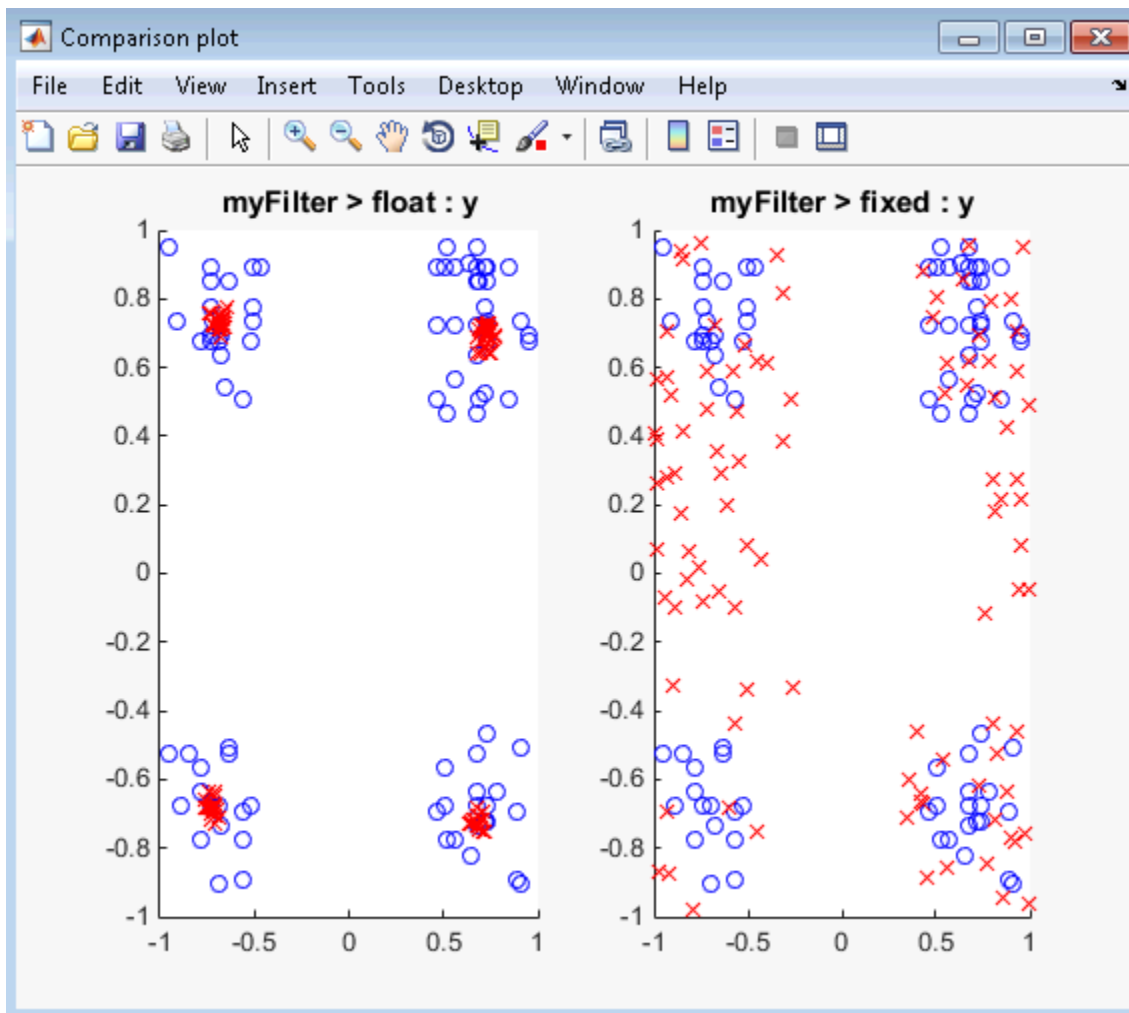


The plot shows that the fixed-point results do not closely match the floating-point results.

Increase the word length to 24 and then convert to fixed point again.

```
fxptcfg.DefaultWordLength = 24;  
fiaccel -args {complex(0, 0)} -float2fixed fxptcfg myFilter
```

The increased word length improved the results. This time, the plot shows that the fixed-point results match the floating-point results.

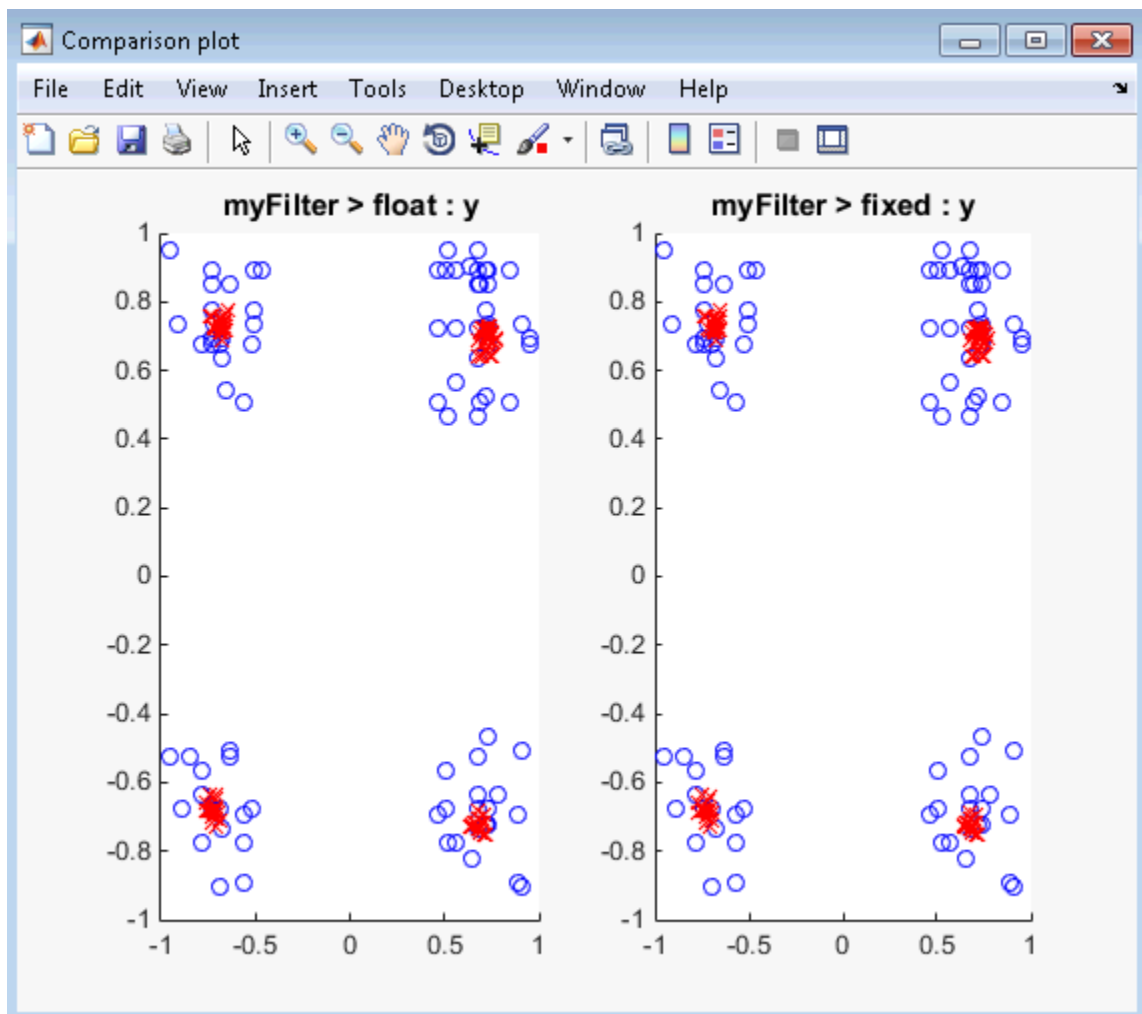

More About

- "Custom Plot Functions"

Enable Plotting Using the Simulation Data Inspector

You can use the Simulation Data Inspector to inspect and compare floating-point and fixed-point input and output data logged using the `fiaccl` function. At the MATLAB command line:

- 1 Create a fixed-point configuration object and configure the test file name.

```
fixptcfg = coder.config('fixpt');  
fixptcfg.TestBenchName = 'dti_test';
```

- 2 Select to run the test file to verify the generated fixed-point MATLAB code. Log inputs and outputs for comparison plotting and select to use the Simulation Data Inspector to plot the results.

```
fixptcfg.TestNumerics = true;  
fixptcfg.LogIOForComparisonPlotting = true;  
fixptcfg.PlotWithSimulationDataInspector = true;
```

- 3 Generate fixed-point MATLAB code using `fiaccl`.

```
fiaccl -float2fixed fixptcfg dti
```

For an example, see “Propose Data Types Based on Derived Ranges”.

More About

- “Inspecting Data Using the Simulation Data Inspector”

Fixed-Point Conversion — Manual Conversion

- “Manual Fixed-Point Conversion Workflow” on page 11-2
- “Manual Fixed-Point Conversion Best Practices” on page 11-4
- “Implement FIR Filter Algorithm for Floating-Point and Fixed-Point Types using cast and zeros” on page 11-19

Manual Fixed-Point Conversion Workflow

- 1 Implement your algorithm in MATLAB.
- 2 Write a test file that calls your original MATLAB algorithm to validate the behavior of your algorithm.

Create a test file to validate that the algorithm works as expected in floating point before converting it to fixed point. Use the same test file to propose fixed-point data types. After the conversion, use this test file to compare fixed-point results to the floating-point baseline.

- 3 Prepare algorithm for instrumentation.
- 4 Write an entry-point function.

For instrumentation and code generation, it is convenient to have an entry-point function that calls the function to be converted to fixed point. You can cast the function inputs to different data types, and add calls to different variations of the algorithm for comparison. By using an entry-point function, you can run both fixed-point and floating-point variants of your algorithm. You can also run different variants of fixed-point. This approach allows you to iterate on your code more quickly to arrive at the optimal fixed-point design.

- 5 Build instrumented MEX for original MATLAB algorithm.
- 6 Run your original MATLAB algorithm to log min/max data. View this data in the instrumentation report.
- 7 Separate data types from algorithm.

Convert functions to use types tables and update entry-point function.

- 8 Validate modified function.
 - a Create fixed-point types table based on proposed data types.
 - b Build MEX function.
 - c Run and compare MEX function behavior against baseline.
- 9 Use proposed fixed-point data types.

Create fixed-point types table based on proposed data types, build mex, run, and then compare against baseline.

- 10 Optionally, if have a MATLAB Coder license, generate code.

Start by testing native C-types.

11 Iterate, tune algorithm.

For example, tune the algorithm to avoid overflow or eliminate bias.

Manual Fixed-Point Conversion Best Practices

In this section...

“Create a Test File” on page 11-4

“Prepare Your Algorithm for Code Acceleration or Code Generation” on page 11-5

“Check for Fixed-Point Support for Functions Used in Your Algorithm” on page 11-6

“Manage Data Types and Control Bit Growth” on page 11-7

“Separate Data Type Definitions from Algorithm” on page 11-8

“Convert to Fixed Point” on page 11-10

“Optimize Data Types” on page 11-12

“Optimize Your Algorithm” on page 11-15

Fixed-Point Designer software helps you design and convert your algorithms to fixed point. Whether you are simply designing fixed-point algorithms in MATLAB or using Fixed-Point Designer in conjunction with MathWorks code generation products, these best practices help you get from generic MATLAB code to an efficient fixed-point implementation. These best practices are also covered in this webinar: Manual Fixed-Point Conversion Best Practices Webinar

Create a Test File

A best practice for structuring your code is to separate your core algorithm from other code that you use to test and verify the results. Create a test file to call your original MATLAB algorithm and fixed-point versions of the algorithm. For example, as shown in the following table, you might set up some input data to feed into your algorithm, and then, after you process that data, create some plots to verify the results. Since you need to convert only the algorithmic portion to fixed-point, it is more efficient to structure your code so that you have a test file, in which you create your inputs, call your algorithm, and plot the results, and one (or more) algorithmic files, in which you do the core processing.

Original code	Best Practice	Modified code
<code>% TEST INPUT x = randn(100,1);</code>	Issue	Test file <code>% TEST INPUT</code>

Original code	Best Practice	Modified code
<pre>% ALGORITHM y = zeros(size(x)); y(1) = x(1); for n=2:length(x) y(n)=y(n-1) + x(n); end % VERIFY RESULTS yExpected=cumsum(x); plot(y-yExpected) title('Error')</pre>	<p>Generation of test input and verification of results are intermingled with the algorithm code.</p> <p>Fix</p> <p>Create a test file that is separate from your algorithm. Put the algorithm in its own function.</p>	<pre>x = randn(100,1); % ALGORITHM y = cumulative_sum(x); % VERIFY RESULTS yExpected = cumsum(x); plot(y-yExpected) title('Error')</pre> <p>Algorithm in its own function</p> <pre>function y = cumulative_sum(x) y = zeros(size(x)); y(1) = x(1); for n=2:length(x) y(n) = y(n-1) + x(n); end end</pre>

You can use the test file to:

- Verify that your floating-point algorithm behaves as you expect before you convert it to fixed point. The floating-point algorithm behavior is the baseline against which you compare the behavior of the fixed-point versions of your algorithm.
- Propose fixed-point data types.
- Compare the behavior of the fixed-point versions of your algorithm to the floating-point baseline.

Your test files should exercise the algorithm over its full operating range so that the simulation ranges are accurate. For example, for a filter, realistic inputs are impulses, sums of sinusoids, and chirp signals. With these inputs, using linear theory, you can verify that the outputs are correct. Signals that produce maximum output are useful for verifying that your system does not overflow. The quality of the proposed fixed-point data types depends on how well the test files cover the operating range of the algorithm with the accuracy that you want.

Prepare Your Algorithm for Code Acceleration or Code Generation

Using Fixed-Point Designer, you can:

- Instrument your code and provide data type proposals to help you convert your algorithm to fixed point, using the following functions:
 - `buildInstrumentedMex`, which generates compiled C code that includes logging instrumentation.
 - `showInstrumentationResults`, which shows the results logged by the instrumented, compiled C code.
 - `clearInstrumentationResults`, which clears the logged instrumentation results from memory.
- Accelerate your fixed-point algorithms by creating a MEX file using the `fiaccl` function.

Any MATLAB algorithms that you want to instrument using `buildInstrumentedMex` and any fixed-point algorithms that you want to accelerate using `fiaccl` must comply with code generation requirements and rules. To view the subset of the MATLAB language that is supported for code generation, see “Functions and Objects Supported for C and C++ Code Generation — Alphabetical List”.

To help you identify unsupported functions or constructs in your MATLAB code, use one of the following tools.

- Add the `%#codegen` pragma to the top of your MATLAB file. The MATLAB code analyzer flags functions and constructs that are not available in the subset of the MATLAB language supported for code generation. This advice appears in real-time as you edit your code in the MATLAB editor.

For more information, see “Check Code Using the MATLAB Code Analyzer”.

- Use the Code Generation Readiness tool to generate a static report on your code. The report identifies calls to functions and the use of data types that are not supported for code generation. To generate a report for a function, `myFunction1`, at the command line, enter `coder.screener('myFunction1')`.

For more information, see “Check Code Using the Code Generation Readiness Tool”.

Check for Fixed-Point Support for Functions Used in Your Algorithm

Before you start your fixed-point conversion, identify which functions used in your algorithm are not supported for fixed point. Consider how you might replace them or otherwise modify your implementation to be more optimized for embedded targets. For

example, you might need to find (or write your own) replacements for functions like `log2`, `fft`, and `exp`. Other functions like `sin`, `cos`, and `sqrt` may support fixed point, but for better efficiency, you may want to consider an alternative implementation like a lookup table or CORDIC-based algorithm.

If you cannot find a replacement immediately, you can continue converting the rest of your algorithm to fixed point by simply insulating any functions that don't support fixed-point with a cast to double at the input, and a cast back to a fixed-point type at the output.

Original Code	Best Practice	Modified Code
<code>y = 1/exp(x);</code>	<p>Issue</p> <p>The <code>exp()</code> function is not defined for fixed-point inputs.</p> <p>Fix</p> <p>Cast the input to double until you have a replacement. In this case, <code>1/exp(x)</code> is more suitable for fixed-point growth than <code>exp(x)</code>, so replace the whole expression with a <code>1/exp</code> function, possibly as a lookup table.</p>	<code>y = 1/exp(double(x));</code>

Manage Data Types and Control Bit Growth

The `(:)=` syntax is known as subscripted assignment. When you use this syntax, MATLAB overwrites the value of the left-hand side argument, but retains the existing data type and array size. This is particularly important in keeping fixed-point variables fixed point (as opposed to inadvertently turning them into doubles), and for preventing bit growth when you want to maintain a particular data type for the output.

Original Code	Best Practice	Modified Code
<code>acc = 0; for n = 1:numel(x) acc = acc + x(n); end</code>	<p>Issue</p>	<code>acc = 0; for n = 1:numel(x) acc(:) = acc + x(n); end</code>

Original Code	Best Practice	Modified Code
	<p><code>acc = acc + x(n)</code> overwrites <code>acc</code> with <code>acc + x(n)</code>. When you are using all double types, this behavior is fine. However, when you introduce fixed-point data types in your code, if <code>acc</code> is overwritten, the data type of <code>acc</code> might change.</p> <p>Fix</p> <p>To preserve the original data type of <code>acc</code>, assign into <code>acc</code> using <code>acc(:) =</code>. Using subscripted assignment casts the right-hand-side value into the same data type as <code>acc</code> and prevents bit growth.</p>	

For more information, see “Controlling Bit Growth”.

Separate Data Type Definitions from Algorithm

For instrumentation and code generation, create an entry-point function that calls the function that you want to convert to fixed point. You can then cast the function inputs to different data types. You can add calls to different variations of the function for comparison. By using an entry-point function, you can run both fixed-point and floating-point variants of your algorithm. You can also run different variants of fixed-point. This approach allows you to iterate on your code more quickly to arrive at the optimal fixed-point design.

This method of fixed-point conversion makes it easier for you to compare several different fixed-point implementations, and also allows you to easily retarget your algorithm to a different device.

To separate data type definitions from your algorithm:

- 1 When a variable is first defined, use `cast(x, 'like', y)` or `zeros(m, n, 'like', y)` to cast it to your desired data type.

- 2 Create a table of data type definitions, starting with original data types used in your code. Before converting to fixed point, create a data type table that uses all single data types to find type mismatches and other problems.
- 3 Run your code connected to each table and look at the results to verify the connection.

Original code	Best Practice	Modified code
<pre>% Algorithm n = 128; y = zeros(size(n));</pre>	<p>Issue</p> <p>The default data type in MATLAB is double-precision floating-point.</p> <p>Fix</p> <ol style="list-style-type: none"> 1 Use <code>cast(..., 'like', ...)</code> and <code>zeros(..., 'like', ...)</code> to programmatically specify types that are defined in a separate table. 2 Create an original types table, usually in a separate function. 3 Add single data types to your table to help verify the connection with your code. 	<pre>% Algorithm T = mytypes('double'); n = cast(128, 'like', T.n); y = zeros(size(n), 'like', T.y); function T = mytypes(dt) switch(dt) case 'double' T.n = double([]); T.y = double([]); case 'single' T.n = single([]); T.y = single([]); end end</pre>

Separating data type specifications from algorithm code enables you to:

- Reuse your algorithm code with different data types.
- Keep your algorithm uncluttered with data type specifications and switch statements for different data types.
- Improve readability of your algorithm code.
- Switch between fixed-point and floating-point data types to compare baselines.

- Switch between variations of fixed-point settings without changing the algorithm code.

Convert to Fixed Point

What Are Your Goals for Converting to Fixed Point?

Before you start the conversion, consider your goals for converting to fixed point. Are you implementing your algorithm in C or HDL? What are your target constraints? The answers to these questions determine many fixed-point properties such as the available word length, fraction length, and math modes, as well as available math libraries.

Build and Run an Instrumented MEX Function

Build and run an instrumented MEX function to get fixed-point types proposals using the `buildInstrumentedMex` and `showInstrumentationResults` functions. Test files should exercise your algorithm over its full operating range. The quality of the proposed fixed-point data types depends on how well the test file covers the operating range of the algorithm with the accuracy that you want. A simple set of test vectors may not exercise the full range of types, so use the proposals as a guideline for choosing an initial set of fixed-point types, and use your best judgement and experience in adjusting the types. If loop indices are used only as index variables, they are automatically converted to integer types, so you do not have to explicitly convert them to fixed point.

Algorithm Code	Test File
<pre>function [y,z] = myfilter(b,x,z) y = zeros(size(x)); for n = 1:length(x) z(:) = [x(n); z(1:end-1)]; y(n) = b * z; end end</pre>	<pre>% Test inputs b = fir1(11,0.25); t = linspace(0,10*pi,256)'; x = sin((pi/16)*t.^2); % Linear chirp z = zeros(size(b')); % Build buildInstrumentedMex myfilter ... -args {b,x,z} -histogram % Run [y,z] = myfilter_mex(b,x,z); % Show showInstrumentationResults myfilter_mex ... -defaultDT numericType(1,16) -proposeFL</pre>

```

Function: myfilter
1 function [y,z] = myfilter(b,x,z)
2   y = zeros(size(x));
3   for n=1:length(x)
4     z(:) = [x(n); z(1:end-1)];
5     y(n) = b * z;
6   end
7 end

```

Order	Variable	Type	Size	Class	Complex	Proposed Signedness	Proposed WL	Proposed FL	Always Whole Number	SimMin	SimMax	Histogram
1	y	Output	256 x 1	double	No	Signed	16	15	No	-0.9514825238809547	0.9831716442570267	
2	z	I/O	12 x 1	double	No	Signed	16	14	No	-0.999998881428792	0.9999956940701684	
3	b	Input	1 x 12	double	No	Signed	16	17	No	-0.004465461051253895	0.24958855452476303	
4	x	Input	256 x 1	double	No	Signed	16	14	No	-0.999998881428792	0.9999956940701684	
5	n	Local	1 x 1	double	No	Signed	16	0	Yes	1	256	

Create a Types Table

Create a types table using a structure with prototypes for the variables. The proposed types are computed from the simulation runs. A long simulation run with a wide range of expected data produces better proposals. You can use the proposed types or use your knowledge of the algorithm and implementation constraints to improve the proposals.

Because the data types, not the values, are used, specify the prototype values as empty ([]).

In some cases, it might be more efficient to leave some parts of the code in floating point. For example, when there is high dynamic range or that part of the code is sensitive to round-off errors.

Algorithm Code

```

function [y,z]=myfilter(b,x,z,T)
  y = zeros(size(x),'like',T.y);
  for n = 1:length(x)
    z(:) = [x(n); z(1:end-1)];
    y(n) = b * z;
  end
end

```

Types Tables

```

function T = mytypes(dt)
  switch dt
    case 'double'

```

Types Tables

```

T.b = double([]);
T.x = double([]);
T.y = double([]);

case 'fixed16'
    T.b = fi([],true,16,15);
    T.x = fi([],true,16,15);
    T.y = fi([],true,16,14);
end
end

```

Test File

```

% Test inputs
b = fir1(11,0.25);
t = linspace(0,10*pi,256)';
x = sin((pi/16)*t.^2);
% Linear chirp

% Cast inputs
T=mytypes('fixed16');
b=cast(b,'like',T.b);
x=cast(x,'like',T.x);
z=zeros(size(b),'like',T.x);

% Run
[y,z] = myfilter(b,x,z,T);

```

Run With Fixed-Point Types and Compare Results

Create a test file to validate that the floating-point algorithm works as expected before converting it to fixed point. You can use the same test file to propose fixed-point data types, and to compare fixed-point results to the floating-point baseline after the conversion.

Optimize Data Types**Use Scaled Doubles**

Use scaled doubles to detect potential overflows. Scaled doubles are a hybrid between floating-point and fixed-point numbers. Fixed-Point Designer stores them as doubles


with the scaling, sign, and word length information retained. To use scaled doubles, you can use the data type override (DTO) property or you can set the 'DataType' property to 'ScaledDouble' in the `fi` or `numericType` constructor.

To...	Use...	Example
Set data type override locally	<code>numericType</code> <code>DataType</code> property	<pre>T.a = fi([],1,16,13,'DataType', 'ScaledDouble'); a = cast(pi, 'like', T.a) a = 3.1416 DataTypeMode: Scaled double: binary point scaling Signedness: Signed WordLength: 16 FractionLength: 13</pre>
Set data type override globally	<code>fipref</code> <code>DataTypeOverride</code> property	<pre>fipref('DataTypeOverride','ScaledDoubles') T.a = fi([],1,16,13); a = 3.1416 DataTypeMode:Scaled double: binary point scaling Signedness: Signed WordLength:16 FractionLength:13</pre>

For more information, see “Scaled Doubles”.

Use the Histogram to Fine-Tune Data Type Settings

To fine-tune fixed-point type settings, run the `buildInstrumentedMex` function with the `-histogram` flag and then run the generated MEX function with your desired test inputs. When you use the `showInstrumentationResults` to display the code generation report, the report displays a Histogram icon. Click the icon to open the `NumericTypeScope` and view the distribution of values observed in your simulation for the selected variable.

Overflows indicated in red in the Code Generation Report show in the "outside range" bin in the `NumericTypeScope`. Launch the `NumericTypeScope` for an associated variable or expression by clicking on the histogram view icon .

Explore Design Tradeoffs

Once you have your first set of fixed-point data types, you can then add different variations of fixed-point values to your types table. You can modify and iterate to avoid overflows, adjust fraction lengths, and change rounding methods to eliminate bias.

Algorithm Code

```
function [y,z] = myfilter(b,x,z,T)
    y = zeros(size(x),'like',T.y);
    for n = 1:length(x)
        z(:) = [x(n); z(1:end-1)];
        y(n) = b * z;
    end
end
```

Types Tables

```
function T = mytypes(dt)
    switch dt
        case 'double'
            T.b = double([]);
            T.x = double([]);
            T.y = double([]);

        case 'fixed8'
            T.b = fi([],true,8,7);
            T.x = fi([],true,8,7);
            T.y = fi([],true,8,6);

        case 'fixed16'
            T.b = fi([],true,16,15);
            T.x = fi([],true,16,15);
            T.y = fi([],true,16,14);
    end
end
```

Test File

```
function mytest
    % Test inputs
    b = fir1(11,0.25);
    t = linspace(0,10*pi,256)';
    x = sin((pi/16)*t.^2); % Linear chirp

    % Run
```

Test File

```

y0 = entrypoint('double',b,x);
y8 = entrypoint('fixed8',b,x);
y16 = entrypoint('fixed16',b,x);

% Plot
subplot(3,1,1)
plot(t,x,'c',t,y0,'k')
legend('Input','Baseline output')
title('Baseline')

subplot(3,2,3)
plot(t,y8,'k')
title('8-bit fixed-point output')
subplot(3,2,4)
plot(t,y0-double(y8),'r')
title('8-bit fixed-point error')

subplot(3,2,5)
plot(t,y16,'k')
title('16-bit fixed-point output')
xlabel('Time (s)')
subplot(3,2,6)
plot(t,y0-double(y16),'r')
title('16-bit fixed-point error')
xlabel('Time (s)')
end

function [y,z] = entrypoint(dt,b,x)
    T = mytypes(dt);
    b = cast(b,'like',T.b);
    x = cast(x,'like',T.x);
    z = zeros(size(b),'like',T.x);
    [y,z] = myfilter(b,x,z,T);
end

```

Optimize Your Algorithm

Use `fimath` to Get Natural Types for C or HDL

`fimath` properties define the rules for performing arithmetic operations on `fi` objects, including math, rounding, and overflow properties. You can use the `fimath`

ProductMode and SumMode properties to retain natural data types for C and HDL. The KeepLSB setting for ProductMode and SumMode models the behavior of integer operations in the C language, while KeepMSB models the behavior of many DSP devices. Different rounding methods require different amounts of overhead code. Setting the RoundingMethod property to Floor, which is equivalent to two's complement truncation, provides the most efficient rounding implementation. Similarly, the standard method for handling overflows is to wrap using modulo arithmetic. Other overflow handling methods create costly logic. Whenever possible, set the OverflowAction to Wrap.

MATLAB Code	Best Practice	Generated C Code
<pre>% Code being compiled function y = adder(a,b) y = a + b; end With types defined with default fimath settings: T.a = fi([],1,16,0); T.b = fi([],1,16,0); a = cast(0,'like',T.a); b = cast(0,'like',T.b);</pre>	<p>Issue</p> <p>Additional code is generated to implement saturation overflow, nearest rounding, and full-precision arithmetic.</p>	<pre>int adder(short a, short b) { int y; int i0; int i1; int i2; int i3; i0 = a; i1 = b; if ((i0 & 65536) != 0) { i2 = i0 -65536; } else { i2 = i0 & 65535; } if ((i1 & 65536) != 0) { i3 = i1 -65536; } else { i3 = i1 & 65535; } i0 = i2 + i3; if ((i0 & 65536) != 0) { y = i0 -65536; } else { y = i0 & 65535; } return y; }</pre>
Code being compiled	Fix	int adder(short a, short b)

MATLAB Code	Best Practice	Generated C Code
<pre>function y = adder(a,b) y = a + b; end</pre> <p>With types defined with <code>fimath</code> settings that match your processor types:</p> <pre>F = fimath(... 'RoundingMethod','Floor', ... 'OverflowAction','Wrap', ... 'ProductMode','KeepLSB', ... 'ProductWordLength',32, ... 'SumMode','KeepLSB', ... 'SumWordLength',32);</pre> <pre>T.a = fi([],1,16,0,F); T.b = fi([],1,16,0,F); a = cast(0,'like',T.a); b = cast(0,'like',T.b);</pre>	<p>To make the generated code more efficient, choose fixed-point math settings that match your processor types.</p>	<pre>{ return a + b; }</pre>

Replace Built-in Functions With More Efficient Fixed-Point Implementations

Some MATLAB built-in functions can be made more efficient for fixed-point implementation. For example, you can replace a built-in function with a Lookup table implementation, or a CORDIC implementation, which requires only iterative shift-add operations.

Re-implement Division Operations Where Possible

Often, division is not fully supported by hardware and can result in slow processing. When your algorithm requires a division, consider replacing it with one of the following options:

- Use bit shifting when the denominator is a power of two. For example, `bitsra(x,3)` instead of `x/8`.
- Multiply by the inverse when the denominator is constant. For example, `x*0.2` instead of `x/5`.

Eliminate Floating-Point Variables

For more efficient code, eliminate floating-point variables. The one exception to this is loop indices because they usually become integer types.

Implement FIR Filter Algorithm for Floating-Point and Fixed-Point Types using cast and zeros

This example shows you how to convert a finite impulse-response (FIR) filter to fixed point by separating the fixed-point type specification from the algorithm code.

Separating data type type specification from algorithm code allows you to:

- Re-use your algorithm code with different data types
- Keep your algorithm uncluttered with data type specification and switch statements for different data types
- Keep your algorithm code more readable
- Switch between fixed point and floating point to compare baselines
- Switch between variations of fixed point settings without changing the algorithm code

Original Algorithm

This example converts MATLAB® code for a finite impulse response (FIR) filter to fixed point.

The formula for the n'th output $y(n)$ of an (FIR) filter, given filter coefficients b , and input x is:

$$y(n) = b(1)*x(n) + b(2)*x(n-1) + \dots + b(\text{end})*x(n-\text{length}(b)+1)$$

Linear Buffer Implementation

There are several different ways to write an FIR filter. One way is with a linear buffer like in the following function, where b is a row vector and z is a column vector the same length as b .

```
function [y,z] = fir_filt_linear_buff(b,x,z)
    y = zeros(size(x));
    for n=1:length(x)
        z = [x(n); z(1:end-1)];
        y(n) = b * z;
    end
end
```

The linear buffer implementation takes advantage of MATLAB's convenient matrix syntax and is easy to read and understand. However, it introduces a full copy of the state buffer for every sample of the input.

Circular Buffer Implementation

To implement the FIR filter more efficiently, you can store the states in a circular buffer, z , whose elements are $z(p) = x(n)$, where $p = \text{mod}(n-1, \text{length}(b))+1$, for $n=1, 2, 3, \dots$

For example, let $\text{length}(b) = 3$, and initialize p and z to:

$$p = 0, z = [0 \quad 0 \quad 0]$$

Start with the first sample and fill the state buffer z in a circular manner.

$$n = 1, p = 1, z(1) = x(1), z = [x(1) \quad 0 \quad 0] \\ y(1) = b(1)*z(1) + b(2)*z(3) + b(3)*z(2)$$

$$n = 2, p = 2, z(2) = x(2), z = [x(1) \quad x(2) \quad 0] \\ y(2) = b(1)*z(2) + b(2)*z(1) + b(3)*z(3)$$

$$n = 3, p = 3, z(3) = x(3), z = [x(1) \quad x(2) \quad x(3)] \\ y(3) = b(1)*z(3) + b(2)*z(2) + b(3)*z(1)$$

$$n = 4, p = 1, z(1) = x(4), z = [x(4) \quad x(2) \quad x(3)] \\ y(4) = b(1)*z(1) + b(2)*z(3) + b(3)*z(2)$$

$$n = 5, p = 2, z(2) = x(5), z = [x(4) \quad x(5) \quad x(3)] \\ y(5) = b(1)*z(2) + b(2)*z(1) + b(3)*z(3)$$

$$n = 6, p = 3, z(3) = x(6), z = [x(4) \quad x(5) \quad x(6)] \\ y(6) = b(1)*z(3) + b(2)*z(2) + b(3)*z(1)$$

...

You can implement the FIR filter using a circular buffer like the following MATLAB function.

```
function [y,z,p] = fir_filt_circ_buff_original(b,x,z,p)
    y = zeros(size(x));
    nx = length(x);
    nb = length(b);
    for n=1:nx
        p=p+1; if p>nb, p=1; end
        z(p) = x(n);
        acc = 0;
        k = p;
        for j=1:nb
```

```
        acc = acc + b(j)*z(k);  
        k=k-1; if k<1, k=nb; end  
    end  
    y(n) = acc;  
end  
end
```

Test File

Create a test file to validate that the floating-point algorithm works as expected before converting it to fixed point. You can use the same test file to propose fixed-point data types, and to compare fixed-point results to the floating-point baseline after the conversion.

The test vectors should represent realistic inputs that exercise the full range of values expected by your system. Realistic inputs are impulses, sums of sinusoids, and chirp signals, for which you can verify that the outputs are correct using linear theory. Signals that produce maximum output are useful for verifying that your system does not overflow.

Set up

Run the following code to capture and reset the current state of global fixed-point math settings and fixed-point preferences.

```
resetglobalfimath;  
FIPREF_STATE = get(fipref);  
resetfipref;
```

Run the following code to copy the test functions into a temporary folder so this example doesn't interfere with your own work.

```
tempdirObj = fidemo.fiTempdir('fir_filt_circ_buff_fixed_point_conversion_example');  
copyfile(fullfile(matlabroot, 'toolbox', 'fixedpoint', 'fideos', '+fidemo', ...  
    'fir_filt_*.m'), '.', 'f');
```

Filter coefficients

Use the following low-pass filter coefficients that were computed using the `fir1` function from Signal Processing Toolbox.

```
b = fir1(11,0.25);
```

```
b = [-0.004465461051254  
     -0.004324228005260  
     +0.012676739550326  
     +0.074351188907780  
     +0.172173206073645  
     +0.249588554524763  
     +0.249588554524763  
     +0.172173206073645  
     +0.074351188907780  
     +0.012676739550326  
     -0.004324228005260  
     -0.004465461051254]';
```

Time vector

Use this time vector to create the test signals.

```
nx = 256;  
t = linspace(0,10*pi,nx)';
```

Impulse input

The response of an FIR filter to an impulse input is the filter coefficients themselves.

```
x_impulse = zeros(nx,1); x_impulse(1) = 1;
```

Signal that produces the maximum output

The maximum output of a filter occurs when the signs of the inputs line up with the signs of the filter's impulse response.

```
x_max_output = sign(fliplr(b))';  
x_max_output = repmat(x_max_output,ceil(nx/length(b)),1);  
x_max_output = x_max_output(1:nx);
```

The maximum magnitude of the output is the 1-norm of its impulse response, which is $\text{norm}(b,1) = \text{sum}(\text{abs}(b))$.

```
maximum_output_magnitude = norm(b,1) %#ok<*NOPTS>
```

```
maximum_output_magnitude =
```

```
1.0352
```

Sum of sines

A sum of sines is a typical input for a filter and you can easily see the high frequencies filtered out in the plot.

```
f0=0.1; f1=2;  
x_sines = sin(2*pi*t*f0) + 0.1*sin(2*pi*t*f1);
```

Chirp

A chirp gives a good visual of the low-pass filter action of passing the low frequencies and attenuating the high frequencies.

```
f_chirp = 1/16; % Target frequency  
x_chirp = sin(pi*f_chirp*t.^2); % Linear chirp  
  
titles = {'Impulse', 'Max output', 'Sum of sines', 'Chirp'};  
x = [x_impulse, x_max_output, x_sines, x_chirp];
```


Call the original function

Before starting the conversion to fixed point, call your original function with the test file inputs to establish a baseline to compare to subsequent outputs.

```
y0 = zeros(size(x));  
for i=1:size(x,2)  
    % Initialize the states for each column of input  
    p = 0;  
    z = zeros(size(b));  
    y0(:,i) = fir_filt_circ_buff_original(b,x(:,i),z,p);  
end
```

Baseline Output

```
fir_filt_circ_buff_plot(1,titles,t,x,y0)
```

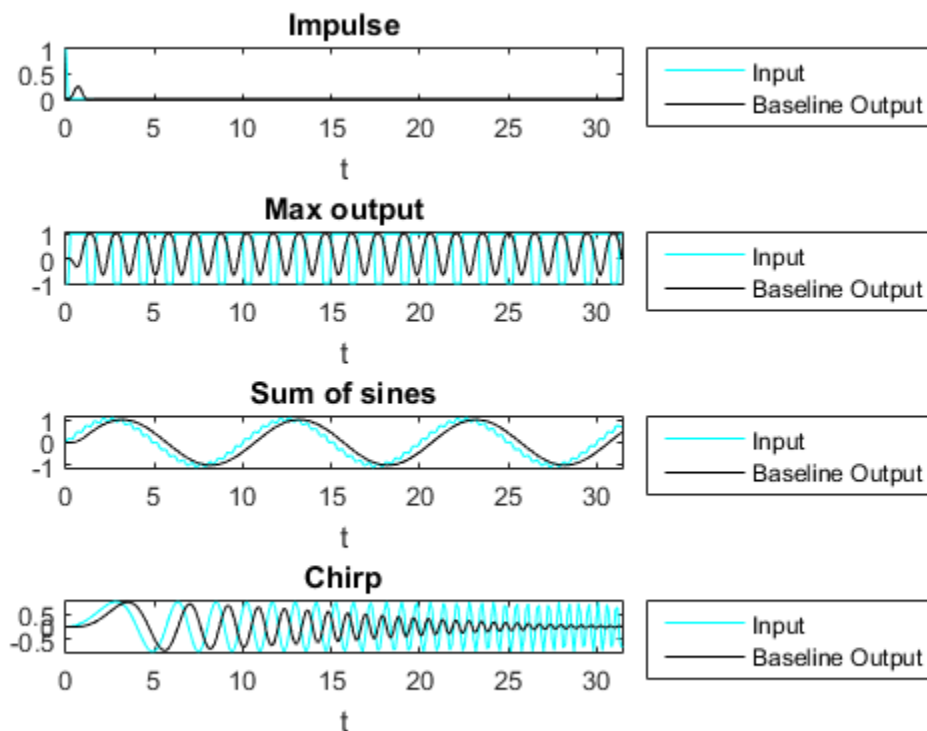

Prepare for Instrumentation and Code Generation

The first step after the algorithm works in MATLAB is to prepare it for instrumentation, which requires code generation. Before the conversion, you can use the `coder.screener` function to analyze your code and identify unsupported functions and language features.

Entry-point function

When doing instrumentation and code generation, it is convenient to have an entry-point function that calls the function to be converted to fixed point. You can cast the FIR filter's inputs to different data types, and add calls to different variations of the filter for comparison. By using an entry-point function you can run both fixed-point and floating-

point variants of your filter, and also different variants of fixed-point. This allows you to iterate on your code more quickly to arrive at the optimal fixed-point design.

```
function y = fir_filt_circ_buff_original_entry_point(b,x,reset)
    if nargin<3, reset = true; end
    % Define the circular buffer z and buffer position index p.
    % They are declared persistent so the filter can be called in a streaming
    % loop, each section picking up where the last section left off.
    persistent z p
    if isempty(z) || reset
        p = 0;
        z = zeros(size(b));
    end
    [y,z,p] = fir_filt_circ_buff_original(b,x,z,p);
end
```

Test file

Your test file calls the compiled entry-point function.

```
function y = fir_filt_circ_buff_test(b,x)

    y = zeros(size(x));

    for i=1:size(x,2)
        reset = true;
        y(:,i) = fir_filt_circ_buff_original_entry_point_mex(b,x(:,i),reset);
    end

end
```

Build original function

Compile the original entry-point function with buildInstrumentedMex. This instruments your code for logging so you can collect minimum and maximum values from the simulation and get proposed data types.

```
reset = true;
buildInstrumentedMex fir_filt_circ_buff_original_entry_point -args {b, x(:,1), reset}
```

Run original function

Run your test file inputs through the algorithm to log minimum and maximum values.

```
y1 = fir_filt_circ_buff_test(b,x);
```

Show types

Use `showInstrumentationResults` to view the data types of all your variables and the minimum and maximum values that were logged during the test file run. Look at the maximum value logged for the output variable `y` and accumulator variable `acc` and note that they attained the theoretical maximum output value that you calculated previously.

```
showInstrumentationResults fir_filt_circ_buff_original_entry_point_mex
```

To see these results in the instrumented Code Generation Report:


- Select function `fir_filt_circ_buff_original`
- Select the Variables tab

Variable	Type	Size	Class	Complex	Always Whole Number	SimMin	SimMax
acc	Local	1 x 1	double	No	No	-1.0045281391112986	1.035158756226056
b	Input	1 x 12	double	No	No	-0.004465461051254	0.249588554524763
j	Local	1 x 1	double	No	Yes	1	12
k	Local	1 x 1	double	No	Yes	0	12
n	Local	1 x 1	double	No	Yes	1	256
nb	Local	1 x 1	double	No	Yes	12	12
nx	Local	1 x 1	double	No	Yes	256	256
p	I/O	1 x 1	double	No	Yes	0	13
x	Input	256 x 1	double	No	No	-1.0966086573451541	1.0874250377226369
y	Output	256 x 1	double	No	No	-0.9959923266057762	1.035158756226056
z	I/O	1 x 12	double	No	No	-1.0966086573451541	1.0874250377226369

Validate original function

Every time you modify your function, validate that the results still match your baseline.

```
fir_filt_circ_buff_plot2(2,titles,t,x,y0,y1)
```

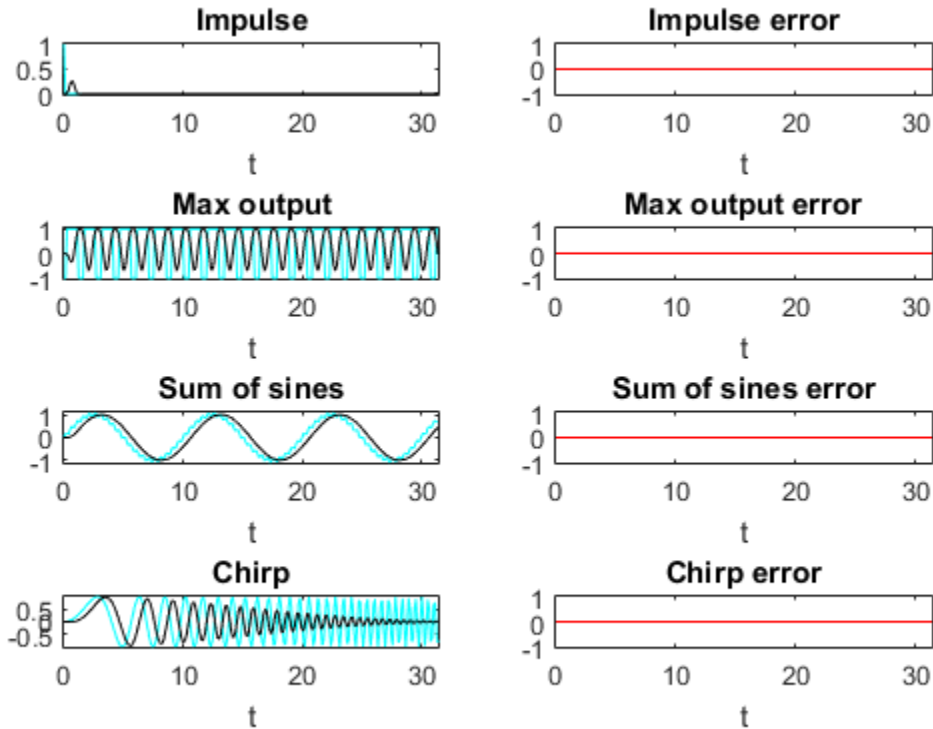

Convert Functions to use Types Tables

To separate data types from the algorithm, you:

- 1 Create a table of data type definitions.
- 2 Modify the algorithm code to use data types from that table.

This example shows the iterative steps by creating different files. In practice, you can make the iterative changes to the same file.

Original types table

Create a types table using a structure with prototypes for the variables set to their original types. Use the baseline types to validate that you made the initial conversion

correctly, and also use it to programatically toggle your function between floating point and fixed point types. The index variables j , k , n , nb , nx are automatically converted to integers by MATLAB Coder™, so you don't need to specify their types in the table.

Specify the prototype values as empty (`[]`) since the data types are used, but not the values.

```
function T = fir_filt_circ_buff_original_types()
    T.acc=double([]);
    T.b=double([]);
    T.p=double([]);
    T.x=double([]);
    T.y=double([]);
    T.z=double([]);
end
```

Type-aware filter function

Prepare the filter function and entry-point function to be type-aware by using the `cast` and `zeros` functions and the types table.

Use subscripted assignment `acc(:)=...`, `p(:)=1`, and `k(:)=nb` to preserve data types during assignment. See the "Cast fi Objects" section in the Fixed-Point Designer documentation for more details about subscripted assignment and preserving data types.

The function call `y = zeros(size(x),'like',T.y)` creates an array of zeros the same size as `x` with the properties of variable `T.y`. Initially, `T.y` is a double defined in function `fir_filt_circ_buff_original_types`, but it is re-defined as a fixed-point type later in this example.

The function call `acc = cast(0,'like',T.acc)` casts the value 0 with the same properties as variable `T.acc`. Initially, `T.acc` is a double defined in function `fir_filt_circ_buff_original_types`, but it is re-defined as a fixed-point type later in this example.

```
function [y,z,p] = fir_filt_circ_buff_typed(b,x,z,p,T)
    y = zeros(size(x),'like',T.y);
    nx = length(x);
    nb = length(b);
    for n=1:nx
        p(:)=p+1; if p>nb, p(:)=1; end
        z(p) = x(n);
        acc = cast(0,'like',T.acc);
    end
end
```

```

        k = p;
        for j=1:nb
            acc(:) = acc + b(j)*z(k);
            k(:)=k-1; if k<1, k(:)=nb; end
        end
        y(n) = acc;
    end
end

```

Type-aware entry-point function

The function call `p1 = cast(0,'like',T1.p)` casts the value 0 with the same properties as variable `T1.p`. Initially, `T1.p` is a double defined in function `fir_filt_circ_buff_original_types`, but it is re-defined as an integer type later in this example.

The function call `z1 = zeros(size(b),'like',T1.z)` creates an array of zeros the same size as `b` with the properties of variable `T1.z`. Initially, `T1.z` is a double defined in function `fir_filt_circ_buff_original_types`, but it is re-defined as a fixed-point type later in this example.

```

function y1 = fir_filt_circ_buff_typed_entry_point(b,x,reset)
    if nargin<3, reset = true; end
    %
    % Baseline types
    %
    T1 = fir_filt_circ_buff_original_types();
    % Each call to the filter needs to maintain its own states.
    persistent z1 p1
    if isempty(z1) || reset
        p1 = cast(0,'like',T1.p);
        z1 = zeros(size(b),'like',T1.z);
    end
    b1 = cast(b,'like',T1.b);
    x1 = cast(x,'like',T1.x);
    [y1,z1,p1] = fir_filt_circ_buff_typed(b1,x1,z1,p1,T1);
end

```

Validate modified function


Every time you modify your function, validate that the results still match your baseline. Since you used the original types in the types table, the outputs should be identical. This validates that you made the conversion to separate the types from the algorithm correctly.

```

buildInstrumentedMex fir_filt_circ_buff_typed_entry_point -args {b, x(:,1), reset}

y1 = fir_filt_circ_buff_typed_test(b,x);
fir_filt_circ_buff_plot2(3,titles,t,x,y0,y1)

```

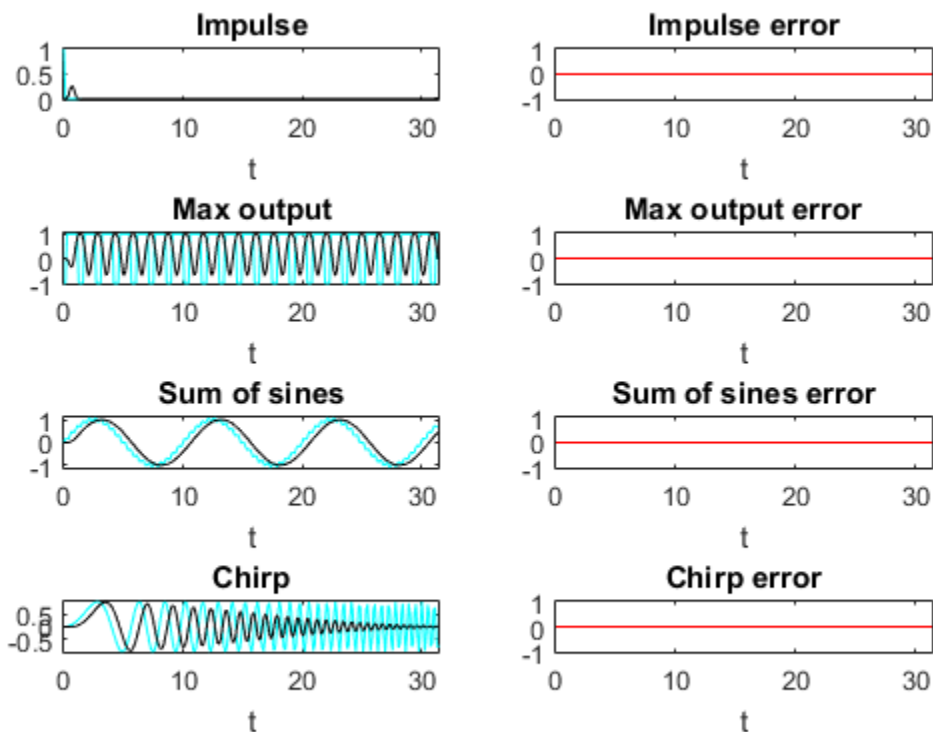

Propose data types from simulation min/max logs

Use the `showInstrumentationResults` function to propose fixed-point fraction lengths, given a default signed fixed-point type and 16-bit word length.

```

showInstrumentationResults fir_filt_circ_buff_original_entry_point_mex ...
    -defaultDT numerictype(1,16) -proposeFL

```

In the instrumented Code Generation Report, select function `fir_filt_circ_buff_original` and the Variables tab to see these results.

Variable	Type	Size	Class	Complex	Proposed Signedness	Proposed WL	Proposed FL	Always Whole Number	SimMin	SimMax
acc	Local	1 x 1	double	No	Signed	16	14	No	-1.0045281391112986	1.035158756226056
b	Input	1 x 12	double	No	Signed	16	17	No	-0.004465461051254	0.249588554524763
j	Local	1 x 1	double	No	Signed	16	0	Yes	1	12
k	Local	1 x 1	double	No	Signed	16	0	Yes	0	12
n	Local	1 x 1	double	No	Signed	16	0	Yes	1	256
nb	Local	1 x 1	double	No	Signed	16	0	Yes	12	12
nx	Local	1 x 1	double	No	Signed	16	0	Yes	256	256
p	I/O	1 x 1	double	No	Signed	16	0	Yes	0	13
x	Input	256 x 1	double	No	Signed	16	14	No	-1.0966086573451541	1.0874250377226369
y	Output	256 x 1	double	No	Signed	16	14	No	-0.9959923266057762	1.035158756226056
z	I/O	1 x 12	double	No	Signed	16	14	No	-1.0966086573451541	1.0874250377226369

Create a fixed-point types table

Use the proposed types from the Code Generation Report to guide you in choosing fixed-point types and create a fixed-point types table using a structure with prototypes for the variables.

Use your knowledge of the algorithm to improve on the proposals. For example, you are using the acc variable as an accumulator, so make it 32-bits. From the Code Generation Report, you can see that acc needs at least 2 integer bits to prevent overflow, so set the fraction length to 30.

Variable p is used as an index, so you can make it a builtin 16-bit integer.

Specify the prototype values as empty ([]) since the data types are used, but not the values.

```
function T = fir_filt_circ_buff_fixed_point_types()
    T.acc=fi([],true,32,30);
    T.b=fi([],true,16,17);
    T.p=int16([]);
    T.x=fi([],true,16,14);
    T.y=fi([],true,16,14);
    T.z=fi([],true,16,14);
end
```

Add fixed point to entry-point function

Add a call to the fixed-point types table in the entry-point function:

```
T2 = fir_filt_circ_buff_fixed_point_types();
```

```

persistent z2 p2
if isempty(z2) || reset
    p2 = cast(0, 'like', T2.p);
    z2 = zeros(size(b), 'like', T2.z);
end
b2 = cast(b, 'like', T2.b);
x2 = cast(x, 'like', T2.x);
[y2,z2,p2] = fir_filt_circ_buff_typed(b2,x2,z2,p2,T2);

```

Build and run algorithm with fixed-point data types

```
buildInstrumentedMex fir_filt_circ_buff_typed_entry_point -args {b, x(:,1), reset}
```

```
[y1,y2] = fir_filt_circ_buff_typed_test(b,x);
```

```
showInstrumentationResults fir_filt_circ_buff_typed_entry_point_mex
```

To see these results in the instrumented Code Generation Report:

- Select the entry-point function, `fir_filt_circ_buff_typed_entry_point`
- Select `fir_filt_circ_buff_typed` in the following line of code:

```
[y2,z2,p2] = fir_filt_circ_buff_typed(b2,x2,z2,p2,T2);
```


- Select the Variables tab

Variable	Type	Size	Class	Complex	Signedness	WL	FL	Percent of Current Range	Always Whole Number	SimMin	SimMax
acc	Local	1 x 1	embedded.fi	No	Signed	32	30	52	No	-1.004551738500595	1.03515625
b	Input	1 x 12	embedded.fi	No	Signed	16	17	100	No	-0.00446319580078125	0.2495880126953125
j	Local	1 x 1	double	No	-	-	-	-	Yes	1	12
k	Local	1 x 1	int16	No	-	-	-	-	Yes	0	12
n	Local	1 x 1	double	No	-	-	-	-	Yes	1	256
nb	Local	1 x 1	double	No	-	-	-	-	Yes	12	12
nx	Local	1 x 1	double	No	-	-	-	-	Yes	256	256
p	I/O	1 x 1	int16	No	-	-	-	-	Yes	0	13
T	Input	1 x 1	struct	-	-	-	-	-	-	-	-
x	Input	256 x 1	embedded.fi	No	Signed	16	14	55	No	-1.09661865234375	1.08740234375
y	Output	256 x 1	embedded.fi	No	Signed	16	14	52	No	-0.9959716796875	1.03515625
z	I/O	1 x 12	embedded.fi	No	Signed	16	14	55	No	-1.09661865234375	1.08740234375

16-bit word length, full precision math

Validate that the results are within an acceptable tolerance of your baseline.

```
fir_filt_circ_buff_plot2(4,titles,t,x,y1,y2);
```

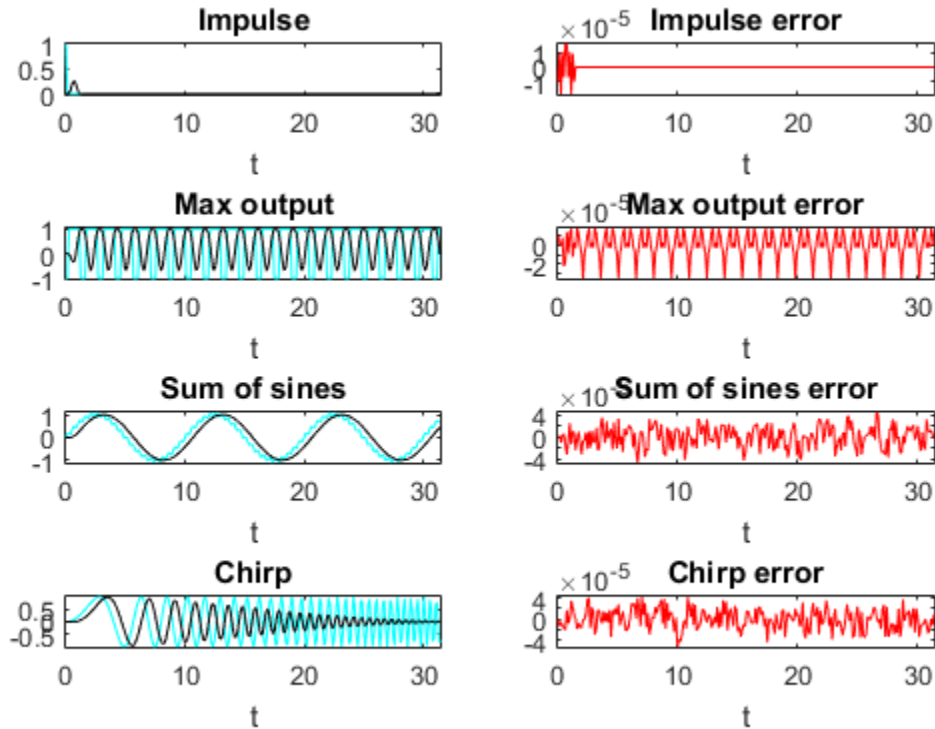Your algorithm has now been converted to fixed-point MATLAB code. If you also want to convert to C-code, then proceed to the next section.

Generate C-Code

This section describes how to generate efficient C-code from the fixed-point MATLAB code from the previous section.

Required products

You need MATLAB Coder™ to generate C-code, and you need Embedded Coder® for the hardware implementation settings used in this example.

Algorithm tuned for most efficient C-code

The output variable `y` is initialized to zeros, and then completely overwritten before it is used. Therefore, filling `y` with all zeros is unnecessary. You can use the `coder.nullcopy` function to declare a variable without actually filling it with values, which makes the code in this case more efficient. However, you have to be very careful when using `coder.nullcopy` because if you access an element of a variable before it is assigned, then you are accessing uninitialized memory and its contents are unpredictable.

A rule of thumb for when to use `coder.nullcopy` is when the initialization takes significant time compared to the rest of the algorithm. If you are not sure, then the safest thing to do is to not use it.

```
function [y,z,p] = fir_filt_circ_buff_typed_codegen(b,x,z,p,T)
    % Use coder.nullcopy only when you are certain that every value of
    % the variable is overwritten before it is used.
    y = coder.nullcopy(zeros(size(x), 'like', T.y));
    nx = length(x);
    nb = length(b);
    for n=1:nx
        p(:)=p+1; if p>nb, p(:)=1; end
        z(p) = x(n);
        acc = cast(0, 'like', T.acc);
        k = p;
        for j=1:nb
            acc(:) = acc + b(j)*z(k);
            k(:)=k-1; if k<1, k(:)=nb; end
        end
        y(n) = acc;
    end
end
```

Native C-code types

You can set the fixed-point math properties to match the native actions of C. This generates the most efficient C-code, but this example shows that it can create problems with overflow and produce less accurate results which are corrected in the next section. It doesn't always create problems, though, so it is worth trying first to see if you can get the cleanest possible C-code.

Set the fixed-point math properties to use floor rounding and wrap overflow because those are the default actions in C.

Set the fixed-point math properties of products and sums to match native C 32-bit integer types, and to keep the least significant bits (LSBs) of math operations.

Add these settings to a fixed-point types table.

```
function T = fir_filt_circ_buff_dsp_types()
    F = fimath('RoundingMethod','Floor',...
             'OverflowAction','Wrap',...
             'ProductMode','KeepLSB',...
             'ProductWordLength',32,...
             'SumMode','KeepLSB',...
             'SumWordLength',32);
    T.acc=fi([],true,32,30,F);
    T.p=int16([]);
    T.b=fi([],true,16,17,F);
    T.x=fi([],true,16,14,F);
    T.y=fi([],true,16,14,F);
    T.z=fi([],true,16,14,F);
end
```


Test the native C-code types

Add a call to the types table in the entry-point function and run the test file.

```
[y1,y2,y3] = fir_filt_circ_buff_typed_test(b,x); %#ok<*ASGLU>
```

In the second row of plots, you can see that the maximum output error is twice the size of the input, indicating that a value that should have been positive overflowed to negative. You can also see that the other outputs did not overflow. This is why it is important to have your test file exercise the full range of values in addition to other typical inputs.

```
fir_filt_circ_buff_plot2(5,titles,t,x,y1,y3);
```

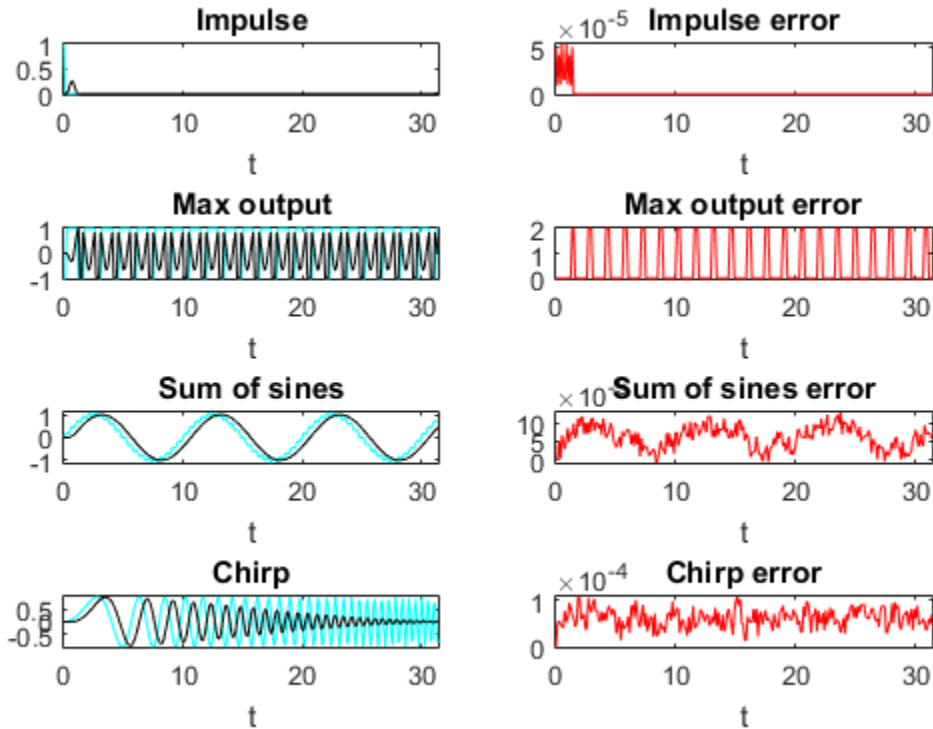

Scaled Double types to find overflows

Scaled double variables store their data in double-precision floating-point, so they carry out arithmetic in full range. They also retain their fixed-point settings, so they are able to report when a computation goes out of the range of the fixed-point type.

Change the data types to scaled double, and add these settings to a scaled-double types table.

```
function T = fir_filt_circ_buff_scaled_double_types()
    F = fimath('RoundingMethod','Floor',...
              'OverflowAction','Wrap',...
              'ProductMode','KeepLSB',...
              'ProductWordLength',32,...
```

```

        'SumMode', 'KeepLSB', ...
        'SumWordLength', 32);
DT = 'ScaledDouble';
T.acc=fi([],true,32,30,F,'DataType',DT);
T.p=int16([]);
T.b=fi([],true,16,17,F,'DataType',DT);
T.x=fi([],true,16,14,F,'DataType',DT);
T.y=fi([],true,16,14,F,'DataType',DT);
T.z=fi([],true,16,14,F,'DataType',DT);
end

```

Add a call to the the scaled-double types table to the entry-point function and run the test file.

```
[y1,y2,y3,y4] = fir_filt_circ_buff_typed_test(b,x); %#ok<*NASGU>
```

Show the instrumentation results with the scaled-double types.

```
showInstrumentationResults fir_filt_circ_buff_typed_entry_point_mex
```

To see these results in the instrumented Code Generation Report:

- Select the entry-point function, `fir_filt_circ_buff_typed_entry_point`
- Select `fir_filt_circ_buff_typed_codegen` in the following line of code:

```
[y4,z4,p4] = fir_filt_circ_buff_typed_codegen(b4,x4,z4,p4,T4);
```

- Select the Variables tab.
- Look at the variables in the table. None of the variables overflowed, which indicates that the overflow occurred as the result of an operation.
- Hover over the operators in the report (+, -, *, =).
- Hover over the "+" in this line of MATLAB code in the instrumented Code Generation Report:

```
acc(:) = acc + b(j)*z(k);
```

The report shows that the sum overflowed:

```

% Use coder.nullcopy only when you are certain that even
% the variable will be overwritten before it is used.
y = coder.nullcopy(zeros(size(x), 'like', T.y));
nx = length(x);
nb = length(b);
for n=1:nx
    p(:)=p+1; if p>nb, p(:)=1; end
    z(p) = x(n);
    acc = cast(0, 'like', T.acc);
    k = p;
    for j=1:nb
        acc(:) = acc + b(j)*z(k);
        k(:)=k-1; if k
    end
    y(n) = acc;
end

```

Primary	All Messages (0)	Variable	Type
		y	Output
		z	I/O
		p	I/O

Information for the selected expression:

Size	1 x 1
Class	embedded.fi
Complex	No
DT Mode	ScaledDouble
Signedness	Signed
WL	32
FL	31
Percent of Current Range	104
Always Whole Number	No
SimMin	-1.0045281391112986
SimMax	1.035158756226056

The reason the sum overflowed is that a full-precision product for $b(j)*z(k)$ produces a `numerictype(true,32,31)` because b has `numerictype(true,16,17)` and z has

numerictype(true,16,14). The sum type is set to "keep least significant bits" (KeepLSB), so the sum has numerictype(true,32,31). However, 2 integer bits are necessary to store the minimum and maximum simulated values of -1.0045 and +1.035, respectively.

Adjust to avoid the overflow

Set the fraction length of b to 16 instead of 17 so that $b(j)*z(k)$ is numerictype(true,32,30), and so the sum is also numerictype(true,32,30) following the KeepLSB rule for sums.

Leave all other settings the same, and set

```
T.b=fir([],true,16,16,F);
```

Then the sum in this line of MATLAB code no longer overflows:


```
acc(:) = acc + b(j)*z(k);
```

Run the test file with the new settings and plot the results.

```
[y1,y2,y3,y4,y5] = fir_filt_circ_buff_typed_test(b,x);
```

You can see that the overflow has been avoided. However, the plots show a bias and a larger error due to using C's natural floor rounding. If this bias is acceptable to you, then you can stop here and the generated C-code is very clean.

```
fir_filt_circ_buff_plot2(6,titles,t,x,y1,y5);
```

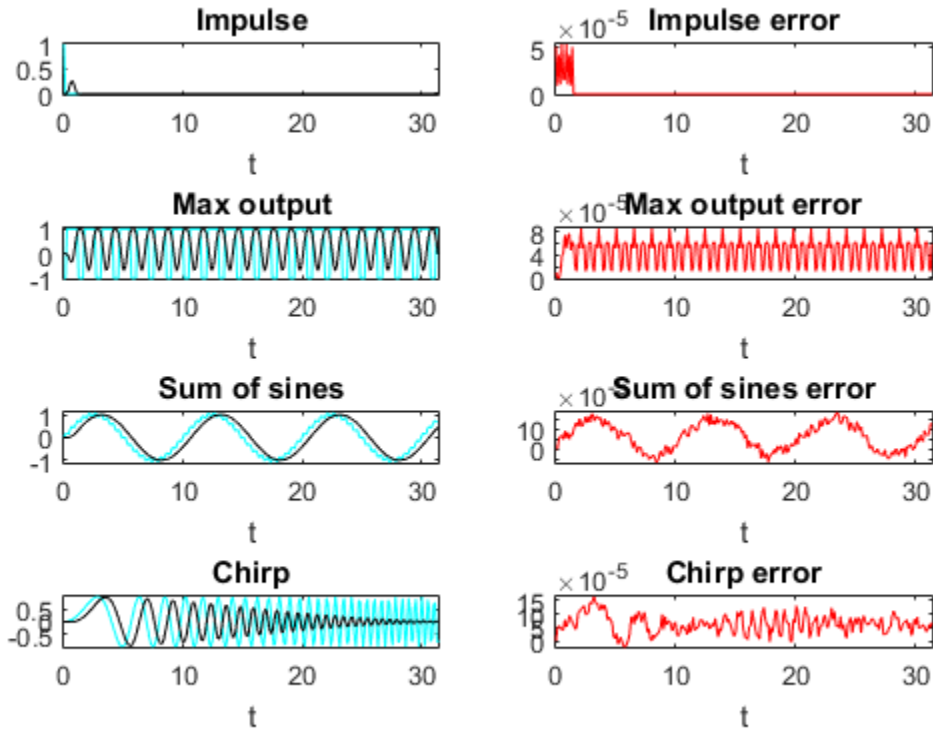

Eliminate the bias

If the bias is not acceptable in your application, then change the rounding method to 'Nearest' to eliminate the bias. Rounding to nearest generates slightly more complicated C-code, but it may be necessary for you if you want to eliminate the bias and have a smaller error.

The final fixed-point types table with nearest rounding and adjusted coefficient fraction length is:

```
function T = fir_filt_circ_buff_dsp_nearest_types()
    F = fimath('RoundingMethod','Nearest',...
              'OverflowAction','Wrap',...
              'ProductMode','KeepLSB',...
              ...)
```



```

        'ProductWordLength',32,...
        'SumMode','KeepLSB',...
        'SumWordLength',32);
T.acc=fi([],true,32,30,F);
T.p=int16([]);
T.b=fi([],true,16,16,F);
T.x=fi([],true,16,14,F);
T.y=fi([],true,16,14,F);
T.z=fi([],true,16,14,F);
end


```

Call this types table from the entry-point function and run and plot the output.

```

[y1,y2,y3,y4,y5,y6] = fir_filt_circ_buff_typed_test(b,x);
fir_filt_circ_buff_plot2(7,titles,t,x,y1,y6);

```

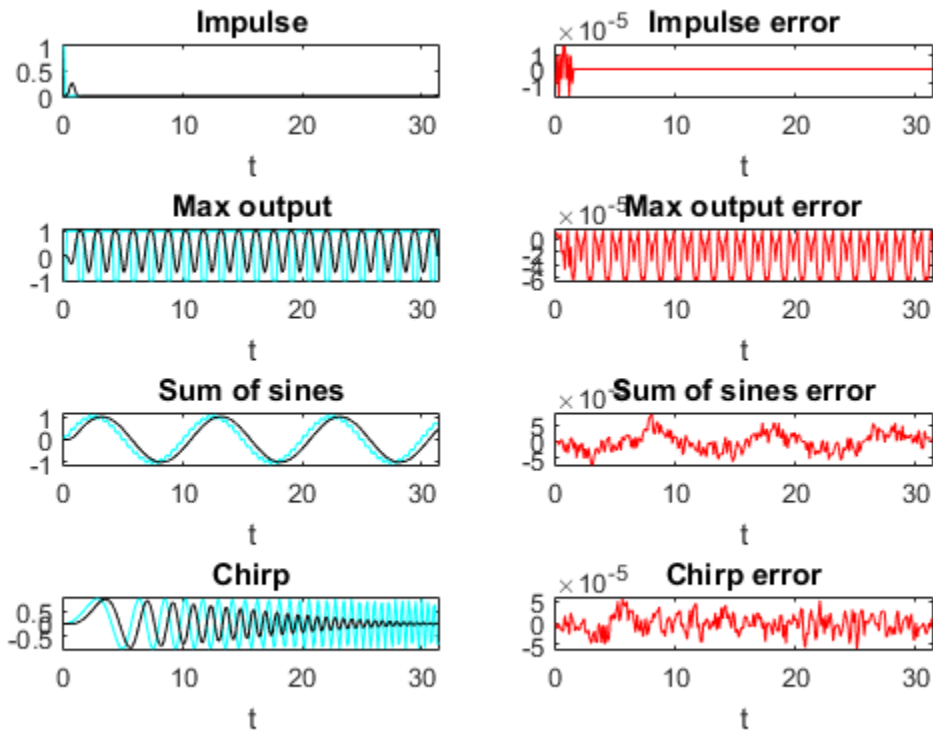

Code generation command

Run this build function to generate C-code. It is a best practice to create a build function so you can generate C-code for your core algorithm without the entry-point function or test file so the C-code for the core algorithm can be included in a larger project.

```
function fir_filt_circ_buff_build_function()
%
% Declare input arguments
%
T = fir_filt_circ_buff_dsp_nearest_types();
b = zeros(1,12,'like',T.b);
x = zeros(256,1,'like',T.x);
z = zeros(size(b),'like',T.z);
p = cast(0,'like',T.p);
%
% Code generation configuration
%
h = coder.config('lib');
h.PurelyIntegerCode = true;
h.SaturateOnIntegerOverflow = false;
h.SupportNonFinite = false;
h.HardwareImplementation.ProdBitPerShort = 8;
h.HardwareImplementation.ProdBitPerInt = 16;
h.HardwareImplementation.ProdBitPerLong = 32;
%
% Generate C-code
%
codegen fir_filt_circ_buff_typed_codegen -args {b,x,z,p,T} -config h -launchreport
end
```

Generated C-Code

Using these settings, MATLAB Coder generates the following C-code:

```
void fir_filt_circ_buff_typed_codegen(const int16_T b[12], const int16_T x[256],
int16_T z[12], int16_T *p, int16_T y[256])
{
    int16_T n;
    int32_T acc;
    int16_T k;
    int16_T j;
    for (n = 0; n < 256; n++) {
        (*p)++;
        if (*p > 12) {
```

```
    *p = 1;
}
z[*p - 1] = x[n];
acc = 0L;
k = *p;
for (j = 0; j < 12; j++) {
    acc += (int32_T)b[j] * z[k - 1];
    k--;
    if (k < 1) {
        k = 12;
    }
}
y[n] = (int16_T)((acc >> 16) + ((acc & 32768L) != 0L));
}
}
```

Run the following code to restore the global states.

```
fipref(FIPREF_STATE);
clearInstrumentationResults fir_filt_circ_buff_original_entry_point_mex
clearInstrumentationResults fir_filt_circ_buff_typed_entry_point_mex
clear fir_filt_circ_buff_original_entry_point_mex
clear fir_filt_circ_buff_typed_entry_point_mex
```

Run the following code to delete the temporary folder.

```
tempdirObj.cleanup;
```


Viewing Test Results With Simulation Data Inspector

Inspecting Data Using the Simulation Data Inspector

In this section...

“What Is the Simulation Data Inspector?” on page 12-2

“Import Logged Data” on page 12-2

“Export Logged Data” on page 12-2

“Group Signals” on page 12-3

“Run Options” on page 12-3

“Create Report” on page 12-3

“Comparison Options” on page 12-3

“Enabling Plotting Using the Simulation Data Inspector” on page 12-3

“Save and Load Simulation Data Inspector Sessions” on page 12-4

What Is the Simulation Data Inspector?

The Simulation Data Inspector allows you to view data logged during the fixed-point conversion process. You can use it to inspect and compare the inputs and outputs to the floating-point and fixed-point versions of your algorithm.

For fixed-point conversion, there is no programmatic interface for the Simulation Data Inspector.

Import Logged Data

Before importing data into the Simulation Data Inspector, you must have previously logged data to the base workspace or to a MAT-file.

Export Logged Data

The Simulation Data Inspector provides the capability to save data collected by the fixed-point conversion process to a MAT-file that you can later reload. The format of the MAT-file is different from the format of a MAT-file created from the base workspace.

Group Signals

You can customize the organization of your logged data in the Simulation Data Inspector **Runs** pane. By default, data is first organized by run. You can then organize your data by logged variable or no hierarchy.

Run Options

You can configure the Simulation Data Inspector to:

- Append New Runs

In the Run Options dialog box, the default is set to add new runs to the bottom of the run list. To append new runs to the top of the list, select **Add new runs to top**.

- Specify a Run Naming Rule

To specify run naming rules, in the Simulation Data Inspector toolbar, click **Run Configuration**.

Create Report

You can create a report of the runs or comparison plots. Specify the name and location of the report file. By default, the Simulation Data Inspector overwrites existing files. To preserve existing reports, select **If report exists, increment file name to prevent overwriting**.

Comparison Options

To change how signals are matched when runs are compared, specify the **Align by** and **Then by** parameters and then click **OK**.

Enabling Plotting Using the Simulation Data Inspector

To enable the Simulation Data Inspector in the Fixed-Point Converter app, see “Enable Plotting Using the Simulation Data Inspector”.

To enable the Simulation Data Inspector in the programmatic workflow, see “Enable Plotting Using the Simulation Data Inspector”.

Save and Load Simulation Data Inspector Sessions

If you have data in the Simulation Data Inspector and you want to archive or share the data to view in the Simulation Data Inspector later, save the Simulation Data Inspector session. When you save a Simulation Data Inspector session, the MAT-file contains:

- All runs, data, and properties from the **Runs** and **Comparisons** panes.
- Check box selection state for data in the **Runs** pane.

Save a Session to a MAT-File

- 1 On the **Visualize** tab, click **Save**.
- 2 Browse to where you want to save the MAT-file to, name the file, and click **Save**.

Load a Saved Simulation Data Inspector Simulation

- 1 On the **Visualize** tab, click **Open**.
- 2 Browse, select the MAT-file saved from the Simulation Data Inspector, and click **Open**.
- 3 If data in the session is plotted on multiple subplots, on the **Format** tab, click **Subplots** and select the subplot layout.

Code Acceleration and Code Generation from MATLAB for Fixed-Point Algorithms

- “Code Acceleration and Code Generation from MATLAB” on page 13-3
- “Requirements for Generating Compiled C Code Files” on page 13-4
- “Functions Supported for Code Acceleration or C Code Generation” on page 13-5
- “Workflow for Fixed-Point Code Acceleration and Generation” on page 13-16
- “Set Up C Compiler” on page 13-17
- “Accelerate Code Using `fiaccel`” on page 13-18
- “File Infrastructure and Paths Setup” on page 13-24
- “Detect and Debug Code Generation Errors” on page 13-27
- “Set Up C Code Compilation Options” on page 13-29
- “MEX Configuration Dialog Box Options” on page 13-31
- “Best Practices for Accelerating Fixed-Point Code” on page 13-36
- “Use Fixed-Point Code Generation Reports” on page 13-40
- “Generate C Code from Code Containing Global Data” on page 13-45
- “Define Input Properties Programmatically in MATLAB File” on page 13-50
- “Control Run-Time Checks” on page 13-57
- “Fix Run-Time Stack Overflows” on page 13-59
- “Code Generation with MATLAB Coder” on page 13-60
- “Code Generation with MATLAB Function Block” on page 13-61
- “Generate Fixed-Point FIR Code Using MATLAB Function Block” on page 13-70
- “Fixed-Point FIR Code Example Parameter Values” on page 13-74
- “Accelerate Code for Variable-Size Data” on page 13-76

- “Accelerate Fixed-Point Simulation” on page 13-86
- “Code Generation Readiness Tool” on page 13-89
- “Check Code Using the Code Generation Readiness Tool” on page 13-96
- “Check Code Using the MATLAB Code Analyzer” on page 13-97
- “Fix Errors Detected at Code Generation Time” on page 13-98
- “Avoid Multiword Operations in Generated Code” on page 13-99
- “Find Potential Data Type Issues in Generated Code” on page 13-102

Code Acceleration and Code Generation from MATLAB

In many cases, you may want your code to run faster and more efficiently. *Code acceleration* provides optimizations for accelerating fixed-point algorithms through MEX file building. In Fixed-Point Designer the `fiaccel` function converts your MATLAB code to a MEX function and can greatly accelerate the execution speed of your fixed-point algorithms.

Code generation creates efficient, production-quality C/C++ code for desktop and embedded applications. There are several ways to use Fixed-Point Designer software to generate C/C++ code.

Use...	To...	Requires...	See...
MATLAB Coder (codegen) function	Automatically convert MATLAB code to C/C++ code	MATLAB Coder code generation software license	“C Code Generation at the Command Line” in the MATLAB Coder documentation
MATLAB Function	Use MATLAB code in your Simulink models that generate embeddable C/C++ code	Simulink license	“What Is a MATLAB Function Block?” in the Simulink documentation

MATLAB code generation supports variable-size arrays and matrices with known upper bounds. To learn more about using variable-size signals, see “What Is Variable-Size Data?”.

Requirements for Generating Compiled C Code Files

You use the `fiaccel` function to generate MEX code from a MATLAB algorithm. The algorithm must meet these requirements:

- Must be a MATLAB function, not a script
- Must meet the requirements listed on the `fiaccel` reference page
- Does not call custom C code using any of the following MATLAB Coder constructs:
 - `coder.ceval`
 - `coder.ref`
 - `coder.rref`
 - `coder.wref`

Functions Supported for Code Acceleration or C Code Generation

In addition to function-specific limitations listed in the table, the following general limitations apply to the use of Fixed-Point Designer functions in generated code, with `fiaccel`:

- `fipref` and `quantizer` objects are not supported.
- Word lengths greater than 128 bits are not supported.
- You cannot change the `fimath` or `numericType` of a given `fi` variable after that variable has been created.
- The `boolean` value of the `DataTypeMode` and `DataType` properties are not supported.
- For all `SumMode` property settings other than `FullPrecision`, the `CastBeforeSum` property must be set to `true`.
- You can use parallel for (`parfor`) loops in code compiled with `fiaccel`, but those loops are treated like regular `for` loops.
- When you compile code containing `fi` objects with nontrivial slope and bias scaling, you may see different results in generated code than you achieve by running the same code in MATLAB.

Function	Remarks/Limitations
<code>abs</code>	N/A
<code>accumneg</code>	N/A
<code>accumpos</code>	N/A
<code>add</code>	• Code generation in MATLAB does not support the syntax <code>F.add(a,b)</code> . You must use the syntax <code>add(F,a,b)</code> .
<code>all</code>	N/A
<code>any</code>	N/A
<code>atan2</code>	N/A
<code>bitand</code>	Not supported for slope-bias scaled <code>fi</code> objects.
<code>bitandreduce</code>	N/A
<code>bitcmp</code>	N/A
<code>bitconcat</code>	N/A

Function	Remarks/Limitations
bitget	N/A
bitor	Not supported for slope-bias scaled <code>fi</code> objects.
bitorreduce	N/A
bitreplicate	N/A
bitrol	N/A
bitror	N/A
bitset	N/A
bitshift	N/A
bitsliceget	N/A
bitsll	Generated code may not handle out of range shifting.
bitsra	Generated code may not handle out of range shifting.
bitsrl	Generated code may not handle out of range shifting.
bitxor	Not supported for slope-bias scaled <code>fi</code> objects.
bitxorreduce	N/A
ceil	N/A
complex	N/A
conj	N/A
conv	<ul style="list-style-type: none"> • Variable-sized inputs are only supported when the <code>SumMode</code> property of the governing <code>fimath</code> is set to <code>Specify precision</code> or <code>Keep LSB</code>. • For variable-sized signals, you may see different results between generated code and MATLAB. <ul style="list-style-type: none"> • In the generated code, the output for variable-sized signals is computed using the <code>SumMode</code> property of the governing <code>fimath</code>. • In MATLAB, the output for variable-sized signals is computed using the <code>SumMode</code> property of the governing <code>fimath</code> when both inputs are nonscalar. However, if either input is a scalar, MATLAB computes the output using the <code>ProductMode</code> of the governing <code>fimath</code>.

Function	Remarks/Limitations
convergent	N/A
cordicabs	Variable-size signals are not supported.
cordicangle	Variable-size signals are not supported.
cordicatan2	Variable-size signals are not supported.
cordiccart2pol	Variable-size signals are not supported.
cordicccexp	Variable-size signals are not supported.
cordicccos	Variable-size signals are not supported.
cordicpol2cart	Variable-size signals are not supported.
cordicrotate	Variable-size signals are not supported.
cordicsin	Variable-size signals are not supported.
cordicsincos	Variable-size signals are not supported.
cos	N/A
ctranspose	N/A
diag	If supplied, the index, k , must be a real and scalar integer value that is not a <code>fi</code> object.
divide	<ul style="list-style-type: none"> Any non-<code>fi</code> input must be constant; that is, its value must be known at compile time so that it can be cast to a <code>fi</code> object. Complex and imaginary divisors are not supported. Code generation in MATLAB does not support the syntax <code>T.divide(a,b)</code>.
double	For the automated workflow, do not use explicit double or single casts in your MATLAB algorithm to insulate functions that do not support fixed-point data types. The automated conversion tool does not support these casts. Instead of using casts, supply a replacement function. For more information, see “Function Replacements”.
end	N/A
eps	<ul style="list-style-type: none"> Supported for scalar fixed-point signals only. Supported for scalar, vector, and matrix, <code>fi</code> single and <code>fi</code> double signals.
eq	Not supported for fixed-point signals with different biases.

Function	Remarks/Limitations
fi	<ul style="list-style-type: none"> • The default constructor syntax without any input arguments is not supported. • If the <code>numericType</code> is not fully specified, the input to <code>fi</code> must be a constant, a <code>fi</code>, a single, or a built-in integer value. If the input is a built-in double value, it must be a constant. This limitation allows <code>fi</code> to autoscale its fraction length based on the known data type of the input. • All properties related to data type must be constant for code generation. • <code>numericType</code> object information must be available for nonfixed-point Simulink inputs.
filter	<ul style="list-style-type: none"> • Variable-sized inputs are only supported when the <code>SumMode</code> property of the governing <code>fimath</code> is set to <code>Specify precision</code> or <code>Keep LSB</code>.
fimath	<ul style="list-style-type: none"> • Fixed-point signals coming in to a MATLAB Function block from Simulink are assigned a <code>fimath</code> object. You define this object in the MATLAB Function block dialog in the Model Explorer. • Use to create <code>fimath</code> objects in the generated code. • If the <code>ProductMode</code> property of the <code>fimath</code> object is set to anything other than <code>FullPrecision</code>, the <code>ProductWordLength</code> and <code>ProductFractionLength</code> properties must be constant. • If the <code>SumMode</code> property of the <code>fimath</code> object is set to anything other than <code>FullPrecision</code>, the <code>SumWordLength</code> and <code>SumFractionLength</code> properties must be constant.
fix	N/A
fixed.Quantizer	N/A
flip	The dimensions argument must be a built-in type; it cannot be a <code>fi</code> object.
fliplr	N/A
flipud	N/A
floor	N/A
for	N/A

Function	Remarks/Limitations
ge	Not supported for fixed-point signals with different biases.
get	The syntax <code>structure = get(o)</code> is not supported.
getlsb	N/A
getmsb	N/A
gt	Not supported for fixed-point signals with different biases.
horzcat	N/A
imag	N/A
int8, int16, int32, int64	N/A
ipermute	N/A
iscolumn	N/A
isempty	N/A
isequal	N/A
isfi	Avoid using the <code>isfi</code> function in code that you intend to convert using the automated workflow. The value returned by <code>isfi</code> in the fixed-point code might differ from the value returned in the original MATLAB algorithm. The behavior of the fixed-point code might differ from the behavior of the original algorithm.
isfimath	N/A
isfimathlocal	N/A
isfinite	N/A
isinf	N/A
isnan	N/A
isnumeric	N/A
isnumericitype	N/A
isreal	N/A
isrow	N/A
isscalar	N/A
assigned	N/A

Function	Remarks/Limitations
isvector	N/A
le	Not supported for fixed-point signals with different biases.
length	N/A
logical	N/A
lowerbound	N/A
lsb	<ul style="list-style-type: none"> • Supported for scalar fixed-point signals only. • Supported for scalar, vector, and matrix, <code>fi</code> single and double signals.
lt	Not supported for fixed-point signals with different biases.
max	N/A
mean	N/A
median	N/A
min	N/A
minus	Any non- <code>fi</code> input must be constant; that is, its value must be known at compile time so that it can be cast to a <code>fi</code> object.

Function	Remarks/Limitations
mpower	<ul style="list-style-type: none"> • When the exponent k is a variable and the input is a scalar, the ProductMode property of the governing fimath must be SpecifyPrecision. • When the exponent k is a variable and the input is not scalar, the SumMode property of the governing fimath must be SpecifyPrecision. • Variable-sized inputs are only supported when the SumMode property of the governing fimath is set to SpecifyPrecision or Keep LSB. • For variable-sized signals, you may see different results between the generated code and MATLAB. <ul style="list-style-type: none"> • In the generated code, the output for variable-sized signals is computed using the SumMode property of the governing fimath. • In MATLAB, the output for variable-sized signals is computed using the SumMode property of the governing fimath when the first input, a, is nonscalar. However, when a is a scalar, MATLAB computes the output using the ProductMode of the governing fimath.
mpy	<ul style="list-style-type: none"> • Code generation in MATLAB does not support the syntax F.mpy(a,b). You must use the syntax mpy(F,a,b). • When you provide complex inputs to the mpy function inside of a MATLAB Function block, you must declare the input as complex before running the simulation. To do so, go to the Ports and data manager and set the Complexity parameter for all known complex inputs to On.
mrdivide	N/A

Function	Remarks/Limitations
mtimes	<ul style="list-style-type: none"> • Any non-<code>fi</code> input must be constant; that is, its value must be known at compile time so that it can be cast to a <code>fi</code> object. • Variable-sized inputs are only supported when the <code>SumMode</code> property of the governing <code>fimath</code> is set to <code>SpecifyPrecision</code> or <code>KeepLSB</code>. • For variable-sized signals, you may see different results between the generated code and MATLAB. <ul style="list-style-type: none"> • In the generated code, the output for variable-sized signals is computed using the <code>SumMode</code> property of the governing <code>fimath</code>. • In MATLAB, the output for variable-sized signals is computed using the <code>SumMode</code> property of the governing <code>fimath</code> when both inputs are nonscalar. However, if either input is a scalar, MATLAB computes the output using the <code>ProductMode</code> of the governing <code>fimath</code>.
ndims	N/A
ne	Not supported for fixed-point signals with different biases.
nearest	N/A
numberofelements	<code>numberofelements</code> will be removed in a future release. Use <code>numel</code> instead.
numel	N/A
numerictype	<ul style="list-style-type: none"> • Fixed-point signals coming in to a MATLAB Function block from Simulink are assigned a <code>numerictype</code> object that is populated with the signal's data type and scaling information. • Returns the data type when the input is a nonfixed-point signal. • Use to create <code>numerictype</code> objects in generated code. • All <code>numerictype</code> object properties related to the data type must be constant.
permute	The dimensions argument must be a built-in type; it cannot be a <code>fi</code> object.
plus	Any non- <code>fi</code> inputs must be constant; that is, its value must be known at compile time so that it can be cast to a <code>fi</code> object.
pow2	N/A

Function	Remarks/Limitations
power	When the exponent <code>k</code> is a variable, the <code>ProductMode</code> property of the governing <code>fimath</code> must be <code>SpecifyPrecision</code> .
qr	N/A
quantize	N/A
range	N/A
rdivide	N/A
real	N/A
realmax	N/A
realmin	N/A
reinterpretcast	N/A
removefimath	N/A
repmat	The <code>dimensions</code> argument must be a built-in type; it cannot be a <code>fi</code> object.
rescale	N/A
reshape	N/A
rot90	In the syntax <code>rot90(A,k)</code> , the argument <code>k</code> must be a built-in type; it cannot be a <code>fi</code> object.
round	N/A
setfimath	N/A
sfi	<ul style="list-style-type: none"> All properties related to data type must be constant for code generation.
shiftdim	The <code>dimensions</code> argument must be a built-in type; it cannot be a <code>fi</code> object.
sign	N/A
sin	N/A
single	For the automated workflow, do not use explicit double or single casts in your MATLAB algorithm to insulate functions that do not support fixed-point data types. The automated conversion tool does not support these casts. Instead of using casts, supply a replacement function. For more information, see “Function Replacements”.

Function	Remarks/Limitations
size	N/A
sort	The dimensions argument must be a built-in type; it cannot be a <code>fi</code> object.
squeeze	N/A
sqrt	<ul style="list-style-type: none"> Complex and [Slope Bias] inputs error out. Negative inputs yield a 0 result.
storedInteger	N/A
storedIntegerToDouble	N/A
sub	<ul style="list-style-type: none"> Code generation in MATLAB does not support the syntax <code>F.sub(a,b)</code>. You must use the syntax <code>sub(F,a,b)</code>.
subsasgn	N/A
subsref	N/A
sum	Variable-sized inputs are only supported when the <code>SumMode</code> property of the governing <code>fimath</code> is set to <code>Specify precision</code> or <code>Keep LSB</code> .
times	<ul style="list-style-type: none"> Any non-<code>fi</code> input must be constant; that is, its value must be known at compile time so that it can be cast to a <code>fi</code> object. When you provide complex inputs to the <code>times</code> function inside of a MATLAB Function block, you must declare the input as complex before running the simulation. To do so, go to the Ports and data manager and set the Complexity parameter for all known complex inputs to <code>On</code>.
transpose	N/A
tril	If supplied, the index, k , must be a real and scalar integer value that is not a <code>fi</code> object.
triu	If supplied, the index, k , must be a real and scalar integer value that is not a <code>fi</code> object.
ufi	<ul style="list-style-type: none"> All properties related to data type must be constant for code generation.
uint8, uint16, uint32, uint64	N/A
uminus	N/A

Function	Remarks/Limitations
uplus	N/A
upperbound	N/A
vertcat	N/A

Workflow for Fixed-Point Code Acceleration and Generation

Step	Action	Details
1	Set up your C compiler.	See “Set Up C Compiler” on page 13-17.
2	Set up your file infrastructure.	See “File Infrastructure and Paths Setup” on page 13-24.
3	Make your MATLAB algorithm suitable for code generation	See “Best Practices for Accelerating Fixed-Point Code” on page 13-36.
4	Set compilation options.	See “Set Up C Code Compilation Options” on page 13-29.
5	Specify properties of primary function inputs.	See “Primary Function Input Specification”.
6	Run <code>fiaccel</code> with the appropriate command-line options.	See “Recommended Compilation Options for <code>fiaccel</code> ” on page 13-36.

Set Up C Compiler

Fixed-Point Designer automatically locates and uses a supported installed compiler. For the current list of supported compilers, see Supported and Compatible Compilers on the MathWorks Web site.

You can use `mex -setup` to change the default compiler. See “Changing Default Compiler”.

Accelerate Code Using `fiaccel`

In this section...

“Speeding Up Fixed-Point Execution with `fiaccel`” on page 13-18

“Running `fiaccel`” on page 13-18

“Generated Files and Locations” on page 13-19

“Data Type Override Using `fiaccel`” on page 13-21

“Specifying Default `fimath` Values for MEX Functions” on page 13-22

Speeding Up Fixed-Point Execution with `fiaccel`

You can convert fixed-point MATLAB code to MEX functions using `fiaccel`. The generated MEX functions contain optimizations to automatically accelerate fixed-point algorithms to compiled C/C++ code speed in MATLAB. The `fiaccel` function can greatly increase the execution speed of your algorithms.

Running `fiaccel`

The basic command is:

```
fiaccel M_fcn
```

By default, `fiaccel` performs the following actions:

- Searches for the function `M_fcn` stored in the file `M_fcn.m` as specified in “Compile Path Search Order” on page 13-24.
- Compiles `M_fcn` to MEX code.
- If there are no errors or warnings, generates a platform-specific MEX file in the current folder, using the naming conventions described in “File Naming Conventions” on page 13-39.
- If there are errors, does not generate a MEX file, but produces an error report in a default output folder, as described in “Generated Files and Locations” on page 13-19.
- If there are warnings, but no errors, generates a platform-specific MEX file in the current folder, but does report the warnings.

You can modify this default behavior by specifying one or more compiler options with `fiaccel`, separated by spaces on the command line.

Generated Files and Locations

`fiaccel` generates files in the following locations:

Generates:	In:
Platform-specific MEX files	Current folder
HTML reports (if errors or warnings occur during compilation)	Default output folder: <code>fiaccel/mex/M_fcn_name/html</code>

You can change the name and location of generated files by using the options `-o` and `-d` when you run `fiaccel`.

In this example, you will use the `fiaccel` function to compile different parts of a simple algorithm. By comparing the run times of the two cases, you will see the benefits and best use of the `fiaccel` function.

Comparing Run Times When Accelerating Different Algorithm Parts

The algorithm used throughout this example replicates the functionality of the MATLAB `sum` function, which sums the columns of a matrix. To see the algorithm, type `open fi_matrix_column_sum.m` at the MATLAB command line.

```
function B = fi_matrix_column_sum(A)
% Sum the columns of matrix A.
%#codegen
    [m,n] = size(A);
    w = get(A,'WordLength') + ceil(log2(m));
    f = get(A,'FractionLength');
    B = fi(zeros(1,n),true,w,f);
    for j = 1:n
        for i = 1:m
            B(j) = B(j) + A(i,j);
        end
    end
end
```

Trial 1: Best Performance

The best way to speed up the execution of the algorithm is to compile the entire algorithm using the `fiaccel` function. To evaluate the performance improvement provided by the `fiaccel` function when the entire algorithm is compiled, run the following code.

The first portion of code executes the algorithm using only MATLAB functions. The second portion of the code compiles the entire algorithm using the `fiaccel` function. The MATLAB `tic` and `toc` functions keep track of the run times for each method of execution.

```
% MATLAB
fipref('NumericTypeDisplay','short');
A = fi(randn(1000,10));
tic
B = fi_matrix_column_sum(A)
t_matrix_column_sum_m = toc

% fiaccel
fiaccel fi_matrix_column_sum -args {A} ...
-I [matlabroot '/toolbox/fixedpoint/fidemos']
tic
B = fi_matrix_column_sum_mex(A);
t_matrix_column_sum_mex = toc
```

Trial 2: Worst Performance

Compiling only the smallest unit of computation using the `fiaccel` function leads to much slower execution. In some cases, the overhead that results from calling the `mex` function inside a nested loop can cause even slower execution than using MATLAB functions alone. To evaluate the performance of the `mex` function when only the smallest unit of computation is compiled, run the following code.

The first portion of code executes the algorithm using only MATLAB functions. The second portion of the code compiles the smallest unit of computation with the `fiaccel` function, leaving the rest of the computations to MATLAB.

```
% MATLAB
tic
[m,n] = size(A);
w = get(A,'WordLength') + ceil(log2(m));
f = get(A,'FractionLength');
B = fi(zeros(1,n),true,w,f);
for j = 1:n
    for i = 1:m
        B(j) = fi_scalar_sum(B(j),A(i,j));
        % B(j) = B(j) + A(i,j);
    end
end
t_scalar_sum_m = toc
```

```

% fiaccel
fiaccel fi_scalar_sum -args {B(1),A(1,1)} ...
-I [matlabroot '/toolbox/fixedpoint/fidemos']
tic
[m,n] = size(A);
w = get(A,'WordLength') + ceil(log2(m));
f = get(A,'FractionLength');
B = fi(zeros(1,n),true,w,f);
for j = 1:n
    for i = 1:m
        B(j) = fi_scalar_sum_mex(B(j),A(i,j));
        % B(j) = B(j) + A(i,j);
    end
end
t_scalar_sum_mex = toc

```

Ratio of Times

A comparison of Trial 1 and Trial 2 appears in the following table. Your computer may record different times than the ones the table shows, but the ratios should be approximately the same. There is an extreme difference in ratios between the trial where the entire algorithm was compiled using `fiaccel` (`t_matrix_column_sum_mex.m`) and where only the scalar sum was compiled (`t_scalar_sum_mex.m`). Even the file with no `fiaccel` compilation (`t_matrix_column_sum_m`) did better than when only the smallest unit of computation was compiled using `fiaccel` (`t_scalar_sum_mex`).

X (Overall Performance Rank)	Time	X/Best	X _m /X _{mex}
Trial 1: Best Performance			
t_matrix_column_sum_m (2)	1.99759	84.4917	84.4917
t_matrix_column_sum_mex (1)	0.0236424	1	
Trial 2: Worst Performance			
t_scalar_sum_m (4)	10.2067	431.71	2.08017
t_scalar_sum_mex (3)	4.90664	207.536	

Data Type Override Using fiaccel

Fixed-Point Designer software ships with an example of how to generate a MEX function from MATLAB code. The code in the example takes the weighted average of a signal

to create a lowpass filter. To run the example in the Help browser select **MATLAB Examples** under Fixed-Point Designer, and then select Fixed-Point Lowpass Filtering Using MATLAB for Code Generation.

You can specify data type override in this example by typing an extra command at the MATLAB prompt in the “Define Fixed-Point Parameters” section of the example. To turn data type override on, type the following command at the MATLAB prompt after running the `reset(fipref)` command in that section:

```
fipref('DataTypeOverride','TrueDoubles')
```

This command tells Fixed-Point Designer software to create all `fi` objects with type `fi double`. When you compile the code using the `fiaccel` command in the “Compile the M-File into a MEX File” section of the example, the resulting MEX-function uses floating-point data.

Specifying Default `fimath` Values for MEX Functions

MEX functions generated with `fiaccel` use the MATLAB default global `fimath`. The MATLAB factory default global `fimath` has the following properties:

```
RoundingMethod: Nearest  
OverflowAction: Saturate  
ProductMode: FullPrecision  
SumMode: FullPrecision
```

When running MEX functions that depend on the MATLAB default `fimath` value, do not change this value during your MATLAB session. Otherwise, MATLAB generates a warning, alerting you to a mismatch between the compile-time and run-time `fimath` values. For example, create the following MATLAB function:

```
function y = test %#codegen  
y = fi(0);
```

The function `test` constructs a `fi` object without explicitly specifying a `fimath` object. Therefore, `test` relies on the default `fimath` object in effect at compile time.

Generate the MEX function `test_mex` to use the factory setting of the MATLAB default `fimath`.

```
resetglobalfimath;  
fiaccel test  
fiaccel generates a MEX function, test_mex, in the current folder.
```

Run `test_mex`.

```
test_mex
```

```
ans =
    0
      DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
      WordLength: 16
      FractionLength: 15
```

Modify the MATLAB default `fi.math` value so it no longer matches the setting used at compile time.

```
F = fimath('RoundingMethod', 'Floor');
globalfimath(F);
```

Clear the MEX function from memory and rerun it.

```
clear test_mex
test_mex
```

The mismatch is detected and MATLAB generates a warning.

```
testglobalfimath_mex
Warning: This function was generated with a different default fimath than the current
ans =
    0
```

```
      DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
      WordLength: 16
      FractionLength: 15
```

To avoid this issue, separate the `fi.math` properties from your algorithm by using type tables. For more information, see “Separate Data Type Definitions from Algorithm”.

File Infrastructure and Paths Setup

In this section...

“Compile Path Search Order” on page 13-24

“Naming Conventions” on page 13-24

Compile Path Search Order

`fiaccl` resolves function calls by searching first on the code generation path and then on the MATLAB path. By default, `fiaccl` tries to compile and generate code for functions it finds on the path unless you explicitly declare the function to be extrinsic. An *extrinsic function* is a function on the MATLAB path that is dispatched to MATLAB software for execution. `fiaccl` does not compile extrinsic functions, but rather dispatches them to MATLAB for execution.

Naming Conventions

MATLAB enforces naming conventions for functions and generated files.

- “Reserved Prefixes” on page 13-24
- “Reserved Keywords” on page 13-24
- “Conventions for Naming Generated files” on page 13-26

Reserved Prefixes

MATLAB reserves the prefix `eml` for global C functions and variables in generated code. For example, run-time library function names all begin with the prefix `emlrt`, such as `emlrtCallMATLAB`. To avoid naming conflicts, do not name C functions or primary MATLAB functions with the prefix `eml`.

Reserved Keywords

- “C Reserved Keywords” on page 13-25
- “C++ Reserved Keywords” on page 13-25
- “Reserved Keywords for Code Generation” on page 13-25

MATLAB Coder software reserves certain words for its own use as keywords of the generated code language. MATLAB Coder keywords are reserved for use internal to

MATLAB Coder software and should not be used in MATLAB code as identifiers or function names. C reserved keywords should also not be used in MATLAB code as identifiers or function names. If your MATLAB code contains any reserved keywords, the code generation build does not complete and an error message is displayed. To address this error, modify your code to use identifiers or names that are not reserved.

If you are generating C++ code using the MATLAB Coder software, in addition, your MATLAB code must not contain the “C++ Reserved Keywords” on page 13-25.

C Reserved Keywords

auto	double	int	struct
break	else	long	switch
case	enum	register	typedef
char	extern	return	union
const	float	short	unsigned
continue	for	signed	void
default	goto	sizeof	volatile
do	if	static	while

C++ Reserved Keywords

catch	friend	protected	try
class	inline	public	typeid
const_cast	mutable	reinterpret_cast	typename
delete	namespace	static_cast	using
dynamic_cast	new	template	virtual
explicit	operator	this	wchar_t
export	private	throw	

Reserved Keywords for Code Generation

abs	fortran	localZCE	rtNaN
asm	HAVESTDIO	localZCSV	SeedFileBuffer
bool	id_t	matrix	SeedFileBufferLen

boolean_T	int_T	MODEL	single
byte_T	int8_T	MT	TID01EQ
char_T	int16_T	NCSTATES	time_T
cint8_T	int32_T	NULL	true
cint16_T	int64_T	NUMST	TRUE
cint32_T	INTEGER_CODE	pointer_T	uint_T
creal_T	LINK_DATA_BUFFER_SIZE	PROFILING_ENABLED	uint8_T
creal32_T	LINK_DATA_STREAM	PROFILING_NUM_SAMPLES	uint16_T
creal64_T	localB	real_T	uint32_T
cuint8_T	localC	real32_T	uint64_T
cuint16_T	localDWork	real64_T	UNUSED_PARAMETER
cuint32_T	localP	RT	USE_RTMODEL
ERT	localX	RT_MALLOC	VCAST_FLUSH_DATA
false	localXdis	rtInf	vector
FALSE	localXdot	rtMinusInf	

Conventions for Naming Generated files

MATLAB provides platform-specific extensions for MEX files.

Platform	MEX File Extension
Linux [®] x86-64	.mexa64
Windows [®] (32-bit)	.mexw32
Windows x64	.mexw64

Detect and Debug Code Generation Errors

In this section...

“Debugging Strategies” on page 13-27

“Error Detection at Design Time” on page 13-28

“Error Detection at Compile Time” on page 13-28

Debugging Strategies

To prepare your algorithms for code generation, MathWorks recommends that you choose a debugging strategy for detecting and correcting violations in your MATLAB applications, especially if they consist of a large number of MATLAB files that call each other's functions. Here are two best practices:

Debugging Strategy	What to Do	Pros	Cons
Bottom-up verification	<ol style="list-style-type: none"> 1 Verify that your lowest-level (leaf) functions are suitable for code generation. 2 Work your way up the function hierarchy incrementally to compile and verify each function, ending with the top-level function. 	<ul style="list-style-type: none"> • Efficient • Safe • Easy to isolate syntax violations 	Requires application tests that work from the bottom up
Top-down verification	<ol style="list-style-type: none"> 1 Declare all functions called by the top-level function to be extrinsic so <code>fiaccl</code> does not compile them. 2 Verify that your top-level function is suitable for code generation. 3 Work downward in the function hierarchy to: <ol style="list-style-type: none"> a. Remove extrinsic declarations one by one 	Lets you retain your top-level tests	Introduces extraneous code that you must remove after code verification, including: <ul style="list-style-type: none"> • Extrinsic declarations • Additional assignment statements as necessary to convert opaque values returned by extrinsic functions to nonopaque values.

Debugging Strategy	What to Do	Pros	Cons
	b. Compile and verify each function, ending with the leaf functions.		

Error Detection at Design Time

To detect potential issues for MEX file building as you write your MATLAB algorithm, add the `%#codegen` directive to the code that you want `fiaccel` to compile. Adding this directive indicates that you intend to generate code from the algorithm and turns on detailed diagnostics during MATLAB code analysis.

Error Detection at Compile Time

Before you can successfully generate code from a MATLAB algorithm, you must verify that the algorithm does not contain syntax and semantics violations that would cause compile-time errors, as described in “Detect and Debug Code Generation Errors” on page 13-27.

`fiaccel` checks for all potential syntax violations at compile time. When `fiaccel` detects errors or warnings, it automatically produces a code generation report that describes the issues and provides links to the offending code. See “Use Fixed-Point Code Generation Reports” on page 13-40.

If your MATLAB code calls functions on the MATLAB path, `fiaccel` attempts to compile these functions unless you declare them to be extrinsic.

Set Up C Code Compilation Options

In this section...

“C Code Compiler Configuration Object” on page 13-29

“Compilation Options Modification at the Command Line Using Dot Notation” on page 13-29

“How fiaccl Resolves Conflicting Options” on page 13-30

C Code Compiler Configuration Object

For C code generation to a MEX file, MATLAB provides a configuration object `coder.MexConfig` for fine-tuning the compilation. To set MEX compilation options:

- 1 Define the compiler configuration object in the MATLAB workspace by issuing a constructor command:

```
comp_cfg = coder.mexconfig
```

MATLAB displays the list of compiler options and their current values in the command window.

- 2 Modify the compilation options as necessary. See “Compilation Options Modification at the Command Line Using Dot Notation” on page 13-29
- 3 Invoke `fiaccl` with the `-config` option and specify the configuration object as its argument:

```
fiaccl -config comp_cfg myMfile
```

The `-config` option instructs `fiaccl` to convert `myFile.m` to a MEX function, based on the compilation settings in `comp_cfg`.

Compilation Options Modification at the Command Line Using Dot Notation

Use dot notation to modify the value of compilation options, using this syntax:

```
configuration_object.property = value
```

Dot notation uses assignment statements to modify configuration object properties. For example, to change the maximum size function to inline and the stack size limit for inlined functions during MEX generation, enter this code at the command line:

```
co_cfg = coder.mexconfig
co_cfg.InlineThreshold = 25;
co_cfg.InlineStackLimit = 4096;
fiaccel -config co_cfg myFun
```

How `fiaccel` Resolves Conflicting Options

`fiaccel` takes the union of all options, including those specified using configuration objects, so that you can specify options in any order.

MEX Configuration Dialog Box Options

MEX Configuration Dialog Box Options

The following table describes parameters for fine-tuning the behavior of `fiaccl` for converting MATLAB files to MEX:

Parameter	Equivalent Command-Line Property and Values (default in bold)	Description
Report		
Create code generation report	GenerateReport true, false	Document generated code in an HTML report.
Launch report automatically	LaunchReport true, false	Specify whether to automatically display HTML reports after code generation completes. Note: Requires that you enable Create code generation report
Debugging		
Echo expressions without semicolons	EchoExpressions true , false	Specify whether or not actions that do not terminate with a semicolon appear in the MATLAB Command Window.
Enable debug build	EnableDebugging true, false	Compile the generated code in debug mode.
Language and Semantics		
Constant Folding Timeout	ConstantFoldingTimeout <i>integer</i> , 10000	Specify the maximum number of instructions to be executed by the constant folder.
Dynamic memory allocation	DynamicMemoryAllocation 'off' , 'AllVariableSizeArrays'	Enable dynamic memory allocation for variable-size data. By default, dynamic memory allocation is disabled and <code>fiaccl</code> allocates memory

Parameter	Equivalent Command-Line Property and Values (default in bold)	Description
		<p>statically on the stack. When you select dynamic memory allocation, <code>fiaccel</code> allocates memory for all variable-size data dynamically on the heap.</p> <p>You <i>must</i> use dynamic memory allocation for all unbounded variable-size data.</p>
Enable variable sizing	EnableVariableSizing true , false	Enable support for variable-size arrays.
Extrinsic calls	ExtrinsicCalls true , false	<p>Allow calls to extrinsic functions.</p> <p>When enabled (true), the compiler generates code for the call to a MATLAB function, but does not generate the function's internal code.</p> <p>When disabled (false), the compiler ignores the extrinsic function. Does not generate code for the call to the MATLAB function—as long as the extrinsic function does not affect the output of the caller function. Otherwise, the compiler issues a compiler error.</p>

Parameter	Equivalent Command-Line Property and Values (default in bold)	Description
Global Data Synchronization Mode	GlobalDataSyncMethod <i>string</i> , SyncAlways , SyncAtEntryAndExits, NoSync	<p>Controls when global data is synchronized with the MATLAB global workspace. By default, (SyncAlways), synchronizes global data at MEX function entry and exit and for all extrinsic calls. This synchronization ensures maximum consistency between MATLAB and generated code. If the extrinsic calls do not affect global data, use this option with the <code>coder.extrinsic -sync:off</code> option to turn off synchronization for these calls.</p> <p>SyncAtEntryAndExits synchronizes global data at MEX function entry and exit only. If only a few extrinsic calls affect global data, use this option with the <code>coder.extrinsic -sync:on</code> option to turn on synchronization for these calls.</p> <p>NoSync disables synchronization. Ensure that your generated code does not interact with MATLAB before disabling synchronization. Otherwise, inconsistencies might occur.</p>
Saturate on integer overflow	SaturateOnIntegerOverflow true , false	Add checks in the generated code to detect integer overflow or underflow.

Parameter	Equivalent Command-Line Property and Values (default in bold)	Description
Safety (disable for faster MEX)		
Ensure memory integrity	IntegrityChecks true , false	Detects violations of memory integrity in code generated from MATLAB algorithms and stops execution with a diagnostic message. Setting IntegrityChecks to false also disables the run-time stack.
Ensure responsiveness	ResponsivenessChecks true , false	Enables responsiveness checks in code generated from MATLAB algorithms.
Function Inlining and Stack Allocation		
Inline Stack Limit	InlineStackLimit <i>integer</i> , 4000	Specify the stack size limit on inlined functions.
Inline Threshold	InlineThreshold <i>integer</i> , 10	Specify the maximum size of functions to be inlined.
Inline Threshold Max	InlineThresholdMax <i>integer</i> , 200	Specify the maximum size of functions after inlining.
Stack Usage Max	StackUsageMax <i>integer</i> , 200000	Specify the maximum stack usage per application in bytes. Set a limit that is lower than the available stack size. Otherwise, a runtime stack overflow might occur. Overflows are detected and reported by the C compiler, not by <code>fiaccel</code> .
Optimizations		
Use BLAS library if possible	EnableBLAS true , false	Speed up low-level matrix operations during simulation by calling the Basic Linear Algebra Subprograms (BLAS) library.

See Also

- “Control Run-Time Checks” on page 13-57
- “Variable-Size Data Definition for Code Generation”
- “Generate C Code from Code Containing Global Data” on page 13-45

Best Practices for Accelerating Fixed-Point Code

In this section...

“Recommended Compilation Options for `fiaccel`” on page 13-36

“Build Scripts” on page 13-37

“Check Code Interactively Using MATLAB Code Analyzer” on page 13-38

“Separating Your Test Bench from Your Function Code” on page 13-38

“Preserving Your Code” on page 13-38

“File Naming Conventions” on page 13-39

Recommended Compilation Options for `fiaccel`

- `-args` – Specify input parameters by example

Use the `-args` option to specify the properties of primary function inputs as a cell array of example values at the same time as you generate code for the MATLAB file with `fiaccel`. The cell array can be a variable or literal array of constant values. The cell array should provide the same number and order of inputs as the primary function.

When you use the `-args` option you are specifying the data types and array dimensions of these parameters, not the values of the variables. For more information, see “Define Input Properties by Example at the Command Line”.

Note: Alternatively, you can use the `assert` function to define properties of primary function inputs directly in your MATLAB file. For more information, see “Define Input Properties Programmatically in MATLAB File” on page 13-50.

- `-report` – Generate code generation report

Use the `-report` option to generate a report in HTML format at code generation time to help you debug your MATLAB code and verify that it is suitable for code generation. If you do not specify the `-report` option, `fiaccel` generates a report only if build errors or warnings occur.

The code generation report contains the following information:

- Summary of code generation results, including type of target and number of warnings or errors
- Target build log that records build and linking activities
- Links to generated files
- Error and warning messages (if any)

For more information, see `fiaccl`.

Build Scripts

Use build scripts to call `fiaccl` to generate MEX functions from your MATLAB function.

A build script automates a series of MATLAB commands that you want to perform repeatedly from the command line, saving you time and eliminating input errors. For instance, you can use a build script to clear your workspace before each build and to specify code generation options.

This example shows a build script to run `fiaccl` to process `lms_02.m`:

```
close all;
clear all;
clc;

N = 73113;

fiaccl -report lms_02.m ...
      -args { zeros(N,1) zeros(N,1) }
```

In this example, the following actions occur:

- `close all` deletes all figures whose handles are not hidden. See `close` in the MATLAB Graphics function reference for more information.
- `clear all` removes all variables, functions, and MEX-files from memory, leaving the workspace empty. This command also clears all breakpoints.

Note: Remove the `clear all` command from the build scripts if you want to preserve breakpoints for debugging.

- `clc` clears all input and output from the Command Window display, giving you a “clean screen.”

- `N = 73113` sets the value of the variable `N`, which represents the number of samples in each of the two input parameters for the function `lms_02`
- `fiaccl -report lms_02.m -args { zeros(N,1) zeros(N,1) }` calls `fiaccl` to accelerate simulation of the file `lms_02.m` using the following options:
 - `-report` generates a code generation report
 - `-args { zeros(N,1) zeros(N,1) }` specifies the properties of the function inputs as a cell array of example values. In this case, the input parameters are `N`-by-1 vectors of real doubles.

Check Code Interactively Using MATLAB Code Analyzer

The code analyzer checks your code for problems and recommends modifications to maximize performance and maintainability. You can use the code analyzer to check your code continuously in the MATLAB Editor while you work.

To ensure that continuous code checking is enabled:

- 1 From the MATLAB menu, select **File > Preferences > Code Analyzer**.

The list of code analyzer preferences appears.

- 2 Select the **Enable integrated warning and error messages** check box.

Separating Your Test Bench from Your Function Code

Separate your core algorithm from your test bench. Create a separate test script to do all the pre- and post-processing such as loading inputs, setting up input values, calling the function under test, and outputting test results. See the example on the `fiaccl` reference page.

Preserving Your Code

Preserve your code before making further modifications. This practice provides a fallback in case of error and a baseline for testing and validation. Use a consistent file naming convention, as described in “File Naming Conventions” on page 13-39. For example, add a 2-digit suffix to the file name for each file in a sequence. Alternatively, use a version control system.

File Naming Conventions

Use a consistent file naming convention to identify different types and versions of your MATLAB files. This approach keeps your files organized and minimizes the risk of overwriting existing files or creating two files with the same name in different folders.

For example, the file naming convention in the Generating MEX Functions getting started tutorial is:

- The suffix `_build` identifies a build script.
- The suffix `_test` identifies a test script.
- A numerical suffix, for example, `_01` identifies the version of a file. These numbers are typically two-digit sequential integers, beginning with 01, 02, 03, and so on.

For example:

- The file `build_01.m` is the first version of the build script for this tutorial.
- The file `test_03.m` is the third version of the test script for this tutorial.

Use Fixed-Point Code Generation Reports

In this section...

“Code Generation Report Creation” on page 13-40

“Code Generation Report Opening” on page 13-41

“Viewing Your MATLAB Code” on page 13-41

“Viewing Variables in the Variables Tab” on page 13-43

“See Also” on page 13-44

Code Generation Report Creation

When you compile your code with the `fiaccl` function or the MATLAB Coder `codegen` function, you can use the `-report` option to generate a code generation report. This report allows you to examine the data types of the variables and expressions in your code.

This example shows how to create a code generation report.

- 1 In a local writable folder, write a MATLAB function, `moving_average.m`.

```
function [avg,z] = moving_average(x,z)
%#codegen
    if nargin < 2,
        z = fi(zeros(10,1),1,16,15);
    end
    z(2:end) = z(1:end-1); % Update buffer
    z(1) = x; % Add new value
    avg = mean(z); % Compute moving average
end
```

- 2 In the same folder, write a MATLAB function, `test_moving_average.m`.

```
function avg = test_moving_average(x)
%#codegen
    if nargin < 1,
        x = fi(rand(100,1),1,16,15);
    end
    z = fi(zeros(10,1),1,16,15);
    avg = x;
    for k = 1:length(x)
```



```

        [avg(k),z] = moving_average(x(k),z);
    end
end

```

- 3 Use `fiaccel` to create a MEX function and accelerate the code. Specify the type of input `x` using the `-args` option. Specify the `-report` option to create a code generation report.

```

x = fi(rand(100,1),1,16,15);
fiaccel -report test_moving_average -args {x}

```

Code Generation Report Opening

If code generation completes, you receive the following message:

Code generation successful: [View report](#)

Click the **View report** link to open the report.

If code generation fails, you get a link to the error report:

Code generation failed: [View report](#)

Click the **View report** link to view the error report and debug your code. For more information on working with error reports, see “Code Generation Reports”.


Viewing Your MATLAB Code

When the code generation report opens, you can hover your cursor over the variables and expressions in your MATLAB code to see their data type information. The code generation report provides color-coded data type information according to the following legend.

Color	Meaning
Green	Data type information is available for the selected variable at this location in the code.
Orange	There is a warning message associated with the selected variable or expression.
Pink	No data type information is available for the selected variable.

Color	Meaning
Purple	Data type information is available for the selected expression at this location in the code.
Red	There is an error message associated with the selected variable or expression.

Variables in your code that have data type information available appear highlighted in green.

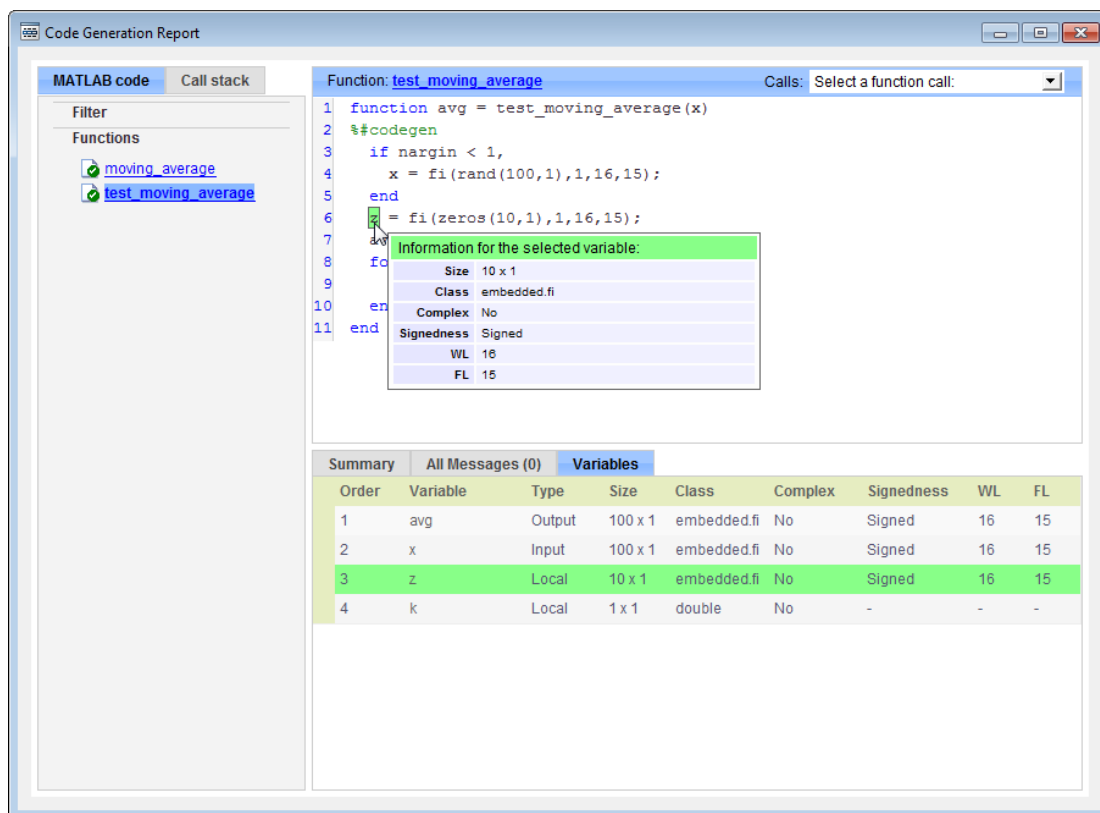

Expressions in your code that have data type information available appear highlighted in purple, as the next figure shows.

The screenshot shows the Code Generation Report window for a MATLAB function named `test_moving_average`. The code is as follows:

```

1 function avg = test_moving_average(x)
2 %#codegen
3 if nargin < 1,
4     x = fi(rand(100,1),1,16,15);
5 end
6 z = fi(zeros(10,1),1,16,15);
7 avg = x;
8 for k = 1:length(x)
9     [avg(k), z] = moving_average(x(k), z);
10 end
11 end

```

The expression `[avg(k), z] = moving_average(x(k), z);` on line 9 is selected, and a tooltip displays the following information:

Information for the selected expression:	
Size	1 x 1
Class	embedded.fi
Complex	No
Signedness	Signed
WL	16
FL	15

Below the code, a summary table is displayed with the following data:

Order	Variable	Type	Size	Class	Complex	Signedness	WL	FL
1	avg	Output	100 x 1	embedded.fi	No	Signed	16	15
2	x	Input	100 x 1	embedded.fi	No	Signed	16	15
3	z	Local	10 x 1	embedded.fi	No	Signed	16	15
4	k	Local	1 x 1	double	No	-	-	-

Viewing Variables in the Variables Tab

To see the data type information for all the variables in your file, click the **Variables** tab of the code generation report. You can expand all `fi` and `fimath` objects listed in the **Variables** tab to display the `fimath` properties. When you expand a `fi` object in the **Variables** tab, the report indicates whether the `fi` object has a local `fimath` object or is using default `fimath` values.

The following figure shows the information displayed for a `fi` object that is using default `fimath` values.

Summary		All Messages (0)		Variables				
Order	Variable	Type	Size	Class	Complex	Signedness	WL	FL
1	avg	Output	100 x 1	embedded.fi	No	Signed	16	15
Global fimath:								
				Round mode: nearest	Sum mode: FullPrecision			
				Overflow mode: saturate	Maximum sum word length: 65535			
				Product mode: FullPrecision	Cast before sum: Yes			
				Maximum product word length: 65535				
2	x	Input	100 x 1	embedded.fi	No	Signed	16	15
3	z	Local	10 x 1	embedded.fi	No	Signed	16	15
4	k	Local	1 x 1	double	No	-	-	-

You can sort the variables by clicking the column headings in the **Variables** tab. To sort the variables by multiple columns, press the **Shift** key while clicking the column headings.

See Also

For more information about using the code generation report with the `fiaccel` function, see the `fiaccel` reference page.

For information about local and default `fimath`, see “`fimath` Object Construction” on page 4-2.

For information about using the code generation report with the `codegen` function, see “Code Generation Reports”.

Generate C Code from Code Containing Global Data

In this section...

“Workflow Overview” on page 13-45

“Declaring Global Variables” on page 13-45

“Defining Global Data” on page 13-46

“Synchronizing Global Data with MATLAB” on page 13-47

“Limitations of Using Global Data” on page 13-49

Workflow Overview

To generate MEX functions from MATLAB code that uses global data:

- 1 Declare the variables as global in your code.
- 2 Define and initialize the global data before using it.

For more information, see “Defining Global Data” on page 13-46.

- 3 Compile your code using `fiaccel`.

If you use global data, you must also specify whether you want to synchronize this data between MATLAB and the generated code. If there is no interaction between MATLAB and the generated code, it is safe to disable synchronization. Otherwise, you should enable synchronization. For more information, see “Synchronizing Global Data with MATLAB” on page 13-47.

Declaring Global Variables

For code generation, you must declare global variables before using them in your MATLAB code. Consider the `use_globals` function that uses two global variables `AR` and `B`.

```
function y = use_globals()
%#codegen
% Turn off inlining to make
% generated code easier to read
coder.inline('never');
% Declare AR and B as global variables
global AR;
```

```
global B;  
AR(1) = B(1);  
y = AR * 2;
```

Defining Global Data

You can define global data either in the MATLAB global workspace or at the command line. If you do not initialize global data at the command line, `fiaccel` looks for the variable in the MATLAB global workspace. If the variable does not exist, `fiaccel` generates an error.

Defining Global Data in the MATLAB Global Workspace

To compile the `use_globals` function described in “Declaring Global Variables” on page 13-45 using `fiaccel`:

- 1 Define the global data in the MATLAB workspace. At the MATLAB prompt, enter:

```
global AR B;  
AR = fi(ones(4),1,16,14);  
B = fi([1 2 3],1,16,13);
```

- 2 Compile the function to generate a MEX file named `use_globalsx`.

```
fiaccel -o use_globalsx use_globals
```

Defining Global Data at the Command Line

To define global data at the command line, use the `fiaccel -global` option. For example, to compile the `use_globals` function described in “Declaring Global Variables” on page 13-45, specify two global inputs `AR` and `B` at the command line.

```
fiaccel -o use_globalsx ...  
-global {'AR',fi(ones(4)),'B',fi([1 2 3])} use_globals
```

Alternatively, specify the type and initial value with the `-globals` flag using the format `-globals {'g', {type, initial_value}}`.

Defining Variable-Sized Global Data

To provide initial values for variable-sized global data, specify the type and initial value with the `-globals` flag using the format `-globals {'g', {type, initial_value}}`. For example, to specify a global variable `g1` that has an initial value `[1 1]` and upper bound `[2 2]`, enter:

```
fiaccel foo -globals {'g1',{coder.typeof(0,[2 2],1),[1 1]}}
```

For a detailed explanation of `coder.typeof` syntax, see `coder.typeof`.

Synchronizing Global Data with MATLAB

Why Synchronize Global Data?

The generated code and MATLAB each have their own copies of global data. To ensure consistency, you must synchronize their global data whenever the two interact. If you do not synchronize the data, their global variables might differ. The level of interaction determines when to synchronize global data.

When to Synchronize Global Data

By default, synchronization between global data in MATLAB and generated code occurs at MEX function entry and exit and for all *extrinsic* calls, which are calls to MATLAB functions on the MATLAB path that `fiaccel` dispatches to MATLAB for execution. This behavior ensures maximum consistency between generated code and MATLAB.

To improve performance, you can:

- Select to synchronize only at MEX function entry and exit points.
- Disable synchronization when the global data does not interact.
- Choose whether to synchronize before and after each extrinsic call.

The following table summarizes which global data synchronization options to use. To learn how to set these options, see “How to Synchronize Global Data” on page 13-48.

Global Data Synchronization Options

If you want to...	Set the global data synchronization mode to:	Synchronize before and after extrinsic calls?
Ensure maximum consistency when all extrinsic calls modify global data.	At MEX-function entry, exit and extrinsic calls (default)	Yes. Default behavior.
Ensure maximum consistency when most extrinsic calls modify global data, but a few do not.	At MEX-function entry, exit and	Yes. Use the <code>coder.extrinsic - sync:off</code> option to turn

If you want to...	Set the global data synchronization mode to:	Synchronize before and after extrinsic calls?
	extrinsic calls (default)	off synchronization for the extrinsic calls that do not affect global data.
Ensure maximum consistency when most extrinsic calls do not modify global data, but a few do.	At MEX-function entry and exit	Yes. Use the <code>coder.extrinsic -sync:on</code> option to synchronize only the calls that modify global data.
Maximize performance when synchronizing global data, and none of your extrinsic calls modify global data.	At MEX-function entry and exit	No.
Communicate between generated code files only. No interaction between global data in MATLAB and generated code.	Disabled	No.

How to Synchronize Global Data

To control global data synchronization, set the global data synchronization mode and select whether to synchronize extrinsic functions. For guidelines on which options to use, see “When to Synchronize Global Data” on page 13-47.

You control the synchronization of global data with extrinsic functions using the `coder.extrinsic -sync:on` and `-sync:off` options.

Controlling the Global Data Synchronization Mode from the Command Line

- 1 Define the compiler options object in the MATLAB workspace by issuing a constructor command:

```
comp_cfg = coder.mexconfig
```
- 2 From the command line, set the `GlobalDataSyncMethod` property to `Always`, `SyncAtEntryAndExits` or `NoSync`, as applicable. For example:

```
comp_cfg.GlobalDataSyncMethod = 'SyncAtEntryAndExits';
```
- 3 Use the `comp_cfg` configuration object when compiling your code by specifying it using the `-config` compilation option. For example,


```
fiaccel -config comp_cfg myFile
```

Controlling Synchronization for Extrinsic Function Calls

You can control whether synchronization between global data in MATLAB and generated code occurs before and after you call an extrinsic function. To do so, use the `coder.extrinsic -sync:on` and `-sync:off` options.

By default, global data is:

- Synchronized before and after each extrinsic call if the global data synchronization mode is **At MEX-function entry, exit and extrinsic calls**. If you are sure that certain extrinsic calls do not affect global data, turn off synchronization for these calls using the `-sync:off` option. Turning off synchronization improves performance. For example, if functions `foo1` and `foo2` *do not* affect global data, turn off synchronization for these functions:

```
coder.extrinsic('-sync:off', 'foo1', 'foo2');
```

- Not synchronized if the global data synchronization mode is **At MEX-function entry and exit**. If the code has a few extrinsic calls that affect global data, turn on synchronization for these calls using the `-sync:on` option. For example, if functions `foo1` and `foo2` *do* affect global data, turn on synchronization for these functions:

```
coder.extrinsic('-sync:on', 'foo1', 'foo2');
```

- Not synchronized if the global data synchronization mode is **Disabled**. When synchronization is disabled, you cannot control the synchronization for specific extrinsic calls. The `-sync:on` option has no effect.

Limitations of Using Global Data

You cannot use global data with

- The `coder.cstructname` function. This function does not support global variables.
- The `coder.varsized` function. Instead, use a `coder.typeof` object to define variable-sized global data as described in “Defining Variable-Sized Global Data” on page 13-46.

Define Input Properties Programmatically in MATLAB File

In this section...

“How to Use `assert`” on page 13-50

“Rules for Using `assert` Function” on page 13-54

“Specifying Properties of Primary Fixed-Point Inputs” on page 13-54

“Specifying Class and Size of Scalar Structure” on page 13-55

“Specifying Class and Size of Structure Array” on page 13-56

How to Use `assert`

You can use the MATLAB `assert` function to define properties of primary function inputs directly in your MATLAB file.

Use the `assert` function to invoke standard MATLAB functions for specifying the class, size, and complexity of primary function inputs.

Specify Any Class

```
assert ( isa ( param, 'class_name' ) )
```

Sets the input parameter *param* to the MATLAB class *class_name*. For example, to set the class of input *U* to a 32-bit signed integer, call:

```
...  
assert(isa(U, 'embedded.fi'));  
...
```

Note: If you set the class of an input parameter to `fi`, you must also set its `numericType`, see “Specify numericType of Fixed-Point Input” on page 13-53. You can also set its `fimath` properties, see “Specify fimath of Fixed-Point Input” on page 13-53.

If you set the class of an input parameter to `struct`, you must specify the properties of each field in the structure in the order in which you define the fields in the structure definition.

Specify `fi` Class

```
assert ( isfi ( param ) )  
assert ( isa ( param, 'embedded.fi' ) )
```

Sets the input parameter *param* to the MATLAB class `fi` (fixed-point numeric object). For example, to set the class of input `U` to `fi`, call:

```
...  
assert(isfi(U));  
...  
or  
...  
assert(isa(U,'embedded.fi'));  
...
```

Note: If you set the class of an input parameter to `fi`, you must also set its `numericType`, see “Specify `numericType` of Fixed-Point Input” on page 13-53. You can also set its `fimath` properties, see “Specify `fimath` of Fixed-Point Input” on page 13-53.

Specify Structure Class

```
assert ( isstruct ( param ) )
```

Sets the input parameter *param* to the MATLAB class `struct` (structure). For example, to set the class of input `U` to a `struct`, call:

```
...  
assert(isstruct(U));  
...  
or  
...  
assert(isa(U,'struct'));  
...
```

Note: If you set the class of an input parameter to `struct`, you must specify the properties of each field in the structure in the order in which you define the fields in the structure definition.

Specify Any Size

```
assert ( all ( size (param) == [dims ] ) )
```

Sets the input parameter *param* to the size specified by dimensions *dims*. For example, to set the size of input *U* to a 3-by-2 matrix, call:

```
...
assert(all(size(U)== [3 2]));
...
```

Specify Scalar Size

```
assert ( isscalar (param ) )
assert ( all ( size (param) == [ 1 ] ) )
```

Sets the size of input parameter *param* to scalar. For example, to set the size of input *U* to scalar, call:

```
...
assert(isscalar(U));
...
or
...
assert(all(size(U)== [1]));
...
```

Specify Real Input

```
assert ( isreal (param ) )
```

Specifies that the input parameter *param* is real. For example, to specify that input *U* is real, call:

```
...
assert(isreal(U));
...
```

Specify Complex Input

```
assert ( ~isreal ( param ) )
```

Specifies that the input parameter *param* is complex. For example, to specify that input *U* is complex, call:

```
...
assert(~isreal(U));
...
```

Specify numerictype of Fixed-Point Input

```
assert ( isequal ( numerictype ( fiparam ), T ) )
```

Sets the `numerictype` properties of `fi` input parameter *fiparam* to the `numerictype` object *T*. For example, to specify the `numerictype` property of fixed-point input *U* as a signed `numerictype` object *T* with 32-bit word length and 30-bit fraction length, use the following code:

```
...
% Define the numerictype object.
T = numerictype(1, 32, 30);

% Set the numerictype property of input U to T.
assert(isequal(numerictype(U),T));
...
```

Specify fimath of Fixed-Point Input

```
assert ( isequal ( fimath ( fiparam ), F ) )
```

Sets the `fimath` properties of `fi` input parameter *fiparam* to the `fimath` object *F*. For example, to specify the `fimath` property of fixed-point input *U* so that it saturates on integer overflow, use the following code:

```
...
% Define the fimath object.
F = fimath('OverflowAction','Saturate');

% Set the fimath property of input U to F.
assert(isequal(fimath(U),F));
...
```

Specify Multiple Properties of Input

```
assert ( function1 ( params ) && function2 ( params ) && function3 ( params ) && ... )
```

Specifies the class, size, and complexity of one or more inputs using a single `assert` function call. For example, the following code specifies that input `U` is a double, complex, 3-by-3 matrix, and input `V` is a 16-bit unsigned integer:

```
...  
assert(isa(U,'double') && ~isreal(U) && all(size(U) == [3 3]) && isa(V,'uint16'));  
...
```

Rules for Using `assert` Function

Follow these rules when using the `assert` function to specify the properties of primary function inputs:

- Call `assert` functions at the beginning of the primary function, before any flow-control operations such as `if` statements or subroutine calls.
- Do not call `assert` functions inside conditional constructs, such as `if`, `for`, `while`, and `switch` statements.
- If you set the class of an input parameter to `fi`:
 - You must also set its `numericType`, see “Specify `numericType` of Fixed-Point Input” on page 13-53.
 - You can also set its `fiMath` properties, see “Specify `fiMath` of Fixed-Point Input” on page 13-53.
- If you set the class of an input parameter to `struct`, you must specify the class, size, and complexity of each field in the structure in the order in which you define the fields in the structure definition.

Specifying Properties of Primary Fixed-Point Inputs

In the following example, the primary MATLAB function `emcsqrtfi` takes one fixed-point input: `x`. The code specifies the following properties for this input:

Property	Value
class	fi

Property	Value
numericity	numericity object T, as specified in the primary function
fimath	fimath object F, as specified in the primary function
size	scalar (by default)
complexity	real (by default)

```
function y = emcsqrtfi(x)
T = numericity('WordLength',32,'FractionLength',23,...
    'Signed',true);
F = fimath('SumMode','SpecifyPrecision',...
    'SumWordLength',32,'SumFractionLength',23,...
    'ProductMode','SpecifyPrecision',...
    'ProductWordLength',32,'ProductFractionLength',23);
assert(isfi(x));
assert(isequal(numericity(x),T));
assert(isequal(fimath(x),F));

y = sqrt(x);
```

Specifying Class and Size of Scalar Structure

Assume you have defined S as the following scalar MATLAB structure:

```
S = struct('r',double(1),'i',fi(4,true,8,0));
```

This code specifies the class and size of S and its fields when passed as an input to your MATLAB function:

```
function y = fcn(S)

% Specify the class of the input as struct.
assert(isstruct(S));

% Specify the size of the fields r and i
% in the order in which you defined them.
T = numericity('Wordlength', 8,'FractionLength', ...
    0,'signed',true);
assert(isa(S.r,'double'));
assert(isfi(S.i) && isequal(numericity(S.i),T));

y = S;
```

Note: The only way to name a field in a structure is to set at least one of its properties. Therefore in the preceding example, an `assert` function specifies that field `S.r` is of type `double`, even though `double` is the default.

Specifying Class and Size of Structure Array

For structure arrays, you must choose a representative element of the array for specifying the properties of each field. For example, assume you have defined `S` as the following 1-by-2 array of MATLAB structures:

```
S = struct('r',{double(1), double(2)},'i',...
          {fi(4,1,8,0), fi(5,1,8,0)});
```

The following code specifies the class and size of each field of structure input `S` using the first element of the array:

```
function y = fcn(S)

% Specify the class of the input S as struct.
assert(isstruct(S));
T = numerictype('Wordlength', 8,'FractionLength', ...
              0,'signed',true);

% Specify the size of the fields r and i
% based on the first element of the array.
assert(all(size(S) == [1 2]));
assert(isa(S(1).r,'double'));
assert(isfi(S(1).i) && isequal(numerictype(S(1).i),T));

y = S;
```

Note: The only way to name a field in a structure is to set at least one of its properties. Therefore in the example above, an `assert` function specifies that field `S(1).r` is of type `double`, even though `double` is the default.

Control Run-Time Checks

In this section...

“Types of Run-Time Checks” on page 13-57

“When to Disable Run-Time Checks” on page 13-57

“How to Disable Run-Time Checks” on page 13-58

Types of Run-Time Checks

In simulation, the code generated for your MATLAB functions includes the following run-time checks and external function calls.

- Memory integrity checks

These checks detect violations of memory integrity in code generated for MATLAB functions and stop execution with a diagnostic message.

Caution For safety, these checks are enabled by default. Without memory integrity checks, violations will result in unpredictable behavior.

- Responsiveness checks in code generated for MATLAB functions

These checks enable periodic checks for Ctrl+C breaks in code generated for MATLAB functions. Enabling responsiveness checks also enables graphics refreshing.

Caution For safety, these checks are enabled by default. Without these checks the only way to end a long-running execution might be to terminate MATLAB.

- Extrinsic calls to MATLAB functions

Extrinsic calls to MATLAB functions, for example to display results, are enabled by default for debugging purposes. For more information about extrinsic functions, see “Declaring MATLAB Functions as Extrinsic Functions”.

When to Disable Run-Time Checks

Generally, generating code with run-time checks enabled results in more generated code and slower simulation than generating code with the checks disabled. Similarly, extrinsic

calls are time consuming and have an adverse effect on performance. Disabling run-time checks and extrinsic calls usually results in streamlined generated code and faster simulation, with these caveats:

Consider disabling...	Only if...
Memory integrity checks	You are sure that your code is safe and that all array bounds and dimension checking is unnecessary.
Responsiveness checks	You are sure that you will not need to stop execution of your application using Ctrl+C .
Extrinsic calls	You are only using extrinsic calls to functions that do not affect application results.

How to Disable Run-Time Checks

To disable run-time checks:

- 1 Define the compiler options object in the MATLAB workspace by issuing a constructor command:

```
comp_cfg = coder.MEXConfig
```

- 2 From the command line set the `IntegrityChecks`, `ExtrinsicCalls`, or `ResponsivenessChecks` properties false, as applicable:

```
comp_cfg.IntegrityChecks = false;  
comp_cfg.ExtrinsicCalls = false;  
comp_cfg.ResponsivenessChecks = false;
```

Fix Run-Time Stack Overflows

If your C compiler reports a run-time stack overflow, set the value of the maximum stack usage parameter to be less than the available stack size. Create a command-line configuration object, `coder.MexConfig` and then set the `StackUsageMax` parameter.

Code Generation with MATLAB Coder

MATLAB Coder `codegen` automatically converts MATLAB code directly to C code. It generates standalone C code that is bit-true to fixed-point MATLAB code. Using Fixed-Point Designer and MATLAB Coder software you can generate C code with algorithms containing integer math only (i.e., without any floating-point math).

Code Generation with MATLAB Function Block

In this section...

“Composing a MATLAB Language Function in a Simulink Model” on page 13-61

“MATLAB Function Block with Data Type Override” on page 13-61

“Fixed-Point Data Types with MATLAB Function Block” on page 13-63

Composing a MATLAB Language Function in a Simulink Model

The MATLAB Function block lets you compose a MATLAB language function in a Simulink model that generates embeddable code. When you simulate the model or generate code for a target environment, a function in a MATLAB Function block generates efficient C/C++ code. This code meets the strict memory and data type requirements of embedded target environments. In this way, the MATLAB Function blocks bring the power of MATLAB for the embedded environment into Simulink.

For more information about the MATLAB Function block and code generation, refer to the following:

- MATLAB Function block reference page in the Simulink documentation
- “What Is a MATLAB Function Block?” in the Simulink documentation
- “Code Generation Workflow” in the MATLAB Coder documentation

MATLAB Function Block with Data Type Override

When you use the MATLAB Function block in a Simulink model that specifies data type override, the block determines the data type override equivalents of the input signal and parameter types. The block then uses these equivalent values to run the simulation. The following table shows how the MATLAB Function block determines the data type override equivalent using

- The data type of the input signal or parameter
- The data type override settings in the Simulink model

For more information about data type override, see `fxptdlg`.

Input Signal or Parameter Type	Data Type Override Setting	Data Type Override Applies To Setting	Override Data Type
Inherited single	Double	All numeric types or Floating-point	Built-in double
	Single	All numeric types or Floating-point	Built-in single
	Scaled double	All numeric types or Floating-point	fi scaled double
Specified single	Double	All numeric types or Floating-point	Built-in double
	Single	All numeric types or Floating-point	Built-in single
	Scaled double	All numeric types or Floating-point	fi scaled double
Inherited double	Double	All numeric types or Floating-point	Built-in double
	Single	All numeric types or Floating-point	Built-in single
	Scaled double	All numeric types or Floating-point	fi scaled double
Specified double	Double	All numeric types or Floating-point	Built-in double
	Single	All numeric types or Floating-point	Built-in single
	Scaled double	All numeric types or Floating-point	fi scaled double
Inherited Fixed	Double	All numeric types or Fixed-point	fi double
	Single	All numeric types or Fixed-point	fi single
	Scaled double	All numeric types or Fixed-point	fi scaled double

Input Signal or Parameter Type	Data Type Override Setting	Data Type Override Applies To Setting	Override Data Type
Specified Fixed	Double	All numeric types or Fixed-point	fi double
	Single	All numeric types or Fixed-point	fi single
	Scaled double	All numeric types or Fixed-point	fi scaled double

For more information about using the MATLAB Function block with data type override, see “Using Data Type Override with the MATLAB Function Block”.

Fixed-Point Data Types with MATLAB Function Block

Code generation from MATLAB supports a significant number of Fixed-Point Designer functions. Refer to “Functions Supported for Code Acceleration or C Code Generation” on page 13-5 for information about which Fixed-Point Designer functions are supported.

For more information on working with fixed-point MATLAB Function blocks, see:


- “Specifying Fixed-Point Parameters in the Model Explorer” on page 13-63
- “Using fimath Objects in MATLAB Function Blocks” on page 13-65
- “Sharing Models with Fixed-Point MATLAB Function Blocks” on page 13-67

Note: To simulate models using fixed-point data types in Simulink, you must have a Fixed-Point Designer license.

Specifying Fixed-Point Parameters in the Model Explorer

You can specify parameters for an MATLAB Function block in a fixed-point model using the Model Explorer. Try the following exercise:

- 1 Place a MATLAB Function block in a new model. You can find the block in the Simulink User-Defined Functions library.
- 2 Open the Model Explorer by selecting **View > Model Explorer** from your model.
- 3 Expand the **untitled*** node in the **Model Hierarchy** pane of the Model Explorer. Then, select the **MATLAB Function** node. The Model Explorer now appears as shown in the following figure.

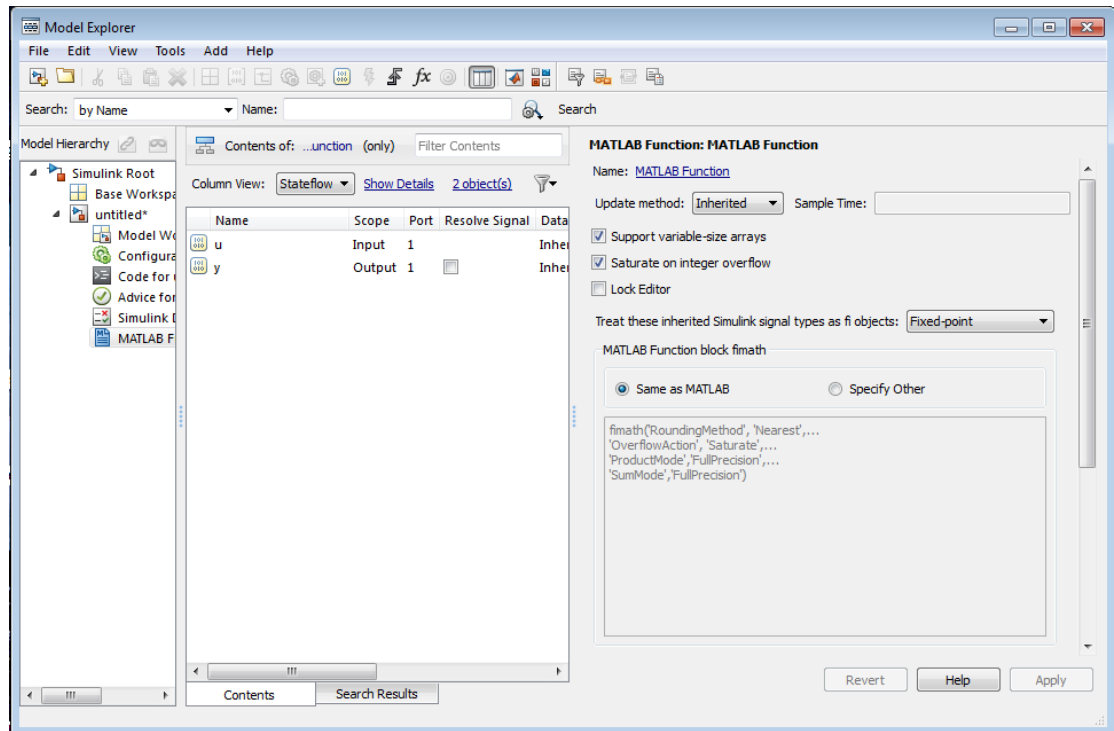

The following parameters in the **Dialog** pane apply to MATLAB Function blocks in models that use fixed-point and integer data types:

Treat these inherited Simulink signal types as fi objects

Choose whether to treat inherited fixed-point and integer signals as **fi** objects.

- When you select **Fixed-point**, the MATLAB Function block treats all fixed-point inputs as Fixed-Point Designer **fi** objects.
- When you select **Fixed-point & Integer**, the MATLAB Function block treats all fixed-point and integer inputs as Fixed-Point Designer **fi** objects.

MATLAB Function block fimath

Specify the `fimath` properties for the block to associate with the following objects:

- All fixed-point and integer input signals to the MATLAB Function block that you choose to treat as **fi** objects.

- All `fi` and `fimath` objects constructed in the MATLAB Function block.

You can select one of the following options for the **MATLAB Function block** `fimath`:

- **Same as MATLAB** — When you select this option, the block uses the same `fimath` properties as the current default `fimath`. The edit box appears dimmed and displays the current default `fimath` in read-only form.
- **Specify Other** — When you select this option, you can specify your own `fimath` object in the edit box.


For more information on these parameters, see “Using `fimath` Objects in MATLAB Function Blocks” on page 13-65.

Using `fimath` Objects in MATLAB Function Blocks

The **MATLAB Function block** `fimath` parameter enables you to specify one set of `fimath` object properties for the MATLAB Function block. The block associates the `fimath` properties you specify with the following objects:

- All fixed-point and integer input signals to the MATLAB Function block that you choose to treat as `fi` objects.
- All `fi` and `fimath` objects constructed in the MATLAB Function block.

You can set these parameters on the following dialog box, which you can access through either the Model Explorer or the “Ports and Data Manager”.

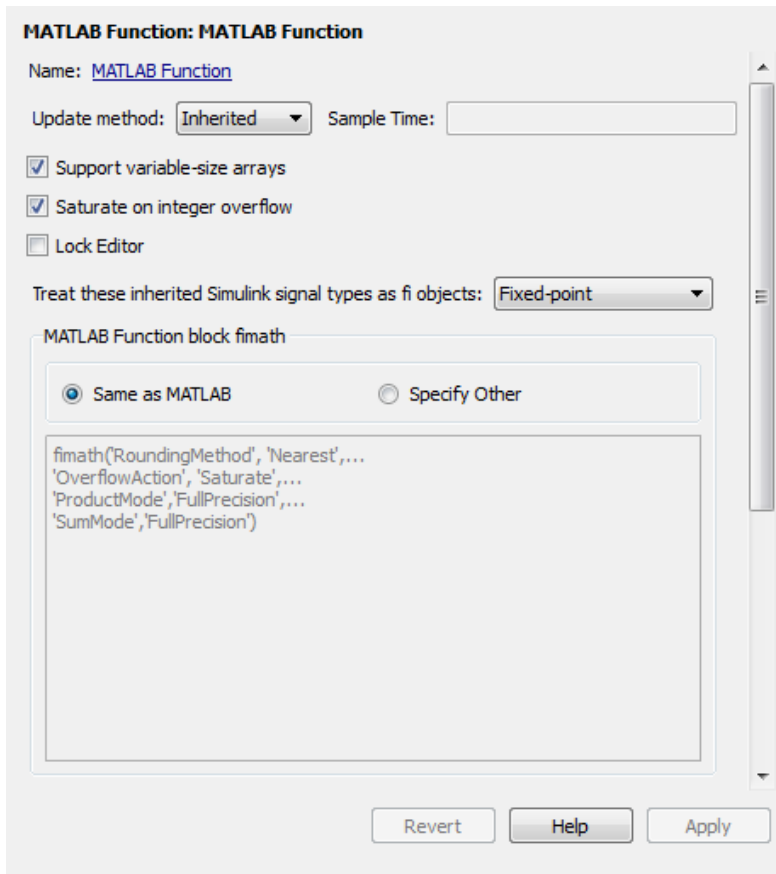

- To access this pane through the Model Explorer:
 - Select **View > Model Explorer** from your model menu.
 - Then, select the MATLAB Function block from the Model Hierarchy pane on the left side of the Model Explorer.
- To access this pane through the Ports and Data Manager, select **Tools > Edit Data/Ports** from the MATLAB Editor menu.

When you select **Same as MATLAB** for the **MATLAB Function block fimath**, the MATLAB Function block uses the current default fimath. The current default fimath appears dimmed and in read-only form in the edit box.

When you select **Specify other** the block allows you to specify your own `fimath` object in the edit box. You can do so in one of two ways:

- Constructing the `fimath` object inside the edit box.
- Constructing the `fimath` object in the MATLAB or model workspace and then entering its variable name in the edit box.

Note: If you use this option and plan to share your model with others, make sure you define the variable in the model workspace. See “Sharing Models with Fixed-Point MATLAB Function Blocks” on page 13-67 for more information on sharing models.

The Fixed-Point Designer `isfimathlocal` function supports code generation for MATLAB.

Sharing Models with Fixed-Point MATLAB Function Blocks

When you collaborate with a coworker, you can share a fixed-point model using the MATLAB Function block. To share a model, make sure that you move any variables you define in the MATLAB workspace, including `fimath` objects, to the model workspace. For example, try the following:

- 1 Place a MATLAB Function block in a new model. You can find the block in the Simulink User-Defined Functions library.
- 2 Define a `fimath` object in the MATLAB workspace that you want to use for any Simulink fixed-point signal entering the MATLAB Function block as an input:

```
F = fimath('RoundingMethod','Floor','OverflowAction','Wrap',...
          'ProductMode','KeepLSB','ProductWordLength',32,...
          'SumMode','KeepLSB','SumWordLength',32)
```


```
F =
    RoundingMethod: Floor
    OverflowAction: Wrap
           ProductMode: KeepLSB
ProductWordLength: 32
           SumMode: KeepLSB
    SumWordLength: 32
    CastBeforeSum: true
```

- 3 Open the Model Explorer by selecting **View > Model Explorer** from your model.
- 4 Expand the **untitled*** node in the **Model Hierarchy** pane of the Model Explorer, and select the **MATLAB Function** node.

- 5 Select **Specify other** for the **MATLAB Function** block **fimath** parameter and enter the variable **F** into the edit box on the **Dialog** pane. Click **Apply** to save your changes.

You have now defined the **fimath** properties to be associated with all Simulink fixed-point input signals and all **fi** and **fimath** objects constructed within the block.

- 6 Select the **Base Workspace** node in the **Model Hierarchy** pane. You can see the variable **F** that you have defined in the MATLAB workspace listed in the **Contents** pane. If you send this model to a coworker, that coworker must first define that same variable in the MATLAB workspace to get the same results.
- 7 Cut the variable **F** from the base workspace, and paste it into the model workspace listed under the node for your model, in this case, **untitled***. The Model Explorer now appears as shown in the following figure.

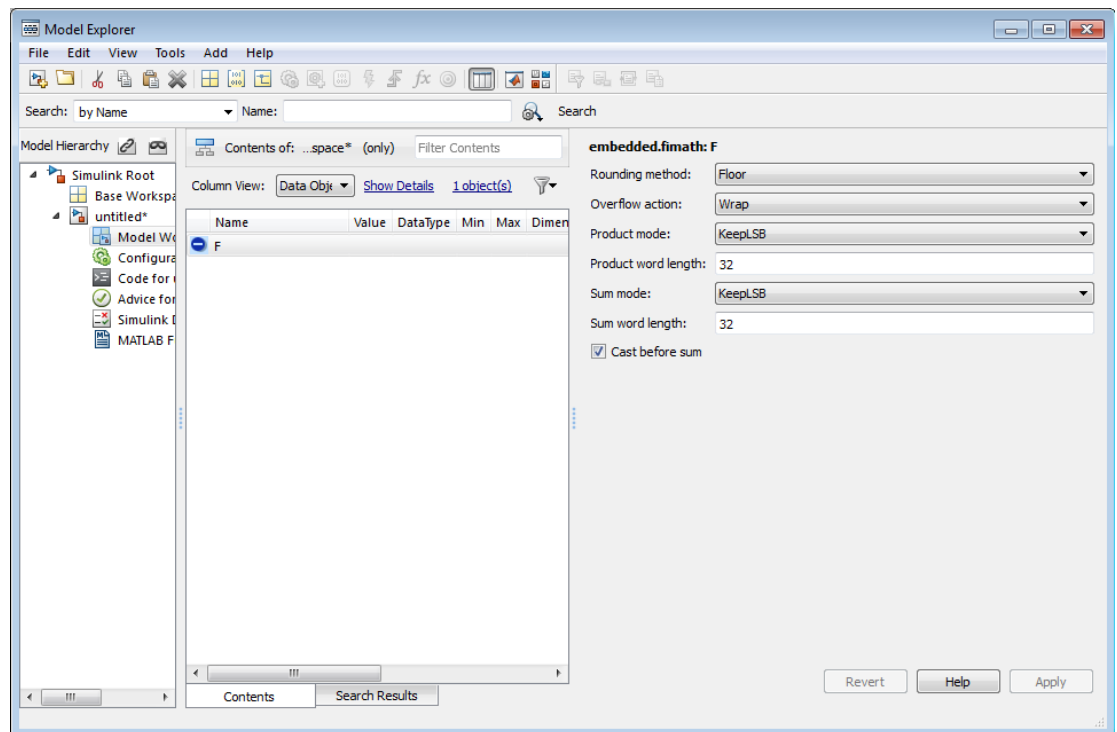

You can now email your model to a coworker. Because you included the required variables in the workspace of the model itself, your coworker can simply run the

model and get the correct results. Receiving and running the model does not require any extra steps.

Generate Fixed-Point FIR Code Using MATLAB Function Block

In this section...

“Program the MATLAB Function Block” on page 13-70

“Prepare the Inputs” on page 13-71

“Create the Model” on page 13-71

“Define the fimath Object Using the Model Explorer” on page 13-73

“Run the Simulation” on page 13-73

Program the MATLAB Function Block

The following example shows how to create a fixed-point, lowpass, direct form FIR filter in Simulink. To create the FIR filter, you use Fixed-Point Designer software and the MATLAB Function block. In this example, you perform the following tasks in the sequence shown:

- 1 Place a MATLAB Function block in a new model. You can find the block in the Simulink User-Defined Functions library.
- 2 Save your model as `cgen_fi`.
- 3 Double-click the MATLAB Function block in your model to open the MATLAB Function Block Editor. Type or copy and paste the following MATLAB code, including comments, into the Editor:

```
function [yout,zf] = dffirdemo(b, x, zi) %#codegen
%codegen_fi doc model example
%Initialize the output signal yout and the final conditions zf
Ty = numerictype(1,12,8);
yout = fi(zeros(size(x)), 'numerictype', Ty);
zf = zi;

% FIR filter code
for k=1:length(x);
    % Update the states: z = [x(k);z(1:end-1)]
    zf(:) = [x(k);zf(1:end-1)];
    % Form the output: y(k) = b*z
    yout(k) = b*zf;
end
```

```
% Plot the outputs only in simulation.  
% This does not generate C code.  
figure;  
subplot(211);plot(x); title('Noisy Signal');grid;  
subplot(212);plot(yout); title('Filtered Signal');grid;
```


Prepare the Inputs

Define the filter coefficients b , noise x , and initial conditions z_i by typing the following code at the MATLAB command line:

```
b=fidemo.fi_fir_coefficients;  
load mtlb  
x = mtlb;  
n = length(x);  
noise = sin(2*pi*2140*(0:n-1)'./Fs);  
x = x + noise;  
zi = zeros(length(b),1);
```

Create the Model

- 1 Add blocks to your model to create the following system.

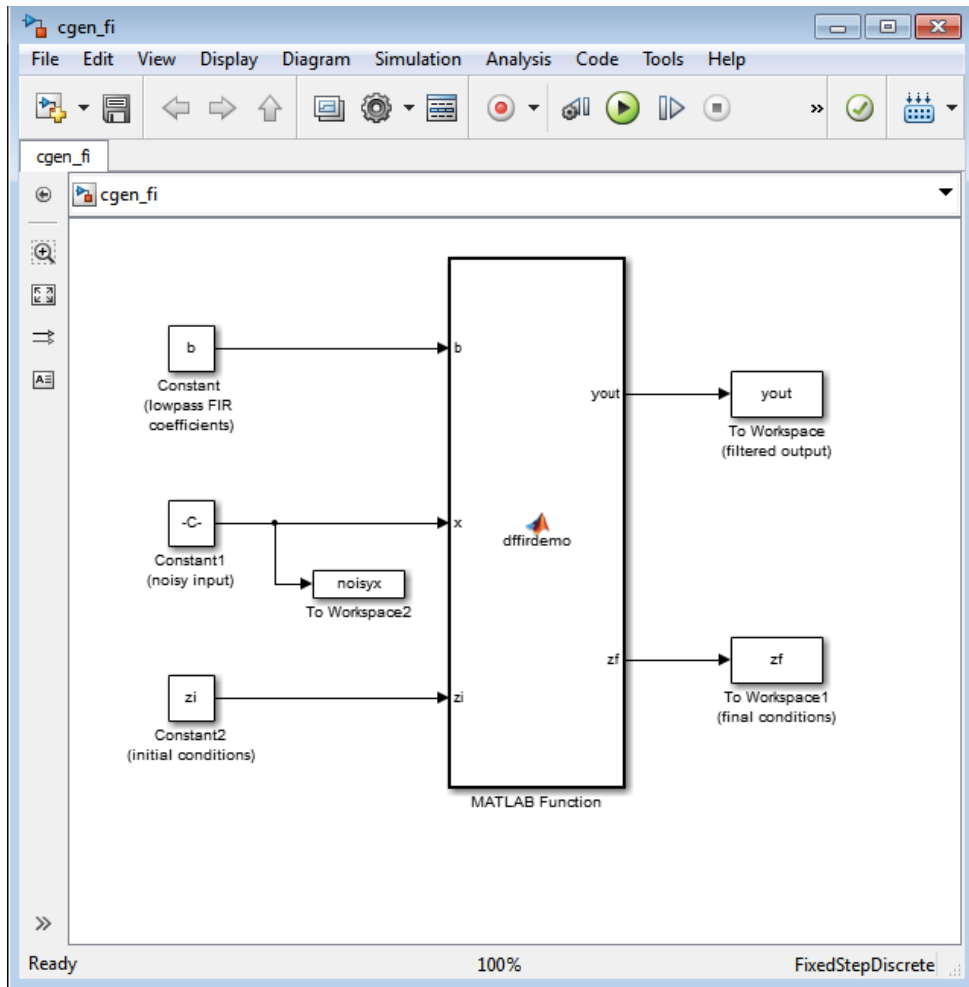

- 2 Set the block parameters in the model to these “Fixed-Point FIR Code Example Parameter Values” on page 13-74.
- 3 From the model menu, select **Simulation > Model Configuration Parameters** and set the following parameters.

Parameter	Value
Stop time	0

Parameter	Value
Type	Fixed-step
Solver	discrete (no continuous states)

Click **Apply** to save your changes.

Define the `fimath` Object Using the Model Explorer

- 1 Open the Model Explorer for the model.
- 2 Click the `cgen_fi` > **MATLAB Function** node in the **Model Hierarchy** pane. The dialog box for the MATLAB Function block appears in the **Dialog** pane of the Model Explorer.
- 3 Select **Specify other** for the **MATLAB Function block** `fimath` parameter on the MATLAB Function block dialog box. You can then create the following `fimath` object in the edit box:

```
fimath('RoundingMethod','Floor','OverflowAction','Wrap',...
      'ProductMode','KeepLSB','ProductWordLength',32,...
      'SumMode','KeepLSB','SumWordLength',32)
```

The `fimath` object you define here is associated with fixed-point inputs to the MATLAB Function block as well as the `fi` object you construct within the block.

By selecting **Specify other** for the **MATLAB Function block** `fimath`, you ensure that your model always uses the `fimath` properties you specified.

Run the Simulation

- 1 Run the simulation by selecting your model and typing **Ctrl+T**. While the simulation is running, information outputs to the MATLAB command line. You can look at the plots of the noisy signal and the filtered signal.
- 2 Next, build embeddable C code for your model by selecting the model and typing **Ctrl+B**. While the code is building, information outputs to the MATLAB command line. A folder called `coder_fi_grt_rtw` is created in your current working folder.
- 3 Navigate to `coder_fi_grt_rtw` > `cgen_fi.c`. In this file, you can see the code generated from your model. Search for the following comment in your code:

```
/* codegen_fi doc model example */
```

This search brings you to the beginning of the section of the code that your MATLAB Function block generated.

Fixed-Point FIR Code Example Parameter Values

Block	Parameter	Value
Constant	Constant value	b
	Interpret vector parameters as 1-D	Not selected
	Sampling mode	Sample based
	Sample time	inf
	Mode	Fixed point
	Signedness	Signed
	Scaling	Slope and bias
	Word length	12
	Slope	2^{-12}
	Bias	0
	Constant1	Constant value
Interpret vector parameters as 1-D		Unselected
Sampling mode		Sample based
Sample time		1
Mode		Fixed point
Signedness		Signed
Scaling		Slope and bias
Word length		12
Slope		2^{-8}
Bias		0
Constant2		Constant value
	Interpret vector parameters as 1-D	Unselected
	Sampling mode	Sample based
	Sample time	inf

Block	Parameter	Value
	Mode	Fixed point
	Signedness	Signed
	Scaling	Slope and bias
	Word length	12
	Slope	2^{-8}
	Bias	0
To Workspace	Variable name	yout
	Limit data points to last	inf
	Decimation	1
	Sample time	-1
	Save format	Array
	Log fixed-point data as a fi object	Selected
To Workspace1	Variable name	zf
	Limit data points to last	inf
	Decimation	1
	Sample time	-1
	Save format	Array
	Log fixed-point data as a fi object	Selected
To Workspace2	Variable name	noisyx
	Limit data points to last	inf
	Decimation	1
	Sample time	-1
	Save format	Array
	Log fixed-point data as a fi object	Selected

Accelerate Code for Variable-Size Data

In this section...

“Disable Support for Variable-Size Data” on page 13-76

“Control Dynamic Memory Allocation” on page 13-76

“Accelerate Code for MATLAB Functions with Variable-Size Data” on page 13-77

“Accelerate Code for a MATLAB Function That Expands a Vector in a Loop” on page 13-79

Variable-size data is data whose size might change at run time. MATLAB supports bounded and unbounded variable-size data for code generation. *Bounded variable-size data* has fixed upper bounds. This data can be allocated statically on the stack or dynamically on the heap. *Unbounded variable-size data* does not have fixed upper bounds. This data must be allocated on the heap. By default, for MEX and C/C++ code generation, support for variable-size data is enabled and dynamic memory allocation is enabled for variable-size arrays whose size exceeds a configurable threshold.

Disable Support for Variable-Size Data

By default, for MEX and C/C++ code acceleration, support for variable-size data is enabled. You modify variable sizing settings at the command line.

- 1 Create a configuration object for code generation.

```
cfg = coder.mexconfig;
```

- 2 Set the `EnableVariableSizing` option:

```
cfg.EnableVariableSizing = false;
```

- 3 Using the `-config` option, pass the configuration object to `fiaccel` :

```
fiaccel -config cfg foo
```

Control Dynamic Memory Allocation

By default, dynamic memory allocation is enabled for variable-size arrays whose size exceeds a configurable threshold. If you disable support for variable-size data, you also disable dynamic memory allocation. You can modify dynamic memory allocation settings at the command line.

- 1 Create a configuration object for code acceleration. For example, for a MEX function:

```
mexcfg = coder.mexconfig;
```
- 2 Set the `DynamicMemoryAllocation` option:

Setting	Action
<code>mexcfg.DynamicMemoryAllocation='Off';</code>	Dynamic memory allocation is disabled. All variable-size data is allocated statically on the stack.
<code>mexcfg.DynamicMemoryAllocation='AllVariableSizeArrays';</code>	Dynamic memory allocation is enabled for all variable-size arrays. All variable-size data is allocated dynamically on the heap.
<code>mexcfg.DynamicMemoryAllocation='Threshold';</code>	Dynamic memory allocation is enabled for all variable-size arrays whose size (in bytes) is greater than or equal to the value specified using the <code>Dynamic memory allocation threshold</code> parameter. Variable-size arrays whose size is less than this threshold are allocated on the stack.

- 3 Optionally, if you set `Dynamic memory allocation` to `'Threshold'`, configure `Dynamic memory allocation threshold` to fine tune memory allocation.
- 4 Using the `-config` option, pass the configuration object to `fiaccl`:

```
fiaccl -config mexcfg foo
```

Accelerate Code for MATLAB Functions with Variable-Size Data

Here is a basic workflow that generates MEX code.

- 1 In the MATLAB Editor, add the compilation directive `%#codegen` at the top of your function.

This directive:

- Indicates that you intend to generate code for the MATLAB algorithm
- Turns on checking in the MATLAB Code Analyzer to detect potential errors during code generation

2 Address issues detected by the Code Analyzer.

In some cases, the MATLAB Code Analyzer warns you when your code assigns data a fixed size but later grows the data, such as by assignment or concatenation in a loop. If that data is supposed to vary in size at run time, you can ignore these warnings.

3 Generate a MEX function using `fiaccel`. Use the following command-line options:

- `-args {coder.typeof...}` if you have variable-size inputs
- `-report` to generate a code generation report

For example:

```
fiaccel -report foo -args {coder.typeof(0,[2 4],1)}
```

This command uses `coder.typeof` to specify one variable-size input for function `foo`. The first argument, `0`, indicates the input data type (`double`) and complexity (`real`). The second argument, `[2 4]`, indicates the size, a matrix with two dimensions. The third argument, `1`, indicates that the input is variable sized. The upper bound is 2 for the first dimension and 4 for the second dimension.

Note: During compilation, `fiaccel` detects variables and structure fields that change size after you define them, and reports these occurrences as errors. In addition, `fiaccel` performs a runtime check to generate errors when data exceeds upper bounds.

4 Fix size mismatch errors:

Cause:	How To Fix:	For More Information:
You try to change the size of data after its size has been locked.	Declare the data to be variable sized.	See “Diagnosing and Fixing Size Mismatch Errors”.

5 Fix upper bounds errors

Cause:	How To Fix:	For More Information:
MATLAB cannot determine or compute the upper bound	Specify an upper bound.	See “Specifying Upper Bounds for Variable-Size Data” and “Diagnosing and Fixing Size Mismatch Errors”.
MATLAB attempts to compute an upper bound for unbounded variable-size data.	If the data is unbounded, enable dynamic memory allocation.	See “Control Dynamic Memory Allocation” on page 13-76

- 6 Generate C/C++ code using the `fiaccel` function.

Accelerate Code for a MATLAB Function That Expands a Vector in a Loop

- “About the MATLAB Function `unique_tol`” on page 13-79
- “Step 1: Add Compilation Directive for Code Generation” on page 13-80
- “Step 2: Address Issues Detected by the Code Analyzer” on page 13-80
- “Step 3: Generate MEX Code” on page 13-80
- “Step 4: Fix the Size Mismatch Error” on page 13-82
- “Step 5: Compare Execution Speed of MEX Function to Original Code” on page 13-84

About the MATLAB Function `unique_tol`

This example uses the function `unique_tol`. This function returns in vector `B` a version of input vector `A`, where the elements are unique to within tolerance `tol` of each other. In vector `B`, $\text{abs}(B(i) - B(j)) > \text{tol}$ for all `i` and `j`. Initially, assume input vector `A` can store up to 100 elements.

```
function B = unique_tol(A, tol)
A = sort(A);
B = A(1);
k = 1;
for i = 2:length(A)
    if abs(A(k) - A(i)) > tol
        B = [B A(i)];
        k = i;
    end
end
```

```
    end  
end
```

Step 1: Add Compilation Directive for Code Generation

Add the `%#codegen` compilation directive at the top of the function:

```
function B = uniquetol(A, tol) %#codegen  
A = sort(A);  
B = A(1);  
k = 1;  
for i = 2:length(A)  
    if abs(A(k) - A(i)) > tol  
        B = [B A(i)];  
        k = i;  
    end  
end
```

Step 2: Address Issues Detected by the Code Analyzer

The Code Analyzer detects that variable `B` might change size in the `for`-loop. It issues this warning:

The variable 'B' appears to change size on every loop iteration. Consider preallocating for speed.

In this function, vector `B` should expand in size as it adds values from vector `A`. Therefore, you can ignore this warning.

Step 3: Generate MEX Code

To generate MEX code, use the `fiaccel` function.

1 Generate a MEX function for `uniquetol`:

```
T = numerictype(1, 16, 15);  
fiaccel -report uniquetol -args {coder.typeof(fi(0,T),[1 100],1),coder.typeof(fi(0,T))}
```

What do these command-line options mean?

`T = numerictype(1, 16, 15)` creates a signed `numerictype` object with a 16-bit word length and 15-bit fraction length that you use to specify the data type of the input arguments for the function `uniquetol`.

The `fiaccel` function `-args` option specifies the class, complexity, and size of each input to function `uniqueTol`:

- The first argument, `coder.typeof`, defines a variable-size input. The expression `coder.typeof(fi(0,T),[1 100],1)` defines input `A` as a vector of real, signed embedded.fi objects that have a 16-bit word length and 15-bit fraction length. The vector has a fixed upper bound; its first dimension is fixed at 1 and its second dimension can vary in size up to 100 elements.

For more information, see “Specify Variable-Size Inputs at the Command Line”.

- The second argument, `coder.typeof(fi(0,T))`, defines input `tol` as a real, signed embedded.fi object with a 16-bit word length and 15-bit fraction length.

The `-report` option instructs `fiaccel` to generate a code generation report, even if no errors or warnings occur.

For more information, see the `fiaccel` reference page.

Executing this command generates a compiler error:

```
??? Size mismatch (size [1 x 1] ~= size [1 x 2]).  
The size to the left is the size  
of the left-hand side of the assignment.
```

- 2 Open the error report and select the **Variables** tab.

Function: `uniquetol`

```

1 function B = uniquetol(A, tol) %#codegen
2 A = sort(A);
3 %coder.varsize('B');
4 B = A(1);
5 k = 1;
6 for i = 2:length(A)
7     if abs(A(k) - A(i)) > tol
8         B = [B A(i)];
9         k = i;
10    end
11 end

```

Summary	All Messages (1)	Variables							
Order	Variable	Type	Size	Class	Complex	Signedness	WL	FL	
+	1	B	Output	1 x 1	embedded.fi	No	Signed	16	15
+	2	A > 1	Input	1 x :100	embedded.fi	No	Signed	16	15
+	3	A > 2	Local	1 x :?	embedded.fi	No	Signed	16	15
+	4	tol	Input	1 x 1	embedded.fi	No	Signed	16	15
	5	k	Local	1 x 1	double	No	-	-	-
	6	i	Local	1 x 1	double	No	-	-	-

The error indicates a size mismatch between the left-hand side and right-hand side of the assignment statement `B = [B A(i)]`; The assignment `B = A(1)` establishes the size of `B` as a fixed-size scalar (1 x 1). Therefore, the concatenation of `[B A(i)]` creates a 1 x 2 vector.

Step 4: Fix the Size Mismatch Error

To fix this error, declare `B` to be a variable-size vector.

- 1 Add this statement to the `uniquetol` function:

```
coder.varsize('B');
```

It should appear before `B` is used (read). For example:

```
function B = uniquetol(A, tol) %#codegen
```

```
A = sort(A);  
  
coder.varsize('B');  
  
B = A(1);  
k = 1;  
for i = 2:length(A)  
    if abs(A(k) - A(i)) > tol  
        B = [B A(i)];  
        k = i;  
    end  
end
```

The function `coder.varsize` declares every instance of `B` in `uniquetol` to be variable sized.

- 2 Generate code again using the same command:

```
fiaccl -report uniquetol -args {coder.typeof(fi(0,T),[1 100],1),coder.typeof(fi(0,T))}
```

In the current folder, `fiaccl` generates a MEX function for `uniquetol` named `uniquetol_mex` and provides a link to the code generation report.

- 3 Click the *View report* link.
- 4 In the code generation report, select the **Variables** tab.

Function: `uniquetol`

```

1 function B = uniquetol(A, tol) %#codegen
2 A = sort(A);
3 coder.ysize('B');
4 B = A(1);
5 k = 1;
6 for i = 2:length(A)
7     if abs(A(k) - A(i)) > tol
8         B = [B A(i)];
9         k = i;
10    end
11 end

```

Summary	All Messages (0)	Variables						
Order	Variable	Type	Size	Class	Complex	Signedness	WL	FL
1	B	Output	1x?	embedded.fi	No	Signed	16	15
2	A	Input	1x:100	embedded.fi	No	Signed	16	15
3	tol	Input	1x1	embedded.fi	No	Signed	16	15
4	k	Local	1x1	double	No	-	-	-
5	i	Local	1x1	double	No	-	-	-

The size of variable B is 1x?, indicating that it is variable size with no upper bounds.

Step 5: Compare Execution Speed of MEX Function to Original Code

Run the original MATLAB algorithm and MEX function with the same inputs for the same number of loop iterations and compare their execution speeds.

- 1 Create inputs of the correct class, complexity, and size to pass to the `uniquetol` MATLAB and MEX functions.

```

x = fi(rand(1,90), T);
tol = fi(0, T);

```

- 2 Run the original `uniquetol` function in a loop and time how long it takes to execute 10 iterations of the loop.

```

tic; for k=1:10, b = uniquetol(x,tol); end; tSim=toc

```

- 3** Run the generated MEX function with the same inputs for the same number of loop iterations.

```
tic; for k=1:10, b = uniquetol_mex(x,tol); end; tSim_mex=toc
```

- 4** Compare the execution times.

```
r = tSim/tSim_mex
```


This example shows that generating a MEX function using `fiaccel` greatly accelerates the execution of the fixed-point algorithm.

Accelerate Fixed-Point Simulation

This example shows how to accelerate fixed-point algorithms using `fiaccel` function. You generate a MEX function from MATLAB® code, run the generated MEX function, and compare the execution speed with MATLAB code simulation.

Description of the Example

This example uses a first-order feedback loop. It also uses a quantizer to avoid infinite bit growth. The output signal is delayed by one sample and fed back to dampen the input signal.

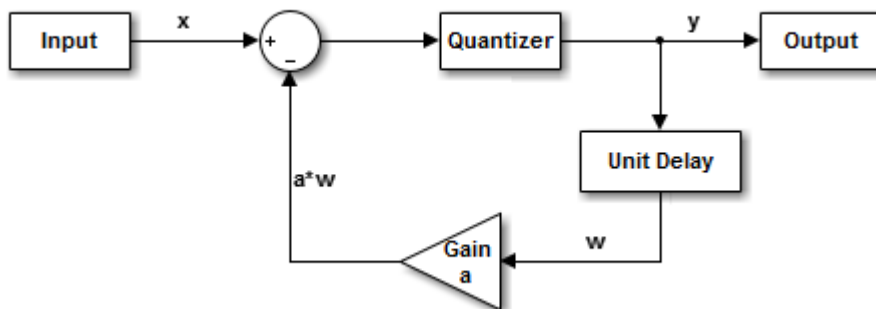

Copy Required File

You need this MATLAB-file to run this example. Copy it to a temporary directory. This step requires write-permission to the system's temporary directory.

```

tempdirObj = fidemo.fiTempdir('fiaccelbasicsdemo');
fiaccedir = tempdirObj.tempDir;
fiaccesrc = ...
    fullfile(matlabroot,'toolbox','fixedpoint','fidemos','+fidemo','fiaccelFeedback.m');
copyfile(fiaccesrc,fiaccedir,'f');
  
```

Inspect the MATLAB Feedback Function Code

The MATLAB function that performs the feedback loop is in the file `fiaccelFeedback.m`. This code quantizes the input, and performs the feedback loop action :

```

type(fullfile(fiaccel_dir, 'fiaccelFeedback.m'))

function [y,w] = fiaccelFeedback(x,a,y,w)
%FIACCELFEEDBACK Quantizer and feedback loop used in FIACCELBASICSDEMO.

% Copyright 1984-2013 The MathWorks, Inc.
%#codegen

for n = 1:length(x)
    y(n) = quantize(x(n) - a*w, true, 16, 12, 'floor', 'wrap');
    w     = y(n);
end

```

The following variables are used in this function:

- `x` is the input signal vector.
- `y` is the output signal vector.
- `a` is the feedback gain.
- `w` is the unit-delayed output signal.

Create the Input Signal and Initialize Variables

```

rng('default'); % Random number generator
x = fi(2*rand(1000,1)-1,true,16,15); % Input signal
a = fi(.9,true,16,15); % Feedback gain
y = fi(zeros(size(x)),true,16,12); % Initialize output. Fraction length
% is chosen to prevent overflow
w = fi(0,true,16,12); % Initialize delayed output
A = coder.Constant(a); % Declare "a" constant for code
% generation

```

Run Normal Mode

```

tic,
y = fiaccelFeedback(x,a,y,w);
t1 = toc;

```

Build the MEX Version of the Feedback Code

```

fiaccel fiaccelFeedback -args {x,A,y,w} -o fiaccelFeedback_mex

```

Run the MEX Version

```

tic

```

```
y2 = fiaccelFeedback_mex(x,y,w);  
t2 = toc;
```

Acceleration Ratio

Code acceleration provides optimizations for accelerating fixed-point algorithms through MEX file generation. Fixed-Point Designer™ provides a convenience function `fiaccel` to convert your MATLAB code to a MEX function, which can greatly accelerate the execution speed of your fixed-point algorithms.

```
r = t1/t2
```

```
r =
```

```
127.6524
```

Clean up Temporary Files

```
clear fiaccelFeedback_mex;  
tempdirObj.cleanUp;
```


Code Generation Readiness Tool

In this section...

“What Information Does the Code Generation Readiness Tool Provide?” on page 13-89

“Summary Tab” on page 13-90


“Code Structure Tab” on page 13-92

“See Also” on page 13-95

What Information Does the Code Generation Readiness Tool Provide?

The code generation readiness tool screens MATLAB code for features and functions that are not supported for code generation. The tool provides a report that lists the source files that contain unsupported features and functions. The report also provides an indication of how much work you must do to make the MATLAB code suitable for code generation. The tool might not detect all code generation issues. Under certain circumstances, it might report false errors. Because the tool might not detect all issues, or might report false errors, generate a MEX function to verify that your code is suitable for code generation before generating C code.

Summary Tab

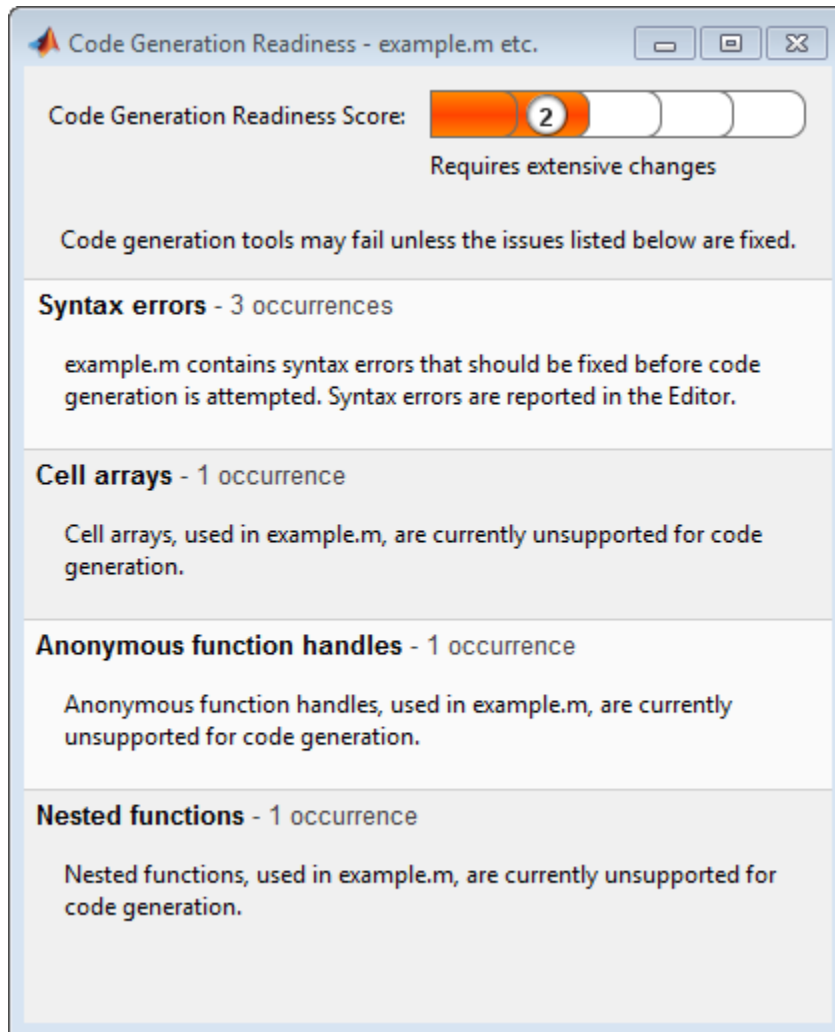


The **Summary** tab provides a **Code Generation Readiness Score** which ranges from 1 to 5. A score of 1 indicates that the tool has detected issues that require extensive changes to the MATLAB code to make it suitable for code generation. A score of 5 indicates that the tool has not detected code generation issues; the code is ready to use with no or minimal changes.

On this tab, the tool also provides information about:

- MATLAB syntax issues. These issues are reported in the MATLAB editor. Use the code analyzer to learn more about the issues and how to fix them.
- Unsupported MATLAB function calls.
- Unsupported MATLAB language features, such as recursion, cell arrays, and nested functions.
- Unsupported data types.

Code Structure Tab

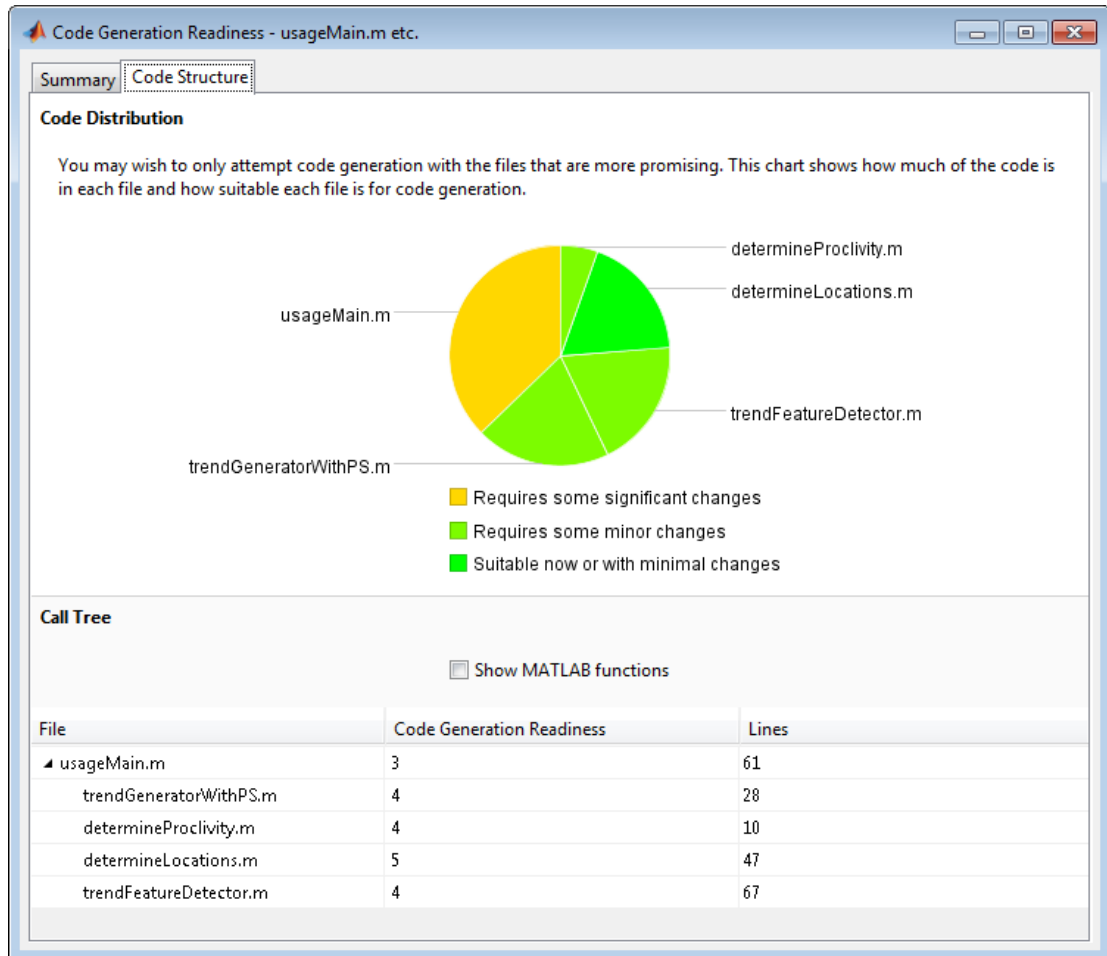

If the code that you are checking calls other MATLAB functions, or you are checking multiple entry-point functions, the tool displays the **Code Structure Tab**.

This tab provides information about the relative size of each file and how suitable each file is for code generation.

Code Distribution


The **Code Distribution** pane provides a pie chart that shows the relative sizes of the files and how suitable each file is for code generation. This information is useful during the planning phase of a project for estimation and scheduling purposes. If the report indicates that there are multiple files not yet suitable for code generation, consider fixing files that require minor changes before addressing files with significant issues.

Call Tree

The **Call Tree** pane provides information on the nesting of function calls. For each called function, the report provides a **Code Generation Readiness** score which ranges from 1 to 5. A score of 1 indicates that the tool has detected issues that require extensive changes to the MATLAB code to make it suitable for code generation. A score of 5 indicates that the tool has not detected code generation issues; the code is ready to use with no or minimal changes. The report also lists the number of lines of code in each file.

Show MATLAB Functions

If you select **Show MATLAB Functions**, the report also lists the MATLAB functions called by your function code. For each of these MATLAB functions, if the function is supported for code generation, the report sets **Code Generation Readiness** to **Yes**.

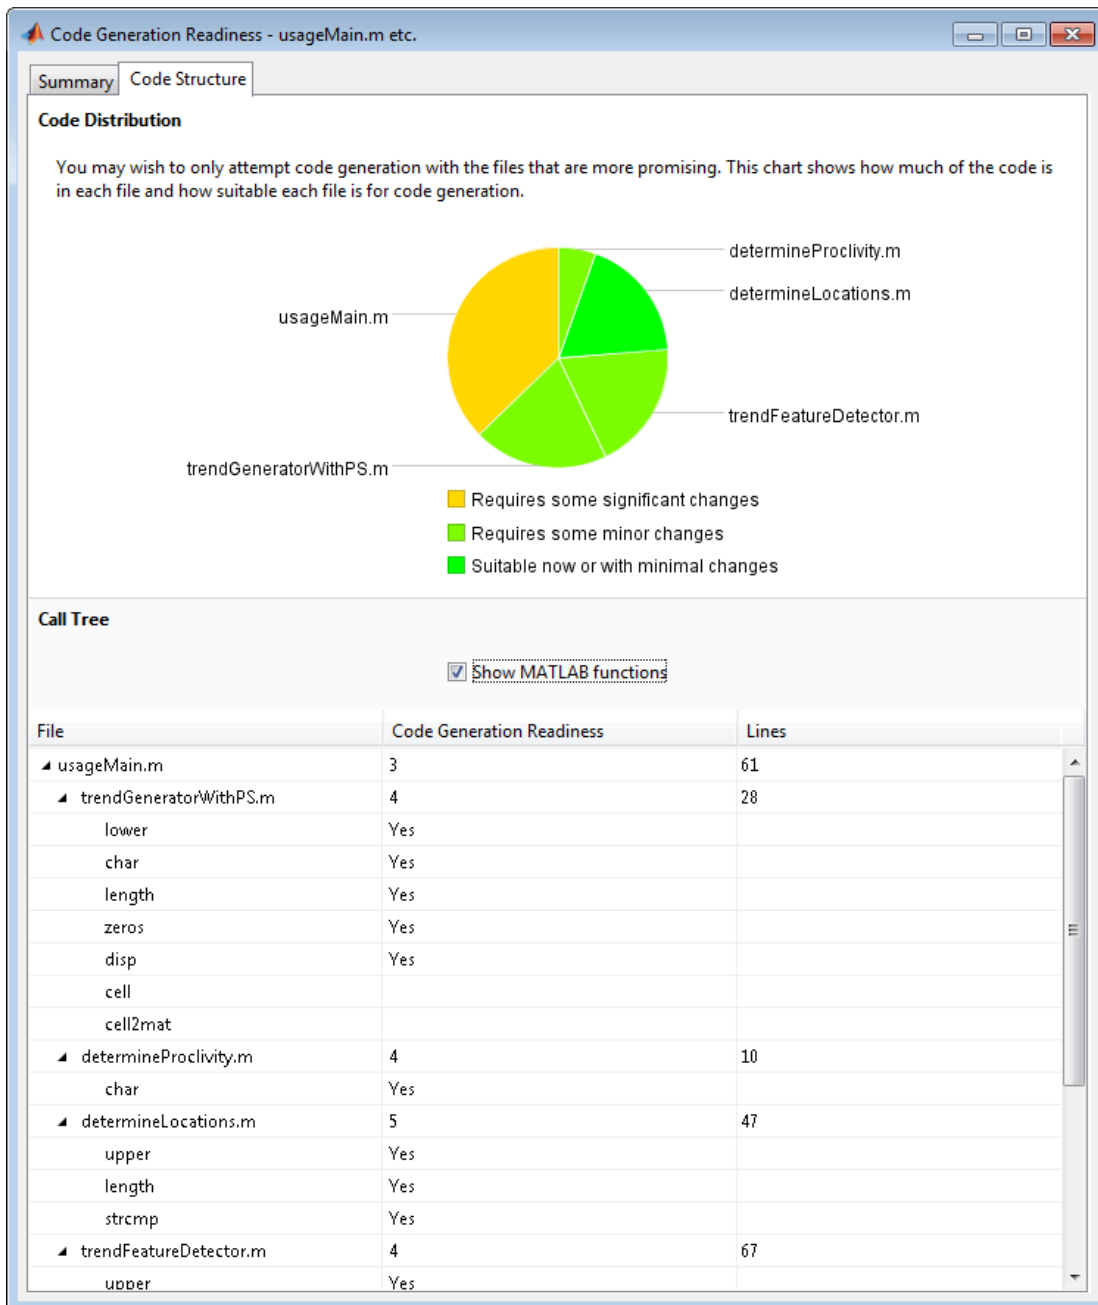

See Also

- “Check Code Using the Code Generation Readiness Tool”

Check Code Using the Code Generation Readiness Tool

Run Code Generation Readiness Tool at the Command Line

- 1 Navigate to the folder that contains the file that you want to check for code generation readiness.
- 2 At the MATLAB command prompt, enter:

```
coder.screener('filename')
```

The **Code Generation Readiness** tool opens for the file named `filename`, provides a code generation readiness score, and lists issues that must be fixed prior to code generation.

Run the Code Generation Readiness Tool From the Current Folder Browser

- 1 In the current folder browser, right-click the file that you want to check for code generation readiness.
- 2 From the context menu, select **Check Code Generation Readiness**.

The **Code Generation Readiness** tool opens for the selected file and provides a code generation readiness score and lists issues that must be fixed prior to code generation.

See Also

- “Code Generation Readiness Tool” on page 13-89

Check Code Using the MATLAB Code Analyzer

The code analyzer checks your code for problems and recommends modifications. You can use the code analyzer to check your code interactively in the MATLAB Editor while you work.

To verify that continuous code checking is enabled:

- 1** In MATLAB, select the **Home** tab and then click **Preferences**.
- 2** In the **Preferences** dialog box, select **Code Analyzer**.
- 3** In the **Code Analyzer Preferences** pane, verify that **Enable integrated warning and error messages** is selected.

Fix Errors Detected at Code Generation Time

When the code generation software detects errors or warnings, it automatically generates an error report. The error report describes the issues and provides links to the MATLAB code with errors.

To fix the errors, modify your MATLAB code to use only those MATLAB features that are supported for code generation. For more information, see “Algorithm Design Basics”. Choose a debugging strategy for detecting and correcting code generation errors in your MATLAB code. For more information, see “Debugging Strategies”.

When code generation is complete, the software generates a MEX function that you can use to test your implementation in MATLAB.

If your MATLAB code calls functions on the MATLAB path, unless the code generation software determines that these functions should be extrinsic or you declare them to be extrinsic, it attempts to compile these functions. See “Resolution of Function Calls for Code Generation”. To get detailed diagnostics, add the `%#codegen` directive to each external function that you want `codegen` to compile.

See Also

- “Use Fixed-Point Code Generation Reports”
- “Why Test MEX Functions in MATLAB?”
- “When to Generate Code from MATLAB Algorithms”
- “Debugging Strategies”
- “Declaring MATLAB Functions as Extrinsic Functions”

Avoid Multiword Operations in Generated Code

This example shows how to avoid multiword operations in generated code by using the `accumpos` function instead of simple addition in your MATLAB algorithm. Similarly, you can use `accumneg` for subtraction.

This example requires a MATLAB Coder license.

Write a simple MATLAB algorithm that adds two numbers and returns the result.

```
function y = my_add1(a, b)
y = a+b;
```

Write a second MATLAB algorithm that adds two numbers using `accumpos` and returns the result.

```
function y = my_add2(a, b)
y = accumpos(a, b); % floor, wrap
```

`accumpos` adds `a` and `b` using the data type of `a`. `b` is cast into the data type of `a`. If `a` is a `fi` object, by default, `accumpos` sets the rounding mode to 'Floor' and the overflow action to 'Wrap'. It ignores the `fimath` properties of `a` and `b`.

Compare the outputs of the two functions in MATLAB.

```
a = fi(1.25, 1, 32,5);
b = fi(0.125, 0, 32);
%%
y1 = my_add1(a, b)
y2 = my_add2(a, b)

y1 =

    1.3750

        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 62
        FractionLength: 34

y2 =

    1.3750
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 32
FractionLength: 5
```

For the simple addition, the word length grows but using `accumpos`, the word length of the result is the same as that of `a`.

Generate C code for the function `my_add1`. First, disable use of the `long long` data type because it is not usually supported by the target hardware.

```
hw = coder.HardwareImplementation;
hw.ProdHWDeviceType = 'Generic->32-bit Embedded Processor';
hw.ProdLongLongMode = false;
hw.ProdBitPerLong = 32;
cfg = coder.config('lib');
cfg.HardwareImplementation = hw;
codegen my_add1 -args {a,b} -report -config cfg
```

MATLAB Coder generates a C static library and provides a link to the code generation report.

View the generated code for the simple addition. Click the `View report` link to open the code generation report and then scroll to the code for the `my_add1` function.

```
/* Function Declarations */
static void MultiWordAdd(const unsigned long u1[], const unsigned long u2[],
    unsigned long y[], int n);
static void MultiWordSignedWrap(const unsigned long u1[], int n1, unsigned int
    n2, unsigned long y[]);
static void sLong2MultiWord(long u, unsigned long y[], int n);
static void sMultiWord2MultiWord(const unsigned long u1[], int n1, unsigned long
    y[], int n);
static void sMultiWord2sMultiWordSat(const unsigned long u1[], int n1, unsigned
    long y[], int n);
static void sMultiWordShl(const unsigned long u1[], int n1, unsigned int n2,
    unsigned long y[], int n);
static void sMultiWordShr(const unsigned long u1[], int n1, unsigned int n2,
    unsigned long y[], int n);
static void uLong2MultiWord(unsigned long u, unsigned long y[], int n);
```

The generated C code contains multiple multiword operations.

Generate C code for the function `my_add2`.

```
codegen my_add2 -args {a,b} -report -config cfg
```

View the generated code for the addition using `accumpos`. Click the `View report` link to open the code generation report and then scroll to the code for the `my_add2` function.

```
int my_add2(int a, unsigned int b)
{
    int y;
    y = a + (int)(b >> 29);
    /* floor, wrap */
    return y;
}
```

For this function, the generated code contains no multiword operations.

Find Potential Data Type Issues in Generated Code

In this section...

“Data Type Issues Overview” on page 13-102

“Enable Highlighting of Potential Data Type Issues” on page 13-102

“Find and Address Cumbersome Operations” on page 13-103

“Find and Address Expensive Rounding” on page 13-105

“Find and Address Expensive Comparison Operations” on page 13-106


Data Type Issues Overview

When you convert MATLAB code to fixed point, you can highlight potential data type issues in the generated HTML report. The report highlights MATLAB code that requires single-precision, double-precision, or expensive fixed-point operations.

- The double-precision check highlights expressions that result in a double-precision operation. Manual inspection of code to find unwanted doubles can be time-consuming and error prone.
- The single-precision check highlights expressions that result in a single operation.
- The expensive fixed-point operations check identifies optimization opportunities for fixed-point code. It highlights expressions in the MATLAB code that require cumbersome multiplication or division, or expensive rounding. For more information on optimizing generated fixed-point code, see “Tips for Making Generated Code More Efficient”.

Enable Highlighting of Potential Data Type Issues

Procedure 13.9. Enable the highlight option using the Fixed-Point Converter app

- 1 On the **Convert to Fixed Point** page, click the **Settings** arrow .
- 2 Under **Plotting and Reporting**, set **Highlight potential data type issues** to **Yes**.

When conversion is complete, open the fixed-point conversion HTML report to view the highlighting. Click **View report** in the **Type Validation Output** tab.

Procedure 13.10. Enable the highlight option using the command-line interface

- 1 Create a fixed-point code configuration object:

```
fixptcfg = coder.config('fixpt');
```

- 2 Set the `HighlightPotentialDataTypeIssues` property of the configuration object to `true`.

```
fixptcfg.HighlightPotentialDataTypeIssues = true;
```

Find and Address Cumbersome Operations

Cumbersome operations usually occur due to an insufficient range of output. Avoid inputs to a multiply or divide operation that have word lengths larger than the base integer type of your processor. Software can process operations with larger word lengths, but this approach requires more code and runs slower.

This example requires Embedded Coder[®] and Fixed-Point Designer licenses to run.


- 1 Create the function `myMul`.

```
function out = myMul(in1, in2)
    out = in1 * in2;
end
```

- 2 Generate code for `myMul`.

```
cfg = coder.config('lib');
cfg.GenerateReport = true;
cfg.HighlightPotentialDataTypeIssues = true;
codegen -config cfg myMul -args {fi(1, 1, 33, 4), fi(1, 1, 32, 4)}
```

- 3 Click **View report**.
- 4 In the Code Generation Report, on the left pane, click the **MATLAB code** tab.
- 5 Expand the **Highlight** section and select the **Expensive fixed-point operations** check box.

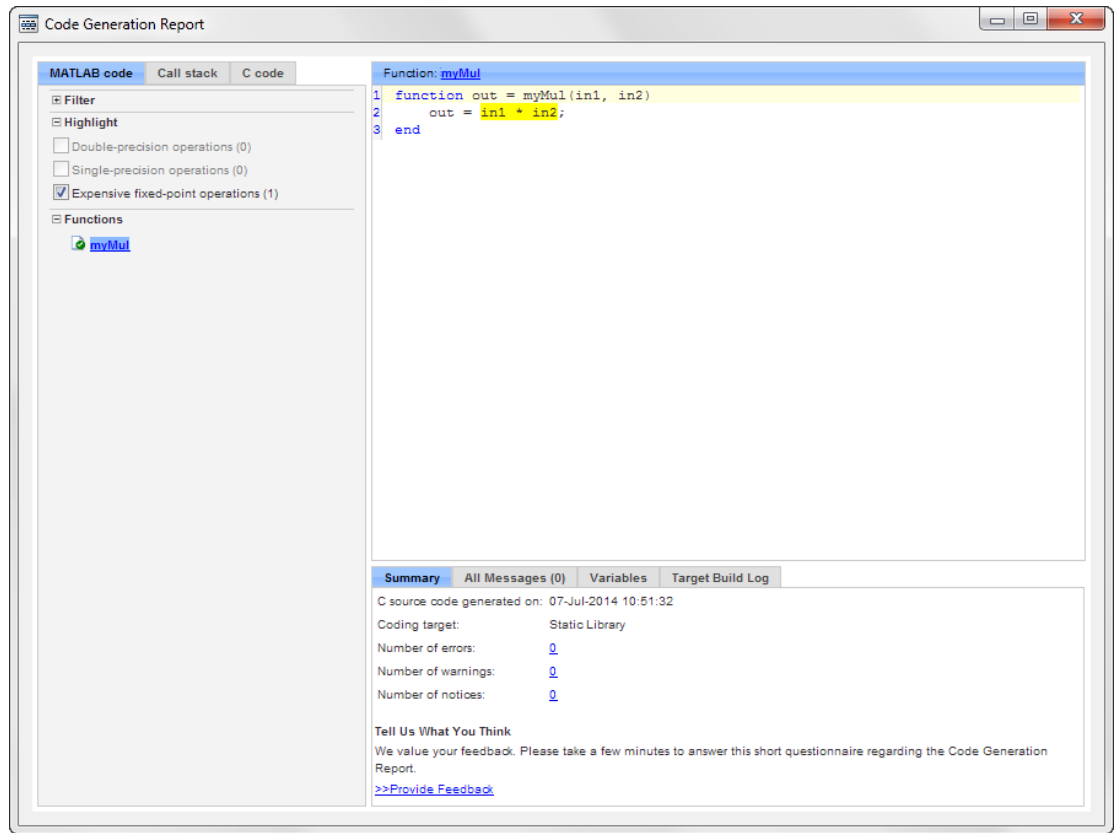

The `in1 * in2` operation is highlighted in the HTML report. On the bottom pane, click the **Variables** tab. The word length of `in1` is 33, and the word length of `in2` is 32. Hovering over the highlighted expression reveals that the product has a word length of 65, which is larger than the target word length of 64. Therefore, the software detects a cumbersome operation.

To resolve this issue, modify the data types of `in1` and `in2` so the word length of the product does not exceed the target word length.

Find and Address Expensive Rounding

Traditional handwritten code, especially for control applications, almost always uses "no effort" rounding. For example, for unsigned integers and two's complement signed integers, shifting right and dropping the bits is equivalent to rounding to floor. To get results comparable to, or better than, what you expect from traditional handwritten code, use the `floor` rounding method.

This example requires Embedded Coder and Fixed-Point Designer licenses to run.


- 1 Create the function `myRounding`.

```
function [quot] = myRounding(in1, in2)
    quot = in1 / in2;
end
```

- 2 Generate code for `myRounding`.

```
cfg = coder.config('lib');
cfg.GenerateReport = true;
cfg.HighlightPotentialDataTypeIssues = true;
codegen -config cfg myRounding -args {fi(1, 1, 32, 2), fi(1, 1, 32, 4)}
```

- 3 Click **View report**.
- 4 In the Code Generation Report, on the left pane, click the **MATLAB code** tab.
- 5 Expand the **Highlight** section and select the **Expensive fixed-point operations** check box.

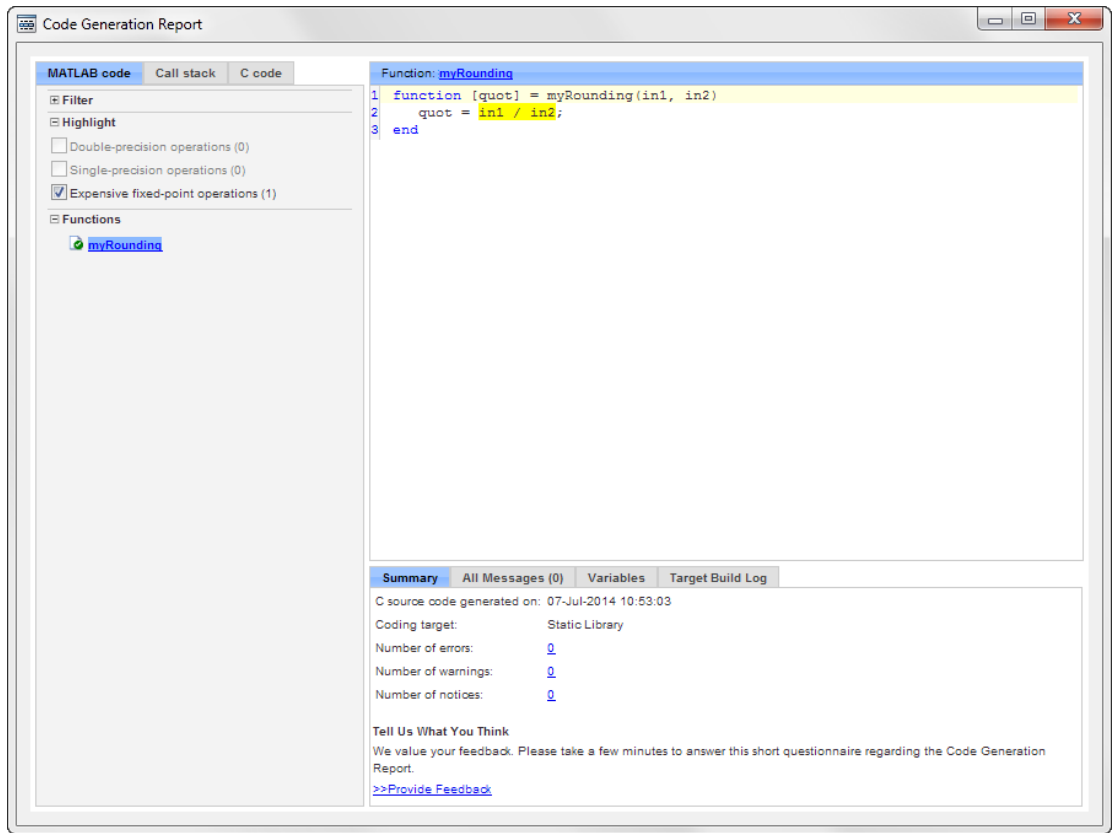

This division operation uses the default rounding method, `nearest`. Changing the rounding method to `Floor` provides a more efficient implementation.

Find and Address Expensive Comparison Operations

Comparison operations generate extra code when a casting operation is required to do the comparison. For example, before comparing an unsigned integer to a signed integer, one of the inputs must be cast to the signedness of the other. Consider optimizing the data types of the input arguments so that a cast is not required in the generated code.

This example requires Embedded Coder and Fixed-Point Designer licenses to run.


- 1 Create the function myRelop.

```
function out = myRelop(in1, in2)
    out = in1 > in2;
end
```

- 2 Generate code for myRelop.

```
cfg = coder.config('lib');
cfg.GenerateReport = true;
cfg.HighlightPotentialDataTypeIssues = true;
codegen -config cfg myRelop -args {fi(1, 1, 32, 1.5, 9, 17), fi(1, 0, 32, 16)}
```

- 3 Click **View report**.
- 4 In the Code Generation Report, on the left pane, click the **MATLAB code** tab.
- 5 Expand the **Highlight** section and select the **Expensive fixed-point operations** check box.

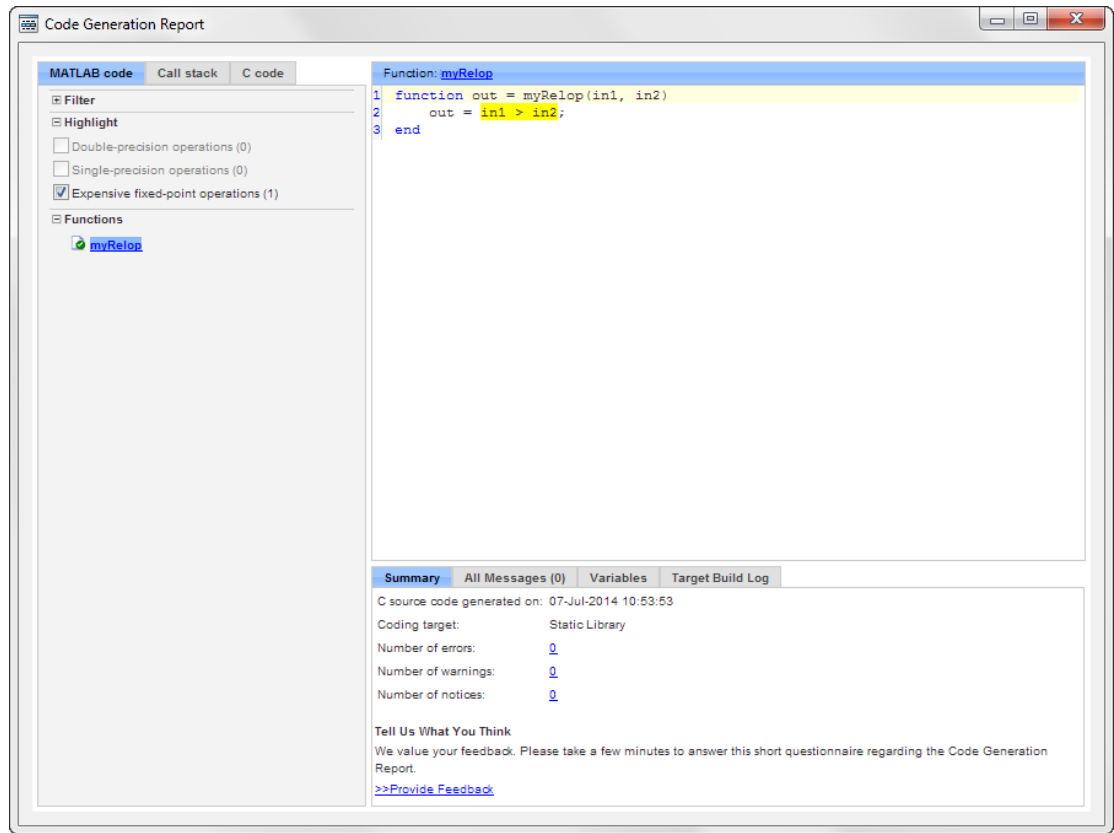

The first input argument, `in1`, is signed with slope bias scaling, while `in2` is unsigned with binary point scaling. Extra code is generated because a cast must occur before the two inputs can be compared.

Change the signedness and scaling of one of the inputs to generate more efficient code.

Interoperability with Other Products

- “fi Objects with Simulink” on page 14-2
- “fi Objects with DSP System Toolbox” on page 14-8
- “Ways to Generate Code” on page 14-13

fi Objects with Simulink

In this section...

“Reading Fixed-Point Data from the Workspace” on page 14-2

“Writing Fixed-Point Data to the Workspace” on page 14-2

“Setting the Value and Data Type of Block Parameters” on page 14-6

“Logging Fixed-Point Signals” on page 14-6

“Accessing Fixed-Point Block Data During Simulation” on page 14-6

Reading Fixed-Point Data from the Workspace

You can read fixed-point data from the MATLAB workspace into a Simulink model via the From Workspace block. To do so, the data must be in a structure format with a `fi` object in the `values` field. In array format, the From Workspace block only accepts real, double-precision data.

To read in `fi` data, the **Interpolate data** parameter of the From Workspace block must not be selected, and the **Form output after final data value by** parameter must be set to anything other than `Extrapolation`.

Writing Fixed-Point Data to the Workspace

You can write fixed-point output from a model to the MATLAB workspace via the To Workspace block in either array or structure format. Fixed-point data written by a To Workspace block to the workspace in structure format can be read back into a Simulink model in structure format by a From Workspace block.

Note To write fixed-point data to the MATLAB workspace as a `fi` object, select the **Log fixed-point data as a fi object** check box on the To Workspace block dialog. Otherwise, fixed-point data is converted to `double` and written to the workspace as `double`.

For example, you can use the following code to create a structure in the MATLAB workspace with a `fi` object in the `values` field. You can then use the From Workspace block to bring the data into a Simulink model.


```
a = fi([sin(0:10)' sin(10:-1:0)'])  
  
a =  
  
      0   -0.5440  
  0.8415   0.4121  
  0.9093   0.9893  
  0.1411   0.6570  
 -0.7568  -0.2794  
 -0.9589  -0.9589  
 -0.2794  -0.7568  
  0.6570   0.1411  
  0.9893   0.9093  
  0.4121   0.8415  
 -0.5440      0  
  
      DataTypeMode: Fixed-point: binary point scaling  
      Signedness: Signed  
      WordLength: 16  
      FractionLength: 15  
  
s.signals.values = a  
  
s =  
  
      signals: [1x1 struct]  
  
s.signals.dimensions = 2  
  
s =  
  
      signals: [1x1 struct]  
  
s.time = [0:10]'  
  
s =  
  
      signals: [1x1 struct]  
      time: [11x1 double]
```

The From Workspace block in the following model has the `fi` structure `s` in the **Data** parameter.

Remember, to write fixed-point data to the MATLAB workspace as a `fi` object, select the **Log fixed-point data as a fi object** check box on the To Workspace block dialog. Otherwise, fixed-point data is converted to `double` and written to the workspace as `double`.

In the model, the following parameters in the **Solver** pane of the **Model Configuration Parameters** dialog have the indicated settings:

- **Start time** — 0.0
- **Stop time** — 10.0
- **Type** — Fixed-step
- **Solver** — Discrete (no continuous states)
- **Fixed step size (fundamental sample time)** — 1.0

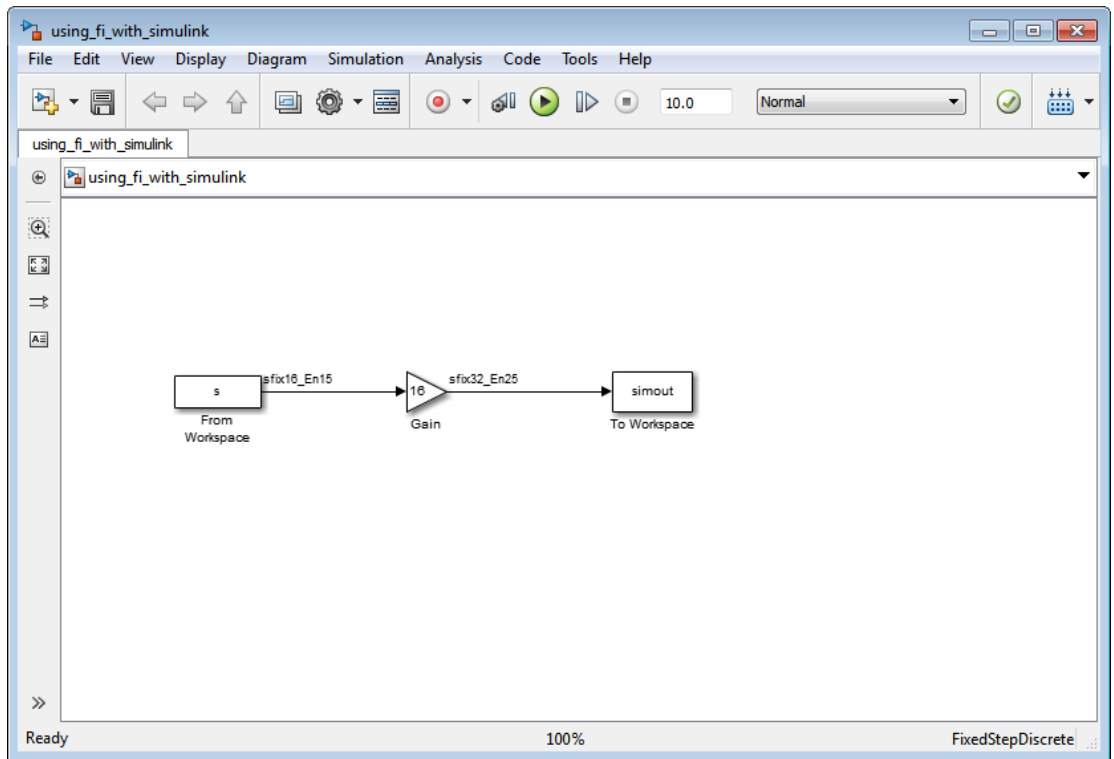

The To Workspace block writes the result of the simulation to the MATLAB workspace as a `fi` structure.

```
simout.signals.values
```

```
ans =
```

```

      0   -8.7041
 13.4634   6.5938
 14.5488  15.8296
  2.2578  10.5117
-12.1089  -4.4707
-15.3428 -15.3428
 -4.4707 -12.1089
 10.5117   2.2578
 15.8296  14.5488

```

```
6.5938    13.4634
-8.7041         0
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 32
FractionLength: 25
```

Setting the Value and Data Type of Block Parameters

You can use Fixed-Point Designer expressions to specify the value and data type of block parameters in Simulink. Refer to “Block Support for Data and Signal Types” in the Simulink documentation for more information.

Logging Fixed-Point Signals

When fixed-point signals are logged to the MATLAB workspace via signal logging, they are always logged as `fi` objects.

To enable signal logging for a signal:

- 1 Select the signal.
- 2 Open the **Record** dropdown.
- 3 Select **Log/Unlog Selected Signals**.

For more information, refer to “Export Signal Data Using Signal Logging” in the Simulink documentation.

When you log signals from a referenced model or Stateflow[®] chart in your model, the word lengths of `fi` objects may be larger than you expect. The word lengths of fixed-point signals in referenced models and Stateflow charts are logged as the next largest data storage container size.

Accessing Fixed-Point Block Data During Simulation

Simulink provides an application program interface (API) that enables programmatic access to block data, such as block inputs and outputs, parameters, states, and work vectors, while a simulation is running. You can use this interface to develop MATLAB

programs capable of accessing block data while a simulation is running or to access the data from the MATLAB command line. Fixed-point signal information is returned to you via this API as `fi` objects. For more information on the API, refer to “Accessing Block Data During Simulation” in the Simulink documentation.

fi Objects with DSP System Toolbox

In this section...
“Reading Fixed-Point Signals from the Workspace” on page 14-8
“Writing Fixed-Point Signals to the Workspace” on page 14-8
“fi Objects with dfilt Objects” on page 14-12

Reading Fixed-Point Signals from the Workspace

You can read fixed-point data from the MATLAB workspace into a Simulink model using the Signal From Workspace and Triggered Signal From Workspace blocks from DSP System Toolbox software. Enter the name of the defined `fi` variable in the **Signal** parameter of the Signal From Workspace or Triggered Signal From Workspace block.

Writing Fixed-Point Signals to the Workspace

Fixed-point output from a model can be written to the MATLAB workspace via the To Workspace or Triggered To Workspace block from the blockset. The fixed-point data is always written as a 2-D or 3-D array.

Note To write fixed-point data to the MATLAB workspace as a `fi` object, select the **Log fixed-point data as a fi object** check box on the Signal To Workspace or Triggered To Workspace block dialog. Otherwise, fixed-point data is converted to `double` and written to the workspace as `double`.

For example, you can use the following code to create a `fi` object in the MATLAB workspace. You can then use the Signal From Workspace block to bring the data into a Simulink model.

```
a = fi([sin(0:10)' sin(10:-1:0)'])
```

```
a =
```

```

    0   -0.5440
  0.8415  0.4121
  0.9093  0.9893
  0.1411  0.6570
 -0.7568 -0.2794
 -0.9589 -0.9589
 -0.2794 -0.7568
  0.6570  0.1411
  0.9893  0.9093
  0.4121  0.8415
 -0.5440     0

```

```

      DataTypeMode: Fixed-point: binary point scaling
      Signedness: Signed
      WordLength: 16
      FractionLength: 15

```

The Signal From Workspace block in the following model has these settings:


- **Signal** — a
- **Sample time** — 1
- **Samples per frame** — 2
- **Form output after final data value by** — Setting to zero

The following parameters in the **Solver** pane of the **Model Configuration Parameters** dialog have these settings:

- **Start time** — 0.0
- **Stop time** — 10.0
- **Type** — Fixed-step
- **Solver** — Discrete (no continuous states)

- **Fixed step size (fundamental sample time) — 1.0**

Remember, to write fixed-point data to the MATLAB workspace as a `fi` object, select the **Log fixed-point data as a fi object** check box on the Signal To Workspace block dialog. Otherwise, fixed-point data is converted to `double` and written to the workspace as `double`.

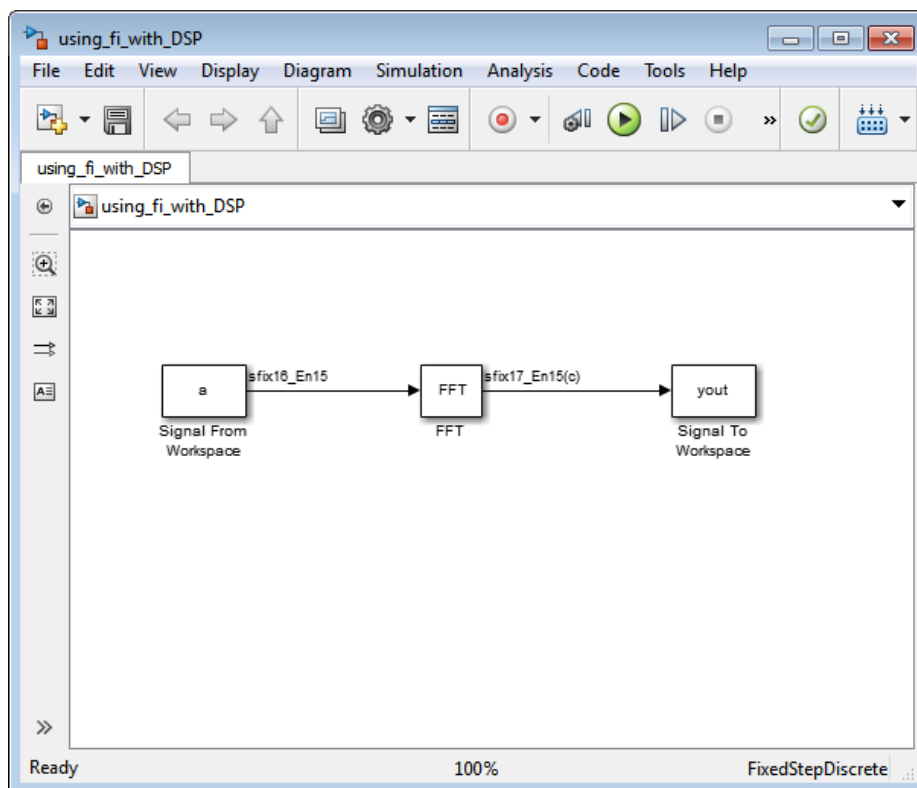

The Signal To Workspace block writes the result of the simulation to the MATLAB workspace as a `fi` object.

```
yout =
```

```
(:,: ,1) =
```

0.8415	-0.1319
-0.8415	-0.9561

(:,:,2) =

1.0504	1.6463
0.7682	0.3324

(:,:,3) =

-1.7157	-1.2383
0.2021	0.6795

(:,:,4) =

0.3776	-0.6157
-0.9364	-0.8979

(:,:,5) =

1.4015	1.7508
0.5772	0.0678

(:,:,6) =

-0.5440	0
-0.5440	0

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 17
FractionLength: 15
```

fi Objects with dfilt Objects

When the `Arithmetic` property is set to `'fixed'`, you can use an existing `fi` object as the input, states, or coefficients of a `dfilt` object in DSP System Toolbox software. Also, fixed-point filters in the toolbox return `fi` objects as outputs. Refer to the DSP System Toolbox software documentation for more information.

Ways to Generate Code

There are several ways to use Fixed-Point Designer software to generate code:


- The Fixed-Point Designer `fiaccel` function converts your fixed-point MATLAB code to a MEX function and can greatly accelerate the execution speed of your fixed-point algorithms.
- The MATLAB Coder `codegen` function automatically converts MATLAB code to C/C++ code. Using the MATLAB Coder software allows you to accelerate your MATLAB code that uses Fixed-Point Designer software. To use the `codegen` function with Fixed-Point Designer software, you also need to have a MATLAB Coder license. For more information, see “C Code Generation at the Command Line” in the MATLAB Coder documentation.
- The MATLAB Function block allows you to use MATLAB code in your Simulink models that generate embeddable C/C++ code. To use the MATLAB Function block with Fixed-Point Designer software, you also need a Simulink license. For more information on the MATLAB Function block, see the Simulink documentation.

Calling Functions for Code Generation

- “Resolution of Function Calls for Code Generation” on page 15-2
- “Resolution of File Types on Code Generation Path” on page 15-6
- “Compilation Directive %#codegen” on page 15-8
- “Call Local Functions” on page 15-9
- “Call Supported Toolbox Functions” on page 15-10
- “Call MATLAB Functions” on page 15-11

Resolution of Function Calls for Code Generation

From a MATLAB function, you can call local functions, supported toolbox functions, and other MATLAB functions. MATLAB resolves function names for code generation as follows:

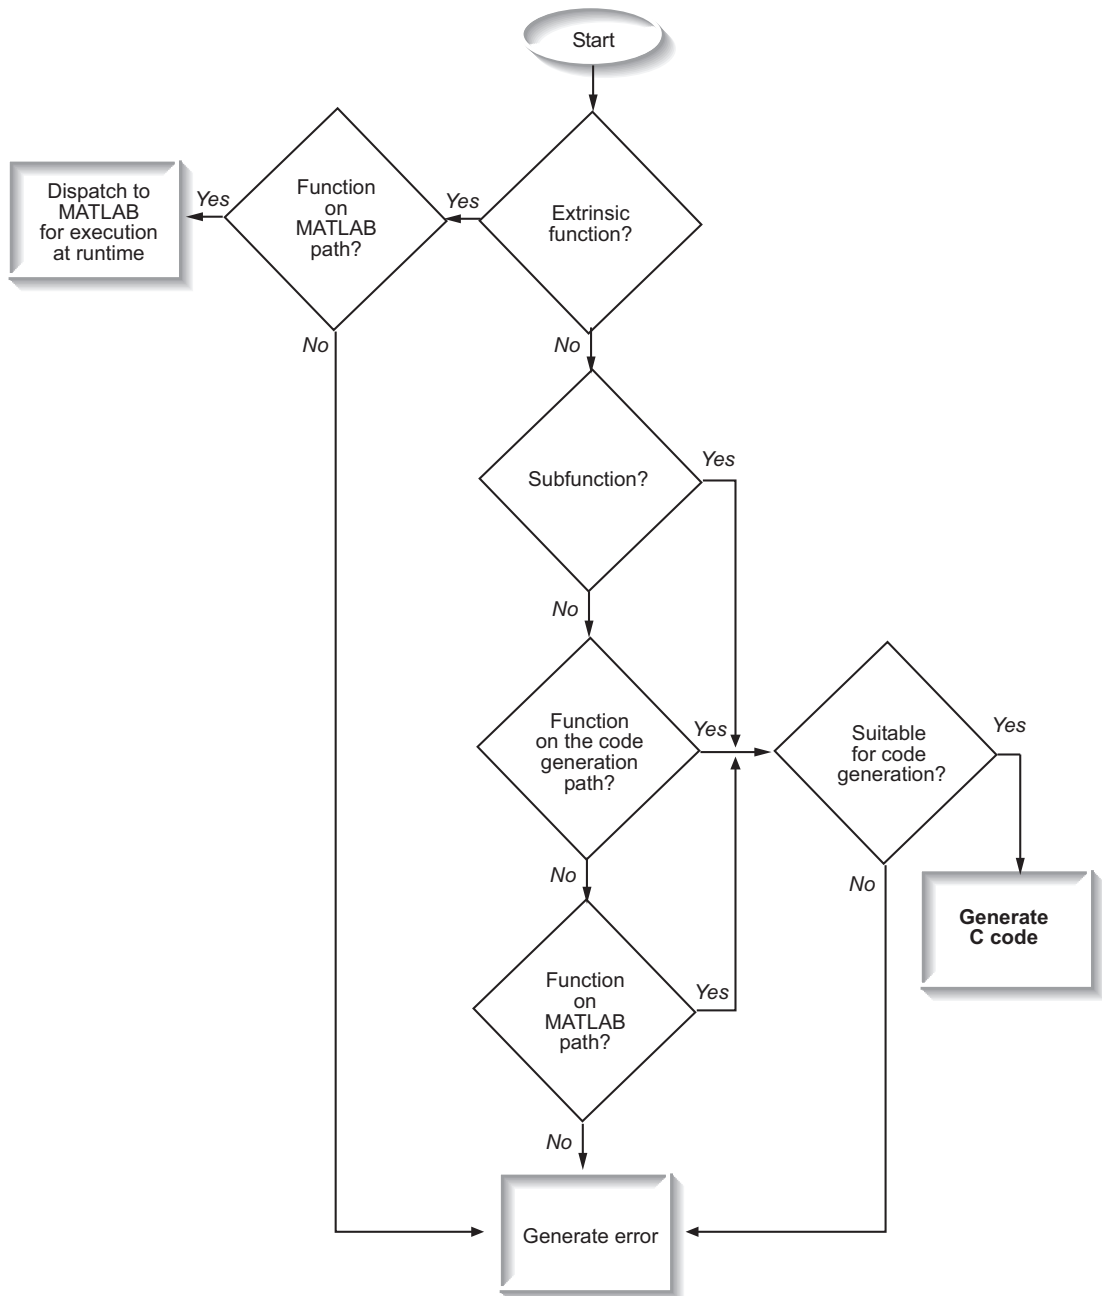

Key Points About Resolving Function Calls

The diagram illustrates key points about how MATLAB resolves function calls for code generation:

- Searches two paths, the code generation path and the MATLAB path

See “Compile Path Search Order” on page 15-4.

- Attempts to compile functions unless the code generation software determines that it should not compile them or you explicitly declare them to be extrinsic.

If a MATLAB function is not supported for code generation, you can declare it to be extrinsic by using the construct `coder.extrinsic`, as described in “Declaring MATLAB Functions as Extrinsic Functions”. During simulation, the code generation software generates code for the call to an extrinsic function, but does not generate the function's internal code. Therefore, simulation can run only on platforms where MATLAB software is installed. During standalone code generation, MATLAB attempts to determine whether the extrinsic function affects the output of the function in which it is called — for example by returning `mxArrays` to an output variable. Provided that the output does not change, MATLAB proceeds with code generation, but excludes the extrinsic function from the generated code. Otherwise, compilation errors occur.

The code generation software detects calls to many common visualization functions, such as `plot`, `disp`, and `figure`. The software treats these functions like extrinsic functions but you do not have to declare them extrinsic using the `coder.extrinsic` function.

- Resolves file type based on precedence rules described in “Resolution of File Types on Code Generation Path” on page 15-6

Compile Path Search Order

During code generation, function calls are resolved on two paths:

1 Code generation path

MATLAB searches this path first during code generation. The code generation path contains the toolbox functions supported for code generation.

2 MATLAB path

If the function is not on the code generation path, MATLAB searches this path.


MATLAB applies the same dispatcher rules when searching each path (see “Function Precedence Order”).

When to Use the Code Generation Path

Use the code generation path to override a MATLAB function with a customized version. A file on the code generation path shadows a file of the same name on the MATLAB path.

Resolution of File Types on Code Generation Path

MATLAB uses the following precedence rules for code generation:

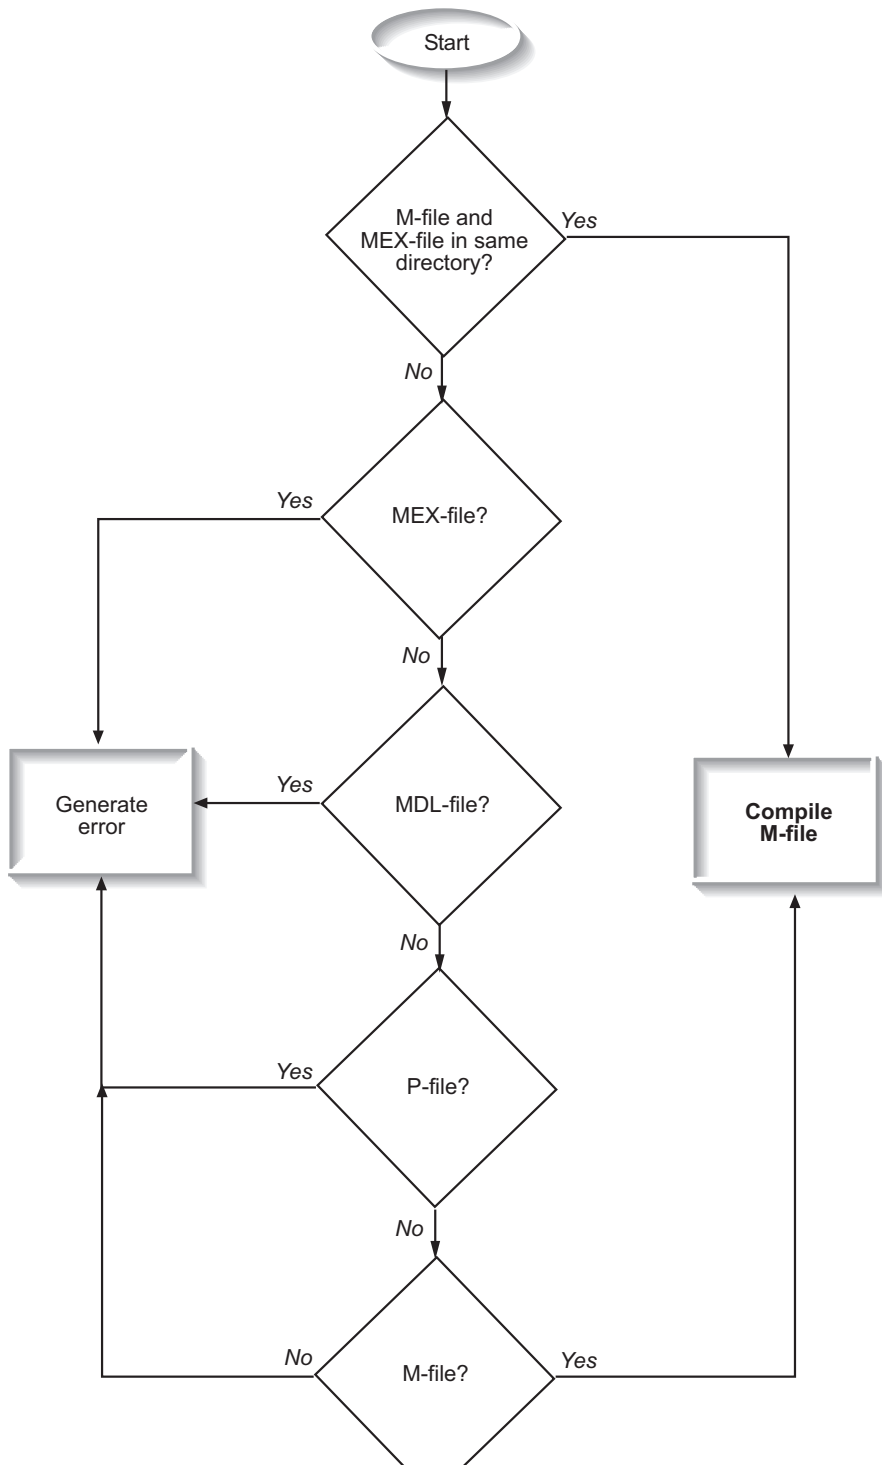

Compilation Directive `%#codegen`

Add the `%#codegen` directive (or pragma) to your function after the function signature to indicate that you intend to generate code for the MATLAB algorithm. Adding this directive instructs the MATLAB code analyzer to help you diagnose and fix violations that would result in errors during code generation.

```
function y = my_fcn(x) %#codegen
```

```
.....
```

Call Local Functions

Local functions are functions defined in the body of MATLAB function. They work the same way for code generation as they do when executing your algorithm in the MATLAB environment.

The following example illustrates how to define and call a local function `mean`:

```
function [mean, stdev] = stats(vals)
%#codegen

% Calculates a statistical mean and a standard
% deviation for the values in vals.

len = length(vals);
mean = avg(vals, len);
stdev = sqrt(sum(((vals-avg(vals,len)).^2))/len);
plot(vals, '-+');

function mean = avg(array,size)
mean = sum(array)/size;
```

Call Supported Toolbox Functions

You can call toolbox functions directly if they are supported for code generation. For a list of supported functions, see “Functions and Objects Supported for C and C++ Code Generation — Alphabetical List” on page 25-2.

Call MATLAB Functions

The code generation software attempts to generate code for functions, even if they are not supported for C code generation. The software detects calls to many common visualization functions, such as `plot`, `disp`, and `figure`. The software treats these functions like extrinsic functions but you do not have to declare them extrinsic using `coder.extrinsic`. During simulation, the code generation software generates code for these functions, but does not generate their internal code. During standalone code generation, MATLAB attempts to determine whether the visualization function affects the output of the function in which it is called. Provided that the output does not change, MATLAB proceeds with code generation, but excludes the visualization function from the generated code. Otherwise, compilation errors occur.

For example, you might want to call `plot` to visualize your results in the MATLAB environment. If you generate a MEX function from a function that calls `plot` and then run the generated MEX function, the code generation software dispatches calls to the `plot` function to MATLAB. If you generate a library or executable, the generated code does not contain calls to the `plot` function. The code generation report highlights calls from your MATLAB code to extrinsic functions so that it is easy to determine which functions are supported only in the MATLAB environment.

The screenshot shows the MATLAB code editor with the following content:

```

MATLAB code | Call stack | C code
Function: stats | Calls: Select a function call:
1 function [mean, stdev] = stats(vals)
2 %#codegen
3
4 % Calculates a statistical mean and a standard
5 % deviation for the values in vals.
6
7 len = length(vals);
8 mean = avg(vals, len);
9 stdev = sqrt(sum((vals-avg(vals, len)).^2)/len);
10 plot(vals, '-+');
11

```

A tooltip points to the `plot` function call on line 10, stating: "Only supported within the MATLAB environment."

For unsupported functions other than common visualization functions, you must declare the functions (like `pause`) to be extrinsic (see “Resolution of Function Calls for Code Generation” on page 15-2). Extrinsic functions are not compiled, but instead executed in MATLAB during simulation (see “How MATLAB Resolves Extrinsic Functions During Simulation” on page 15-16).

There are two ways to declare a function to be extrinsic:

- Use the `coder.extrinsic` construct in main functions or local functions (see “Declaring MATLAB Functions as Extrinsic Functions” on page 15-12).
- Call the function indirectly using `feval` (see “Calling MATLAB Functions Using `feval`” on page 15-16).

Declaring MATLAB Functions as Extrinsic Functions

To declare a MATLAB function to be extrinsic, add the `coder.extrinsic` construct at the top of the main function or a local function:

```
coder.extrinsic('function_name_1', ... , 'function_name_n');
```

Declaring Extrinsic Functions

The following code declares the MATLAB `patch` function extrinsic in the local function `create_plot`:

```
function c = pythagoras(a,b,color) %#codegen
% Calculates the hypotenuse of a right triangle
% and displays the triangle.
```

```
c = sqrt(a^2 + b^2);
create_plot(a, b, color);
```

```
function create_plot(a, b, color)
%Declare patch and axis as extrinsic
```

```
coder.extrinsic('patch');
```

```
x = [0;a;a];
y = [0;0;b];
patch(x, y, color);
axis('equal');
```

The code generation software detects that `axis` is not supported for code generation and automatically treats it as an extrinsic function. The compiler does not generate code for `patch` and `axis`, but instead dispatches them to MATLAB for execution.

To test the function, follow these steps:

- 1 Convert `pythagoras` to a MEX function by executing this command at the MATLAB prompt:

```
codegen -report pythagoras -args {1, 1, [.3 .3 .3]}
```

- Click the link to the code generation report and then, in the report, view the MATLAB code for `create_plot`.

The report highlights the `patch` and `axis` functions to indicate that they are supported only within the MATLAB environment.

The screenshot shows the MATLAB code generation report for the `create_plot` function. The code is as follows:

```

7
8
9 function create_plot(a, b, color)
10 %Declare patch and axis as extrinsic
11
12 coder.extrinsic('patch'); % , 'axis');
13
14 x = [0;a;a];
15 y = [0;0;b];
16 patch(x, y, color);
17 axis('equal');


```

A tooltip points to the `axis('equal')` call, stating: "Only supported within the MATLAB environment."

- Run the MEX function by executing this command:

```
pythagoras_mex(3, 4, [1.0 0.0 0.0]);
```

MATLAB displays a plot of the right triangle as a red patch object:

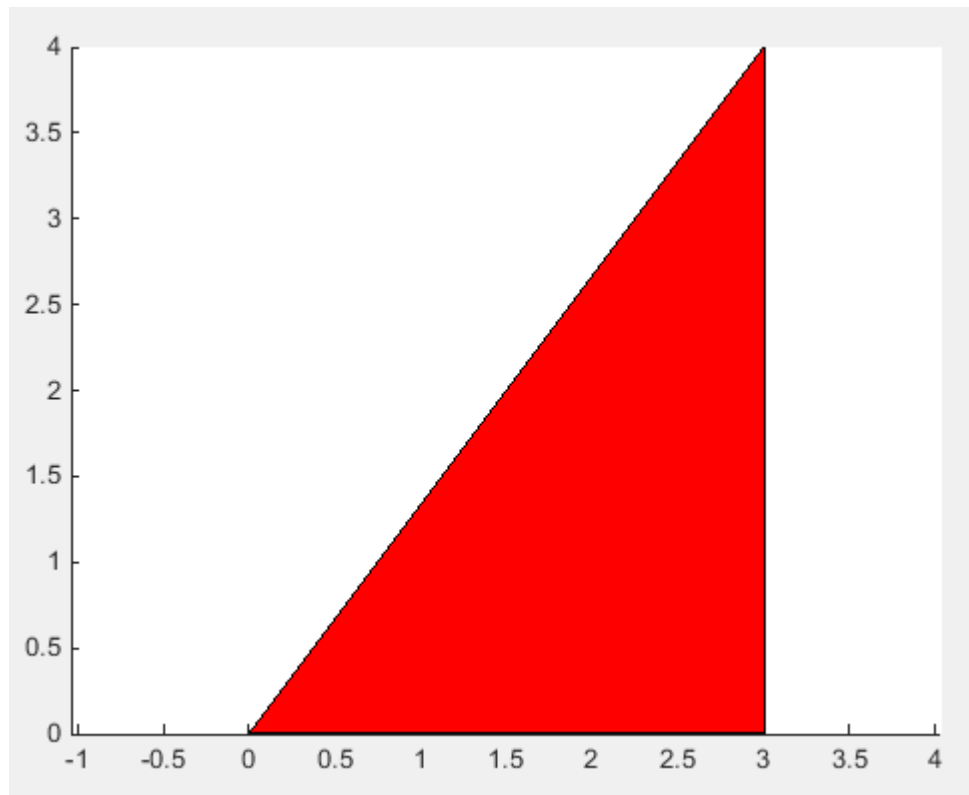

When to Use the `coder.extrinsic` Construct

Use the `coder.extrinsic` construct to:

- Call MATLAB functions that do not produce output — such as `pause` — during simulation, without generating unnecessary code (see “How MATLAB Resolves Extrinsic Functions During Simulation” on page 15-16).
- Make your code self-documenting and easier to debug. You can scan the source code for `coder.extrinsic` statements to isolate calls to MATLAB functions, which can potentially create and propagate `mxArrays` (see “Working with `mxArrays`” on page 15-17).

- Save typing. With one `coder.extrinsic` statement, each subsequent function call is extrinsic, as long as the call and the statement are in the same scope (see “Scope of Extrinsic Function Declarations” on page 15-15).
- Declare the MATLAB function(s) extrinsic throughout the calling function scope (see “Scope of Extrinsic Function Declarations” on page 15-15). To narrow the scope, use `feval` (see “Calling MATLAB Functions Using `feval`” on page 15-16).

Rules for Extrinsic Function Declarations

Observe the following rules when declaring functions extrinsic for code generation:

- Declare the function extrinsic before you call it.
- Do not use the extrinsic declaration in conditional statements.

Scope of Extrinsic Function Declarations

The `coder.extrinsic` construct has function scope. For example, consider the following code:

```
function y = foo %#codegen
coder.extrinsic('rat','min');
[N D] = rat(pi);
y = 0;
y = min(N, D);
```

In this example, `rat` and `min` are treated as extrinsic every time they are called in the main function `foo`. There are two ways to narrow the scope of an extrinsic declaration inside the main function:

- Declare the MATLAB function extrinsic in a local function, as in this example:

```
function y = foo %#codegen
coder.extrinsic('rat');
[N D] = rat(pi);
y = 0;
y = mymin(N, D);

function y = mymin(a,b)
coder.extrinsic('min');
y = min(a,b);
```

Here, the function `rat` is extrinsic every time it is called inside the main function `foo`, but the function `min` is extrinsic only when called inside the local function `mymin`.

- Call the MATLAB function using `feval`, as described in “Calling MATLAB Functions Using `feval`” on page 15-16.

Calling MATLAB Functions Using `feval`

The function `feval` is automatically interpreted as an extrinsic function during code generation. Therefore, you can use `feval` to conveniently call functions that you want to execute in the MATLAB environment, rather than compiled to generated code.


Consider the following example:

```
function y = foo
coder.extrinsic('rat');
[N D] = rat(pi);
y = 0;
y = feval('min', N, D);
```

Because `feval` is extrinsic, the statement `feval('min', N, D)` is evaluated by MATLAB — not compiled — which has the same result as declaring the function `min` extrinsic for just this one call. By contrast, the function `rat` is extrinsic throughout the function `foo`.

How MATLAB Resolves Extrinsic Functions During Simulation

MATLAB resolves calls to extrinsic functions — functions that do not support code generation — as follows:

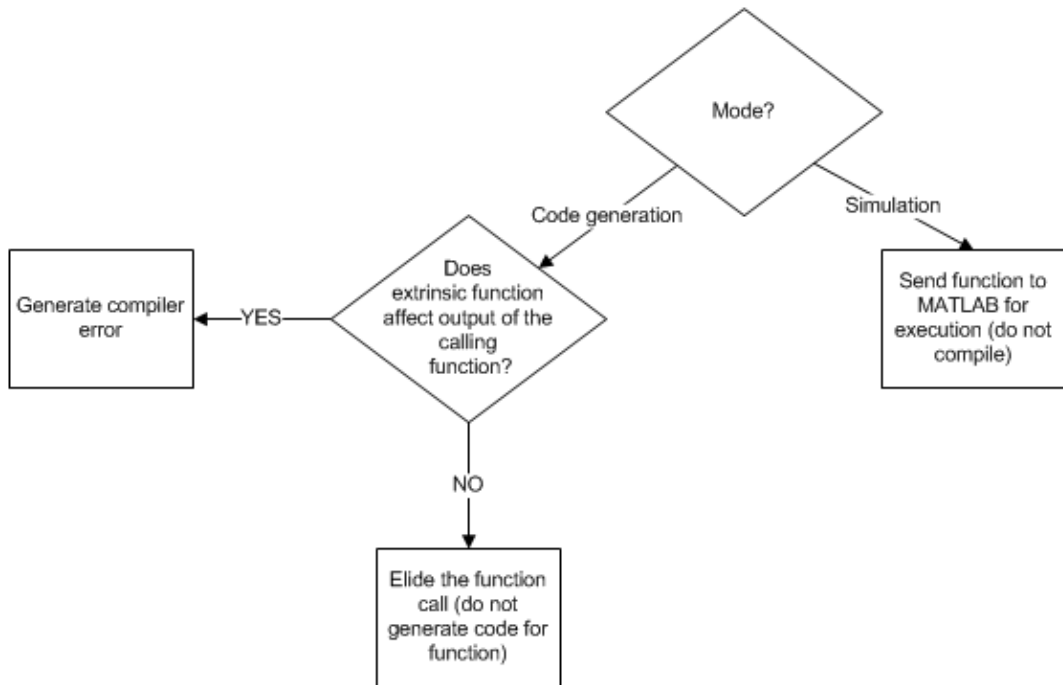

During simulation, MATLAB generates code for the call to an extrinsic function, but does not generate the function's internal code. Therefore, you can run the simulation only on platforms where you install MATLAB software.

During code generation, MATLAB attempts to determine whether the extrinsic function affects the output of the function in which it is called — for example by returning `mxArrays` to an output variable (see “Working with `mxArrays`” on page 15-17). Provided that the output does not change, MATLAB proceeds with code generation, but excludes the extrinsic function from the generated code. Otherwise, MATLAB issues a compiler error.

Working with `mxArrays`

The output of an extrinsic function is an `mxArray` — also called a MATLAB array. The only valid operations for `mxArrays` are:

- Storing `mxArrays` in variables

- Passing `mxArrays` to functions and returning them from functions
- Converting `mxArrays` to known types at run time

To use `mxArrays` returned by extrinsic functions in other operations, you must first convert them to known types, as described in “Converting `mxArrays` to Known Types” on page 15-18.

Converting `mxArrays` to Known Types

To convert an `mxArray` to a known type, assign the `mxArray` to a variable whose type is defined. At run time, the `mxArray` is converted to the type of the variable assigned to it. However, if the data in the `mxArray` is not consistent with the type of the variable, you get a run-time error.

For example, consider this code:

```
function y = foo %#codegen
coder.extrinsic('rat');
[N D] = rat(pi);
y = min(N, D);
```

Here, the top-level function `foo` calls the extrinsic MATLAB function `rat`, which returns two `mxArrays` representing the numerator `N` and denominator `D` of the rational fraction approximation of `pi`. Although you can pass these `mxArrays` to another MATLAB function — in this case, `min` — you cannot assign the `mxArray` returned by `min` to the output `y`.

If you run this function `foo` in a MATLAB Function block in a Simulink model, the code generates the following error during simulation:

```
Function output 'y' cannot be of MATLAB type.
```

To fix this problem, define `y` to be the type and size of the value that you expect `min` to return — in this case, a scalar double — as follows:

```
function y = foo %#codegen
coder.extrinsic('rat');
[N D] = rat(pi);
y = 0; % Define y as a scalar of type double
y = min(N,D);
```

Restrictions on Extrinsic Functions for Code Generation

The full MATLAB run-time environment is not supported during code generation. Therefore, the following restrictions apply when calling MATLAB functions extrinsically:

- MATLAB functions that inspect the caller, or read or write to the caller's workspace do not work during code generation. Such functions include:
 - `dbstack`
 - `evalin`
 - `assignin`
 - `save`
- The MATLAB debugger cannot inspect variables defined in extrinsic functions.
- Functions in generated code may produce unpredictable results if your extrinsic function performs the following actions at run time:
 - Change folders
 - Change the MATLAB path
 - Delete or add MATLAB files
 - Change warning states
 - Change MATLAB preferences
 - Change Simulink parameters

Limit on Function Arguments

You can call functions with up to 64 inputs and 64 outputs.

Code Generation for MATLAB Classes

- “MATLAB Classes Definition for Code Generation” on page 16-2
- “Classes That Support Code Generation” on page 16-7
- “Generate Code for MATLAB Value Classes” on page 16-8
- “Generate Code for MATLAB Handle Classes and System Objects” on page 16-13
- “MATLAB Classes in Code Generation Reports” on page 16-15
- “Troubleshooting Issues with MATLAB Classes” on page 16-18

MATLAB Classes Definition for Code Generation

To generate efficient standalone code for MATLAB classes, you must use classes differently than when running your code in the MATLAB environment.

What's Different	More Information
Class must be in a single file. Because of this limitation, code generation is not supported for a class definition that uses an @-folder.	"Creating a Single, Self-Contained Class Definition File"
Restricted set of language features.	"Language Limitations" on page 16-2
Restricted set of code generation features.	"Code Generation Features Not Compatible with Classes" on page 16-3
Definition of class properties.	"Defining Class Properties for Code Generation" on page 16-4
Use of handle classes.	"Generate Code for MATLAB Handle Classes and System Objects" on page 16-13
Calls to base class constructor.	"Calls to Base Class Constructor" on page 16-5
Global variables containing MATLAB objects are not supported for code generation.	N/A
Inheritance from built-in MATLAB classes is not supported.	"Inheritance from Built-In MATLAB Classes Not Supported" on page 16-6

Language Limitations

Although code generation support is provided for common features of classes such as properties and methods, there are a number of advanced features which are not supported, such as:

- Events
- Listeners
- Arrays of objects

- Recursive data structures
 - Linked lists
 - Trees
 - Graphs
- Overloadable operators `subsref`, `subsassign`, and `subsindex`

In MATLAB, classes can define their own versions of the `subsref`, `subsassign`, and `subsindex` methods. Code generation does not support classes that have their own definitions of these methods.

- The `empty` method

In MATLAB, classes have a built-in static method, `empty`, which creates an empty array of the class. Code generation does not support this method.

- The following MATLAB handle class methods:
 - `addlistener`
 - `delete`
 - `eq`
 - `findobj`
 - `findpro`
- The `AbortSet` property attribute

Code Generation Features Not Compatible with Classes

- You can generate code for entry-point MATLAB functions that use classes, but you cannot generate code directly for a MATLAB class.

For example, if `ClassNameA` is a class definition, you cannot generate code by executing:

```
codegen ClassNameA
```

- If an entry-point MATLAB function has an input or output that is a MATLAB class, you cannot generate code for this function.

For example, if function `f00` takes one input, `a`, that is a MATLAB object, you cannot generate code for `f00` by executing:

```
codegen foo -args {a}
```

- Code generation does not support assigning an object of a value class into a nontunable property. For example, `obj.prop=v;` is invalid when `prop` is a nontunable property and `v` is an object based on a value class.
- You cannot use `coder.extrinsic` to declare a class or method as extrinsic.
- You cannot pass a MATLAB class to the function.
- If you use classes in code in the MATLAB Function block, you cannot use the debugger to view class information.
- The `coder.nullcopy` function does not support MATLAB classes as inputs.

Defining Class Properties for Code Generation

For code generation, you must define class properties differently than you normally would when running your code in the MATLAB environment:

- After defining a property, do not assign it an incompatible type. Do not use a property before attempting to grow it.

When you define class properties for code generation, consider the same factors that you take into account when defining variables. In the MATLAB language, variables can change their class, size, or complexity dynamically at run time so you can use the same variable to hold a value of varying class, size, or complexity. C and C++ use static typing. Before using variables, to determine their type, the code generation software requires a complete assignment to each variable. Similarly, before using properties, you must explicitly define their class, size, and complexity.

- Initial values:
 - If the property does not have an explicit initial value, the code generation software assumes that it is undefined at the beginning of the constructor. The code generation software does not assign an empty matrix as the default.
 - If the property does not have an initial value and the code generation software cannot determine that the property is assigned prior to first use, the software generates a compilation error.
 - For System objects, if a nontunable property is a structure, you must completely assign the structure. You cannot do partial assignment using subscripting.

For example, for a nontunable property, you can use the following assignment:

```
mySystemObject.nonTunableProperty=struct('fieldA','a','fieldB','b');
```

You cannot use the following partial assignments:

```
mySystemObject.nonTunableProperty.fieldA = a;
mySystemObject.nonTunableProperty.fieldB = b;
```

- If dynamic memory allocation is enabled, code generation supports variable-size properties for handle classes. Without dynamic memory allocation, you cannot generate code for handle classes that have variable-size properties.
- `coder. varsize` is not supported for class properties.
- MATLAB computes class initial values at class loading time before code generation. If you use persistent variables in MATLAB class property initialization, the value of the persistent variable computed when the class loads belongs to MATLAB; it is not the value used at code generation time. If you use `coder.target` in MATLAB class property initialization, `coder.target('MATLAB')` returns `true` (1).

Calls to Base Class Constructor

If a class constructor contains a call to the constructor of the base class, the call to the base class constructor must come before `for`, `if`, `return`, `switch` or `while` statements.

For example, if you define a class B based on class A:

```
classdef B < A
    methods
        function obj = B(varargin)
            if nargin == 0
                a = 1;
                b = 2;
            elseif nargin == 1
                a = varargin{1};
                b = 1;
            elseif nargin == 2
                a = varargin{1};
                b = varargin{2};
            end
            obj = obj@A(a,b);
        end
    end
end
```

Because the class definition for **B** uses an `if` statement before calling the base class constructor for **A**, you cannot generate code for function `callB`:

```
function [y1,y2] = callB
x = B;
y1 = x.p1;
y2 = x.p2;
end
```

However, you can generate code for `callB` if you define class **B** as:

```
classdef B < A
    methods
        function obj = NewB(varargin)
            [a,b] = getaandb(varargin{:});
            obj = obj@A(a,b);
        end
    end
end
```

```
function [a,b] = getaandb(varargin)
if nargin == 0
    a = 1;
    b = 2;
elseif nargin == 1
    a = varargin{1};
    b = 1;
elseif nargin == 2
    a = varargin{1};
    b = varargin{2};
end
end
```

Inheritance from Built-In MATLAB Classes Not Supported

You cannot generate code for classes that inherit from built-in MATLAB classes. For example, you cannot generate code for the following class:

```
classdef myclass < double
```

Classes That Support Code Generation

You can generate code for MATLAB value and handle classes and user-defined System objects. Your class can have multiple methods and properties and can inherit from multiple classes.

To generate code for:	Example:
Value classes	“Generate Code for MATLAB Value Classes” on page 16-8
Handle classes including user-defined System objects	“Generate Code for MATLAB Handle Classes and System Objects” on page 16-13

For more information, see:

- “Classes in the MATLAB Language”
- “MATLAB Classes Definition for Code Generation” on page 16-2

Generate Code for MATLAB Value Classes

This example shows how to generate code for a MATLAB value class and then view the generated code in the code generation report.

- 1 In a writable folder, create a MATLAB value class, `Shape`. Save the code as `Shape.m`.

```
classdef Shape
% SHAPE Create a shape at coordinates
% centerX and centerY
    properties
        centerX;
        centerY;
    end
    properties (Dependent = true)
        area;
    end
    methods
        function out = get.area(obj)
            out = obj.getarea();
        end
        function obj = Shape(centerX,centerY)
            obj.centerX = centerX;
            obj.centerY = centerY;
        end
    end
end
methods(Abstract = true)
    getarea(obj);
end
methods(Static)
    function d = distanceBetweenShapes(shape1,shape2)
        xDist = abs(shape1.centerX - shape2.centerX);
        yDist = abs(shape1.centerY - shape2.centerY);
        d = sqrt(xDist^2 + yDist^2);
    end
end
end
```

- 2 In the same folder, create a class, `Square`, that is a subclass of `Shape`. Save the code as `Square.m`.

```
classdef Square < Shape
% Create a Square at coordinates center X and center Y
```

```

% with sides of length of side
properties
    side;
end
methods
    function obj = Square(side,centerX,centerY)
        obj@Shape(centerX,centerY);
        obj.side = side;
    end
    function Area = getarea(obj)
        Area = obj.side^2;
    end
end
end

```

- 3 In the same folder, create a class, Rhombus, that is a subclass of Shape. Save the code as Rhombus.m.

```

classdef Rhombus < Shape
    properties
        diag1;
        diag2;
    end
    methods
        function obj = Rhombus(diag1,diag2,centerX,centerY)
            obj@Shape(centerX,centerY);
            obj.diag1 = diag1;
            obj.diag2 = diag2;
        end
        function Area = getarea(obj)
            Area = 0.5*obj.diag1*obj.diag2;
        end
    end
end
end

```

- 4 Write a function that uses this class.

```

function [TotalArea, Distance] = use_shape
%#codegen
s = Square(2,1,2);
r = Rhombus(3,4,7,10);
TotalArea = s.area + r.area;
Distance = Shape.distanceBetweenShapes(s,r);

```

- 5 Generate a static library for use_shape and generate a code generation report.

codegen -config:lib -report use_shape

codegen generates a C static library with the default name, use_shape, and supporting files in the default folder, codegen/lib/use_shape.

- 6 Click the **View report** link.
- 7 In the report, on the **MATLAB code** tab, click the link to the Rhombus class.

The report displays the class definition of the Rhombus class and highlights the class constructor. On the **Variables** tab, it provides details of the variables used in the class. If a variable is a MATLAB object, by default, the report displays the object without displaying its properties. To view the list of properties, expand the list. Within the list of properties, the list of inherited properties is collapsed. In the following report, the lists of properties and inherited properties are expanded.

The screenshot shows the Code Generation Report window with the following content:

MATLAB code Call stack C code

Method: Rhombus Calls: Select a function call:

```

1 classdef Rhombus < Shape
2     properties
3         diag1;
4         diag2;
5     end
6     methods
7         function obj = Rhombus(diag1,diag2,centerX,centerY)
8             obj@Shape(centerX,centerY);
9             obj.diag1 = diag1;
10            obj.diag2 = diag2;
11        end
12        function Area = getarea(obj)
13            Area = 0.5*obj.diag1*obj.diag2;
14        end
15    end
16 end
17

```

Summary All Messages (0) Variables Target Build Log

Order	Variable	Type	Size	Class	Complex
1	obj	Output	1 x 1	Rhombus	-
1.1		Inherited		Shape	
1.1.1	centerX	Property	1 x 1	double	No
1.1.2	centerY	Property	1 x 1	double	No
1.2	diag1	Property	1 x 1	double	No
1.3	diag2	Property	1 x 1	double	No
2	diag1	Input	1 x 1	double	No
3	diag2	Input	1 x 1	double	No
4	centerX	Input	1 x 1	double	No
5	centerY	Input	1 x 1	double	No

- 8 At the top right side of the report, expand the **Calls** list.

The **Calls** list shows that there is a call to the Rhombus constructor from `use_shape` and that this constructor calls the Shape constructor.

The screenshot shows the Code Generation Report window with the following components:

- Left Panel (MATLAB code):** A tree view showing the class hierarchy: Rhombus (with links to Rhombus and getarea), Shape (with links to Shape.1, Shape.2, and distanceBetweenShapes), and Square (with links to Square and getarea).
- Method View:** The `Rhombus` method is selected, showing the following code:


```

1 classdef Rhombus < Shape
2     properties
3         diag1;
4         diag2;
5     end
6     methods
7         function obj = Rhombus(diag1,diag2,centerX,centerY)
8             obj@Shape(centerX,centerY);
9             obj.diag1 = diag1;
10            obj.diag2 = diag2;
11        end
12        function Area = getarea(obj)
13            Area = 0.5*obj.diag1*obj.diag2;
14        end
15    end
16 end
17
```
- Call Stack:** A dropdown menu is open, showing the following calls:
 - Select a function call:
 - Select a function call:
 - Calls to this function
 - From use_shape line 4
 - Calls from this function
 - From line 8 to Shape
- Summary Table:** A table with columns: Order, Variable, Type, Size, Class, and Complex.

Order	Variable	Type	Size	Class	Complex
1	obj	Output	1 x 1	Rhombus	-
1.1		Inherited		Shape	
1.1.1	centerX	Property	1 x 1	double	No
1.1.2	centerY	Property	1 x 1	double	No
1.2	diag1	Property	1 x 1	double	No
1.3	diag2	Property	1 x 1	double	No
2	diag1	Input	1 x 1	double	No
3	diag2	Input	1 x 1	double	No
4	centerX	Input	1 x 1	double	No
5	centerY	Input	1 x 1	double	No

- 9 The constructor for the Rhombus class calls the Shape method of the base Shape class: `obj@Shape`. In the report, click the Shape link in this call.

The screenshot shows the 'Code Generation Report' window. On the left, a tree view shows the class hierarchy: Rhombus (with methods [Rhombus](#) and [getarea](#)), Shape (with methods [Shape.1](#), [Shape.2](#), and [distanceBetweenShapes](#)), and Square (with methods [Square](#) and [getarea](#)). The main pane displays the MATLAB code for the `Rhombus` class, with the line `function obj = Rhombus(diag1,diag2,centerX,centerY)` highlighted. A red circle highlights the `obj@Shape` link in the code. Below the code is a 'Summary' table with the following data:

Order	Variable	Type	Size	Class	Complex
1	obj	Output	1 x 1	Rhombus	-
1.1		Inherited		Shape	
1.1.1	centerX	Property	1 x 1	double	No
1.1.2	centerY	Property	1 x 1	double	No
1.2	diag1	Property	1 x 1	double	No
1.3	diag2	Property	1 x 1	double	No
2	diag1	Input	1 x 1	double	No
3	diag2	Input	1 x 1	double	No
4	centerX	Input	1 x 1	double	No
5	centerY	Input	1 x 1	double	No

The link takes you to the `Shape` method in the `Shape` class definition.

Generate Code for MATLAB Handle Classes and System Objects

This example shows how to generate code for a user-defined System object and then view the generated code in the code generation report.

- 1 In a writable folder, create a System object, `AddOne`, which subclasses from `matlab.System`. Save the code as `AddOne.m`.

```
classdef AddOne < matlab.System
% ADDONE Compute an output value that increments the input by one

    methods (Access=protected)
        % stepImpl method is called by the step method
        function y = stepImpl(~,x)
            y = x+1;
        end
    end
end
```

- 2 Write a function that uses this System object.

```
function y = testAddOne(x)
%#codegen
    p = AddOne();
    y = p.step(x);
end
```


- 3 Generate a MEX function for this code.

```
codegen -report testAddOne -args {0}
```


The `-report` option instructs `codegen` to generate a code generation report, even if no errors or warnings occur. The `-args` option specifies that the `testAddOne` function takes one scalar double input.

```
>> codegen -report testAddOne -args {0}
Code generation successful: View report
```

- 4 Click the **View report** link.
- 5 In the report, on the **MATLAB Code** tab **Functions** panel, click `testAddOne`, then click the **Variables** tab. You can view information about the variable `p` on this tab.

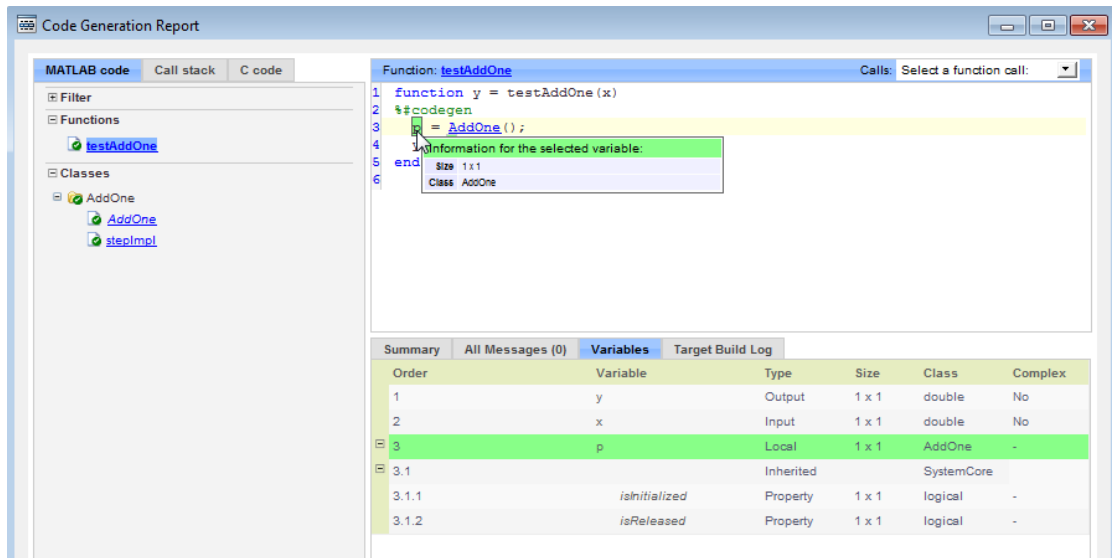

6 To view the class definition, on the **Classes** panel, click **AddOne**.

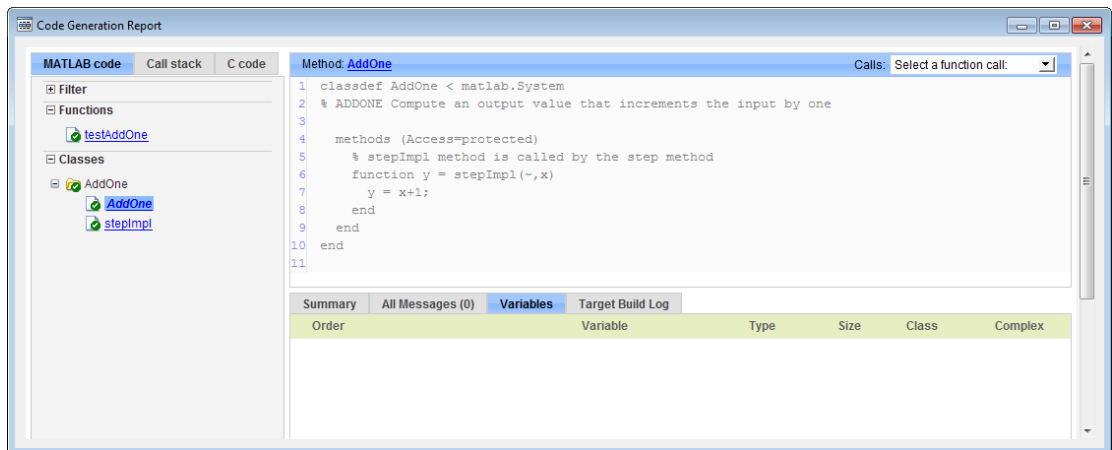

MATLAB Classes in Code Generation Reports

What Reports Tell You About Classes

Code generation reports:

- Provide a hierarchical tree of the classes used in your MATLAB code.
- Display a list of methods for each class in the MATLAB code tab.
- Display the objects used in your MATLAB code together with their properties on the **Variables** tab.
- Provide a filter so that you can sort methods by class, size, and complexity.
- List the set of calls from and to the selected method in the **Calls** list.

How Classes Appear in Code Generation Reports

In the MATLAB Code Tab

The report displays an alphabetical hierarchical list of the classes used in the your MATLAB code. For each class, you can:

- Expand the class information to view the class methods.
- View a class method by clicking its name. The report displays the methods in the context of the full class definition.
- Filter the methods by size, complexity, and class by using the **Filter functions and methods** option.

Default Constructors


If a class has a default constructor, the report displays the constructor in italics.

Specializations

If the same class is specialized into multiple different classes, the report differentiates the specializations by grouping each one under a single node in the tree. The report associates the class definition functions and static methods with the primary node. It associates the instance-specific methods with the corresponding specialized node.

For example, consider a base class, **Shape** that has two specialized subclasses, **Rhombus** and **Square**. The **Shape** class has an abstract method, `getarea`, and a static method, `distanceBetweenShapes`. The code generation report, displays a

node for the specialized `Rhombus` and `Square` classes with their constructors and `getarea` method. It displays a node for the `Shape` class and its associated static method, `distanceBetweenShapes`, and two instances of the `Shape` class, `Shape1` and `Shape2`.

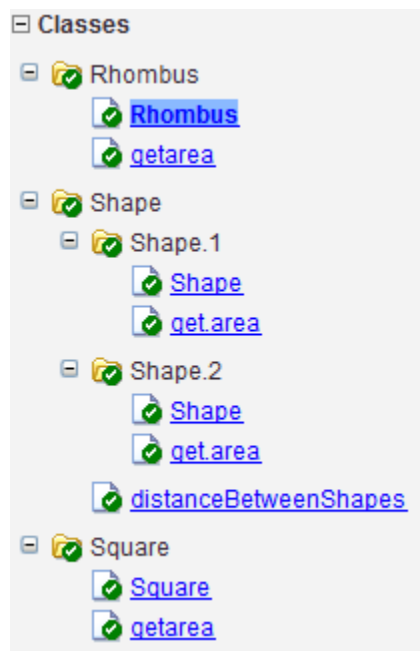

Packages

If you define classes as part of a package, the report displays the package in the list of classes. You can expand the package to view the classes that it contains. For more information about packages, see “Packages Create Namespaces”.

In the Variables Tab

The report displays the objects in the selected function or class. By default, for classes that have properties, the list of properties is collapsed. To expand the list, click the + symbol next to the object name. Within the list of properties, the list of inherited properties is collapsed. To expand the list of inherited properties, click the + symbol next to `Inherited`.

The report displays the properties using just the base property name, not the fully qualified name. For example, if your code uses variable `obj1` that is a MATLAB object

with property `prop1`, then the report displays the property as `prop1` not `obj1.prop1`. When you sort the **Variables** column, the sort order is based on the fully qualified property name.

In the Call Stack

The call stack lists the functions and methods in the order that the top-level function calls them. It also lists the local functions that each function calls.

How to Generate a Code Generation Report

Add the `-report` option to your `codegen` command (requires a MATLAB Coder license)

Troubleshooting Issues with MATLAB Classes

Class *cClass* does not have a property with name *name*

If a MATLAB class has a method, `mymethod`, that returns a handle class with a property, `myprop`, you cannot generate code for the following type of assignment:

```
obj.mymethod().myprop=...
```

For example, consider the following classes:

```
classdef MyClass < handle
    properties
        myprop
    end
    methods
        function this = MyClass
            this.myprop = MyClass2;
        end
        function y = mymethod(this)
            y = this.myprop;
        end
    end
end

classdef MyClass2 < handle
    properties
        aa
    end
end
```

You cannot generate code for function `foo`.

```
function foo
    h = MyClass;
```

```
    h.mymethod().aa = 12;
```

In this function, `h.mymethod()` returns a handle object of type `MyClass2`. In MATLAB, the assignment `h.mymethod().aa = 12;` changes the property of that object. Code generation does not support this assignment.

Workaround

Rewrite the code to return the object and then assign a value to a property of the object.

```
function foo  
  
h = MyClass;  
  
b=h.mymethod();  
b.aa=12;
```


Defining Data for Code Generation

- “Data Definition for Code Generation” on page 17-2
- “Code Generation for Complex Data” on page 17-4
- “Code Generation for Characters” on page 17-9
- “Array Size Restrictions for Code Generation” on page 17-10
- “Code Generation for Constants in Structures and Arrays” on page 17-11

Data Definition for Code Generation

To generate efficient standalone code, you must define the following types and classes of data differently than you normally would when running your code in the MATLAB environment:

Data	What's Different	More Information
Arrays	Maximum number of elements is restricted	“Array Size Restrictions for Code Generation” on page 17-10
Complex numbers	<ul style="list-style-type: none"> Complexity of variables must be set at time of assignment and before first use Expressions containing a complex number or variable evaluate to a complex result, even if the result is zero <p>Note: Because MATLAB does not support complex integer arithmetic, you cannot generate code for functions that use complex integer arithmetic</p>	“Code Generation for Complex Data” on page 17-4
Characters	Restricted to 8 bits of precision	“Code Generation for Characters” on page 17-9
Enumerated data	<ul style="list-style-type: none"> Supports integer-based enumerated types only Restricted use in <code>switch</code> statements and <code>for</code>-loops 	“Enumerated Data”
Function handles	<ul style="list-style-type: none"> Same bound variable cannot reference 	“Function Handles”

Data	What's Different	More Information
	<p data-bbox="647 300 862 357">different function handles</p> <ul data-bbox="609 374 911 604" style="list-style-type: none"><li data-bbox="609 374 911 496">• Cannot pass function handles to or from primary or extrinsic functions<li data-bbox="609 513 911 604">• Cannot view function handles from the debugger	

Code Generation for Complex Data

In this section...

“Restrictions When Defining Complex Variables” on page 17-4

“Code Generation for Complex Data with Zero-Valued Imaginary Parts” on page 17-4

“Results of Expressions That Have Complex Operands” on page 17-8

Restrictions When Defining Complex Variables

For code generation, you must set the complexity of variables at the time of assignment. Assign a complex constant to the variable or use the `complex` function. For example:

```
x = 5 + 6i; % x is a complex number by assignment.
y = complex(5,6); % y is the complex number 5 + 6i.
```

After assignment, you cannot change the complexity of a variable. Code generation for the following function fails because $x(k) = 3 + 4i$ changes the complexity of x .

```
function x = test1( )
x = zeros(3,3); % x is real
for k = 1:numel(x)
    x(k) = 3 + 4i;
end
end
```

To resolve this issue, assign a complex constant to x .

```
function x = test1( )
x = zeros(3,3)+ 0i; %x is complex
for k = 1:numel(x)
    x(k) = 3 + 4i;
end
end
```

Code Generation for Complex Data with Zero-Valued Imaginary Parts

For code generation, complex data that has all zero-valued imaginary parts remains complex. This data does not become real. This behavior has the following implications:

- In some cases, results from functions that sort complex data by absolute value can differ from the MATLAB results. See “Functions That Sort Complex Values by Absolute Value” on page 17-5.
- For functions that require that complex inputs are sorted by absolute value, complex inputs with zero-valued imaginary parts must be sorted by absolute value. These functions include `ismember`, `union`, `intersect`, `setdiff`, and `setxor`.

Functions That Sort Complex Values by Absolute Value

Functions that sort complex values by absolute value include `sort`, `issorted`, `sortrows`, `median`, `min`, and `max`. These functions sort complex numbers by absolute value even when the imaginary parts are zero. In general, sorting the absolute values produces a different result than sorting the real parts. Therefore, when inputs to these functions are complex with zero-valued imaginary parts in generated code, but real in MATLAB, the generated code can produce different results than MATLAB. In the following examples, the input to `sort` is real in MATLAB, but complex with zero-valued imaginary parts in the generated code:

- **You Pass Real Inputs to a Function Generated for Complex Inputs**

- 1 Write this function:

```
function myout = mysort(A)
myout = sort(A);
end
```

- 2 Call `mysort` in MATLAB.

```
A = -2:2;
mysort(A)

ans =

    -2    -1     0     1     2
```

- 3 Generate a MEX function for complex inputs.

```
A = -2:2;
codegen mysort -args {complex(A)} -report
```

- 4 Call the MEX Function with real inputs.

```
mysort_mex(A)

ans =
```

```
0    1   -1    2   -2
```

You generated the MEX function for complex inputs, therefore, it treats the real inputs as complex numbers with zero-valued imaginary parts. It sorts the numbers by the absolute values of the complex numbers. Because the imaginary parts are zero, the MEX function returns the results to the MATLAB workspace as real numbers. See “Inputs and Outputs for MEX Functions Generated for Complex Arguments” on page 17-7.

- **Input to sort Is Output from a Function That Returns Complex in Generated Code**

- 1 Write this function:

```
function y = myfun(A)
x = eig(A);
y = sort(x, 'descend');
```

The output from `eig` is the input to `sort`. In generated code, `eig` returns a complex result. Therefore, in the generated code, `x` is complex.

- 2 Call `myfun` in MATLAB.

```
A = [2 3 5;0 5 5;6 7 4];
myfun(A)
```

```
ans =
```

```
12.5777
 2.0000
-3.5777
```

The result of `eig` is real. Therefore, the inputs to `sort` are real.

- 3 Generate a MEX function for complex inputs.

```
codegen myfun -args {complex(A)}
```

- 4 Call the MEX function.

```
myfun_mex(A)
```

```
ans =
```

```
12.5777
-3.5777
 2.0000
```


In the MEX function, `eig` returns a complex result. Therefore, the inputs to `sort` are complex. The MEX function sorts the inputs in descending order of the absolute values.

Inputs and Outputs for MEX Functions Generated for Complex Arguments

For MEX functions created by `fiaccl`:

- Suppose that you generate the MEX function for complex inputs. If you call the MEX function with real inputs, the MEX function transforms the real inputs to complex values with zero-valued imaginary parts.
- If the MEX function returns complex values that have all zero-valued imaginary parts, the MEX function returns the values to the MATLAB workspace as real values. For example, consider this function:

```
function y = foo()
    y = 1 + 0i; % y is complex with imaginary part equal to zero
end
```

If you generate a MEX function for `foo` and view the code generation report, you see that `y` is complex.

```
codegen foo -report
```

Order	Variable	Type	Size	Class	Complex
1	y	Output	1 x 1	double	Yes

If you run the MEX function, you see that in the MATLAB workspace, the result of `foo_mex` is the real value 1.

```
z = foo_mex

ans =

    1
```

Results of Expressions That Have Complex Operands

In general, expressions that contain one or more complex operands produce a complex result in generated code, even if the value of the result is zero. Consider the following line of code:

```
z = x + y;
```

Suppose that at run time, x has the value $2 + 3i$ and y has the value $2 - 3i$. In MATLAB, this code produces the real result $z = 4$. During code generation, the types for x and y are known, but their values are not known. Because either or both operands in this expression are complex, z is defined as a complex variable requiring storage for a real and an imaginary part. z equals the complex result $4 + 0i$ in generated code, not 4 , as in MATLAB code.

Exceptions to this behavior are:

- When the imaginary parts of complex results are zero, MEX functions return the results to the MATLAB workspace as real values. See “Inputs and Outputs for MEX Functions Generated for Complex Arguments” on page 17-7.
- When the imaginary part of the argument is zero, complex arguments to extrinsic functions are real.

```
function y = foo()  
    coder.extrinsic('sqrt')  
    x = 1 + 0i; % x is complex  
    y = sqrt(x); % x is real, y is real  
end
```

- Functions that take complex arguments but produce real results return real values.

```
y = real(x); % y is the real part of the complex number x.  
y = imag(x); % y is the real-valued imaginary part of x.  
y = isreal(x); % y is false (0) for a complex number x.
```

- Functions that take real arguments but produce complex results return complex values.

```
z = complex(x,y); % z is a complex number for a real x and y.
```

Code Generation for Characters

The complete set of Unicode characters is not supported for code generation. Characters are restricted to 8 bits of precision in generated code. Because many mathematical operations require more than 8 bits of precision, it is recommended that you do not perform arithmetic with characters if you intend to generate code from your MATLAB algorithm.

Array Size Restrictions for Code Generation

For code generation, the maximum number of elements of an array is constrained by the code generation software and the target hardware.

For fixed-size arrays and variable-size arrays that use static memory allocation, the maximum number of elements is the smaller of:

- `intmax('int32')`.
- The largest integer that fits in the C `int` data type on the target hardware.

For variable-size arrays that use dynamic memory allocation, the maximum number of elements is the smaller of:

- `intmax('int32')`.
- The largest power of 2 that fits in the C `int` data type on the target hardware.

These restrictions apply even on a 64-bit platform.

For a fixed-size array, if the number of elements exceeds the maximum, the code generation software reports an error at compile time. For a variable-size array, if the number of elements exceeds the maximum during execution of the generated MEX in MATLAB, the MEX code reports an error. Generated standalone code cannot report array size violations.

See Also

- “Variable-Size Data”

Code Generation for Constants in Structures and Arrays

The code generation software does not recognize constant structure fields or array elements in the following cases:

Fields or elements are assigned inside control constructs

In the following code, the code generation software recognizes that the structure fields `s.a` and `s.b` are constants.

```
function y = mystruct()  
s.a = 3;  
s.b = 5;  
y = zeros(s.a,s.b);
```

If any structure field is assigned inside a control construct, the code generation software does not recognize the constant fields. This limitation also applies to arrays with constant elements. Consider the following code:

```
function y = mystruct(x)  
s.a = 3;  
if x > 1  
    s.b = 4;  
else  
    s.b = 5;  
end  
y = zeros(s.a,s.b);
```

The code generation software does not recognize that `s.a` and `s.b` are constant. If variable-sizing is enabled, `y` is treated as a variable-size array. If variable-sizing is disabled, the code generation software reports an error.

Constants are assigned to array elements using non-scalar indexing

In the following code, the code generation software recognizes that `a(1)` is constant.

```
function y = myarray()  
a = zeros(1,3);  
a(1) = 20;  
y = coder.const(a(1));
```

In the following code, because `a(1)` is assigned using non-scalar indexing, the code generation software does not recognize that `a(1)` is constant.

```
function y = myarray()  
a = zeros(1,3);  
a(1:2) = 20;  
y = coder.const(a(1));
```

A function returns a structure or array that has constant and nonconstant elements

For an output structure that has both constant and nonconstant fields, the code generation software does not recognize the constant fields. This limitation also applies to arrays that have constant and nonconstant elements. Consider the following code:

```
function y = mystruct_out(x)  
s = create_structure(x);  
y = coder.const(s.a);  
  
function s = create_structure(x)  
s.a = 10;  
s.b = x;
```

Because `create_structure` returns a structure `s` that has one constant field and one nonconstant field, the code generation software does not recognize that `s.a` is constant. The `coder.const` call fails because `s.a` is not constant.

Defining Functions for Code Generation

- “Specify Variable Numbers of Arguments” on page 18-2
- “Supported Index Expressions” on page 18-3
- “Apply Operations to a Variable Number of Arguments” on page 18-4
- “Implement Wrapper Functions” on page 18-6
- “Pass Property/Value Pairs” on page 18-7
- “Variable Length Argument Lists for Code Generation” on page 18-9

Specify Variable Numbers of Arguments

You can use `varargin` in a function definition to specify that the function accepts a variable number of input arguments for a given input argument. You can use `varargout` in a function definition to specify that the function returns a variable number of arguments for a given output argument.

When you use `varargin` and `varargout` for code generation, there are the following limitations:

- You cannot use `varargout` in the function definition for a top-level function.
- You cannot use `varargin` in the function definition for a top-level function in a MATLAB Function block in a Simulink model, or in a MATLAB function in a Stateflow diagram.
- If you use `varargin` to define an argument to a top-level function, the code generation software generates the function with a fixed number of arguments. This fixed number of arguments is based on the number of example arguments that you provide on the command line or in a MATLAB Coder project test file.

Common applications of `varargin` and `varargout` for code generation are to:

- “Apply Operations to a Variable Number of Arguments” on page 18-4
- “Implement Wrapper Functions” on page 18-6
- “Pass Property/Value Pairs” on page 18-7

Code generation relies on loop unrolling to produce simple and efficient code for `varargin` and `varargout`. This technique permits most common uses of `varargin` and `varargout`, but some uses are not allowed (see “Variable Length Argument Lists for Code Generation” on page 18-9).

For more information about using `varargin` and `varargout` in MATLAB functions, see [Passing Variable Numbers of Arguments](#).

Supported Index Expressions

In MATLAB, `varargin` and `varargout` are cell arrays. Generated code does not support cell arrays, but does allow you to use the most common syntax — curly braces `{}` — for indexing into `varargin` and `varargout` arrays, as in this example:

```

%#codegen
function [x,y,z] = fcn(a,b,c)
[x,y,z] = subfcn(a,b,c);

function varargout = subfcn(varargin)
for i = 1:length(varargin)
    varargout{i} = varargin{i};
end

```

You can use the following index expressions. The *exp* arguments must be constant expressions or depend on a loop index variable.

Expression		Description
<code>varargin</code> (<i>read only</i>)	<code>varargin{exp}</code>	Read the value of element <i>exp</i>
	<code>varargin{exp1:exp2}</code>	Read the values of elements <i>exp1</i> through <i>exp2</i>
	<code>varargin{:}</code>	Read the values of all elements
<code>varargout</code> (<i>read and write</i>)	<code>varargout{exp}</code>	Read or write the value of element <i>exp</i>

Note: The use of `()` is not supported for indexing into `varargin` and `varargout` arrays.

Apply Operations to a Variable Number of Arguments

You can use `varargin` and `varargout` in `for`-loops to apply operations to a variable number of arguments. To index into `varargin` and `varargout` arrays in generated code, the value of the loop index variable must be known at compile time. Therefore, during code generation, the compiler attempts to automatically unroll these `for`-loops. Unrolling eliminates the loop logic by creating a separate copy of the loop body in the generated code for each iteration. Within each iteration, the loop index variable becomes a constant. For example, the following function automatically unrolls its `for`-loop in the generated code:

```
 %#codegen
function [cmLen,cmwth,cmhgt] = conv_2_metric(inlen,inwth,inhgt)

[cmLen,cmwth,cmhgt] = inch_2_cm(inlen,inwth,inhgt);

function varargout = inch_2_cm(varargin)
for i = 1:length(varargin)
    varargout{i} = varargin{i} * 2.54;
end
```

When to Force Loop Unrolling

To automatically unroll `for`-loops containing `varargin` and `varargout` expressions, the relationship between the loop index expression and the index variable must be determined at compile time.

In the following example, the function `fcn` cannot detect a logical relationship between the index expression `j` and the index variable `i`:

```
 %#codegen
function [x,y,z] = fcn(a,b,c)

[x,y,z] = subfcn(a,b,c);

function varargout = subfcn(varargin)
j = 0;
for i = 1:length(varargin)
    j = j+1;
    varargout{j} = varargin{j};
end
```

As a result, the function does not unroll the loop and generates a compilation error:

Nonconstant expression or empty matrix.
This expression must be constant because
its value determines the size or class of some expression.

To fix the problem, you can force loop unrolling by wrapping the loop header in the function `coder.unroll`, as follows:

```

%#codegen
function [x,y,z] = fcn(a,b,c)
    [x,y,z] = subfcn(a,b,c);

function varargout = subfcn(varargin)
    j = 0;
    for i = coder.unroll(1:length(varargin))
        j = j + 1;
        varargout{j} = varargin{j};
    end;

```

Using Variable Numbers of Arguments in a for-Loop

The following example multiplies a variable number of input dimensions in inches by 2.54 to convert them to centimeters:

```

%#codegen
function [cmlen,cmwth,cmhgt] = conv_2_metric(inlen,inwth,inhgt)

[cmlen,cmwth,cmhgt] = inch_2_cm(inlen,inwth,inhgt);

function varargout = inch_2_cm(varargin)
for i = 1:length(varargin)
    varargout{i} = varargin{i} * 2.54;
end

```

Key Points About the Example

- `varargin` and `varargout` appear in the local function `inch_2_cm`, not in the top-level function `conv_2_metric`.
- The index into `varargin` and `varargout` is a for-loop variable

For more information, see “Variable Length Argument Lists for Code Generation” on page 18-9.

Implement Wrapper Functions

You can use `varargin` and `varargout` to write wrapper functions that accept up to 64 inputs and pass them directly to another function.

Passing Variable Numbers of Arguments from One Function to Another

The following example passes a variable number of inputs to different optimization functions, based on a specified input method:

```
%#codegen
function answer = fcn(method,a,b,c)
answer = optimize(method,a,b,c);

function answer = optimize(method,varargin)
    if strcmp(method,'simple')
        answer = simple_optimization(varargin{:});
    else
        answer = complex_optimization(varargin{:});
    end
    ...
end
```

Key Points About the Example

- You can use `{:}` to read all elements of `varargin` and pass them to another function.
- You can mix variable and fixed numbers of arguments.

For more information, see “Variable Length Argument Lists for Code Generation” on page 18-9.

Pass Property/Value Pairs

You can use `varargin` to pass property/value pairs in functions. However, for code generation, you must take precautions to avoid type mismatch errors when evaluating `varargin` array elements in a `for`-loop:

If	Do This:
You assign <code>varargin</code> array elements to local variables in the <code>for</code> -loop	Verify that for all pairs, the size, type, and complexity are the same for each property and the same for each value
Properties or values have different sizes, types, or complexity	Do not assign <code>varargin</code> array elements to local variables in a <code>for</code> -loop; reference the elements directly

For example, in the following function `test1`, the sizes of the property strings and numeric values are not the same in each pair:

```

%#codegen
function test1
    v = create_value('size', 18, 'rgb', [240 9 44]);
end

function v = create_value(varargin)
    v = new_value();
    for i = 1 : 2 : length(varargin)
        name = varargin{i};
        value = varargin{i+1};
        switch name
            case 'size'
                v = set_size(v, value);
            case 'rgb'
                v = set_color(v, value);
            otherwise
            end
        end
    end
end
...

```

Generated code determines the size, type, and complexity of a local variable based on its first assignment. In this example, the first assignments occur in the first iteration of the `for`-loop:

- Defines local variable `name` with size equal to 4
- Defines local variable `value` with a size of scalar

However, in the second iteration, the size of the property string changes to 3 and the size of the numeric value changes to a vector, resulting in a type mismatch error. To avoid such errors, reference `varargin` array values directly, not through local variables, as highlighted in this code:

```

%#codegen
function test1
    v = create_value('size', 18, 'rgb', [240 9 44]);
end

function v = create_value(varargin)
    v = new_value();
    for i = 1 : 2 : length(varargin)
        switch varargin{i}
            case 'size'
                v = set_size(v, varargin{i+1});
            case 'rgb'
                v = set_color(v, varargin{i+1});
            otherwise
                end
        end
    end
end
...

```

Variable Length Argument Lists for Code Generation

Use variable length argument lists in top-level functions according to guidelines

When you use `varargout` and `varargin` for code generation, there are the following limitations:

- You cannot use `varargout` in the function definition for a top-level function.
- You cannot use `varargin` in the function definition for a top-level function in a MATLAB Function block in a Simulink model, or in a MATLAB function in a Stateflow diagram.
- If you use `varargin` to define an argument to a top-level function, the code generation software generates the function with a fixed number of arguments. This fixed number of arguments is based on the number of example arguments that you provide on the command line or in a MATLAB Coder project test file.

A *top-level function* is:

- The function called by Simulink in a MATLAB Function block or by Stateflow in a MATLAB function.
- The function that you provide on the command line to `codegen` or `fiaccel`.

For example, the following code generates compilation errors:

```

%#codegen
function varargout = inch_2_cm(varargin)
for i = 1:length(varargin)
    varargout{i} = varargin{i} * 2.54;
end

```

To fix the problem, write a top-level function that specifies a fixed number of inputs and outputs. Then call `inch_2_cm` as an external function or local function, as in this example:

```

%#codegen
function [cmL, cmW, cmH] = conv_2_metric(inL, inW, inH)
[cmL, cmW, cmH] = inch_2_cm(inL, inW, inH);

function varargout = inch_2_cm(varargin)
for i = 1:length(varargin)
    varargout{i} = varargin{i} * 2.54;
end

```

Use curly braces {} to index into the argument list

For code generation, you can use curly braces {}, but not parentheses (), to index into `varargin` and `varargout` arrays. For more information, see “Supported Index Expressions” on page 18-3.

Verify that indices can be computed at compile time

If you use an expression to index into `varargin` or `varargout`, make sure that the value of the expression can be computed at compile time. For examples, see “Apply Operations to a Variable Number of Arguments” on page 18-4.

Do not write to varargin

Generated code treats `varargin` as a read-only variable. If you want to write to input arguments, copy the values into a local variable.

Defining MATLAB Variables for C/C++ Code Generation

- “Variables Definition for Code Generation” on page 19-2
- “Best Practices for Defining Variables for C/C++ Code Generation” on page 19-3
- “Eliminate Redundant Copies of Variables in Generated Code” on page 19-7
- “Reassignment of Variable Properties” on page 19-9
- “Define and Initialize Persistent Variables” on page 19-10
- “Reuse the Same Variable with Different Properties” on page 19-11
- “Avoid Overflows in for-Loops” on page 19-15
- “Supported Variable Types” on page 19-17

Variables Definition for Code Generation

In the MATLAB language, variables can change their properties dynamically at run time so you can use the same variable to hold a value of any class, size, or complexity. For example, the following code works in MATLAB:

```
function x = foo(c) %#codegen
if(c>0)
    x = 0;
else
    x = [1 2 3];
end
disp(x);
end
```

However, statically-typed languages like C must be able to determine variable properties at compile time. Therefore, for C/C++ code generation, you must explicitly define the class, size, and complexity of variables in MATLAB source code before using them. For example, rewrite the above source code with a definition for *x*:

```
function x = foo(c) %#codegen
x = zeros(1,3);
if(c>0)
    x = 0;
else
    x = [1 2 3];
end
disp(x);
end
```

For more information, see “Best Practices for Defining Variables for C/C++ Code Generation” on page 19-3.

Best Practices for Defining Variables for C/C++ Code Generation

In this section...

“Define Variables By Assignment Before Using Them” on page 19-3

“Use Caution When Reassigning Variables” on page 19-5

“Use Type Cast Operators in Variable Definitions” on page 19-5

“Define Matrices Before Assigning Indexed Variables” on page 19-6

Define Variables By Assignment Before Using Them

For C/C++ code generation, you should explicitly and unambiguously define the class, size, and complexity of variables before using them in operations or returning them as outputs. Define variables by assignment, but note that the assignment copies not only the value, but also the size, class, and complexity represented by that value to the new variable. For example:

Assignment:	Defines:
<code>a = 14.7;</code>	a as a real double scalar.
<code>b = a;</code>	b with properties of a (real double scalar).
<code>c = zeros(5,2);</code>	c as a real 5-by-2 array of doubles.
<code>d = [1 2 3 4 5; 6 7 8 9 0];</code>	d as a real 5-by-2 array of doubles.
<code>y = int16(3);</code>	y as a real 16-bit integer scalar.

Define properties this way so that the variable is defined on the required execution paths during C/C++ code generation (see Defining a Variable for Multiple Execution Paths).

The data that you assign to a variable can be a scalar, matrix, or structure. If your variable is a structure, define the properties of each field explicitly (see Defining Fields in a Structure).

Initializing the new variable to the value of the assigned data sometimes results in redundant copies in the generated code. To avoid redundant copies, you can define variables without initializing their values by using the `coder.nullcopy` construct as described in “Eliminate Redundant Copies of Variables in Generated Code” on page 19-7.

When you define variables, they are local by default; they do not persist between function calls. To make variables persistent, see “Define and Initialize Persistent Variables” on page 19-10.

Defining a Variable for Multiple Execution Paths

Consider the following MATLAB code:

```
...
if c > 0
    x = 11;
end
% Later in your code ...
if c > 0
    use(x);
end
...
```

Here, x is assigned only if $c > 0$ and used only when $c > 0$. This code works in MATLAB, but generates a compilation error during code generation because it detects that x is undefined on some execution paths (when $c \leq 0$),

To make this code suitable for code generation, define x before using it:

```
x = 0;
...
if c > 0
    x = 11;
end
% Later in your code ...
if c > 0
    use(x);
end
...
```

Defining Fields in a Structure

Consider the following MATLAB code:

```
...
if c > 0
    s.a = 11;
    disp(s);
else
    s.a = 12;
end
```

```

    s.b = 12;
end
% Try to use s
use(s);
...

```

Here, the first part of the `if` statement uses only the field `a`, and the `else` clause uses fields `a` and `b`. This code works in MATLAB, but generates a compilation error during C/C++ code generation because it detects a structure type mismatch. To prevent this error, do not add fields to a structure after you perform certain operations on the structure. For more information, see “Structure Definition for Code Generation”.

To make this code suitable for C/C++ code generation, define all fields of `s` before using it.

```

...
% Define all fields in structure s
s = struct('a',0, 'b', 0);
if c > 0
    s.a = 11;
    disp(s);
else
    s.a = 12;
    s.b = 12;
end
% Use s
use(s);
...

```

Use Caution When Reassigning Variables

In general, you should adhere to the "one variable/one type" rule for C/C++ code generation; that is, each variable must have a specific class, size and complexity. Generally, if you reassign variable properties after the initial assignment, you get a compilation error during code generation, but there are exceptions, as described in “Reassignment of Variable Properties” on page 19-9.

Use Type Cast Operators in Variable Definitions

By default, constants are of type `double`. To define variables of other types, you can use type cast operators in variable definitions. For example, the following code defines variable `y` as an integer:

```

...

```

```
x = 15; % x is of type double by default.  
y = uint8(x); % y has the value of x, but cast to uint8.  
...
```

Define Matrices Before Assigning Indexed Variables

When generating C/C++ code from MATLAB, you cannot grow a variable by writing into an element beyond its current size. Such indexing operations produce run-time errors. You must define the matrix first before assigning values to its elements.

For example, the following initial assignment is not allowed for code generation:

```
g(3,2) = 14.6; % Not allowed for creating g  
           % OK for assigning value once created
```

For more information about indexing matrices, see “Incompatibility with MATLAB in Matrix Indexing Operations for Code Generation” on page 26-31.

Eliminate Redundant Copies of Variables in Generated Code

In this section...

“When Redundant Copies Occur” on page 19-7

“How to Eliminate Redundant Copies by Defining Uninitialized Variables” on page 19-7

“Defining Uninitialized Variables” on page 19-8

When Redundant Copies Occur

During C/C++ code generation, MATLAB checks for statements that attempt to access uninitialized memory. If it detects execution paths where a variable is used but is potentially not defined, it generates a compile-time error. To prevent these errors, define variables by assignment before using them in operations or returning them as function outputs.

Note, however, that variable assignments not only copy the properties of the assigned data to the new variable, but also initialize the new variable to the assigned value. This forced initialization sometimes results in redundant copies in C/C++ code. To eliminate redundant copies, define uninitialized variables by using the `coder.nullcopy` function, as described in “How to Eliminate Redundant Copies by Defining Uninitialized Variables” on page 19-7.

How to Eliminate Redundant Copies by Defining Uninitialized Variables

- 1 Define the variable with `coder.nullcopy`.
- 2 Initialize the variable before reading it.

When the uninitialized variable is an array, you must initialize all of its elements before passing the array as an input to a function or operator — even if the function or operator does not read from the uninitialized portion of the array.

What happens if you access uninitialized data?

Uninitialized memory contains arbitrary values. Therefore, accessing uninitialized data may lead to segmentation violations or nondeterministic program behavior (different runs of the same program may yield inconsistent results).

Defining Uninitialized Variables

In the following code, the assignment statement `X = zeros(1,N)` not only defines `X` to be a 1-by-5 vector of real doubles, but also initializes each element of `X` to zero.

```
function X = fcn %#codegen

N = 5;
X = zeros(1,N);
for i = 1:N
    if mod(i,2) == 0
        X(i) = i;
    else
        X(i) = 0;
    end
end
```

This forced initialization creates an extra copy in the generated code. To eliminate this overhead, use `coder.nullcopy` in the definition of `X`:

```
function X = fcn2 %#codegen

N = 5;
X = coder.nullcopy(zeros(1,N));
for i = 1:N
    if mod(i,2) == 0
        X(i) = i;
    else
        X(i) = 0;
    end
end
```


Reassignment of Variable Properties

For C/C++ code generation, there are certain variables that you can reassign after the initial assignment with a value of different class, size, or complexity:

Dynamically sized variables

A variable can hold values that have the same class and complexity but different sizes. If the size of the initial assignment is not constant, the variable is dynamically sized in generated code. For more information, see “Variable-Size Data”.

Variables reused in the code for different purposes

You can reassign the type (class, size, and complexity) of a variable after the initial assignment if each occurrence of the variable can have only one type. In this case, the variable is renamed in the generated code to create multiple independent variables. For more information, see “Reuse the Same Variable with Different Properties” on page 19-11.

Define and Initialize Persistent Variables

Persistent variables are local to the function in which they are defined, but they retain their values in memory between calls to the function. To define persistent variables for C/C++ code generation, use the `persistent` statement, as in this example:

```
persistent PROD_X;
```

The definition should appear at the top of the function body, after the header and comments, but before the first use of the variable. During code generation, the value of the persistent variable is initialized to an empty matrix by default. You can assign your own value after the definition by using the `isempty` statement, as in this example:

```
function findProduct(inputvalue) %#codegen
persistent PROD_X

if isempty(PROD_X)
    PROD_X = 1;
end
PROD_X = PROD_X * inputvalue;
end
```

Reuse the Same Variable with Different Properties

In this section...

“When You Can Reuse the Same Variable with Different Properties” on page 19-11

“When You Cannot Reuse Variables” on page 19-11

“Limitations of Variable Reuse” on page 19-14

When You Can Reuse the Same Variable with Different Properties

You can reuse (reassign) an input, output, or local variable with different class, size, or complexity if MATLAB can unambiguously determine the properties of each occurrence of this variable during C/C++ code generation. If so, MATLAB creates separate uniquely named local variables in the generated code. You can view these renamed variables in the code generation report (see “Use Fixed-Point Code Generation Reports”).

A common example of variable reuse is in `if-elseif-else` or `switch-case` statements. For example, the following function `example1` first uses the variable `t` in an `if` statement, where it holds a scalar double, then reuses `t` outside the `if` statement to hold a vector of doubles.

```
function y = example1(u) %#codegen
if all(all(u>0))
    % First, t is used to hold a scalar double value
    t = mean(mean(u)) / numel(u);
    u = u - t;
end
% t is reused to hold a vector of doubles
t = find(u > 0);
y = sum(u(t(2:end-1)));
```

To compile this example and see how MATLAB renames the reused variable `t`, see Variable Reuse in an `if` Statement.

When You Cannot Reuse Variables

You cannot reuse (reassign) variables if it is not possible to determine the class, size, and complexity of an occurrence of a variable unambiguously during code generation. In this case, variables cannot be renamed and a compilation error occurs.

For example, the following `example2` function assigns a fixed-point value to `x` in the `if` statement and reuses `x` to store a matrix of doubles in the `else` clause. It then uses `x`

after the `if-else` statement. This function generates a compilation error because after the `if-else` statement, variable `x` can have different properties depending on which `if-else` clause executes.

```
function y = example2(use_fixpoint, data) %#codegen
    if use_fixpoint
        % x is fixed-point
        x = fi(data, 1, 12, 3);
    else
        % x is a matrix of doubles
        x = data;
    end
    % When x is reused here, it is not possible to determine its
    % class, size, and complexity
    t = sum(sum(x));
    y = t > 0;
end
```

Variable Reuse in an if Statement

To see how MATLAB renames a reused variable `t`:

- 1 Create a MATLAB file `example1.m` containing the following code.

```
function y = example1(u) %#codegen
if all(all(u>0))
    % First, t is used to hold a scalar double value
    t = mean(mean(u)) / numel(u);
    u = u - t;
end
% t is reused to hold a vector of doubles
t = find(u > 0);
y = sum(u(t(2:end-1)));
end
```

- 2 Compile `example1`.

For example, to generate a MEX function, enter:

```
codegen -o example1x -report example1.m -args {ones(5,5)}
```

Note: `codegen` requires a MATLAB Coder license.

When the compilation is complete, `codegen` generates a MEX function, `example1x` in the current folder, and provides a link to the code generation report.

- 3 Open the code generation report.
- 4 In the MATLAB code pane of the code generation report, place your pointer over the variable `t` inside the `if` statement.

The code generation report highlights both instances of `t` in the `if` statement because they share the same class, size, and complexity. It displays the data type information for `t` at this point in the code. Here, `t` is a scalar double.

```
% First time t is used to hold a scalar double value.
t = mean(mean(u)) / numel(u);
u = u - t;
```

Information for the selected variable:	
Size	1 x 1
Complex	No
Class	double

- 5 In the MATLAB code pane of the report, place your pointer over the variable `t` outside the for-loop.

This time, the report highlights both instances of `t` outside the `if` statement. The report indicates that `t` might hold up to 25 doubles. The size of `t` is `:25`, that is, a column vector containing a maximum of 25 doubles.

```
t = find(u);
y = sum(u(t(2:end-1)));
```

Information for the selected variable:	
Size	:25
Complex	No
Class	double

- 6 Click the **Variables** tab to view the list of variables used in `example1`.

The report displays a list of the variables in `example1`. There are two uniquely named local variables `t>1` and `t>2`.

- 7 In the list of variables, place your pointer over `t>1`.

The code generation report highlights both instances of `t` in the `if` statement.

- 8 In the list of variables, place your pointer over `t>2`

The code generation report highlights both instances of `t` outside the `if` statement.

Limitations of Variable Reuse

The following variables cannot be renamed in generated code:

- Persistent variables.
- Global variables.
- Variables passed to C code using `coder.ref`, `coder.rref`, `coder.wref`.
- Variables whose size is set using `coder.ysize`.
- Variables whose names are controlled using `coder.cstructname`.
- The index variable of a `for`-loop when it is used inside the loop body.
- The block outputs of a MATLAB Function block in a Simulink model.
- Chart-owned variables of a MATLAB function in a Stateflow chart.

Avoid Overflows in for-Loops

When memory integrity checks are enabled, if the code generation software detects that a loop variable might overflow on the last iteration of the `for`-loop, it reports an error.

To avoid this error, use the workarounds provided in the following table.

Loop conditions causing the error	Workaround
<ul style="list-style-type: none"> The loop counter increments by 1 The end value equals the maximum value of the integer type The loop is not covering the full range of the integer type 	<p>Rewrite the loop so that the end value is not equal to the maximum value of the integer type. For example, replace:</p> <pre>N=intmax('int16') for k=N-10:N</pre> <p>with:</p> <pre>for k=1:10</pre>
<ul style="list-style-type: none"> The loop counter decrements by 1 The end value equals the minimum value of the integer type The loop is not covering the full range of the integer type 	<p>Rewrite the loop so that the end value is not equal to the minimum value of the integer type. For example, replace:</p> <pre>N=intmin('int32') for k=N+10:-1:N</pre> <p>with:</p> <pre>for k=10:-1:1</pre>
<ul style="list-style-type: none"> The loop counter increments or decrements by 1 The start value equals the minimum or maximum value of the integer type The end value equals the maximum or minimum value of the integer type <p>The loop covers the full range of the integer type.</p>	<p>Rewrite the loop casting the type of the loop counter start, step, and end values to a bigger integer or to double. For example, rewrite:</p> <pre>M= intmin('int16'); N= intmax('int16'); for k=M:N % Loop body end to M= intmin('int16'); N= intmax('int16'); for k=int32(M):int32(N) % Loop body</pre>

Loop conditions causing the error	Workaround
<ul style="list-style-type: none">• The loop counter increments or decrements by a value not equal to 1• On last loop iteration, the loop variable value is not equal to the end value	end Rewrite the loop so that the loop variable on the last loop iteration is equal to the end value.
Note: The software error checking is conservative. It may incorrectly report a loop as being potentially infinite.	

Supported Variable Types

You can use the following data types for C/C++ code generation from MATLAB:

Type	Description
char	Character array (string)
complex	Complex data. Cast function takes real and imaginary components
double	Double-precision floating point
int8, int16, int32, int64	Signed integer
logical	Boolean true or false
single	Single-precision floating point
struct	Structure
uint8, uint16, uint32, uint64	Unsigned integer
Fixed-point	See “Fixed-Point Data Types”.

Design Considerations for C/C++ Code Generation

- “When to Generate Code from MATLAB Algorithms” on page 20-2
- “Which Code Generation Feature to Use” on page 20-4
- “Prerequisites for C/C++ Code Generation from MATLAB” on page 20-5
- “MATLAB Code Design Considerations for Code Generation” on page 20-6
- “Differences in Behavior After Compiling MATLAB Code” on page 20-8
- “MATLAB Language Features Supported for C/C++ Code Generation” on page 20-12

When to Generate Code from MATLAB Algorithms

Generating code from MATLAB algorithms for desktop and embedded systems allows you to perform your software design, implementation, and testing completely within the MATLAB workspace. You can:

- Verify that your algorithms are suitable for code generation
- Generate efficient, readable, and compact C/C++ code automatically, which eliminates the need to manually translate your MATLAB algorithms and minimizes the risk of introducing errors in the code.
- Modify your design in MATLAB code to take into account the specific requirements of desktop and embedded applications, such as data type management, memory use, and speed.
- Test the generated code and easily verify that your modified algorithms are functionally equivalent to your original MATLAB algorithms.
- Generate MEX functions to:
 - Accelerate MATLAB algorithms in certain applications.
 - Speed up fixed-point MATLAB code.
- Generate hardware description language (HDL) from MATLAB code.

When Not to Generate Code from MATLAB Algorithms

Do not generate code from MATLAB algorithms for the following applications. Use the recommended MathWorks product instead.

To:	Use:
Deploy an application that uses handle graphics	MATLAB Compiler™
Use Java	MATLAB Compiler SDK™
Use toolbox functions that do not support code generation	Toolbox functions that you rewrite for desktop and embedded applications
Deploy MATLAB based GUI applications on a supported MATLAB host	MATLAB Compiler
Deploy web-based or Windows applications	MATLAB Compiler SDK

To:	Use:
Interface C code with MATLAB	MATLAB <code>mex</code> function

Which Code Generation Feature to Use

To...	Use...	Required Product	To Explore Further...
Generate MEX functions for verifying generated code	<code>codegen</code> function	MATLAB Coder	Try this in “MEX Function Generation at the Command Line”.
Produce readable, efficient, and compact code from MATLAB algorithms for deployment to desktop and embedded systems.	MATLAB Coder app	MATLAB Coder	Try this in “C Code Generation Using the MATLAB Coder App”.
	<code>codegen</code> function	MATLAB Coder	Try this in “C Code Generation at the Command Line”.
Generate MEX functions to accelerate MATLAB algorithms	MATLAB Coder app	MATLAB Coder	See “Accelerate MATLAB Algorithms”.
	<code>codegen</code> function	MATLAB Coder	
Integrate MATLAB code into Simulink	MATLAB Function block	Simulink	Try this in “Track Object Using MATLAB Code”.
Speed up fixed-point MATLAB code	<code>fiaccel</code> function	Fixed-Point Designer	Learn more in “Code Acceleration and Code Generation from MATLAB”.
Integrate custom C code into MATLAB and generate efficient, readable code	<code>codegen</code> function	MATLAB Coder	Learn more in “Specify External File Locations”.
Integrate custom C code into code generated from MATLAB	<code>coder.ceval</code> function	MATLAB Coder	Learn more in <code>coder.ceval</code> .
Generate HDL from MATLAB code	MATLAB Function block	Simulink and HDL Coder	Learn more at www.mathworks.com/products/slhdlcoder .

Prerequisites for C/C++ Code Generation from MATLAB

To generate C/C++ or MEX code from MATLAB algorithms, you must install the following software:

- MATLAB Coder product
- C/C++ compiler

MATLAB Code Design Considerations for Code Generation

When writing MATLAB code that you want to convert into efficient, standalone C/C++ code, you must consider the following:

- Data types

C and C++ use static typing. To determine the types of your variables before use, MATLAB Coder requires a complete assignment to each variable.

- Array sizing

Variable-size arrays and matrices are supported for code generation. You can define inputs, outputs, and local variables in MATLAB functions to represent data that varies in size at run time.

- Memory

You can choose whether the generated code uses static or dynamic memory allocation.

With dynamic memory allocation, you potentially use less memory at the expense of time to manage the memory. With static memory, you get better speed, but with higher memory usage. Most MATLAB code takes advantage of the dynamic sizing features in MATLAB, therefore dynamic memory allocation typically enables you to generate code from existing MATLAB code without modifying it much. Dynamic memory allocation also allows some programs to compile even when upper bounds cannot be found.

Static allocation reduces the memory footprint of the generated code, and therefore is suitable for applications where there is a limited amount of available memory, such as embedded applications.

- Speed

Because embedded applications must run in real time, the code must be fast enough to meet the required clock rate.

To improve the speed of the generated code:

- Choose a suitable C/C++ compiler. Do not use the default compiler that MathWorks supplies with MATLAB for Windows 32-bit platforms.
- Consider disabling run-time checks.

By default, for safety, the code generated for your MATLAB code contains memory integrity checks and responsiveness checks. Generally, these checks result in more generated code and slower simulation. Disabling run-time checks usually results in streamlined generated code and faster simulation. Disable these checks only if you have verified that array bounds and dimension checking is unnecessary.

See Also

- “Data Definition Basics”
- “Variable-Size Data”
- “Bounded Versus Unbounded Variable-Size Data”
- “Control Dynamic Memory Allocation”
- “Control Run-Time Checks”

Differences in Behavior After Compiling MATLAB Code

In this section...

“Why Are There Differences?” on page 20-8
“Character Size” on page 20-8
“Order of Evaluation in Expressions” on page 20-8
“Termination Behavior” on page 20-9
“Size of Variable-Size N-D Arrays” on page 20-9
“Size of Empty Arrays” on page 20-10
“Floating-Point Numerical Results” on page 20-10
“NaN and Infinity Patterns” on page 20-10
“Code Generation Target” on page 20-11
“MATLAB Class Initial Values” on page 20-11
“Variable-Size Support for Code Generation” on page 20-11
“Complex Numbers” on page 20-11

Why Are There Differences?

To convert MATLAB code to C/C++ code that works efficiently, the code generation process introduces optimizations that intentionally cause the generated code to behave differently — and sometimes produce different results — from the original source code. This section describes these differences.

Character Size

MATLAB supports 16-bit characters, but the generated code represents characters in 8 bits, the standard size for most embedded languages like C. See “Code Generation for Characters” on page 17-9.

Order of Evaluation in Expressions

Generated code does not enforce order of evaluation in expressions. For most expressions, order of evaluation is not significant. However, for expressions with side effects, the

generated code may produce the side effects in different order from the original MATLAB code. Expressions that produce side effects include those that:

- Modify persistent or global variables
- Display data to the screen
- Write data to files
- Modify the properties of handle class objects

In addition, the generated code does not enforce order of evaluation of logical operators that do not short circuit.

For more predictable results, it is good coding practice to split expressions that depend on the order of evaluation into multiple statements. For example, rewrite:

```
A = f1() + f2();
```

as

```
A = f1();  
A = A + f2();
```

so that the generated code calls `f1` before `f2`.

Termination Behavior

Generated code does not match the termination behavior of MATLAB source code. For example, optimizations remove infinite loops from generated code if they do not have side effects. As a result, the generated code may terminate even though the corresponding MATLAB code does not.

Size of Variable-Size N-D Arrays

For variable-size N-D arrays, the `size` function might return a different result in generated code than in MATLAB source code. The `size` function sometimes returns trailing ones (singleton dimensions) in generated code, but always drops trailing ones in MATLAB. For example, for an N-D array `X` with dimensions `[4 2 1 1]`, `size(X)` might return `[4 2 1 1]` in generated code, but always returns `[4 2]` in MATLAB. See “Incompatibility with MATLAB in Determining Size of Variable-Size N-D Arrays” on page 26-28.

Size of Empty Arrays

The size of an empty array in generated code might be different from its size in MATLAB source code. See “Incompatibility with MATLAB in Determining Size of Empty Arrays” on page 26-29.

Floating-Point Numerical Results

The generated code might not produce the same floating-point numerical results as MATLAB in the following situations:

When computer hardware uses extended precision registers

Results vary depending on how the C/C++ compiler allocates extended precision floating-point registers. Computation results might not match MATLAB calculations because of different compiler optimization settings or different code surrounding the floating-point calculations.

For certain advanced library functions

The generated code might use different algorithms to implement certain advanced library functions, such as `fft`, `svd`, `eig`, `mldivide`, and `mrdivide`.

For example, the generated code uses a simpler algorithm to implement `svd` to accommodate a smaller footprint. Results might also vary according to matrix properties. For example, MATLAB might detect symmetric or Hermitian matrices at run time and switch to specialized algorithms that perform computations faster than implementations in the generated code.

For implementation of BLAS library functions

For implementations of BLAS library functions. Generated C/C++ code uses reference implementations of BLAS functions, which may produce different results from platform-specific BLAS implementations in MATLAB.

NaN and Infinity Patterns

The generated code might not produce exactly the same pattern of NaN and `inf` values as MATLAB code when these values are mathematically meaningless. For example, if MATLAB output contains a NaN, output from the generated code should also contain a NaN, but not necessarily in the same place.

Code Generation Target

The `coder.target` function returns different values in MATLAB than in the generated code. The intent is to help you determine whether your function is executing in MATLAB or has been compiled for a simulation or code generation target. See `coder.target`.

MATLAB Class Initial Values

Before code generation, at class loading time, MATLAB computes class initial values. The code generation software uses the value that MATLAB computes. It does not recompute the initial value. If the initialization uses a function call to compute the initial value, the code generation software does not execute this function. If the function modifies a global state, for example, a persistent variable, code generation software might provide a different initial value than MATLAB. For more information, see “Defining Class Properties for Code Generation”.

Variable-Size Support for Code Generation

For incompatibilities with MATLAB in variable-size support for code generation, see:

- “Incompatibility with MATLAB for Scalar Expansion”
- “Incompatibility with MATLAB in Determining Size of Variable-Size N-D Arrays”
- “Incompatibility with MATLAB in Determining Size of Empty Arrays”
- “Incompatibility with MATLAB in Vector-Vector Indexing”
- “Incompatibility with MATLAB in Matrix Indexing Operations for Code Generation”

Complex Numbers

See “Code Generation for Complex Data” on page 17-4.

MATLAB Language Features Supported for C/C++ Code Generation

MATLAB supports the following language features in generated code:

- N-dimensional arrays (see “Array Size Restrictions for Code Generation” on page 17-10)
- Matrix operations, including deletion of rows and columns
- Variable-sized data (see “Variable-Size Data Definition for Code Generation” on page 26-3)
- Subscripting (see “Incompatibility with MATLAB in Matrix Indexing Operations for Code Generation” on page 26-31)
- Complex numbers (see “Code Generation for Complex Data” on page 17-4)
- Numeric classes (see “Supported Variable Types” on page 19-17)
- Double-precision, single-precision, and integer math
- Fixed-point arithmetic (see “Code Acceleration and Code Generation from MATLAB”)
- Program control statements `if`, `switch`, `for`, `while`, and `break`
- Arithmetic, relational, and logical operators
- Local functions
- Persistent variables (see “Define and Initialize Persistent Variables” on page 19-10)
- Global variables.
- Structures (see “Structure Definition for Code Generation”)
- Characters (see “Code Generation for Characters” on page 17-9)
- Function handles (see “Function Handle Definition for Code Generation”)
- Frames
- Variable length input and output argument lists
- Subset of MATLAB toolbox functions (see “Functions and Objects Supported for C and C++ Code Generation — Alphabetical List” on page 25-2)
- Subset of functions and System objects in Aerospace Toolbox, Communications System Toolbox™, Computer Vision System Toolbox™, DSP System Toolbox, Fixed-Point Designer, Image Processing Toolbox™, Signal Processing Toolbox™, Phased Array System Toolbox™, Statistics and Machine Learning Toolbox™ (see “Functions and Objects Supported for C and C++ Code Generation — Category List” on page 25-147)

- MATLAB classes (see “MATLAB Classes Definition for Code Generation”)
- Ability to call functions (see “Resolution of Function Calls for Code Generation” on page 15-2)

MATLAB Language Features Not Supported for C/C++ Code Generation

MATLAB does not support the following features in generated code:

- Anonymous functions
- Cell arrays
- Java
- Nested functions
- Recursion
- Sparse matrices
- try/catch statements

Code Generation for Enumerated Data

- “Enumerated Data Definition for Code Generation” on page 21-2
- “Enumerated Types Supported for Code Generation” on page 21-3
- “When to Use Enumerated Data for Code Generation” on page 21-6
- “Generate Code for Enumerated Data from MATLAB Algorithms” on page 21-7
- “Define Enumerated Data for Code Generation” on page 21-8
- “Operations on Enumerated Data for Code Generation” on page 21-10
- “Include Enumerated Data in Control Flow Statements” on page 21-13
- “Customize Enumerated Types for Code Generation” on page 21-19
- “Control Names of Enumerated Type Values in Generated Code” on page 21-24
- “Change and Reload Enumerated Data Types” on page 21-27
- “Restrictions on Use of Enumerated Data in for-Loops” on page 21-28
- “Toolbox Functions That Support Enumerated Types for Code Generation” on page 21-29

Enumerated Data Definition for Code Generation

To generate efficient standalone code for enumerated data, you must define and use enumerated types differently than you do in the MATLAB environment:

Difference	More Information
Supports integer-based enumerated types only	“Enumerated Types Supported for Code Generation” on page 21-3
Name of each enumerated data type must be unique	“Naming Enumerated Types for Code Generation” on page 21-9
Each enumerated data type must be defined in a separate file on the MATLAB path	“Define Enumerated Data for Code Generation” on page 21-8 and “Generate Code for Enumerated Data from MATLAB Algorithms” on page 21-7
Restricted set of operations	“Operations on Enumerated Data for Code Generation” on page 21-10
Restricted use in <code>for</code> -loops	“Restrictions on Use of Enumerated Data in <code>for</code> -Loops” on page 21-28

Enumerated Types Supported for Code Generation

An enumerated type is a user-defined type whose values belong to a predefined set of enumerated values. Each enumerated value consists of a name and an underlying numeric value.

You define an enumerated data type in an enumeration class definition file. For code generation, you must base the class on `int8`, `uint8`, `int16`, `uint16`, or `int32`. For example:

```
classdef PrimaryColors < int32
    enumeration
        Red(1),
        Blue(2),
        Yellow(4)
    end
end
```

In this example, the statement `classdef PrimaryColors < int32` means that the enumerated type `PrimaryColors` is based on the built-in type `int32`. `PrimaryColors` inherits the characteristics of the `int32` type. It also defines its own unique characteristics. For example, `PrimaryColors` is restricted to three enumerated values:

Enumerated Value	Enumerated Name	Underlying Numeric Value
Red(1)	Red	1
Blue(2)	Blue	2
Yellow(4)	Yellow	4

Enumeration Class Base Types for Code Generation

For code generation, you must base an enumerated type on one of the following built-in MATLAB integer data types:

- `int8`
- `uint8`
- `int16`
- `uint16`

- `int32`

If you use MATLAB Coder to generate C/C++ code, you can use the base type to control the size of an enumerated type in the generated code. You can:

- Represent an enumerated type as a fixed-size integer that is portable to different targets.
- Reduce memory usage.
- Interface to legacy code.
- Match company standards.

The base type determines the representation of the enumerated type in generated C/C++ code.

C Code Representation for Base Type `int32`

If the base type is `int32`, the code generation software generates a C enumeration type. Consider the following MATLAB enumerated type definition:

```
classdef LEDcolor < int32
    enumeration
        GREEN(1),
        RED(2)
    end
end
```

This enumerated type definition results in the following C code:

```
enum LEDcolor
{
    GREEN = 1,
    RED
};

typedef enum LEDcolor LEDcolor;
```

C Code Representation for Base Type Other Than `int32`

For built-in integer base types other than `int32`, the code generation software generates a `typedef` statement for the enumerated type and `#define` statements for the enumerated values. Consider the following MATLAB enumerated type definition:

```
classdef LEDcolor < int16
    enumeration
        GREEN(1),
        RED(2)
    end
end
```

```
end
```

This enumerated type definition results in the following C code:

```
typedef short LEDcolor;
#define GREEN ((LEDcolor)1)
#define RED ((LEDcolor)2)
```

The C type in the `typedef` statement depends on:

- The integer sizes defined for the production hardware in the Hardware Implementation object or the project settings. See `coder.HardwareImplementation` in the MATLAB Coder documentation.
- The setting that determines use of built-in C types or MathWorks typedefs in the generated code. See “Specify Data Types Used in Generated Code” and “How MATLAB Coder Infers C/C++ Data Types” in the MATLAB Coder documentation.

When to Use Enumerated Data for Code Generation

You can use enumerated types to represent program states and to control program logic, especially when you restrict data to a predetermined set of values and refer to these values by name. You can sometimes achieve these goals by using integers or strings, however, enumerated types offer the following advantages:

- More readable code than integers.
- More robust error checking than integers or strings.

For example, if you mistype the name of an element in the enumerated type, you get a compile-time error that the element does not belong to the set of allowable values.

- More efficient code than strings.

For example, comparisons of enumerated values execute faster than comparisons of strings.

Generate Code for Enumerated Data from MATLAB Algorithms

The basic workflow for generating code for enumerated types in MATLAB code is:

- 1 Define an enumerated data type that inherits from a base type that code generation supports. See “Enumerated Types Supported for Code Generation”.
- 2 Save the enumerated data type in a file on the MATLAB path.
- 3 Write a MATLAB function that uses the enumerated type.
- 4 Specify enumerated type inputs using the project or the command-line interface.
- 5 Generate code.

This workflow requires a MATLAB Coder license.

See Also

- “Define Enumerated Data for Code Generation”

Define Enumerated Data for Code Generation

To define enumerated data for code generation from MATLAB algorithms:

- 1 Create a class definition file.

In the Command Window, select **File > New > Class**.

- 2 Enter the class definition:

```
classdef EnumTypeName < BaseType
```

EnumTypeName is a case-sensitive string that must be unique among data type names and workspace variable names. *BaseType* must be `int8`, `uint8`, `int16`, `uint16`, or `int32`.

For example, the following code defines an enumerated type called `sysMode` that inherits from the built-in type `int32`:

```
classdef sysMode < int32
    ...
end
```

- 3 Define enumerated values in an enumeration section:

```
classdef EnumTypeName < BaseType
    enumeration
        EnumName(N)
        ...
    end
end
```

For example, the following code defines a set of two values for enumerated type `sysMode`:

```
classdef sysMode < int32
    enumeration
        OFF(0),
        ON(1)
    end
end
```

Each enumerated value consists of a string *EnumName* and an underlying integer *N*. Each *EnumName* must be unique within its type. If the enumerated value name

does not include the class name prefix, *EnumName* must be unique across enumerated types. See “Control Names of Enumerated Type Values in Generated Code” on page 21-24.

The underlying integers do not have to be consecutive or ordered, or unique within or across types.

4 Save the file on the MATLAB path.

The name of the file must match the name of the enumerated data type. The match is case sensitive.

For examples, see “Include Enumerated Data in Control Flow Statements” on page 21-13.

Naming Enumerated Types for Code Generation

You must use a unique name for each enumerated data type. Do not use the name of:

- A toolbox function supported for code generation.
- Another data type.
- A variable in the MATLAB base workspace.

For example, you cannot name an enumerated data type `mode` because MATLAB for code generation provides a toolbox function of the same name.

For a list of toolbox functions supported for code generation, see “Functions and Objects Supported for C and C++ Code Generation — Alphabetical List”.

Operations on Enumerated Data for Code Generation

To generate efficient standalone code for enumerated data, you are restricted to the following operations. The examples use the following enumerated class definition:

```
classdef LEDcolor < int32
    enumeration
        GREEN(1),
        RED(2)
    end
end
```

Assignment Operator, =

Example	Result
<pre>xon = LEDcolor.GREEN xoff = LEDcolor.RED</pre>	<pre>xon = GREEN xoff = RED</pre>

Relational Operators, < > <= >= == ~=

Example	Result
<pre>xon == xoff</pre>	<pre>ans = 0</pre>
<pre>xon <= xoff</pre>	<pre>ans = 1</pre>
<pre>xon > xoff</pre>	<pre>ans = 0</pre>

Cast Operation

Example	Result
<pre>double(LEDcolor.RED)</pre>	<pre>ans =</pre>

Example	Result
	2
<pre>z = 2 y = LEDcolor(z)</pre>	<pre>z = 2 y = RED</pre>

Indexing Operation

Example	Result
<pre>m = [1 2] n = LEDcolor(m) p = n(LEDcolor.GREEN)</pre>	<pre>m = 1 2 n = GREEN RED p = GREEN</pre>

Control Flow Statements: if, switch, while

Statement	Example	Executable Example
if	<pre>if state == sysMode.ON led = LEDcolor.GREEN; else led = LEDcolor.RED; end</pre>	“if Statement with Enumerated Data Types” on page 21-13
switch	<pre>switch button case VCRButton.Stop state = VCRState.Stop;</pre>	“switch Statement with Enumerated

Statement	Example	Executable Example
	<pre> case VCRButton.PlayOrPause state = VCRState.Play; case VCRButton.Next state = VCRState.Forward; case VCRButton.Previous state = VCRState.Rewind; otherwise state = VCRState.Stop; end </pre>	“Data Types” on page 21-14
while	<pre> while state ~= State.Ready switch state case State.Standby initialize(); state = State.Boot; case State.Boot boot(); state = State.Ready; end end </pre>	“while Statement with Enumerated Data Types” on page 21-16

Include Enumerated Data in Control Flow Statements

The following examples define enumerated types that use the base type `int32`. You can base an enumerated type on one of these built-in integer types:

- `int8`
- `uint8`
- `int16`
- `uint16`
- `int32`

The base type determines the representation of the enumerated type in the generated C/C++ code. See “Enumerated Types Supported for Code Generation” on page 21-3.

if Statement with Enumerated Data Types

This example defines the enumeration types `LEDcolor` and `sysMode`. The function `displayState` uses these enumerated data types to activate an LED display.

Class Definition: `sysMode`

```
classdef sysMode < int32
    enumeration
        OFF(0),
        ON(1)
    end
end
```

This definition must reside on the MATLAB path in a file with the same name as the class, `sysMode.m`.

Class Definition: `LEDcolor`

```
classdef LEDcolor < int32
    enumeration
        GREEN(1),
        RED(2)
    end
end
```

This definition must reside on the MATLAB path in a file called `LEDcolor.m`.

MATLAB Function: displayState

This function uses enumerated data to activate an LED display, based on the state of a device. It lights a green LED display to indicate the ON state and lights a red LED display to indicate the OFF state.

```
function led = displayState(state)
%#codegen

if state == sysMode.ON
    led = LEDcolor.GREEN;
else
    led = LEDcolor.RED;
end
```

Build and Test a MEX Function for displayState

- 1 Generate a MEX function for `displayState`. Use the `-args` option to pass one of the allowable values for the enumerated data input as a sample value.

```
codegen displayState -args {sysMode.ON}
```

- 2 Test the function. For example,

```
displayState(sysMode.OFF)
```

```
ans =
```

```
    RED
```

switch Statement with Enumerated Data Types

This example is based on the definition of the enumeration types `VCRState` and `VCRButton`. The function `VCR` uses these enumerated data types to set the state of the VCR.

Class Definition: VCRState

```
classdef VCRState < int32
    enumeration
        Stop(0),
        Pause(1),
        Play(2),
        Forward(3),
```

```

        Rewind(4)
    end
end

```

This definition must reside on the MATLAB path in a file with the same name as the class, `VCRState.m`.

Class Definition: `VCRButton`

```

classdef VCRButton < int32
    enumeration
        Stop(1),
        PlayOrPause(2),
        Next(3),
        Previous(4)
    end
end

```

This definition must reside on the MATLAB path in a file with the same name as the class, `VCRButton.m`.

MATLAB Function: `VCR`

This function uses enumerated data to set the state of a VCR, based on the initial state of the VCR and the state of the VCR button.

```

function s = VCR(button)
    %#codegen

    persistent state

    if isempty(state)
        state = VCRState.Stop;
    end

    switch state
        case {VCRState.Stop, VCRState.Forward, VCRState.Rewind}
            state = handleDefault(button);
        case VCRState.Play
            switch button
                case VCRButton.PlayOrPause, state = VCRState.Pause;
                otherwise, state = handleDefault(button);
            end
        case VCRState.Pause

```

```
        switch button
            case VCRButton.PlayOrPause, state = VCRState.Play;
            otherwise, state = handleDefault(button);
        end
    end
end
s = state;

function state = handleDefault(button)
switch button
    case VCRButton.Stop, state = VCRState.Stop;
    case VCRButton.PlayOrPause, state = VCRState.Play;
    case VCRButton.Next, state = VCRState.Forward;
    case VCRButton.Previous, state = VCRState.Rewind;
    otherwise, state = VCRState.Stop;
end
```

Build and Test a MEX Function for VCR

- 1 Generate a MEX function for VCR. Use the `-args` option to pass one of the allowable values for the enumerated data input as a sample value.

```
codegen -args {VCRButton.Stop} VCR
```

- 2 Test the function. For example,

```
s = VCR(VCRButton.Stop)
```

```
s =
```

```
    Stop
```

while Statement with Enumerated Data Types

This example is based on the definition of the enumeration type `State`. The function `Setup` uses this enumerated data type to set the state of a device.

Class Definition: `State`

```
classdef State < int32
    enumeration
        Standby(0),
        Boot(1),
        Ready(2)
    end
end
```


This definition must reside on the MATLAB path in a file with the same name as the class, `State.m`.

MATLAB Function: Setup

The following function `Setup` uses enumerated data to set the state of a device.

```
function s = Setup(initState)
%#codegen

state = initState;

if isempty(state)
    state = State.Standby;
end

while state ~= State.Ready
    switch state
        case State.Standby
            initialize();
            state = State.Boot;
        case State.Boot
            boot();
            state = State.Ready;
    end
end
s = state;

function initialize()
% Perform initialization.

function boot()
% Boot the device.
```

Build and Test a MEX Executable for Setup

- 1 Generate a MEX executable for `Setup`. Use the `-args` option to pass one of the allowable values for the enumerated data input as a sample value.

```
codegen Setup -args {State.Standby}
```

- 2 Test the function. For example,

```
s = Setup(State.Standby)
```

```
s =
```

Ready

Customize Enumerated Types for Code Generation

Customizing Enumerated Types

For code generation, you can customize an enumerated type by using the same techniques that work with MATLAB classes, as described in *Modifying Superclass Methods and Properties*. You can customize an enumerated type by including a `methods` section in the enumerated class definition. You can override the following methods to customize the behavior of an enumerated type. To override a method, include a customized version of the method in the `methods` section in the enumerated class definition. If you do not want to override the inherited methods, omit the `methods` section.

Method	Description	Default Value Returned or Specified	When to Use
<code>addClassNameToEnumNames</code>	Specifies whether the class name becomes a prefix in the generated code.	<code>false</code> — prefix is not used.	If you want the class name to become a prefix in the generated code, override this method to set the return value to <code>true</code> . See “Control Names of Enumerated Type Values in Generated Code” on page 21-24.
<code>getDefaultValue</code>	Returns the default enumerated value.	First value in the enumerated class definition.	If you want the default value for the enumerated type to be something other than the first value listed in the enumerated class definition, override this method to specify a default value. See “Specify a Default Enumerated Value” on page 21-21.

Method	Description	Default Value Returned or Specified	When to Use
getHeaderFile	Specifies the file in which the enumerated class is defined for code generation.	' '	If you want to use an enumerated class definition that is specified in a custom header file, override this method to return the path to this header file. In this case, the code generation software does not generate the class definition. See “Specify a Header File” on page 21-22

Specify a Default Enumerated Value

If the value of a variable that is cast to an enumerated type does not match one of the enumerated type values:

- Generated MEX reports an error.
- Generated C/C++ code replaces the value of the variable with the enumerated type default value.

Unless you specify otherwise, the default value for an enumerated type is the first value in the enumerated class definition. To specify a different default value, add your own `getDefaultValue` method to the methods section. The following code shows a shell for the `getDefaultValue` method:

```
function retVal = getDefaultValue()
% GETDEFAULTVALUE Returns the default enumerated value.
% This value must be an instance of the enumerated class.
% If this method is not defined, the first enumerated value is used.
    retVal = ThisClass.EnumName;
end
```

To customize this method, provide a value for `ThisClass.EnumName` that specifies the default that you want. `ThisClass` must be the name of the class within which the

method exists. EnumName must be the name of an enumerated value defined in that class. For example:

```
classdef LEDcolor < int32
    enumeration
        GREEN(1),
        RED(2)
    end

    methods (Static)
        function y = getDefaultValue()
            y = LEDcolor.RED;
        end
    end
end
```

This example defines the default as LEDcolor.RED. If this method does not appear, the default value is LEDcolor.GREEN, because that value is the first value listed in the enumerated class definition.

Specify a Header File

To prevent the declaration of an enumerated type from being embedded in the generated code, allowing you to provide the declaration in an external file, include the following method in the enumerated class methods section:

```
function y = getHeaderFile()
% GETHEADERFILE File where type is defined for generated code.
% If specified, this file is #included where required in the code.
% Otherwise, the type is written out in the generated code.
y = 'filename';
end
```

Substitute a legal filename for filename. Be sure to provide a filename suffix, typically .h. Providing the method replaces the declaration that appears in the generated code with an #include statement like:

```
#include "imported_enum_type.h"
```

The getHeaderFile method does not create the declaration file itself. You must provide a file of the specified name that declares the enumerated data type. The file can also contain definitions of enumerated types that you do not use in your MATLAB code.

For example, to use the definition of LEDcolor in my_LEDcolor.h:

- 1 Modify the definition of `LEDcolor` to override the `getHeaderFile` method to return the name of the external header file:

```
classdef LEDcolor < int32
    enumeration
        GREEN(1),
        RED(2)
    end

    methods(Static)
        function y=getHeaderFile()
            y='my_LEDcolor.h';
        end
    end
end
```

- 2 In the current folder, provide a header file, `my_LEDcolor.h`, that contains the definition:

```
enum LEDcolor
{
    GREEN = 1,
    RED
};

typedef enum LEDcolor LEDcolor;
```

- 3 Generate a library for the function `displayState` that takes one input of enumerated data type `sysMode`.

```
codegen -config:lib -report displayState -args {sysMode.ON}
```

`codegen` generates a C static library with the default name, `displayState`, and supporting files in the default folder, `codegen/lib/displayState`.

- 4 Click the **View Report** link.
- 5 In the report, on the **C Code** tab, click the link to the `displayState_types.h` file.

The header file contains a `#include` statement for the external header file.

```
#include "my_LEDcolor.h"
```

It does not include a declaration for the enumerated class.

Control Names of Enumerated Type Values in Generated Code

This example shows how to control whether generated enumerated type value names include the class name prefix from the enumerated type definition. By default, the generated enumerated type value name does not include the class name prefix.

- 1 Define the enumerated type `sysMode`. Store it in `sysMode.m` on the MATLAB path.

```
classdef sysMode < int32
    enumeration
        OFF(0),
        ON(1)
    end
end
```

- 2 Define the enumerated type `LEDcolor`. Store it in `LEDcolor.m` on the MATLAB path.

```
classdef LEDcolor < int32
    enumeration
        GREEN(1),
        RED(2)
    end
end
```

- 3 Define the function `displayState`, which uses enumerated data to activate an LED display, based on the state of a device. `displayState` lights a green LED display to indicate the ON state and lights a red LED display to indicate the OFF state. Store in `displayState.m` on the MATLAB path.

```
function led = displayState(state)
    %#codegen

    if state == sysMode.ON
        led = LEDcolor.GREEN;
    else
        led = LEDcolor.RED;
    end
end
```

- 4 Generate a library for the function `displayState` that takes one input of enumerated data type `sysMode`.

```
codegen -config:lib -report displayState -args {sysMode.ON}
```


codegen generates a C static library with the default name, `displayState`, and supporting files in the default folder, `codegen/lib/displayState`.

- 5 Click the **View Report** link.
- 6 In the report, on the **C Code** tab, click the link to the `displayState_types.h` file.

The report displays the header file containing the enumerated data type definition.

```
enum LEDcolor
{
    GREEN = 1,
    RED
};

typedef enum LEDcolor LEDcolor;
```

The enumerated value names do not include the class name prefix `LEDcolor_`.

- 7 Modify the definition of `LEDcolor` to add the `addClassNameToEnumNames` method. Set the return value to `true` so that the enumerated value names in the generated code contain the class prefix.

```
classdef LEDcolor < int32
    enumeration
        GREEN(1),
        RED(2)
    end

    methods(Static)
        function y=addClassNameToEnumNames()
            y=true;
        end
    end
end
```

- 8 Clear existing class instances.

```
clear classes
```

- 9 Generate code.

```
codegen -config:lib -report displayState -args {sysMode.ON}
```

- 10 Open the code generation report and look at the enumerated type definition in `displayState_types.h`.

```
enum LEDcolor
{
    LEDcolor_GREEN = 1,
    LEDcolor_RED
};
```

```
typedef enum LEDcolor LEDcolor;
```

The enumerated value names include the class name prefix.

Change and Reload Enumerated Data Types

You can change the definition of an enumerated data type by editing and saving the file that contains the definition. You do not need to inform MATLAB that a class definition has changed. MATLAB automatically reads the modified definition when you save the file. However, the class definition changes do not take full effect if class instances (enumerated values) exist that reflect the previous class definition. Such instances might exist in the base workspace or might be cached. The following table explains options for removing instances of an enumerated data type from the base workspace and cache.

If In Base Workspace...	If In Cache...
<p>Do one of the following:</p> <ul style="list-style-type: none">• Locate and delete specific obsolete instances.• Delete the classes from the workspace by using the <code>clear classes</code> command. For more information, see <code>clear</code>.	<ul style="list-style-type: none">• Clear MEX functions that are caching instances of the class.

Restrictions on Use of Enumerated Data in for-Loops

Do not use enumerated data as the loop counter variable in for - loops

To iterate over a range of enumerated data with consecutive values, in the loop counter, cast the enumerated data to a built-in integer type. The size of the built-in integer type must be big enough to contain the enumerated value.

For example, suppose you define an enumerated type `ColorCodes` as follows:

```
classdef ColorCodes < int32
    enumeration
        Red(1),
        Blue(2),
        Green(3),
        Yellow(4),
        Purple(5)
    end
end
```

Because the enumerated values are consecutive, you can use `ColorCodes` data in a for-loop like this:

```
...
for i = int32(ColorCodes.Red):int32(ColorCodes.Purple)
    c = ColorCodes(i);
    ...
end
```

Toolbox Functions That Support Enumerated Types for Code Generation

The following MATLAB toolbox functions support enumerated types for code generation:

- `cast`
- `cat`
- `circshift`
- `flipdim`
- `fliplr`
- `flipud`
- `histc`
- `intersect`
- `ipermute`
- `isequal`
- `isequaln`
- `isfinite`
- `isinf`
- `ismember`
- `isnan`
- `issorted`
- `length`
- `permute`
- `repmat`
- `reshape`
- `rot90`
- `setdiff`
- `setxor`
- `shiftdim`
- `sort`
- `sortrows`

- squeeze
- union
- unique

Code Generation for Function Handles

- “Function Handle Definition for Code Generation” on page 22-2
- “Define and Pass Function Handles for Code Acceleration” on page 22-3
- “Function Handle Limitations for Code Generation” on page 22-5

Function Handle Definition for Code Generation

You can use function handles to invoke functions indirectly and parameterize operations that you repeat frequently. You can perform the following operations with function handles:

- Define handles that reference user-defined functions and built-in functions supported for code generation (see “Functions and Objects Supported for C and C++ Code Generation — Alphabetical List”)

Note: You cannot define handles that reference extrinsic MATLAB functions.

- Define function handles as scalar values
- Define structures that contain function handles
- Pass function handles as arguments to other functions (excluding extrinsic functions)

To generate efficient standalone code for enumerated data, you are restricted to using a subset of the operations you can perform with function handles in MATLAB, as described in “Function Handle Limitations for Code Generation” on page 22-5

Define and Pass Function Handles for Code Acceleration

The following code example shows how to define and call function handles for code acceleration.

```
function [y1, y2] = addval(m)
%#codegen

disp(m);

% Pass function handle to addone
% to add one to each element of m
y1 = map(@addone, m);
disp(y1);

% Pass function handle to addtwo
% to add two to each element of m
y2 = map(@addtwo, m);
disp(y2);

function y = map(f,m)
    y = m;
    for i = 1:numel(y)
        y(i) = f(y(i));
    end

function y = addone(u)
y = u + 1;

function y = addtwo(u)
y = u + 2;
```

This code passes function handles `@addone` and `@addtwo` to the function `map` which increments each element of the matrix `m` by the amount prescribed by the referenced function. Note that `map` stores the function handle in the input variable `f` and then uses `f` to invoke the function — in this case `addone` first and then `addtwo`.

You can use the function `fiaccel` to convert the function `addval` to a MEX executable that you can run in MATLAB. Follow these steps:

- 1 At the MATLAB command prompt, define and initialize a 3-by-3 matrix:

```
m = fi(magic(3));
```

- 2 Use `fiaccel` to compile the function to a MEX executable:

```
fiaccel addval -args {m}
```

- 3 Execute the function:

```
[y1, y2] = addval_mex(m);
```

```
8 1 6
3 5 7
4 9 2
```

```
        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 16
        FractionLength: 11
```

```
9 2 7
4 6 8
5 10 3
```

```
        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 16
        FractionLength: 11
```

```
10 3 8
5 7 9
6 11 4
```

```
        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 16
        FractionLength: 11
```

Function Handle Limitations for Code Generation

You cannot use the same bound variable to reference different function handles.

After you bind a variable to a specific function, you cannot use the same variable to reference two different function handles, as in this example:

```
%Incorrect code
...
x = @plus;
x = @minus;
...
```

This code produces a compilation error.

You cannot pass function handles to or from `coder.ceval`.

You cannot pass function handles as inputs to or outputs from `coder.ceval`. For example, suppose that `f` and `str.f` are function handles:

```
f = @sin;
str.x = pi;
str.f = f;
```

The following statements result in compilation errors:

```
coder.ceval('foo', @sin);
coder.ceval('foo', f);
coder.ceval('foo', str);
```

You cannot pass function handles to or from extrinsic functions.

You cannot pass function handles to or from `feval` and other extrinsic MATLAB functions. For more information, see “Declaring MATLAB Functions as Extrinsic Functions” on page 15-12.

You cannot pass function handles to or from primary functions.

You cannot pass function handles as inputs to or outputs from primary functions. For example, consider this function:

```
function x = plotFcn(fhandle, data)

assert(isa(fhandle, 'function_handle') && isa(data, 'double'));
```

```
plot(data, fhandle(data));  
x = fhandle(data);
```

In this example, the function `plotFcn` receives a function handle and its data as primary inputs. `plotFcn` attempts to call the function referenced by the `fhandle` with the input `data` and plot the results. However, this code generates a compilation error. The error indicates that the function `isa` does not recognize `'function_handle'` as a class name when called inside a MATLAB function to specify properties of primary inputs.

Generate Efficient and Reusable Code

- “Optimization Strategies” on page 23-2
- “Modularize MATLAB Code” on page 23-5
- “Eliminate Redundant Copies of Function Inputs” on page 23-6
- “Inline Code” on page 23-8
- “Control Inlining” on page 23-10
- “Fold Function Calls into Constants” on page 23-13
- “Control Stack Space Usage” on page 23-15
- “Stack Allocation and Performance” on page 23-16
- “Dynamic Memory Allocation and Performance” on page 23-17
- “Minimize Dynamic Memory Allocation” on page 23-18
- “Provide Maximum Size for Variable-Size Arrays” on page 23-19
- “Disable Dynamic Memory Allocation During Code Generation” on page 23-25
- “Set Dynamic Memory Allocation Threshold” on page 23-26
- “Excluding Unused Paths from Generated Code” on page 23-28
- “Prevent Code Generation for Unused Execution Paths” on page 23-29
- “Generate Code with Parallel for-Loops (parfor)” on page 23-31
- “Minimize Redundant Operations in Loops” on page 23-33
- “Unroll for-Loops” on page 23-35
- “Support for Integer Overflow and Non-Finites” on page 23-38
- “Integrate Custom Code” on page 23-40
- “MATLAB Coder Optimizations in Generated Code” on page 23-46
- “Generate Reusable Code” on page 23-49

Optimization Strategies

MATLAB Coder introduces certain optimizations when generating C/C++ code or MEX functions from your MATLAB code. For more information, see “MATLAB Coder Optimizations in Generated Code”.

To optimize your generated code further, you can:

- Adapt your MATLAB code.
- Control code generation using the configuration object from the command-line or the project settings dialog box.

To optimize the execution speed of generated code, for these conditions, perform the following actions as necessary:

Condition	Action
You have <code>for</code> -loops whose iterations are independent of each other.	“Generate Code with Parallel for-Loops (<code>parfor</code>)”
You have variable-size arrays in your MATLAB code.	“Minimize Dynamic Memory Allocation”
You have multiple variable-size arrays in your MATLAB code. You want dynamic memory allocation for larger arrays and static allocation for smaller ones.	“Set Dynamic Memory Allocation Threshold”
You want your generated function to be called by reference.	“Eliminate Redundant Copies of Function Inputs”
You are calling small functions in your MATLAB code.	“Inline Code”
You have limited target memory for your generated code. You want to inline small functions and generate separate code for larger ones.	“Control Inlining”
You do not want to generate code for expressions that contain constants only.	“Fold Function Calls into Constants”
You have loop operations in your MATLAB code that do not depend on the loop index.	“Minimize Redundant Operations in Loops”

Condition	Action
You have integer operations in your MATLAB code. You know beforehand that integer overflow does not occur during execution of your generated code.	“Disable Support for Integer Overflow”
You know beforehand that Infs and NaNs do not occur during execution of your generated code.	“Disable Support for Non-Finite Numbers”
You have for-loops with few iterations.	“Unroll for-Loops”
You already have legacy C/C++ code optimized for your target environment.	“Integrate Custom Code”

To optimize the memory usage of generated code, for these conditions, perform the following actions as necessary:

Condition	Action
You have if/else/elseif statements or switch/case/otherwise statements in your MATLAB code. You do not require some branches of the statements in your generated code.	“Prevent Code Generation for Unused Execution Paths”
You want your generated function to be called by reference.	“Eliminate Redundant Copies of Function Inputs”
You have limited stack space for your generated code.	“Control Stack Space Usage”
You are calling small functions in your MATLAB code.	“Inline Code”
You have limited target memory for your generated code. You want to inline small functions and generate separate code for larger ones.	“Control Inlining”
You do not want to generate code for expressions that contain constants only.	“Fold Function Calls into Constants”
You have loop operations in your MATLAB code that do not depend on the loop index.	“Minimize Redundant Operations in Loops”
You have integer operations in your MATLAB code. You know beforehand that	“Disable Support for Integer Overflow”

Condition	Action
integer overflow does not occur during execution of your generated code.	
You know beforehand that Inf-s and NaN-s does not occur during execution of your generated code.	“Disable Support for Non-Finite Numbers”
Your MATLAB code has variables that are large arrays or structures. The variable reuse optimization preserves your variable names. You want to see if the extra memory required to preserve the variable names of the large arrays or structures affects performance.	“Reuse Large Arrays and Structures”

Modularize MATLAB Code

For large MATLAB code, streamline code generation by modularizing the code:

- 1 Break up your MATLAB code into smaller, self-contained sections.
- 2 Save each section in a MATLAB function.
- 3 Generate C/C++ code for each function.
- 4 Call the generated C/C++ functions in sequence from a wrapper MATLAB function using `coder.ceval`.
- 5 Generate C/C++ code for the wrapper function.

Besides streamlining code generation for the original MATLAB code, this approach also supplies you with C/C++ codes for the individual sections. You can reuse these codes later by integrating them with other generated C/C++ code using `coder.ceval`.

Eliminate Redundant Copies of Function Inputs

You can reduce the number of copies in your generated code by writing functions that use the same variable as both an input and an output. For example:

```
function A = foo( A, B ) %#codegen
A = A * B;
end
```

This coding practice uses a reference parameter optimization. When a variable acts as both input and output, MATLAB passes the variable by reference in the generated code instead of redundantly copying the input to a temporary variable. In the preceding example, input `A` is passed by reference in the generated code because it also acts as an output for function `foo`:

```
...
/* Function Definitions */
void foo(double *A, double B)
{
    *A *= B;
}
...
```

The reference parameter optimization reduces memory usage and execution time, especially when the variable passed by reference is a large data structure. To achieve these benefits at the call site, call the function with the same variable as both input and output.

By contrast, suppose that you rewrite function `foo` without the optimization:

```
function y = foo2( A, B ) %#codegen
y = A * B;
end
```

MATLAB generates code that passes the inputs by value and returns the value of the output:

```
...
/* Function Definitions */
double foo2(double A, double B)
{
    return A * B;
}
```

...

In some cases, the output of the function cannot be a modified version of its inputs. If you do not use the inputs later in the function, you can modify your code to operate on the inputs instead of on a copy of the inputs. One method is to create additional return values for the function. For example, consider the code:

```
function y1=foo(u1) %#codegen
    x1=u1+1;
    y1=bar(x1);
end

function y2=bar(u2)
    % Since foo does not use x1 later in the function,
    % it would be optimal to do this operation in place
    x2=u2.*2;
    % The change in dimensions in the following code
    % means that it cannot be done in place
    y2=[x2,x2];
end
```

You can modify this code to eliminate redundant copies.

```
function y1=foo(u1) %#codegen
    u1=u1+1;
    [y1, u1]=bar(u1);
end

function [y2, u2]=bar(u2)
    u2=u2.*2;
    % The change in dimensions in the following code
    % still means that it cannot be done in place
    y2=[u2,u2];
end
```

Inline Code

MATLAB uses internal heuristics to determine whether to inline functions in the generated code. You can use the `coder.inline` directive to fine-tune these heuristics for individual functions. For more information, see `coder.inline`.

In this section...
“Prevent Function Inlining” on page 23-8
“Use Inlining in Control Flow Statements” on page 23-8

Prevent Function Inlining

In this example, function `foo` is not inlined in the generated code:

```
function y = foo(x)
    coder.inline('never');
    y = x;
end
```

Use Inlining in Control Flow Statements

You can use `coder.inline` in control flow code. If the software detects contradictory `coder.inline` directives, the generated code uses the default inlining heuristic and issues a warning.

Suppose you want to generate code for a division function that will be embedded in a system with limited memory. To optimize memory use in the generated code, the following function, `inline_division`, manually controls inlining based on whether it performs scalar division or vector division:

```
function y = inline_division(dividend, divisor)

% For scalar division, inlining produces smaller code
% than the function call itself.
if isscalar(dividend) && isscalar(divisor)
    coder.inline('always');
else
% Vector division produces a for-loop.
% Prohibit inlining to reduce code size.
    coder.inline('never');
```

```
end

if any(divisor == 0)
    error('Can not divide by 0');
end

y = dividend / divisor;
```

Related Examples

- “Control Inlining”

Control Inlining

Restrict inlining when:

- The size of generated code exceeds desired limits due to excessive inlining of functions. Suppose that you include the statement, `coder.inline('always')`, inside a certain function. You then call that function at many different sites in your code. The generated code can be large due to the function being inlined every time it is called.

The call sites must be different. For instance, inlining does not lead to large code if the function to be inlined is called several times inside a loop.

- You have limited RAM or stack space.

In this section...
“Control Size of Functions Inlined” on page 23-10
“Control Size of Functions After Inlining” on page 23-11
“Control Stack Size Limit on Inlined Functions” on page 23-11

Control Size of Functions Inlined

You can use the MATLAB Coder app or the command-line interface to control the maximum size of functions that can be inlined. The function size is measured in terms of an abstract number of instructions, not actual MATLAB instructions or instructions in the target processor. Experiment with this parameter to obtain the inlining behavior that you want.

- Using the app, in the project settings dialog box, on the **All Settings** tab, set the value of the field, **Inline threshold**, to the maximum size that you want.
- At the command line, create a `codegen` configuration object. Set the value of the property, `InlineThreshold`, to the maximum size that you want.

```
cfg = coder.config('lib');  
cfg.InlineThreshold = 100;
```

Generate code using this configuration object.

Control Size of Functions After Inlining

You can use the MATLAB Coder app or the command-line interface to control the maximum size of functions after inlining. The function size is measured in terms of an abstract number of instructions, not actual MATLAB instructions or instructions in the target processor. Experiment with this parameter to obtain the inlining behavior that you want.

- Using the app, in the project settings dialog box, on the **All Settings** tab, set the value of the field, **Inline threshold max**, to the maximum size that you want.
- At the command line, create a `codegen` configuration object. Set the value of the property, `InlineThresholdMax`, to the maximum size that you want.

```
cfg = coder.config('lib');  
cfg.InlineThresholdMax = 100;
```

Generate code using this configuration object.

Control Stack Size Limit on Inlined Functions

Specifying a limit on the stack space constrains the amount of inlining allowed. For out-of-line functions, stack space for variables local to the function is released when the function returns. However, for inlined functions, stack space remains occupied by the local variables even after the function is executed. The value of the property, `InlineStackLimit`, is measured in bytes. Based on information from the target hardware settings, the software estimates the number of stack variables that a certain value of `InlineStackLimit` can accommodate. This estimate excludes possible C compiler optimizations such as putting variables in registers.

You can use the MATLAB Coder app or the command-line interface to control the stack size limit on inlined functions.

- Using the app, in the project settings dialog box, on the **All Settings** tab, set the value of the field, **Inline stack limit**, to the maximum size that you want.
- At the command line, create a `codegen` configuration object. Set the value of the property, `InlineStackLimit`, to the maximum size that you want.

```
cfg = coder.config('lib');  
cfg.InlineStackLimit = 2000;
```

Generate code using this configuration object.

Related Examples

- “Inline Code”

Fold Function Calls into Constants

This example shows how to specify constants in generated code using `coder.const`. The code generation software folds an expression or a function call in a `coder.const` statement into a constant in generated code. Because the generated code does not have to evaluate the expression or call the function every time, this optimization reduces the execution time of the generated code.

Write a function `AddShift` that takes an input `Shift` and adds it to the elements of a vector. The vector consists of the square of the first 10 natural numbers. `AddShift` generates this vector.

```
function y = AddShift(Shift) %#codegen
y = (1:10).^2+Shift;
```

Generate code for `AddShift` using the `codegen` command. Open the Code Generation Report.

```
codegen -config:lib -launchreport AddShift -args 0
```

The code generation software generates code for creating the vector. It adds `Shift` to each element of the vector during vector creation. The definition of `AddShift` in generated code looks as follows:

```
void AddShift(double Shift, double y[10])
{
    int k;
    for (k = 0; k < 10; k++) {
        y[k] = (double)((1 + k) * (1 + k)) + Shift;
    }
}
```

Replace the statement

```
y = (1:10).^2+Shift;
```

with

```
y = coder.const((1:10).^2)+Shift;
```

Generate code for `AddShift` using the `codegen` command. Open the Code Generation Report.

```
codegen -config:lib -launchreport AddShift -args 0
```

The code generation software creates the vector containing the squares of the first 10 natural numbers. In the generated code, it adds `Shift` to each element of this vector. The definition of `AddShift` in generated code looks as follows:

```
void AddShift(double Shift, double y[10])
{
    int i0;
    static const signed char iv0[10] = { 1, 4, 9, 16, 25, 36,
                                         49, 64, 81, 100 };

    for (i0 = 0; i0 < 10; i0++) {
        y[i0] = (double)iv0[i0] + Shift;
    }
}
```

See Also

`coder.const`


Control Stack Space Usage

This example shows how to set the maximum stack space that the generated code uses. Set the maximum stack usage when:

- You have limited stack space, for instance, in embedded targets.
- Your C compiler reports a run-time stack overflow.

The value of the property, `StackUsageMax`, is measured in bytes. Based on information from the target hardware settings, the software estimates the number of stack variables that a certain value of `StackUsageMax` can accommodate. This estimate excludes possible C compiler optimizations such as putting variables in registers.

Control Stack Space Usage Using the MATLAB Coder App

- 1 To open the **Generate** dialog box, on the **Generate Code** page, click the **Generate** arrow .
- 2 Set **Build type** to `Source Code`, `Static Library`, `Dynamic Library`, or `Executable` (depending on your requirements).
- 3 Click **More Settings**.
- 4 On the **Memory** tab, set **Stack usage max** to the value that you want.

Control Stack Space Usage at the Command Line

- 1 Create a configuration object for code generation.

Use `coder.config` with arguments `'lib'`, `'dll'`, or `'exe'` (depending on your requirements). For example:

```
cfg = coder.config('lib');
```

- 2 Set the property, `StackUsageMax`, to the value that you want.

```
cfg.StackUsageMax=400000;
```

More About

- “Stack Allocation and Performance”

Stack Allocation and Performance

By default, local variables are allocated on the stack. Large variables that do not fit on the stack are statically allocated in memory.

Stack allocation typically uses memory more efficiently than static allocation. However, stack space is sometimes limited, typically in embedded processors. MATLAB Coder allows you to manually set a limit on the stack space usage to make your generated code suitable for your target hardware. You can choose this limit based on the target hardware configurations. For more information, see “Control Stack Space Usage”.

Dynamic Memory Allocation and Performance

To achieve faster execution of generated code, minimize dynamic (or run-time) memory allocation of arrays.

MATLAB Coder does not provide a size for unbounded arrays in generated code. Instead, such arrays are referenced indirectly through pointers. For such arrays, memory cannot be allocated during compilation of generated code. Based on storage requirements for the arrays, memory is allocated and freed at run time as required. This run-time allocation and freeing of memory leads to slower execution of the generated code. For more information on dynamic memory allocation, see “Bounded Versus Unbounded Variable-Size Data”.

When Dynamic Memory Allocation Occurs

Dynamic memory allocation occurs when the code generation software cannot find upper bounds for variable-size arrays. The software cannot find upper bounds when you specify the size of an array using a variable that is not a compile-time constant. An example of such a variable is an input variable (or a variable computed from an input variable).

Instances in the MATLAB code that can lead to dynamic memory allocation are:

- Array initialization: You specify array size using a variable whose value is known only at run time.
- After initialization of an array:
 - You declare the array as variable-size using `coder.varsize` without explicit upper bounds. After this declaration, you expand the array by concatenation inside a loop. The number of loop runs is known only at run time.
 - You use a `reshape` function on the array. At least one of the size arguments to the `reshape` function is known only at run time.

If you know the maximum size of the array, you can avoid dynamic memory allocation. You can then provide an upper bound for the array and prevent dynamic memory allocation in generated code. For more information, see “Minimize Dynamic Memory Allocation” on page 23-18.

Minimize Dynamic Memory Allocation

When possible, minimize dynamic memory allocation because it leads to slower execution of generated code. Dynamic memory allocation occurs when the code generation software cannot find upper bounds for variable-size arrays.

If you know the maximum size of a variable-size array, you can avoid dynamic memory allocation. Follow these steps:

- 1 “Provide Maximum Size for Variable-Size Arrays” on page 23-19.
- 2 Depending on your requirements, do one of the following:
 - “Disable Dynamic Memory Allocation During Code Generation” on page 23-25.
 - “Set Dynamic Memory Allocation Threshold”

Caution If a variable-size array in the MATLAB code does not have a maximum size, disabling dynamic memory allocation leads to a code generation error. Before disabling dynamic memory allocation, you must provide a maximum size for variable-size arrays in your MATLAB code.

More About

- “Dynamic Memory Allocation and Performance”

Provide Maximum Size for Variable-Size Arrays

To constrain array size for variable-size arrays, do one of the following:

- **Constrain Array Size Using `assert` Statements**

If the variable specifying array size is not a compile-time constant, use an `assert` statement with relational operators to constrain the variable. Doing so helps the code generation software to determine a maximum size for the array.

The following examples constrain array size using `assert` statements:

- **When Array Size Is Specified by Input Variables**

Define a function `array_init` which initializes an array `y` with input variable `N`:

```
function y = array_init (N)
    assert(N <= 25); % Generates exception if N > 25
    y = zeros(1,N);
```

The `assert` statement constrains input `N` to a maximum size of 25. In the absence of the `assert` statement, `y` is assigned a pointer to an array in the generated code, thus allowing dynamic memory allocation.

- **When Array Size Is Obtained from Computation Using Input Variables**

Define a function, `array_init_from_prod`, which takes two input variables, `M` and `N`, and uses their product to specify the maximum size of an array, `y`.

```
function y = array_init_from_prod (M,N)
    size=M*N;
    assert(size <= 25); % Generates exception if size > 25
    y=zeros(1,size);
```

The `assert` statement constrains the product of `M` and `N` to a maximum of 25.

Alternatively, if you restrict `M` and `N` individually, it leads to dynamic memory allocation:

```
function y = array_init_from_prod (M,N)
    assert(M <= 5);
    assert(N <= 5);
    size=M*N;
    y=zeros(1,size);
```

This code causes dynamic memory allocation because M and N can both have unbounded negative values. Therefore, their product can be unbounded and positive even though, individually, their positive values are bounded.

Tip Place the `assert` statement on a variable immediately before it is used to specify array size.

Tip You can use `assert` statements to restrict array sizes in most cases. When expanding an array inside a loop, this strategy does not work if the number of loop runs is known only at run time.

- **Restrict Concatenations in a Loop Using `coder.versize` with Upper Bounds**

You can expand arrays beyond their initial size by concatenation. When you concatenate additional elements inside a loop, there are two syntax rules for expanding arrays.

- 1 Array size during initialization is not a compile-time constant**

If the size of an array during initialization is not a compile-time constant, you can expand it by concatenating additional elements:

```
function out=ExpandArray(in) % Expand an array by five elements
    out = zeros(1,in);
    for i=1:5
        out = [out 0];
    end
```

- 2 Array size during initialization is a compile-time constant**

Before concatenating elements, you have to declare the array as variable-size using `coder.versize`:

```
function out=ExpandArray() % Expand an array by five elements
    out = zeros(1,5);
    coder.versize('out');
    for i=1:5
        out = [out 0];
    end
```


Either case leads to dynamic memory allocation. To prevent dynamic memory allocation in such cases, use `coder. varsize` with explicit upper bounds. This example shows how to use `coder. varsize` with explicit upper bounds:

Restrict Concatenations Using `coder. varsize` with Upper Bounds

- 1 Define a function, `RunningAverage`, that calculates the running average of an `N`-element subset of an array:

```
function avg=RunningAverage(N)

% Array whose elements are to be averaged
NumArray=[1 6 8 2 5 3];

% Initialize average:
% These will also be the first two elements of the function output
avg=[0 0];

% Place a bound on the argument
coder. varsize('avg',[1 8]);

% Loop to calculate running average
for i=1:N
    s=0;
    s=s+sum(NumArray(1:i));
    avg=[avg s/i];
% Increase the size of avg as required by concatenation
end
```

The output, `avg`, is an array that you can expand as required to accommodate the running averages. As a new running average is calculated, it is added to the array `avg` through concatenation, thereby expanding the array.

Because the maximum number of running averages is equal to the number of elements in `NumArray`, you can supply an explicit upper bound for `avg` in the `coder. varsize` statement. In this example, the upper bound is 8 (the two initial elements plus the six elements of `NumArray`).

- 2 Generate code for `RunningAverage` with input argument of type `double`:

```
codegen -config:lib -report RunningAverage -args 2
```

In the generated code, `avg` is assigned an array of size 8 (static memory allocation). The function definition for `RunningAverage` appears as follows (using built-in C types):

```
void RunningAverage (double N, double avg_data[8], int avg_size[2])
```

- 3 By contrast, if you remove the explicit upper bound, the generated code dynamically allocates `avg`.

Replace the statement

```
coder.varsized('avg',[1 8]);
```

with:

```
coder.varsized('avg');
```

- 4 Generate code for `RunningAverage` with input argument of type `double`:

```
codegen -config:lib -report RunningAverage -args 2
```

In the generated code, `avg` is assigned a pointer to an array, thereby allowing dynamic memory allocation. The function definition for `RunningAverage` appears as follows (using built-in C types):

```
void Test(double N, mxArray_real_T *avg)
```

Note: Dynamic memory allocation also occurs if you precede `coder.varsized('avg')` with the following `assert` statement:

```
assert(N < 6);
```

The `assert` statement does not restrict the number of concatenations within the loop.

• Constrain Array Size When Rearranging a Matrix

The statement `out = reshape(in,m,n,...)` takes an array, `in`, as an argument and returns array, `out`, having the same elements as `in`, but reshaped as an `m`-by-`n`-by-`...` matrix. If one of the size variables `m`, `n`, `...` is not a compile-time constant, then dynamic memory allocation of `out` takes place.

To avoid dynamic memory allocation, use an `assert` statement before the `reshape` statement to restrict the size variables `m`, `n`, `...` to `numel(in)`. This example shows how to use an `assert` statement before a `reshape` statement:

Rearrange a Matrix into Given Number of Rows

- 1 Define a function, `ReshapeMatrix`, which takes an input variable, `N`, and reshapes a matrix, `mat`, to have `N` rows:

```
function [out1,out2] = ReshapeMatrix(N)

    mat = [1 2 3 4 5; 4 5 6 7 8]
    % Since mat has 10 elements, N must be a factor of 10
    % to pass as argument to reshape

    out1 = reshape(mat,N,[]);
    % N is not restricted

    assert(N < numel(mat));
    % N is restricted to number of elements in mat
    out2 = reshape(mat,N,[]);
```

- 2 Generate code for `ReshapeArray` using the `codegen` command (the input argument does not have to be a factor of 10):

```
codegen -config:lib -report ReshapeArray -args 3
```

While `out1` is dynamically allocated, `out2` is assigned an array with size 100 (=10 X 10) in the generated code.

Tip If your system has limited memory, do not use the `assert` statement in this way. For an `n`-element matrix, the `assert` statement creates an `n`-by-`n` matrix, which might be large.

Related Examples


- “Minimize Dynamic Memory Allocation”
- “Disable Dynamic Memory Allocation During Code Generation”
- “Set Dynamic Memory Allocation Threshold”

More About

- “Dynamic Memory Allocation and Performance”

Disable Dynamic Memory Allocation During Code Generation

To disable dynamic memory allocation using the MATLAB Coder app:

- 1 To open the **Generate** dialog box, on the **Generate Code** page, click the **Generate** arrow .
- 2 Click **More Settings**.
- 3 On the **Memory** tab, under **Variable Sizing Support**, set **Dynamic memory allocation** to **Never**.

To disable dynamic memory allocation at the command line:

- 1 In the MATLAB workspace, define the configuration object:

```
cfg=coder.config('lib');
```
- 2 Set the `DynamicMemoryAllocation` property of the configuration object to `Off`:

```
cfg.DynamicMemoryAllocation = 'Off';
```

If a variable-size array in the MATLAB code does not have a maximum upper bound, disabling dynamic memory allocation leads to a code generation error. Therefore, you can identify variable-size arrays in your MATLAB code that do not have a maximum upper bound. These arrays are the arrays that are dynamically allocated in the generated code.

Related Examples

- “Minimize Dynamic Memory Allocation”
- “Provide Maximum Size for Variable-Size Arrays”
- “Set Dynamic Memory Allocation Threshold”

More About

- “Dynamic Memory Allocation and Performance”


Set Dynamic Memory Allocation Threshold


This example shows how to specify a dynamic memory allocation threshold for variable-size arrays. Dynamic memory allocation optimizes storage requirements for variable-size arrays, but causes slower execution of generated code. Instead of disabling dynamic memory allocation for all variable-size arrays, you can disable dynamic memory allocation for arrays less than a certain size.

Specify this threshold when you want to:

- Disable dynamic memory allocation for smaller arrays. For smaller arrays, static memory allocation can speed up generated code. Static memory allocation can lead to unused storage space. However, you can decide that the unused storage space is not a significant consideration for smaller arrays.
- Enable dynamic memory allocation for larger arrays. For larger arrays, when you use dynamic memory allocation, you can significantly reduce storage requirements.

Set Dynamic Memory Allocation Threshold Using the MATLAB Coder App

- 1 To open the **Generate** dialog box, on the **Generate Code** page, click the **Generate** arrow .
- 2 Click **More Settings**.
- 3 On the **Memory** tab, select the **Enable variable-sizing** check box.
- 4 Set **Dynamic memory allocation** to **For arrays with max size at or above threshold**.
- 5 Set **Dynamic memory allocation threshold** to the value that you want.

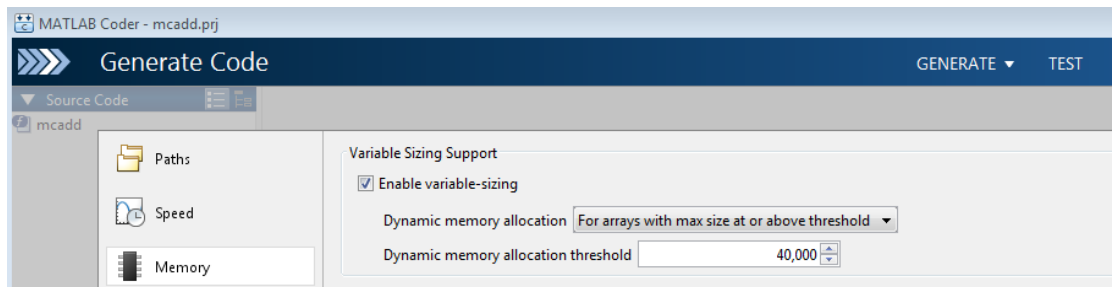

The **Dynamic memory allocation threshold** value is measured in bytes. Based on information from the target hardware settings, the software estimates the size of the array that a certain value of `DynamicMemoryAllocationThreshold` can accommodate. This estimate excludes possible C compiler optimizations such as putting variables in registers.

Set Dynamic Memory Allocation Threshold at the Command Line

- 1 Create a configuration object for code generation. Use `coder.config` with arguments `'lib'`, `'dll'`, or `'exe'` (depending on your requirements). For example:

```
cfg = coder.config('lib');
```

- 2 Set `DynamicMemoryAllocation` to `'Threshold'`.

```
cfg.DynamicMemoryAllocation='Threshold';
```

- 3 Set the property, `DynamicMemoryAllocationThreshold`, to the value that you want.

```
cfg.DynamicMemoryAllocationThreshold = 40000;
```

The value stored in `DynamicMemoryAllocationThreshold` is measured in bytes. Based on information from the target hardware settings, the software estimates the size of the array that a certain value of `DynamicMemoryAllocationThreshold` can accommodate. This estimate excludes possible C compiler optimizations such as putting variables in registers.

Related Examples

- “Minimize Dynamic Memory Allocation”
- “Provide Maximum Size for Variable-Size Arrays”
- “Disable Dynamic Memory Allocation During Code Generation”

More About

- “Dynamic Memory Allocation and Performance”

Excluding Unused Paths from Generated Code

In certain situations, you do not need some branches of an: `if`, `elseif`, `else` statement, or a `switch`, `case`, `otherwise` statement in your generated code. For instance:

- You have a MATLAB function that performs multiple tasks determined by a control-flow variable. You might not need some of the tasks in the code generated from this function.
- You have an `if/elseif/if` statement in a MATLAB function performing different tasks based on the nature (type/value) of the input. In some cases, you know the nature of the input beforehand. If so, you do not need some branches of the `if` statement.

You can prevent code generation for the unused branches of an `if/elseif/else` statement or a `switch/case/otherwise` statement. Declare the control-flow variable as a constant. The code generation software generates code only for the branch that the control-flow variable chooses.

Related Examples

- “Prevent Code Generation for Unused Execution Paths”

Prevent Code Generation for Unused Execution Paths

In this section...

“Prevent Code Generation When Local Variable Controls Flow” on page 23-29

“Prevent Code Generation When Input Variable Controls Flow” on page 23-30

If a variable controls the flow of an: `if`, `elseif`, `else` statement, or a `switch`, `case`, `otherwise` statement, declare it as constant so that code generation takes place for one branch of the statement only.

Depending on the nature of the control-flow variable, you can declare it as constant in two ways:

- If the variable is local to the MATLAB function, assign it to a constant value in the MATLAB code. For an example, see “Prevent Code Generation When Local Variable Controls Flow” on page 23-29.
- If the variable is an input to the MATLAB function, you can declare it as constant using `coder.Constant`. For an example, see “Prevent Code Generation When Input Variable Controls Flow” on page 23-30.

Prevent Code Generation When Local Variable Controls Flow

- 1 Define a function `SquareOrCube` which takes an input variable, `in`, and squares or cubes its elements based on whether the choice variable, `ch`, is set to `s` or `c`:

```
function out = SquareOrCube(ch,in) %#codegen
    if ch=='s'
        out = in.^2;
    elseif ch=='c'
        out = in.^3;
    else
        out = 0;
    end
```

- 2 Generate code for `SquareOrCube` using the `codegen` command:

```
codegen -config:lib SquareOrCube -args {'s',zeros(2,2)}
```

The generated C code squares or cubes the elements of a 2-by-2 matrix based on the input for `ch`.

- 3 Add the following line to the definition of `SquareOrCube`:

```
ch = 's';
```

The generated C code squares the elements of a 2-by-2 matrix. The choice variable, `ch`, and the other branches of the `if/elseif/if` statement do not appear in the generated code.

Prevent Code Generation When Input Variable Controls Flow

- 1 Define a function `MathFunc`, which performs different mathematical operations on an input, `in`, depending on the value of the input, `flag`:

```
function out = MathFunc(flag,in) %#codegen
    %# codegen
    switch flag
        case 1
            out=sin(in);
        case 2
            out=cos(in);
        otherwise
            out=sqrt(in);
    end
```

- 2 Generate code for `MathFunc` using the `codegen` command:

```
codegen -config:lib MathFunc -args {1,zeros(2,2)}
```

The generated C code performs different math operations on the elements of a 2-by-2 matrix based on the input for `flag`.

- 3 Generate code for `MathFunc`, declaring the argument, `flag`, as a constant using `coder.Constant`:

```
codegen -config:lib MathFunc -args {coder.Constant(1),zeros(2,2)}
```

The generated C code finds the sine of the elements of a 2-by-2 matrix. The variable, `flag`, and the `switch/case/otherwise` statement do not appear in the generated code.

More About

- “Excluding Unused Paths from Generated Code”

Generate Code with Parallel for-Loops (parfor)

This example shows how to generate C code for a MATLAB algorithm that contains a `parfor`-loop.

- 1 Write a MATLAB function that contains a `parfor`-loop. For example:

```
function a = test_parfor %#codegen
a=ones(10,256);
r=rand(10,256);
parfor i=1:10
    a(i,:)=real(fft(r(i,:)));
end
```

- 2 Generate C code for `test_parfor`. At the MATLAB command line, enter:

```
codegen -config:lib test_parfor
```

Because you did not specify the maximum number of threads to use, the generated C code executes the loop iterations in parallel on the available number of cores.

- 3 To specify a maximum number of threads, rewrite the function `test_parfor` as follows:

```
function a = test_parfor(u) %#codegen
a=ones(10,256);
r=rand(10,256);
parfor (i=1:10,u)
    a(i,:)=real(fft(r(i,:)));
end
```

- 4 Generate C code for `test_parfor`. Use `-args 0` to specify that the input, `u`, is a scalar double. At the MATLAB command line, enter:

```
codegen -config:lib test_parfor -args 0
```

In the generated code, the iterations of the `parfor`-loop run on at most the number of cores specified by the input, `u`. If less than `u` cores are available, the iterations run on the cores available at the time of the call.

More About

- “Algorithm Acceleration Using Parallel for-Loops (`parfor`)”
- “Classification of Variables in `parfor`-Loops”

- “Reduction Assignments in parfor-Loops”

Minimize Redundant Operations in Loops

This example shows how to minimize redundant operations in loops. When a loop operation does not depend on the loop index, performing it inside a loop is redundant. This redundancy often goes unnoticed when you are performing multiple operations in a single MATLAB statement inside a loop. For example, in the following code, the inverse of the matrix **B** is being calculated 100 times inside the loop although it does not depend on the loop index:

```
for i=1:100
    C=C + inv(B)*A^i*B;
end
```

Performing such redundant loop operations can lead to unnecessary processing. To avoid unnecessary processing, move operations outside loops as long as they do not depend on the loop index.

- 1 Define a function, `SeriesFunc(A,B,n)`, that calculates the sum of n terms in the following power series expansion:

$$C = 1 + B^{-1}AB + B^{-1}A^2B + \dots$$

```
function C=SeriesFunc(A,B,n)

% Initialize C with a matrix having same dimensions as A
C=zeros(size(A));

% Perform the series sum
for i=1:n
    C=C+inv(B)*A^i*B;
end
```

- 2 Generate code for `SeriesFunc` with 4-by-4 matrices passed as input arguments for **A** and **B**:

```
X = coder.typeof(zeros(4));
codegen -config:lib -launchreport SeriesFunc -args {X,X,10}
```

In the generated code, the inversion of **B** is performed n times inside the loop. It is more economical to perform the inversion operation once outside the loop because it does not depend on the loop index.

- 3 Modify `SeriesFunc` as follows:

```
function C=SeriesFunc(A,B,n)

% Initialize C with a matrix having same dimensions as A
C=zeros(size(A));

% Perform the inversion outside the loop
inv_B=inv(B);

% Perform the series sum
for i=1:n
    C=C+inv_B*A^i*B;
end
```

This procedure performs the inversion of **B** only once, leading to faster execution of the generated code.

Unroll for-Loops

Unrolling `for`-loops eliminates the loop logic by creating a separate copy of the loop body in the generated code for each iteration. Within each iteration, the loop index variable becomes a constant.

You can also force loop unrolling for individual functions by wrapping the loop header in a `coder.unroll` function. For more information, see `coder.unroll`.

Limit Copying the for-loop Body in Generated Code

To limit the number of times that you copy the body of a `for`-loop in generated code:

- 1 Write a MATLAB function `getrand(n)` that uses a `for`-loop to generate a vector of length `n` and assign random numbers to specific elements. Add a test function `test_unroll`. This function calls `getrand(n)` with `n` equal to values both less than and greater than the threshold for copying the `for`-loop in generated code.

```
function [y1, y2] = test_unroll() %#codegen
% The directive %#codegen indicates that the function
% is intended for code generation
% Calling getrand 8 times triggers unroll
y1 = getrand(8);
% Calling getrand 50 times does not trigger unroll
y2 = getrand(50);

function y = getrand(n)
% Turn off inlining to make
% generated code easier to read
coder.inline('never');

% Set flag variable downroll to repeat loop body
% only for fewer than 10 iterations
downroll = n < 10;
% Declare size, class, and complexity
% of variable y by assignment
y = zeros(n, 1);
% Loop body begins
for i = coder.unroll(1:2:n, downroll)
    if (i > 2) && (i < n-2)
        y(i) = rand();
    end;
end;
```

```
end;  
% Loop body ends
```

- 2 In the default output folder, `codegen/lib/test_unroll`, generate C static library code for `test_unroll`:

```
codegen -config:lib test_unroll
```

In `test_unroll.c`, the generated C code for `getrand(8)` repeats the body of the `for`-loop (unrolls the loop) because the number of iterations is less than 10:

```
static void getrand(double y[8])  
{  
    /* Turn off inlining to make */  
    /* generated code easier to read */  
    /* Set flag variable downroll to repeat loop body */  
    /* only for fewer than 10 iterations */  
    /* Declare size, class, and complexity */  
    /* of variable y by assignment */  
    memset(&y[0], 0, sizeof(double) << 3);  
  
    /* Loop body begins */  
    y[2] = b_rand();  
    y[4] = b_rand();  
  
    /* Loop body ends */  
}
```

The generated C code for `getrand(50)` does not unroll the `for`-loop because the number of iterations is greater than 10:

```
static void b_getrand(double y[50])  
{  
    int i;  
    int b_i;  
  
    /* Turn off inlining to make */  
    /* generated code easier to read */  
    /* Set flag variable downroll to repeat loop body */  
    /* only for fewer than 10 iterations */  
    /* Declare size, class, and complexity */  
    /* of variable y by assignment */  
    memset(&y[0], 0, 50U * sizeof(double));  
  
    /* Loop body begins */
```



```
for (i = 0; i < 25; i++) {  
    b_i = (i << 1) + 1;  
    if ((b_i > 2) && (b_i < 48)) {  
        y[b_i - 1] = b_rand();  
    }  
}
```

Support for Integer Overflow and Non-Finites


The code generation software generates supporting code for the following situations:

- The result of an integer operation falls outside the range that a data type can represent. This situation is known as integer overflow.
- An operation generates non-finite values (`inf` and `NaN`). The supporting code is contained in the files `rt_nonfinite.c`, `rtGetInf.c`, and `rtGetNaN.c` (with corresponding header files).

If you know that these situations do not occur, you can suppress generation of the supporting code. You therefore reduce the size of the generated code and increase its speed. However, if one of these situations occurs, it is possible that the generated code will not match the behavior of the original MATLAB code.

Disable Support for Integer Overflow

You can use the MATLAB Coder app or the command-line interface to disable support for integer overflow. When you disable this support, the overflow behavior of your generated code depends on your target C compiler. Most C compilers wrap on overflow.


- Using the app:
 - 1 To open the **Generate** dialog box, on the **Generate Code** page, click the **Generate** arrow .
 - 2 Click **More Settings**.
 - 3 To disable support for integer overflow, on the **Speed** tab, clear **Saturate on integer overflow**.
- At the command line:
 - 1 Create a configuration object for code generation. Use `coder.config` with arguments `'lib'`, `'dll'`, or `'exe'` (depending on your requirements). For example:

```
cfg = coder.config('lib');
```
 - 2 To disable support for integer overflow, set the `SaturateOnIntegerOverflow` property to `false`.

```
cfg.SaturateOnIntegerOverflow = false;
```

Disable Support for Non-Finite Numbers

You can use the MATLAB Coder app or the command-line interface to disable support for non-finite numbers(`inf` and `NaN`).

- Using the app:
 - 1 To open the **Generate** dialog box, on the **Generate Code** page, click the **Generate** arrow .
 - 2 Set **Build type** to `Source Code`, `Static Library`, `Dynamic Library`, or `Executable` (depending on your requirements).
 - 3 Click **More Settings**.
 - 4 On the **Speed** tab, clear the **Support non-finite numbers** check box.
- At the command line:
 - 1 Create a configuration object for code generation. Use `coder.config` with arguments `'lib'`, `'dll'`, or `'exe'` (depending on your requirements). For example:

```
cfg = coder.config('lib');
```
 - 2 To disable support for integer overflow, set the `SupportNonFinite` property to `false`.

```
cfg.SupportNonFinite = false;
```

Integrate Custom Code

This example shows how to integrate custom code to enhance performance of generated code. Although MATLAB Coder generates optimized code for most applications, you might have legacy code optimized for your specific requirements. For example:

- You have custom libraries optimized for your target environment.
- You have custom libraries for functions not supported by MATLAB Coder.
- You have custom libraries that meet standards set by your company.

In such cases, you can integrate your custom code with the code generated by MATLAB Coder.

This example illustrates how to integrate the function `cublasSgemm` from the NVIDIA® CUDA® Basic Linear Algebra Subroutines (CUBLAS) library in generated code. This function performs matrix multiplication on a Graphics Processing Unit (GPU).

- 1 Define a class `ExternalLib_API` that derives from the class `coder.ExternalDependency`. `ExternalLib_API` defines an interface to the CUBLAS library through the following methods:
 - `getDescriptiveName`: Returns a descriptive name for `ExternalLib_API` to be used for error messages.
 - `isSupportedContext`: Determines if the build context supports the CUBLAS library.
 - `updateBuildInfo`: Adds header file paths and link files to the build information.
 - `GPU_MatrixMultiply`: Defines the interface to the CUBLAS library function `cublasSgemm`.

`ExternalLib_API.m`

```
classdef ExternalLib_API < coder.ExternalDependency
    %#codegen

    methods (Static)

        function bName = getDescriptiveName(-)
            bName = 'ExternalLib_API';
        end
    end
end
```

```

function tf = isSupportedContext(ctx)
    if ctx.isMatlabHostTarget()
        tf = true;
    else
        error('CUBLAS library not available for this target');
    end
end

function updateBuildInfo(buildInfo, ctx)
    [~, linkLibExt, ~, ~] = ctx.getStdLibInfo();

    % Include header file path
    % Include header files later using coder.cinclude
    hdrFilePath = 'C:\My_Includes';
    buildInfo.addIncludePaths(hdrFilePath);

    % Include link files
    linkFiles = strcat('libcublas', linkLibExt);
    linkPath = 'C:\My_Libs';
    linkPriority = '';
    linkPrecompiled = true;
    linkLinkOnly = true;
    group = '';
    buildInfo.addLinkObjects(linkFiles, linkPath, ...
        linkPriority, linkPrecompiled, linkLinkOnly, group);

    linkFiles = strcat('libcudart', linkLibExt);
    buildInfo.addLinkObjects(linkFiles, linkPath, ...
        linkPriority, linkPrecompiled, linkLinkOnly, group);

end

%API for library function 'cuda_MatrixMultiply'
function C = GPU_MatrixMultiply(A, B)
    assert(isa(A,'single'), 'A must be single.');
```

```

    assert(isa(B,'single'), 'B must be single.');
```

```

    if(coder.target('MATLAB'))
        C=A*B;
    else

        % Include header files
        %     for external functions and typedefs

```

```
% Header path included earlier using updateBuildInfo
coder.cinclude('cuda_runtime.h');
coder.cinclude('cublas_v2.h');

% Compute dimensions of input matrices
m = int32(size(A, 1));
k = int32(size(A, 2));
n = int32(size(B, 2));

% Declare pointers to matrices on destination GPU
d_A = coder.opaque('float*');
d_B = coder.opaque('float*');
d_C = coder.opaque('float*');

% Compute memory to be allocated for matrices
% Single = 4 bytes
size_A = m*k*4;
size_B = k*n*4;
size_C = m*n*4;

% Define error variables
error = coder.opaque('cudaError_t');
cudaSuccessV = coder.opaque('cudaError_t', ...
    'cudaSuccess');

% Assign memory on destination GPU
error = coder.ceval('cudaMalloc', ...
    coder.wref(d_A), size_A);
assert(error == cudaSuccessV, ...
    'cudaMalloc(A) failed');
error = coder.ceval('cudaMalloc', ...
    coder.wref(d_B), size_B);
assert(error == cudaSuccessV, ...
    'cudaMalloc(B) failed');
error = coder.ceval('cudaMalloc', ...
    coder.wref(d_C), size_C);
assert(error == cudaSuccessV, ...
    'cudaMalloc(C) failed');

% Define direction of copying
hostToDevice = coder.opaque('cudaMemcpyKind', ...
    'cudaMemcpyHostToDevice');

% Copy matrices to destination GPU
```

```

error = coder.ceval('cudaMemcpy', ...
    d_A, coder.rref(A), size_A, hostToDevice);
assert(error == cudaSuccessV, 'cudaMemcpy(A) failed');

error = coder.ceval('cudaMemcpy', ...
    d_B, coder.rref(B), size_B, hostToDevice);
assert(error == cudaSuccessV, 'cudaMemcpy(B) failed');

% Define type and size for result
C = zeros(m, n, 'single');

error = coder.ceval('cudaMemcpy', ...
    d_C, coder.rref(C), size_C, hostToDevice);
assert(error == cudaSuccessV, 'cudaMemcpy(C) failed');

% Define handle variables for external library
handle = coder.opaque('cublasHandle_t');
blasSuccess = coder.opaque('cublasStatus_t', ...
    'CUBLAS_STATUS_SUCCESS');

% Initialize external library
ret = coder.opaque('cublasStatus_t');
ret = coder.ceval('cublasCreate', coder.wref(handle));
assert(ret == blasSuccess, 'cublasCreate failed');

TRANSA = coder.opaque('cublasOperation_t', ...
    'CUBLAS_OP_N');
alpha = single(1);
beta = single(0);

% Multiply matrices on GPU
ret = coder.ceval('cublasSgemm', handle, ...
    TRANSA, TRANSA, m, n, k, ...
    coder.rref(alpha), d_A, m, ...
    d_B, k, ...
    coder.rref(beta), d_C, k);

assert(ret == blasSuccess, 'cublasSgemm failed');

% Copy result back to local host
deviceToHost = coder.opaque('cudaMemcpyKind', ...
    'cudaMemcpyDeviceToHost');
error = coder.ceval('cudaMemcpy', coder.wref(C), ...

```

```

        d_C, size_C, deviceToHost);
    assert(error == cudaSuccessV, 'cudaMemcpy(C) failed');

    end
end
end
end
end

```

- 2 To perform the matrix multiplication using the interface defined in method `GPU_MatrixMultiply` and the build information in `ExternalLib_API`, include the following line in your MATLAB code:

```
C= ExternalLib_API.GPU_MatrixMultiply(A,B);
```

For instance, you can define a MATLAB function `Matrix_Multiply` that solely performs this matrix multiplication.

```
function C = Matrix_Multiply(A, B) %#codegen
    C= ExternalLib_API.GPU_MatrixMultiply(A,B);
```

- 3 Define a MEX configuration object using `coder.config`. For using the CUBLAS libraries, set the target language for code generation to C++.

```
cfg=coder.config('mex');
cfg.TargetLang='C++';
```

- 4 Generate code for `Matrix_Multiply` using `cfg` as the configuration object and two 2 X 2 matrices of type `single` as arguments. Since `cublasSgemm` supports matrix multiplication for data type `float`, the corresponding MATLAB matrices must have type `single`.

```
codegen -config cfg Matrix_Multiply ...
        -args {ones(2,'single'),ones(2,'single')}
```

- 5 Test the generated MEX function `Matrix_Multiply_mex` using two 2 X 2 identity matrices of type `single`.

```
Matrix_Multiply_mex(eye(2,'single'),eye(2,'single'))
```

The output is also a 2 X 2 identity matrix.

See Also

`coder.BuildConfig` | `assert` | `coder.ceval` | `coder.ExternalDependency` | `coder.opaque` | `coder.rref` | `coder.wref`

Related Examples

- “Encapsulate Interface to an External C Library”

More About

- “Encapsulating the Interface to External Code”

MATLAB Coder Optimizations in Generated Code

In this section...

“Constant Folding” on page 23-46

“Loop Fusion” on page 23-47

“Successive Matrix Operations Combined” on page 23-47

“Unreachable Code Elimination” on page 23-48

In order to improve the execution speed and memory usage of generated code, MATLAB Coder introduces the following optimizations:

Constant Folding

When possible, the code generation software evaluates expressions in your MATLAB code that involve compile-time constants only. In the generated code, it replaces these expressions with the result of the evaluations. This behavior is known as constant folding. Because of constant folding, the generated code does not have to evaluate the constants during execution.

The following example shows MATLAB code that is constant-folded during code generation. The function `MultiplyConstant` multiplies every element in a matrix by a scalar constant. The function evaluates this constant using the product of three compile-time constants, `a`, `b`, and `c`.

```
function out=MultiplyConstant(in) %#codegen
    a=pi^4;
    b=1/factorial(4);
    c=exp(-1);
    out=in.*(a*b*c);
end
```

The code generation software evaluates the expressions involving compile-time constants, `a`, `b`, and `c`. It replaces these expressions with the result of the evaluation in generated code.

Constant folding can occur when the expressions involve scalars only. To explicitly enforce constant folding of expressions in other cases, use the `coder.const` function. For more information, see “Fold Function Calls into Constants”.

Control Constant Folding

You can control the maximum number of instructions that can be constant-folded from the command line or the project settings dialog box.

- At the command line, create a configuration object for code generation. Set the property `ConstantFoldingTimeout` to the value that you want.

```
cfg=coder.config('lib');
cfg.ConstantFoldingTimeout = 200;
```

- Using the app, in the project settings dialog box, on the **All Settings** tab, set the field **Constant folding timeout** to the value that you want.

Loop Fusion

When possible, the code generation software fuses successive loops with the same number of runs into a single loop in the generated code. This optimization reduces loop overhead.

The following code contains successive loops, which are fused during code generation. The function `SumAndProduct` evaluates the sum and product of the elements in an array `Arr`. The function uses two separate loops to evaluate the sum `y_f_sum` and product `y_f_prod`.

```
function [y_f_sum,y_f_prod] = SumAndProduct(Arr) %#codegen
    y_f_sum = 0;
    y_f_prod = 1;
    for i = 1:length(Arr)
        y_f_sum = y_f_sum+Arr(i);
    end
    for i = 1:length(Arr)
        y_f_prod = y_f_prod*Arr(i);
    end
```

The code generated from this MATLAB code evaluates the sum and product in a single loop.

Successive Matrix Operations Combined

When possible, the code generation software converts successive matrix operations in your MATLAB code into a single loop operation in generated code. This optimization

reduces excess loop overhead involved in performing the matrix operations in separate loops.

The following example contains code where successive matrix operations take place. The function `ManipulateMatrix` multiplies every element of a matrix `Mat` with a `factor`. To every element in the result, the function then adds a `shift`:

```
function Res=ManipulateMatrix(Mat, factor, shift)
    Res=Mat*factor;
    Res=Res+shift;
end
```

The generated code combines the multiplication and addition into a single loop operation.

Unreachable Code Elimination

When possible, the code generation software suppresses code generation from unreachable procedures in your MATLAB code. For instance, if a branch of an `if`, `elseif`, `else` statement is unreachable, then code is not generated for that branch.

The following example contains unreachable code, which is eliminated during code generation. The function `SaturateValue` returns a value based on the range of its input `x`.

```
function y_b = SaturateValue(x) %#codegen
    if x>0
        y_b = x;
    elseif x>10 %This is redundant
        y_b = 10;
    else
        y_b = -x;
    end
```

The second branch of the `if`, `elseif`, `else` statement is unreachable. If the variable `x` is greater than 10, it is also greater than 0. Therefore, the first branch is executed in preference to the second branch.

MATLAB Coder does not generate code for the unreachable second branch.

Generate Reusable Code

With MATLAB, you can generate reusable code in the following ways:

- Write reusable functions using standard MATLAB function file names which you can call from different locations, for example, in a Simulink model or MATLAB function library.
- Compile external functions on the MATLAB path and integrate them into generated C code for embedded targets.

See “Resolution of Function Calls for Code Generation”.

Common applications include:

- Overriding generated library function with a custom implementation.
- Implementing a reusable library on top of standard library functions that can be used with Simulink.
- Swapping between different implementations of the same function.

Code Generation for MATLAB Structures

- “Structure Definition for Code Generation” on page 24-2
- “Structure Operations Allowed for Code Generation” on page 24-3
- “Define Scalar Structures for Code Generation” on page 24-4
- “Define Arrays of Structures for Code Generation” on page 24-7
- “Make Structures Persistent” on page 24-9
- “Index Substructures and Fields” on page 24-10
- “Assign Values to Structures and Fields” on page 24-12
- “Pass Large Structures as Input Parameters” on page 24-14

Structure Definition for Code Generation

To generate efficient standalone code for structures, you must define and use structures differently than you normally would when running your code in the MATLAB environment:

What's Different	More Information
Use a restricted set of operations.	“Structure Operations Allowed for Code Generation” on page 24-3
Observe restrictions on properties and values of scalar structures.	“Define Scalar Structures for Code Generation” on page 24-4
Make structures uniform in arrays.	“Define Arrays of Structures for Code Generation” on page 24-7
Reference structure fields individually during indexing.	“Index Substructures and Fields” on page 24-10
Avoid type mismatch when assigning values to structures and fields.	“Assign Values to Structures and Fields” on page 24-12

Structure Operations Allowed for Code Generation

To generate efficient standalone code for MATLAB structures, you are restricted to the following operations:

- Define structures as local and persistent variables by assignment and using the `struct` function
- Index structure fields using dot notation
- Define primary function inputs as structures
- Pass structures to local functions

Define Scalar Structures for Code Generation

In this section...

“Restriction When Using struct” on page 24-4

“Restrictions When Defining Scalar Structures by Assignment” on page 24-4

“Adding Fields in Consistent Order on Each Control Flow Path” on page 24-4

“Restriction on Adding New Fields After First Use” on page 24-5

Restriction When Using struct

When you use the `struct` function to create scalar structures for code generation, you cannot create structures of cell arrays.

Restrictions When Defining Scalar Structures by Assignment

When you define a scalar structure by assigning a variable to a preexisting structure, you do not need to define the variable before the assignment. However, if you already defined that variable, it must have the same class, size, and complexity as the structure you assign to it. In the following example, `p` is defined as a structure that has the same properties as the predefined structure `S`:

```
...
S = struct('a', 0, 'b', 1, 'c', 2);
p = S;
...
```

Adding Fields in Consistent Order on Each Control Flow Path

When you create a structure, you must add fields in the same order on each control flow path. For example, the following code generates a compiler error because it adds the fields of structure `x` in a different order in each `if` statement clause:

```
function y = fcn(u) %#codegen
if u > 0
    x.a = 10;
    x.b = 20;
else
    x.b = 30; % Generates an error (on variable x)
```

```

    x.a = 40;
end
y = x.a + x.b;

```

In this example, the assignment to `x.a` comes before `x.b` in the first `if` statement clause, but the assignments appear in reverse order in the `else` clause. Here is the corrected code:

```

function y = fcn(u) %#codegen
if u > 0
    x.a = 10;
    x.b = 20;
else
    x.a = 40;
    x.b = 30;
end
y = x.a + x.b;

```

Restriction on Adding New Fields After First Use

You cannot add fields to a structure after you perform the following operations on the structure:

- Reading from the structure
- Indexing into the structure array
- Passing the structure to a function

For example, consider this code:

```

...
x.c = 10; % Defines structure and creates field c
y = x; % Reads from structure
x.d = 20; % Generates an error
...

```

In this example, the attempt to add a new field `d` after reading from structure `x` generates an error.

This restriction extends across the structure hierarchy. For example, you cannot add a field to a structure after operating on one of its fields or nested structures, as in this example:

```

function y = fcn(u) %#codegen

```

```
x.c = 10;  
y = x.c;  
x.d = 20; % Generates an error
```

In this example, the attempt to add a new field `d` to structure `x` after reading from the structure's field `c` generates an error.

Define Arrays of Structures for Code Generation

In this section...

“Ensuring Consistency of Fields” on page 24-7

“Using repmat to Define an Array of Structures with Consistent Field Properties” on page 24-7

“Defining an Array of Structures Using Concatenation” on page 24-8

Ensuring Consistency of Fields

When you create an array of MATLAB structures with the intent of generating code, you must be sure that each structure field in the array has the same size, type, and complexity.

Once you have created the array of structures, you can make the structure fields variable-size using `coder. varsizes`. For more information, see “Declare a variable-size structure field.”.

Using repmat to Define an Array of Structures with Consistent Field Properties

You can create an array of structures from a scalar structure by using the MATLAB `repmat` function, which replicates and tiles an existing scalar structure:

- 1 Create a scalar structure, as described in “Define Scalar Structures for Code Generation” on page 24-4.
- 2 Call `repmat`, passing the scalar structure and the dimensions of the array.
- 3 Assign values to each structure using standard array indexing and structure dot notation.

For example, the following code creates `X`, a 1-by-3 array of scalar structures. Each element of the array is defined by the structure `s`, which has two fields, `a` and `b`:

```
...  
s.a = 0;  
s.b = 0;  
X = repmat(s,1,3);  
X(1).a = 1;
```

```
X(2).a = 2;  
X(3).a = 3;  
X(1).b = 4;  
X(2).b = 5;  
X(3).b = 6;  
...
```

Defining an Array of Structures Using Concatenation

To create a small array of structures, you can use the concatenation operator, square brackets (`[]`), to join one or more structures into an array (see “Concatenating Matrices”). For code generation, the structures that you concatenate must have the same size, class, and complexity.

For example, the following code uses concatenation and a local function to create the elements of a 1-by-3 structure array:

```
...  
W = [ sab(1,2) sab(2,3) sab(4,5) ];  
  
function s = sab(a,b)  
    s.a = a;  
    s.b = b;  
...
```

Make Structures Persistent

To make structures persist, you define them to be persistent variables and initialize them with the `isempty` statement, as described in “Define and Initialize Persistent Variables” on page 19-10.

For example, the following function defines structure `X` to be persistent and initializes its fields `a` and `b`:

```
function f(u) %#codegen
persistent X

if isempty(X)
    X.a = 1;
    X.b = 2;
end
```

Index Substructures and Fields

Use these guidelines when indexing substructures and fields for code generation:

Reference substructure field values individually using dot notation

For example, the following MATLAB code uses dot notation to index fields and substructures:

```

...
substruct1.a1 = 15.2;
substruct1.a2 = int8([1 2;3 4]);

mystruct = struct('ele1',20.5,'ele2',single(100),
                 'ele3',substruct1);

substruct2 = mystruct;
substruct2.ele3.a2 = 2*(substruct1.a2);
...

```

The generated code indexes elements of the structures in this example by resolving symbols as follows:

Dot Notation	Symbol Resolution
substruct1.a1	Field a1 of local structure substruct1
substruct2.ele3.a1	Value of field a1 of field ele3, a substructure of local structure substruct2
substruct2.ele3.a2(1,1)	Value in row 1, column 1 of field a2 of field ele3, a substructure of local structure substruct2

Reference field values individually in structure arrays

To reference the value of a field in a structure array, you must index into the array to the structure of interest and then reference that structure's field individually using dot notation, as in this example:

```

...
y = X(1).a % Extracts the value of field a
           % of the first structure in array X
...

```


To reference all the values of a particular field for each structure in an array, use this notation in a `for` loop, as in this example:

```
...  
s.a = 0;  
s.b = 0;  
X = repmat(s,1,5);  
for i = 1:5  
    X(i).a = i;  
    X(i).b = i+1;  
end
```

This example uses the `repmat` function to define an array of structures, each with two fields `a` and `b` as defined by `s`. See “Define Arrays of Structures for Code Generation” on page 24-7 for more information.

Do not reference fields dynamically

You cannot reference fields in a structure by using dynamic names, which express the field as a variable expression that MATLAB evaluates at run time (see “Generate Field Names from Variables”).

Assign Values to Structures and Fields

When assigning values to a structure, substructure, or field for code generation, use these guidelines:

Field properties must be consistent across structure-to-structure assignments

If:	Then:
Assigning one structure to another structure.	Define each structure with the same number, type, and size of fields.
Assigning one structure to a substructure of a different structure and vice versa.	Define the structure with the same number, type, and size of fields as the substructure.
Assigning an element of one structure to an element of another structure.	The elements must have the same type and size.

For structures with constant fields, do not assign field values inside control flow constructs

In the following code, the code generation software recognizes that the structure fields `s.a` and `s.b` are constants.

```
function y = mystruct()
s.a = 3;
s.b = 5;
y = zeros(s.a,s.b);
```

If a field of a structure is assigned inside a control flow construct, the code generation software does not recognize that `s.a` and `s.b` are constant. Consider the following code:

```
function y = mystruct(x)
s.a = 3;
if x > 1
    s.b = 4;
else
    s.b = 5;
end
y = zeros(s.a,s.b);
```

If variable-sizing is enabled, `y` is treated as a variable-size array. If variable-sizing is disabled, `y`, the code generation software reports an error.

Do not assign mxArray's to structures

You cannot assign mxArray's to structure elements; convert mxArray's to known types before code generation (see "Working with mxArray's" on page 15-17).

Pass Large Structures as Input Parameters

If you generate a MEX function for a MATLAB function that takes a large structure as an input parameter, for example, a structure containing fields that are matrices, the MEX function might fail to load. This load failure occurs because, when you generate a MEX function from a MATLAB function that has input parameters, the code generation software allocates memory for these input parameters on the stack. To avoid this issue, pass the structure by reference to the MATLAB function. For example, if the original function signature is:

```
y = foo(a, S)
```

where **S** is the structure input, rewrite the function to:

```
[y, S] = foo(a, S)
```

Functions, Classes, and System Objects Supported for Code Generation

- “Functions and Objects Supported for C and C++ Code Generation — Alphabetical List” on page 25-2
- “Functions and Objects Supported for C and C++ Code Generation — Category List” on page 25-147

Functions and Objects Supported for C and C++ Code Generation — Alphabetical List

You can generate efficient C and C++ code for a subset of MATLAB built-in functions and toolbox functions, classes, and System objects that you call from MATLAB code. These function, classes, and System objects appear in alphabetical order in the following table.

To find supported functions, classes, and System objects by MATLAB category or toolbox, see “Functions and Objects Supported for C and C++ Code Generation — Category List”.

Note: For more information on code generation for fixed-point algorithms, refer to “Code Acceleration and Code Generation from MATLAB”.

Name	Product	Remarks and Limitations
abs	MATLAB	—
abs	Fixed-Point Designer	—
accumneg	Fixed-Point Designer	—
accumpos	Fixed-Point Designer	—
acos	MATLAB	<ul style="list-style-type: none"> Generates an error during simulation and returns NaN in generated code when the input value x is real, but the output should be complex. To get the complex result, make the input value complex by passing in <code>complex(x)</code>.
acosd	MATLAB	—
acosh	MATLAB	<ul style="list-style-type: none"> Generates an error during simulation and returns NaN in generated code when the input value x is real, but the output should be complex. To get the complex result, make the input value complex by passing in <code>complex(x)</code>.

Name	Product	Remarks and Limitations
acot	MATLAB	—
acotd	MATLAB	—
acoth	MATLAB	—
acsc	MATLAB	—
acscd	MATLAB	—
acsch	MATLAB	—
add	Fixed-Point Designer	Code generation in MATLAB does not support the syntax <code>F.add(a,b)</code> . You must use the syntax <code>add(F,a,b)</code> .
affine2d	Image Processing Toolbox	When generating code, you can only specify single objects—arrays of objects are not supported.
aicctest	Phased Array System Toolbox	Does not support variable-size inputs.
albersheim	Phased Array System Toolbox	Does not support variable-size inputs.
all	MATLAB	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
all	Fixed-Point Designer	—
ambgfun	Phased Array System Toolbox	Does not support variable-size inputs.
and	MATLAB	—
any	MATLAB	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
any	Fixed-Point Designer	—
aperture2gain	Phased Array System Toolbox	Does not support variable-size inputs.
asec	MATLAB	—
asecd	MATLAB	—

Name	Product	Remarks and Limitations
asech	MATLAB	—
asin	MATLAB	<ul style="list-style-type: none"> Generates an error during simulation and returns NaN in generated code when the input value x is real, but the output should be complex. To get the complex result, make the input value complex by passing in <code>complex(x)</code>.
asind	MATLAB	—
asinh	MATLAB	—
assert	MATLAB	<ul style="list-style-type: none"> Generates specified error messages at compile time only if all input arguments are constants or depend on constants. Otherwise, generates specified error messages at run time. For standalone code generation, excluded from the generated code. See “Rules for Using assert Function”.
assignDetections-ToTracks	Computer Vision System Toolbox	Compile-time constant input: No restriction. Supports MATLAB Function block: Yes
atan	MATLAB	—
atan2	MATLAB	—
atan2	Fixed-Point Designer	—
atan2d	MATLAB	—
atand	MATLAB	—
atanh	MATLAB	<ul style="list-style-type: none"> Generates an error during simulation and returns NaN in generated code when the input value x is real, but the output should be complex. To get the complex result, make the input value complex by passing in <code>complex(x)</code>.
az2broadside	Phased Array System Toolbox	Does not support variable-size inputs.

Name	Product	Remarks and Limitations
azel2phitheta	Phased Array System Toolbox	Does not support variable-size inputs.
azel2phithetapat	Phased Array System Toolbox	Does not support variable-size inputs.
azel2uv	Phased Array System Toolbox	Does not support variable-size inputs.
azel2uvpat	Phased Array System Toolbox	Does not support variable-size inputs.
azelaxes	Phased Array System Toolbox	Does not support variable-size inputs.
bandwidth	MATLAB	—
barthannwin	Signal Processing Toolbox	Window length must be a constant. Expressions or variables are allowed if their values do not change. Specifying constants To specify a constant input for <code>fiaccl</code> , use <code>coder.Constant</code> . For more information, see “Specify Constant Inputs at the Command Line”.
bartlett	Signal Processing Toolbox	Window length must be a constant. Expressions or variables are allowed if their values do not change. Specifying constants To specify a constant input for <code>fiaccl</code> , use <code>coder.Constant</code> . For more information, see “Specify Constant Inputs at the Command Line”.
bboxOverlapRatio	Computer Vision System Toolbox	Compile-time constant input: No restriction Supports MATLAB Function block: No
beat2range	Phased Array System Toolbox	Does not support variable-size inputs.

Name	Product	Remarks and Limitations
besselap	Signal Processing Toolbox	<p>Filter order must be a constant. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
beta	MATLAB	—
betacdf	Statistics and Machine Learning Toolbox	—
betafit	Statistics and Machine Learning Toolbox	—
betainc	MATLAB	Always returns a complex result.
betaincinv	MATLAB	Always returns a complex result.
betainv	Statistics and Machine Learning Toolbox	—
betalike	Statistics and Machine Learning Toolbox	—
betaln	MATLAB	—
betapdf	Statistics and Machine Learning Toolbox	—
betarnd	Statistics and Machine Learning Toolbox	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.

Name	Product	Remarks and Limitations
betastat	Statistics and Machine Learning Toolbox	—
bi2de	Communications System Toolbox	—
billingsleyicm	Phased Array System Toolbox	Does not support variable-size inputs.
bin2dec	MATLAB	<ul style="list-style-type: none"> • Does not match MATLAB when the input is empty.
binaryFeatures	Computer Vision System Toolbox	—
binocdf	Statistics and Machine Learning Toolbox	—
binoinv	Statistics and Machine Learning Toolbox	—
binopdf	Statistics and Machine Learning Toolbox	—
binornd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
binostat	Statistics and Machine Learning Toolbox	—
bitand	MATLAB	—
bitand	Fixed-Point Designer	<ul style="list-style-type: none"> • Not supported for slope-bias scaled <code>fi</code> objects.

Name	Product	Remarks and Limitations
bitandreduce	Fixed-Point Designer	—
bitcmp	MATLAB	—
bitcmp	Fixed-Point Designer	—
bitconcat	Fixed-Point Designer	—
bitget	MATLAB	—
bitget	Fixed-Point Designer	—
bitor	MATLAB	—
bitor	Fixed-Point Designer	<ul style="list-style-type: none"> • Not supported for slope-bias scaled <code>fi</code> objects.
bitorreduce	Fixed-Point Designer	—
bitreplicate	Fixed-Point Designer	—
bitrevorder	Signal Processing Toolbox	—
bitrol	Fixed-Point Designer	—
bitror	Fixed-Point Designer	—
bitset	MATLAB	—
bitset	Fixed-Point Designer	—
bitshift	MATLAB	—
bitshift	Fixed-Point Designer	—
bitsliceget	Fixed-Point Designer	—

Name	Product	Remarks and Limitations
bitsll	Fixed-Point Designer	<ul style="list-style-type: none"> Generated code may not handle out of range shifting.
bitsra	Fixed-Point Designer	<ul style="list-style-type: none"> Generated code may not handle out of range shifting.
bitsrl	Fixed-Point Designer	<ul style="list-style-type: none"> Generated code may not handle out of range shifting.
bitxor	MATLAB	—
bitxor	Fixed-Point Designer	<ul style="list-style-type: none"> Not supported for slope-bias scaled <code>fi</code> objects.
bitxorreduce	Fixed-Point Designer	—
blackman	Signal Processing Toolbox	<p>Window length must be a constant. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
blackmanharris	Signal Processing Toolbox	<p>Window length must be a constant. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
blanks	MATLAB	—
blkdiag	MATLAB	—

Name	Product	Remarks and Limitations
bohmanwin	Signal Processing Toolbox	<p>Window length must be a constant. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccl</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
break	MATLAB	—
BRISKPoints	Computer Vision System Toolbox	<p>Compile-time constant inputs: No restriction</p> <p>Supports MATLAB Function block: No</p> <p>To index locations with this object, use the syntax: <code>points.Location(idx,:)</code>, for <code>points</code> object. See <code>visionRecoverTransformCodeGeneration_kernel.m</code>, which is used in the “Introduction to Code Generation with Feature Matching and Registration” example.</p>
broadside2az	Phased Array System Toolbox	Does not support variable-size inputs.
bsxfun	MATLAB	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
buttap	Signal Processing Toolbox	<p>Filter order must be a constant. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccl</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>

Name	Product	Remarks and Limitations
butter	Signal Processing Toolbox	Filter coefficients must be constants. Expressions or variables are allowed if their values do not change. Specifying constants To specify a constant input for <code>fiaccl</code> , use <code>coder.Constant</code> . For more information, see “Specify Constant Inputs at the Command Line”.
buttord	Signal Processing Toolbox	All inputs must be constants. Expressions or variables are allowed if their values do not change. Specifying constants To specify a constant input for <code>fiaccl</code> , use <code>coder.Constant</code> . For more information, see “Specify Constant Inputs at the Command Line”.
bwdist	Image Processing Toolbox	The <code>method</code> argument must be a compile-time constant. Input images must have fewer than 2^{32} pixels. Generated code for this function uses a precompiled, platform-specific shared library.
bweuler	Image Processing Toolbox	If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.
bwlabel	Image Processing Toolbox	When generating code, the parameter <code>n</code> must be a compile-time constant.
bwlookup	Image Processing Toolbox	For best results, specify an input image of class <code>logical</code> . If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.

Name	Product	Remarks and Limitations
bwmorph	Image Processing Toolbox	<p>The text string specifying the operation must be a constant and, for best results, specify an input image of class <code>logical</code>.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
bwpack	Image Processing Toolbox	Generated code for this function uses a precompiled platform-specific shared library.
bwperim	Image Processing Toolbox	<p>Supports only 2-D images. Does not support any no-output-argument syntaxes. The connectivity matrix input argument, <code>conn</code>, must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
bwselect	Image Processing Toolbox	<p>Supports only the 3 and 4 input argument syntaxes: <code>BW2 = bwselect(BW,c,r)</code> and <code>BW2 = bwselect(BW,c,r,n)</code>. The optional fourth input argument, <code>n</code>, must be a compile-time constant. In addition, with code generation, <code>bwselect</code> only supports only the 1 and 2 output argument syntaxes: <code>BW2 = bwselect(___)</code> or <code>[BW2, idx] = bwselect(___)</code>.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
bwtraceboundary	Image Processing Toolbox	The <code>dir</code> , <code>fstep</code> , and <code>conn</code> arguments must be compile-time constants.
bwunpack	Image Processing Toolbox	Generated code for this function uses a precompiled platform-specific shared library.
ca2tf	DSP System Toolbox	All inputs must be constant. Expressions or variables are allowed if their values do not change.

Name	Product	Remarks and Limitations
cameraMatrix	Computer Vision System Toolbox	Supports MATLAB Function block: No
cameraParameters	Computer Vision System Toolbox	Supports MATLAB Function block: No
cart2pol	MATLAB	—
cart2sph	MATLAB	—
cart2sphvec	Phased Array System Toolbox	Does not support variable-size inputs.
cast	MATLAB	—
cat	MATLAB	<ul style="list-style-type: none"> • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
cbfweights	Phased Array System Toolbox	Does not support variable-size inputs.
cdf	Statistics and Machine Learning Toolbox	—
ceil	MATLAB	—
ceil	Fixed-Point Designer	—
cfirpm	Signal Processing Toolbox	<p>All inputs must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
char	MATLAB	—

Name	Product	Remarks and Limitations
cheb1ap	Signal Processing Toolbox	<p>All inputs must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
cheb1ord	Signal Processing Toolbox	<p>All inputs must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
cheb2ap	Signal Processing Toolbox	<p>All inputs must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
cheb2ord	Signal Processing Toolbox	<p>All inputs must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>

Name	Product	Remarks and Limitations
chebwin	Signal Processing Toolbox	<p>All inputs must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccl</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
cheby1	Signal Processing Toolbox	<p>All inputs must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccl</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
cheby2	Signal Processing Toolbox	<p>All inputs must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccl</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
chi2cdf	Statistics and Machine Learning Toolbox	—
chi2inv	Statistics and Machine Learning Toolbox	—
chi2pdf	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
chi2rnd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
chi2stat	Statistics and Machine Learning Toolbox	—
chol	MATLAB	—
circpol2pol	Phased Array System Toolbox	Does not support variable-size inputs.
circshift	MATLAB	—
cl2tf	DSP System Toolbox	All inputs must be constant. Expressions or variables are allowed if their values do not change.
class	MATLAB	—
colon	MATLAB	<ul style="list-style-type: none"> • Does not accept complex inputs. • The input <i>i</i> cannot have a logical value. • Does not accept vector inputs. • Inputs must be constants. • Uses single-precision arithmetic to produce single-precision results.
comm.ACPR	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.AGC	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Algebraic-Deinterleaver	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.APPDecoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
comm.AWGNChannel	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.BarkerCode	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.BCHDecoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.BCHEncoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Binary-SymmetricChannel	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.BlockDeinterleaver	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.BlockInterleaver	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.BPSKDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.BPSKModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Carrier-Synchronizer	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.CCDF	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Constellation-Diagram	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Convolutional-Deinterleaver	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Convolutional-Encoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Convolutional-Interleaver	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.CPFSKDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
comm.CPFSKModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.CPMCarrier-PhaseSynchronizer	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.CPMDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.CPModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.CRCDetector	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.CRCGenerator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.DBPSKDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.DBPSKModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Descrambler	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Differential-Decoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Differential-Encoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.DiscreteTimeVCO	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.DPSKDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.DPSKModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.DQPSKDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.DQPSKModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
comm.ErrorRate	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.EVM	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.FMBroadcast-Demodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.FMBroadcast-Modulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.FMDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.FMModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.FSKDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.FSKModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.GeneralQAM-Demodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.GeneralQAM-Modulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.GeneralQAMTCM-Demodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.GeneralQAMTCM-Modulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.GMSKDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.GMSKModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.GMSKTiming-Synchronizer	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.GoldSequence	Communications System Toolbox	“System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
comm.HadamardCode	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.HDLCRCDetector	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.HDLCRCGenerator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.HDLRSDecoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.HDLRSEncoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Helical-Deinterleaver	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.HelicalInterleaver	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.IntegrateAnd-DumpFilter	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.IQImbalance-Compensator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.KasamiSequence	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.LDPCDecoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.LDPCEncoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.LTEMIMOChannel	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Matrix-Deinterleaver	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.MatrixHelical-ScanDeinterleaver	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.MatrixHelical-ScanInterLeaver	Communications System Toolbox	“System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
comm.MatrixInterleaver	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Memoryless-Nonlinearity	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.MER	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.MIMOChannel	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.MLSEEqualizer	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.MSKDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.MSKModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.MSKTiming-Synchronizer	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Multiplexed-Deinterleaver	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Multiplexed-Interleaver	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.OFDMDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.OFDMModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.OSTBCCombiner	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.OSTBCEncoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.OQPSKDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.OQPSKModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
comm.PAMDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.PAMModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.PhaseRequency-Offset	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.PhaseNoise	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.PNSequence	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.PSKCoarseFrequencyEstimator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.PSKCoarseFrequencyEstimator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.PSKDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.PSKModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.PSKTCMDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.PSKTCMModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.QAMCoarseFrequencyEstimator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.QPSKDemodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.QPSKModulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.RaisedCosine-ReceiveFilter	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.RaisedCosine-TransmitFilter	Communications System Toolbox	“System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
comm.RayleighChannel	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.RectangularQAM-Demodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Rectangular-Modulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.RectangularQAMTCM-Demodulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.RectangularQAMTCM-Modulator	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.RicianChannel	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.RSDecoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.RSEncoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.Scrambler	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.SphereDecoder	Communications System Toolbox	Communications System Toolbox
comm.SymbolSynchronizer	Communications System Toolbox	Communications System Toolbox
comm.ThermalNoise	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.TurboDecoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.TurboEncoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.ViterbiDecoder	Communications System Toolbox	“System Objects in MATLAB Code Generation”
comm.WalshCode	Communications System Toolbox	“System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
companion	MATLAB	—
complex	MATLAB	—
complex	Fixed-Point Designer	—
computer	MATLAB	<ul style="list-style-type: none"> • Information about the computer on which the code generation software is running. • Use only when the code generation target is S-function (Simulation) or MEX-function.
cond	MATLAB	—
conj	MATLAB	—
conj	Fixed-Point Designer	—
conndef	Image Processing Toolbox	Input arguments must be compile-time constants.
continue	MATLAB	—
conv	MATLAB	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”

Name	Product	Remarks and Limitations
conv	Fixed-Point Designer	<ul style="list-style-type: none"> • Variable-sized inputs are only supported when the <code>SumMode</code> property of the governing <code>fimath</code> is set to <code>Specify precision</code> or <code>Keep LSB</code>. • For variable-sized signals, you may see different results between MATLAB and the generated code. <ul style="list-style-type: none"> • In generated code, the output for variable-sized signals is computed using the <code>SumMode</code> property of the governing <code>fimath</code>. • In MATLAB, the output for variable-sized signals is computed using the <code>SumMode</code> property of the governing <code>fimath</code> when both inputs are nonscalar. However, if either input is a scalar, MATLAB computes the output using the <code>ProductMode</code> of the governing <code>fimath</code>.
conv2	MATLAB	—
convergent	Fixed-Point Designer	—
convn	MATLAB	—
cordicabs	Fixed-Point Designer	<ul style="list-style-type: none"> • Variable-size signals are not supported.
cordicangle	Fixed-Point Designer	<ul style="list-style-type: none"> • Variable-size signals are not supported.
cordicatan2	Fixed-Point Designer	<ul style="list-style-type: none"> • Variable-size signals are not supported.
cordiccart2pol	Fixed-Point Designer	<ul style="list-style-type: none"> • Variable-size signals are not supported.
cordicexp	Fixed-Point Designer	<ul style="list-style-type: none"> • Variable-size signals are not supported.

Name	Product	Remarks and Limitations
cordiccos	Fixed-Point Designer	<ul style="list-style-type: none"> Variable-size signals are not supported.
cordicpol2cart	Fixed-Point Designer	<ul style="list-style-type: none"> Variable-size signals are not supported.
cordicrotate	Fixed-Point Designer	<ul style="list-style-type: none"> Variable-size signals are not supported.
cordicsin	Fixed-Point Designer	<ul style="list-style-type: none"> Variable-size signals are not supported.
cordicsincos	Fixed-Point Designer	<ul style="list-style-type: none"> Variable-size signals are not supported.
cornerPoints	Computer Vision System Toolbox	<p>Compile-time constant input: No restriction Supports MATLAB Function block: No To index locations with this object, use the syntax: <code>points.Location(idx, :)</code>, for <code>points</code> object. See <code>visionRecovertransformCodeGeneration_kernel.m</code>, which is used in the “Introduction to Code Generation with Feature Matching and Registration” example.</p>
corrcoef	MATLAB	<ul style="list-style-type: none"> Row-vector input is only supported when the first two inputs are vectors and nonscalar.
cos	MATLAB	—
cos	Fixed-Point Designer	—
cosd	MATLAB	—
cosh	MATLAB	—
cot	MATLAB	—
cotd	MATLAB	<ul style="list-style-type: none"> In some cases, returns <code>-Inf</code> when MATLAB returns <code>Inf</code>. In some cases, returns <code>Inf</code> when MATLAB returns <code>-Inf</code>.
coth	MATLAB	—

Name	Product	Remarks and Limitations
cov	MATLAB	<ul style="list-style-type: none"> • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” • Does not support the <code>nanflag</code> argument.
cross	MATLAB	<ul style="list-style-type: none"> • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
csc	MATLAB	—
cscd	MATLAB	<ul style="list-style-type: none"> • In some cases, returns <code>-Inf</code> when MATLAB returns <code>Inf</code>. • In some cases, returns <code>Inf</code> when MATLAB returns <code>-Inf</code>.
csch	MATLAB	—
ctranspose	MATLAB	—
ctranspose	Fixed-Point Designer	—
cummin	MATLAB	—
cummax	MATLAB	—
cumprod	MATLAB	Does not support logical inputs. Cast input to <code>double</code> first.
cumsum	MATLAB	Does not support logical inputs. Cast input to <code>double</code> first.
cumtrapz	MATLAB	—
db2pow	Signal Processing Toolbox	—

Name	Product	Remarks and Limitations
dct	Signal Processing Toolbox	<ul style="list-style-type: none"> • Code generation for this function requires the DSP System Toolbox software. • Length of transform dimension must be a power of two. If specified, the pad or truncation value must be constant. Expressions or variables are allowed if their values do not change. <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
de2bi	Communications System Toolbox	—
deal	MATLAB	—
deblank	MATLAB	<ul style="list-style-type: none"> • Supports only inputs from the <code>char</code> class. • Input values must be in the range 0-127.
dec2bin	MATLAB	<ul style="list-style-type: none"> • If input <code>d</code> is <code>double</code>, <code>d</code> must be less than 2^{52}. • If input <code>d</code> is <code>single</code>, <code>d</code> must be less than 2^{23}. • Unless you specify input <code>n</code> to be constant and <code>n</code> is large enough that the output has a fixed number of columns regardless of the input values, this function requires variable-sizing support. Without variable-sizing support, <code>n</code> must be at least 52 for <code>double</code>, 23 for <code>single</code>, 16 for <code>char</code>, 32 for <code>int32</code>, 16 for <code>int16</code>, and so on.

Name	Product	Remarks and Limitations
dec2hex	MATLAB	<ul style="list-style-type: none"> • If input <code>d</code> is <code>double</code>, <code>d</code> must be less than 2^{52}. • If input <code>d</code> is <code>single</code>, <code>d</code> must be less than 2^{23}. • Unless you specify input <code>n</code> to be constant and <code>n</code> is large enough that the output has a fixed number of columns regardless of the input values, this function requires variable-sizing support. Without variable-sizing support, <code>n</code> must be at least 13 for <code>double</code>, 6 for <code>single</code>, 4 for <code>char</code>, 8 for <code>int32</code>, 4 for <code>int16</code>, and so on.
dechirp	Phased Array System Toolbox	Does not support variable-size inputs.
deconv	MATLAB	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
del2	MATLAB	—
delayseq	Phased Array System Toolbox	Does not support variable-size inputs.
depressionang	Phased Array System Toolbox	Does not support variable-size inputs.
det	MATLAB	—
detectBRISKFeatures	Computer Vision System Toolbox	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
detectFASTFeatures	Computer Vision System Toolbox	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
detectHarrisFeatures	Computer Vision System Toolbox	Compile-time constant input: <code>FilterSize</code> Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.

Name	Product	Remarks and Limitations
detectMinEigenFeatures	Computer Vision System Toolbox	Compile-time constant input: FilterSize Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
detectMSERFeatures	Computer Vision System Toolbox	Compile-time constant input: No restriction Supports MATLAB Function block: No For code generation, the function outputs regions.PixelList as an array. The region sizes are defined in regions.Lengths.
detectSURFFeatures	Computer Vision System Toolbox	Compile-time constant input: No restrictions Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
detrend	MATLAB	<ul style="list-style-type: none"> • If supplied and not empty, the input argument <code>bp</code> must satisfy the following requirements: <ul style="list-style-type: none"> • Be real. • Be sorted in ascending order. • Restrict elements to integers in the interval $[1, n-2]$. n is the number of elements in a column of input argument X, or the number of elements in X when X is a row vector. • Contain all unique values. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”

Name	Product	Remarks and Limitations
diag	MATLAB	<ul style="list-style-type: none"> • If supplied, the argument representing the order of the diagonal matrix must be a real and scalar integer value. • For variable-size inputs that are variable-length vectors (1-by-: or :-by-1), diag: <ul style="list-style-type: none"> • Treats the input as a vector input. • Returns a matrix with the given vector along the specified diagonal. • For variable-size inputs that are not variable-length vectors, diag: <ul style="list-style-type: none"> • Treats the input as a matrix. • Does not support inputs that are vectors at run time. • Returns a variable-length vector. <p>If the input is variable-size (:m-by-:n) and has shape 0-by-0 at run time, the output is 0-by-1 not 0-by-0. However, if the input is a constant size 0-by-0, the output is [].</p> • For variable-size inputs that are not variable-length vectors (1-by-: or :-by-1), diag treats the input as a matrix from which to extract a diagonal vector. This behavior occurs even if the input array is a vector at run time. To force diag to build a matrix from variable-size inputs that are not 1-by-: or :-by-1, use: <ul style="list-style-type: none"> • <code>diag(x(:))</code> instead of <code>diag(x)</code> • <code>diag(x(:),k)</code> instead of <code>diag(x,k)</code> <p>“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”</p>
diag	Fixed-Point Designer	<ul style="list-style-type: none"> • If supplied, the index, <i>k</i>, must be a real and scalar integer value that is not a fi object.

Name	Product	Remarks and Limitations
diff	MATLAB	<ul style="list-style-type: none"> • If supplied, the arguments representing the number of times to apply <code>diff</code> and the dimension along which to calculate the difference must be constants. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
disparity	Computer Vision System Toolbox	Compile-time constant input: Method. Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
divide	Fixed-Point Designer	<ul style="list-style-type: none"> • Any non-<code>fi</code> input must be constant. Its value must be known at compile time so that it can be cast to a <code>fi</code> object. • Complex and imaginary divisors are not supported. • The syntax <code>T.divide(a,b)</code> is not supported.
dop2speed	Phased Array System Toolbox	Does not support variable-size inputs.
dopsteeringvec	Phased Array System Toolbox	Does not support variable-size inputs.
dot	MATLAB	—
double	MATLAB	—
double	Fixed-Point Designer	—
downsample	Signal Processing Toolbox	—

Name	Product	Remarks and Limitations
dpss	Signal Processing Toolbox	All inputs must be constants. Expressions or variables are allowed if their values do not change. Specifying constants To specify a constant input for <code>fiaccel</code> , use <code>coder.Constant</code> . For more information, see “Specify Constant Inputs at the Command Line”.
dsp.AdaptiveLattice-Filter	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.AffineProjection-Filter	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.AllpoleFilter	DSP System Toolbox	<ul style="list-style-type: none"> • “System Objects in MATLAB Code Generation” • Only the Denominator property is tunable for code generation.
dsp.AnalyticSignal	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.ArrayPlot	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.ArrayVectorAdder	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.ArrayVectorDivider	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.ArrayVector-Multiplier	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.ArrayVector-Subtractor	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.AudioFileReader	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.AudioRecorder	DSP System Toolbox	“System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
<code>dsp.AudioFileWriter</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”
<code>dsp.AudioPlayer</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”
<code>dsp.Autocorrelator</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”
<code>dsp.BiquadFilter</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”
<code>dsp.BurgAREstimator</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”
<code>dsp.BurgSpectrum-Estimator</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”
<code>dsp.CepstralToLPC</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”
<code>dsp.CICCompensation-Decimator</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”
<code>dsp.CICCompensation-Interpolator</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”
<code>dsp.CICDecimator</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”
<code>dsp.CICInterpolator</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”
<code>dsp.Convolver</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”
<code>dsp.Counter</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”
<code>dsp.Crosscorrelator</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”
<code>dsp.CrossSpectrum-Estimator</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”
<code>dsp.CumulativeProduct</code>	DSP System Toolbox	“System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
dsp.CumulativeSum	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.DCBlocker	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.DCT	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.Delay	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.DelayLine	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.DigitalDown-Converter	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.DigitalUpConverter	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.DigitalFilter	DSP System Toolbox	<ul style="list-style-type: none"> • “System Objects in MATLAB Code Generation” • The <code>SOSMatrix</code> and <code>Scalevalues</code> properties are not supported for code generation.
dsp.FarrowRateConverter	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.FastTransversal-Filter	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.FFT	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.FilterCascade	DSP System Toolbox	<ul style="list-style-type: none"> • You cannot generate code directly from <code>dsp.FilterCascade</code>. You can use the <code>generateFilteringCode</code> method to generate a MATLAB function. You can generate C/C++ code from this MATLAB function. <p>“System Objects in MATLAB Code Generation”</p>

Name	Product	Remarks and Limitations
dsp.FilteredXLMSFilter	DSP System Toolbox	"System Objects in MATLAB Code Generation"
dsp.FIRDecimator	DSP System Toolbox	"System Objects in MATLAB Code Generation"
dsp.FIRFilter	DSP System Toolbox	<ul style="list-style-type: none"> • "System Objects in MATLAB Code Generation" • Only the Numerator property is tunable for code generation.
dsp.FIRHalfband-Decimator	DSP System Toolbox	"System Objects in MATLAB Code Generation"
dsp.FIRHalfband-Interpolator	DSP System Toolbox	"System Objects in MATLAB Code Generation"
dsp.FIRInterpolator	DSP System Toolbox	"System Objects in MATLAB Code Generation"
dsp.FIRRateConverter	DSP System Toolbox	"System Objects in MATLAB Code Generation"
dsp.FrequencyDomain-AdaptiveFilter	DSP System Toolbox	"System Objects in MATLAB Code Generation"
dsp.HighpassFilter	DSP System Toolbox	"System Objects in MATLAB Code Generation"
dsp.Histogram	DSP System Toolbox	<ul style="list-style-type: none"> • This object has no tunable properties for code generation. • "System Objects in MATLAB Code Generation"
dsp.IDCT	DSP System Toolbox	"System Objects in MATLAB Code Generation"
dsp.IFFT	DSP System Toolbox	"System Objects in MATLAB Code Generation"
dsp.IIRFilter	DSP System Toolbox	<ul style="list-style-type: none"> • Only the Numerator and Denominator properties are tunable for code generation. • "System Objects in MATLAB Code Generation"

Name	Product	Remarks and Limitations
dsp.Interpolator	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.KalmanFilter	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.LDLFactor	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.LevinsonSolver	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.LMSFilter	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.LowerTriangular-Solver	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.LowpassFilter	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.LPCToAuto-correlation	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.LPCToCepstral	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.LPCToLSF	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.LPCToLSP	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.LPCToRC	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.LSFToLPC	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.LSPToLPC	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.LUFactor	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.Maximum	DSP System Toolbox	“System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
dsp.Mean	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.Median	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.Minimum	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.NCO	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.Normalizer	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.PeakFinder	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.PeakToPeak	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.PeakToRMS	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.PhaseExtractor	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.PhaseUnwrapper	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.RCToAutocorrelation	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.RCToLPC	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.RMS	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.RLSFilter	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.SampleRateConverter	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.ScalarQuantizer-Decoder	DSP System Toolbox	“System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
dsp.ScalarQuantizer-Encoder	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.SignalSource	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.SineWave	DSP System Toolbox	<ul style="list-style-type: none"> • This object has no tunable properties for code generation. • “System Objects in MATLAB Code Generation”
dsp.SpectrumAnalyzer	DSP System Toolbox	This System object does not generate code. It is automatically declared as an <i>extrinsic</i> variable using the <code>coder.extrinsic</code> function.
dsp.SpectrumEstimator	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.StandardDeviation	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.StateLevels	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.TimeScope	DSP System Toolbox	This System object does not generate code. It is automatically declared as an <i>extrinsic</i> variable using the <code>coder.extrinsic</code> function.
dsp.TransferFunction-Estimator	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.UDPReceiver	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.UDPSender	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.UpperTriangular-Solver	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.VariableFraction-Delay	DSP System Toolbox	“System Objects in MATLAB Code Generation”
dsp.VariableInteger-Delay	DSP System Toolbox	“System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
dsp.Variance	DSP System Toolbox	"System Objects in MATLAB Code Generation"
dsp.VectorQuantizer-Decoder	DSP System Toolbox	"System Objects in MATLAB Code Generation"
dsp.VectorQuantizer-Encoder	DSP System Toolbox	"System Objects in MATLAB Code Generation"
dsp.Window	DSP System Toolbox	<ul style="list-style-type: none"> • This object has no tunable properties for code generation. • "System Objects in MATLAB Code Generation"
dsp.ZeroCrossing-Detector	DSP System Toolbox	"System Objects in MATLAB Code Generation"
edge	Image Processing Toolbox	<p>The <code>method</code>, <code>direction</code>, and <code>sigma</code> arguments must be a compile-time constants. In addition, nonprogrammatic syntaxes are not supported. For example, the syntax <code>edge(im)</code>, where <code>edge</code> does not return a value but displays an image instead, is not supported.</p> <p>If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.</p>
effearthradius	Phased Array System Toolbox	Does not support variable-size inputs.

Name	Product	Remarks and Limitations
eig	MATLAB	<ul style="list-style-type: none"> • For code generation, QZ algorithm is used in all cases. MATLAB can use different algorithms for different inputs. Consequently, V might represent a different basis of eigenvectors. The eigenvalues in D might not be in the same order as in MATLAB. • With one input, $[V,D] = \text{eig}(A)$, the results are similar to those obtained using $[V,D] = \text{eig}(A, \text{eye}(\text{size}(A)), 'qz')$ in MATLAB, except that for code generation, the columns of V are normalized. • Options 'balance', and 'nobalance' are not supported for the standard eigenvalue problem. 'chol' is not supported for the symmetric generalized eigenvalue problem. • Outputs are of complex type. • Does not support the option to calculate left eigenvectors.
ellip	Signal Processing Toolbox	<p>Inputs must be constant. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>

Name	Product	Remarks and Limitations
ellipap	Signal Processing Toolbox	<p>All inputs must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
ellipke	MATLAB	—
ellipord	Signal Processing Toolbox	<p>All inputs must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
end	MATLAB	—
end	Fixed-Point Designer	—
epipolarLine	Computer Vision System Toolbox	<p>Compile-time constant input: No restrictions. Supports MATLAB Function block: Yes</p>
eps	MATLAB	—
eps	Fixed-Point Designer	<ul style="list-style-type: none"> • Supported for scalar fixed-point signals only. • Supported for scalar, vector, and matrix, <code>fi single</code> and <code>fi double</code> signals.
eq	MATLAB	—
eq	Fixed-Point Designer	Not supported for fixed-point signals with different biases.
erf	MATLAB	—
erfc	MATLAB	—
erfcinv	MATLAB	—

Name	Product	Remarks and Limitations
erfcx	MATLAB	—
erfinv	MATLAB	—
error	MATLAB	For standalone code generation, excluded from the generated code.
espritdoa	Phased Array System Toolbox	Does not support variable-size inputs.
estimateFundamental-Matrix	Computer Vision System Toolbox	Compile-time constant input: Method, OutputClass, DistanceType, and ReportRuntimeError. Supports MATLAB Function block: Yes
estimateGeometric-Transform	Computer Vision System Toolbox	Compile-time constant input: transformType Supports MATLAB Function block: No
estimateUncalibrated-Rectification	Computer Vision System Toolbox	Supports MATLAB Function block: Yes Only accepts input points as M -by-2 matrices for C code generation
extractFeatures	Computer Vision System Toolbox	Generates platform-dependent library: Yes for BRISK, FREAK, and SURF methods only. Compile-time constant input: Method Supports MATLAB Function block: Yes for Block method only. Generated code for this function uses a precompiled platform-specific shared library.
extractHOGFeatures	Computer Vision System Toolbox	Compile-time constant input: No Supports MATLAB Function block: No
extrinsics	Computer Vision System Toolbox	Supports MATLAB Function block: No
evcdf	Statistics and Machine Learning Toolbox	—
evinv	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
evpdf	Statistics and Machine Learning Toolbox	—
evrnd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
evstat	Statistics and Machine Learning Toolbox	—
exp	MATLAB	—
expcdf	Statistics and Machine Learning Toolbox	—
expint	MATLAB	—
expinv	Statistics and Machine Learning Toolbox	—
expm	MATLAB	—
expm1	MATLAB	—
exppdf	Statistics and Machine Learning Toolbox	—
exprnd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
expstat	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
extrinsics	Computer Vision System Toolbox	Supports MATLAB Function block: No
eye	MATLAB	classname must be a built-in MATLAB numeric type. Does not invoke the static eye method for other classes. For example, eye(m, n, 'myclass') does not invoke myclass.eye(m,n).
factor	MATLAB	<ul style="list-style-type: none"> • The maximum double precision input is 2³³. • The maximum single precision input is 2²⁵. • The input n cannot have type int64 or uint64.
factorial	MATLAB	—
false	MATLAB	<ul style="list-style-type: none"> • Dimensions must be real, nonnegative, integers.
fcdf	Statistics and Machine Learning Toolbox	—
fclose	MATLAB	—
feof	MATLAB	—
fft	MATLAB	<ul style="list-style-type: none"> • Length of input vector must be a power of 2. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
fft2	MATLAB	<ul style="list-style-type: none"> • Length of input matrix dimensions must each be a power of 2.
fftn	MATLAB	<ul style="list-style-type: none"> • Length of input matrix dimensions must each be a power of 2.
fftshift	MATLAB	—

Name	Product	Remarks and Limitations
fi	Fixed-Point Designer	<ul style="list-style-type: none"> • Use to create a fixed-point constant or variable. • The default constructor syntax without input arguments is not supported. • The rand <code>fi('PropertyName',PropertyValue...)</code> is not supported. To use property name/property value pairs, you must first specify the value <code>v</code> of the <code>fi</code> object as in <code>fi(v,'PropertyName',PropertyValue...)</code>. • If the input value is not known at compile time, you must provide complete <code>numericType</code> information. • All properties related to data type must be constant for code generation. • <code>numericType</code> object information must be available for non-fixed-point Simulink inputs.
filter	MATLAB	<ul style="list-style-type: none"> • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
filter	Fixed-Point Designer	<ul style="list-style-type: none"> • Variable-sized inputs are only supported when the <code>SumMode</code> property of the governing <code>fi</code> object is set to <code>Specify precision</code> or <code>Keep LSB</code>.
filter2	MATLAB	—
filtfilt	Signal Processing Toolbox	<p>Filter coefficients must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>

Name	Product	Remarks and Limitations
fmath	Fixed-Point Designer	<ul style="list-style-type: none"> • Fixed-point signals coming in to a MATLAB Function block from Simulink are assigned the <code>fmath</code> object defined in the MATLAB Function dialog in the Model Explorer. • Use to create <code>fmath</code> objects in generated code. • If the <code>ProductMode</code> property of the <code>fmath</code> object is set to anything other than <code>FullPrecision</code>, the <code>ProductWordLength</code> and <code>ProductFractionLength</code> properties must be constant. • If the <code>SumMode</code> property of the <code>fmath</code> object is set to anything other than <code>FullPrecision</code>, the <code>SumWordLength</code> and <code>SumFractionLength</code> properties must be constant.

Name	Product	Remarks and Limitations
find	MATLAB	<ul style="list-style-type: none"> • Issues an error if a variable-size input becomes a row vector at run time. <hr/> <p>Note: This limitation does not apply when the input is scalar or a variable-length row vector.</p> <hr/> <ul style="list-style-type: none"> • For variable-size inputs, the shape of empty outputs, 0-by-0, 0-by-1, or 1-by-0, depends on the upper bounds of the size of the input. The output might not match MATLAB when the input array is a scalar or [] at run time. If the input is a variable-length row vector, the size of an empty output is 1-by-0, otherwise it is 0-by-1. • Always returns a variable-length vector. Even when you provide the output vector k, the output cannot be fixed-size because the output can contain fewer than k elements. For example, <code>find(x,1)</code> returns a variable-length vector with 1 or 0 elements.
findpeaks	Signal Processing Toolbox	—
finv	Statistics and Machine Learning Toolbox	—
fir1	Signal Processing Toolbox	<p>All inputs must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>

Name	Product	Remarks and Limitations
fir2	Signal Processing Toolbox	<p>All inputs must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
firceqrip	DSP System Toolbox	<p>All inputs must be constant. Expressions or variables are allowed if their values do not change.</p>
fircls	Signal Processing Toolbox	<p>All inputs must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
fircls1	Signal Processing Toolbox	<p>All inputs must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
fireqint	DSP System Toolbox	<p>All inputs must be constant. Expressions or variables are allowed if their values do not change.</p>

Name	Product	Remarks and Limitations
firgr	DSP System Toolbox	<ul style="list-style-type: none"> • All inputs must be constant. Expressions or variables are allowed if their values do not change. • Does not support syntaxes that have cell array input.
firhalfband	DSP System Toolbox	All inputs must be constant. Expressions or variables are allowed if their values do not change.
firlpnorm	DSP System Toolbox	<ul style="list-style-type: none"> • All inputs must be constant. Expressions or variables are allowed if their values do not change. • Does not support syntaxes that have cell array input.
firls	Signal Processing Toolbox	<p>All inputs must be constants. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
firminphase	DSP System Toolbox	All inputs must be constant. Expressions or variables are allowed if their values do not change.
firnyquist	DSP System Toolbox	All inputs must be constant. Expressions or variables are allowed if their values do not change.
firpr2chfb	DSP System Toolbox	All inputs must be constant. Expressions or variables are allowed if their values do not change.

Name	Product	Remarks and Limitations
firpm	Signal Processing Toolbox	All inputs must be constants. Expressions or variables are allowed if their values do not change. Specifying constants To specify a constant input for <code>fiaccl</code> , use <code>coder.Constant</code> . For more information, see “Specify Constant Inputs at the Command Line”.
firpmord	Signal Processing Toolbox	All inputs must be constants. Expressions or variables are allowed if their values do not change. Specifying constants To specify a constant input for <code>fiaccl</code> , use <code>coder.Constant</code> . For more information, see “Specify Constant Inputs at the Command Line”.
fitgeotrans	Image Processing Toolbox	The <code>transformtype</code> argument must be a compile-time constant. The function supports the following transformation types: 'nonreflectivesimilarity', 'similarity', 'affine', or 'projective'.
fix	MATLAB	—
fix	Fixed-Point Designer	—
fixed.Quantizer	Fixed-Point Designer	—
flattopwin	Signal Processing Toolbox	All inputs must be constants. Expressions or variables are allowed if their values do not change. Specifying constants To specify a constant input for <code>fiaccl</code> , use <code>coder.Constant</code> . For more information, see “Specify Constant Inputs at the Command Line”.

Name	Product	Remarks and Limitations
flintmax	MATLAB	—
flip	MATLAB	—
flip	Fixed-Point Designer	The dimensions argument must be a built-in type; it cannot be a <code>fi</code> object.
flipdim	MATLAB	Note: <code>flipdim</code> will be removed in a future release. Use <code>flip</code> instead.
fliplr	MATLAB	—
fliplr	Fixed-Point Designer	—
flipud	MATLAB	—
flipud	Fixed-Point Designer	—
floor	MATLAB	—
floor	Fixed-Point Designer	—
fminsearch	MATLAB	<ul style="list-style-type: none"> • Ignores the <code>Display</code> option. Does not print status information during execution. Test the <code>exitflag</code> output for the exit condition. • The output structure does not include the <code>algorithm</code> or <code>message</code> fields. • Ignores the <code>OutputFcn</code> and <code>PlotFcns</code> options.

Name	Product	Remarks and Limitations
fopen	MATLAB	<ul style="list-style-type: none"> • Does not support: <ul style="list-style-type: none"> • machineformat, encoding, or fileID inputs • message output • fopen('all') • If you disable extrinsic calls, you cannot return fileIDs created with fopen to MATLAB or extrinsic functions. You can use such fileIDs only internally. • When generating C/C++ executables, static libraries, or dynamic libraries, you can open up to 20 files. • The generated code does not report errors from invalid file identifiers. Write your own file open error handling in your MATLAB code. Test whether fopen returns -1, which indicates that the file open failed. For example: <pre style="margin-left: 20px;"> ... fid = fopen(filename, 'r'); if fid == -1 % fopen failed else % fopen successful, okay to call fread A = fread(fid); ... </pre> • The behavior of the generated code for fread is compiler-dependent if you: <ol style="list-style-type: none"> 1 Open a file using fopen with a permission of a+. 2 Read the file using fread before calling an I/O function, such as fseek or

Name	Product	Remarks and Limitations
		frewind, that sets the file position indicator.
for	MATLAB	—
for	Fixed-Point Designer	—
fpdf	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
fprintf	MATLAB	<ul style="list-style-type: none"> • Does not support: <ul style="list-style-type: none"> • <code>b</code> and <code>t</code> subtypes on <code>%u</code>, <code>%o</code> <code>%x</code>, and <code>%X</code> formats. • <code>\$</code> flag for reusing input arguments. • printing arrays. • There is no automatic casting. Input arguments must match their format types for predictable results. • Escaped characters are limited to the decimal range of 0–127. • A call to <code>fprintf</code> with <code>fileID</code> equal to 1 or 2 becomes <code>printf</code> in the generated C/C++ code in the following cases: <ul style="list-style-type: none"> • The <code>fprintf</code> call is inside a <code>parfor</code> loop. • Extrinsic calls are disabled. • When the MATLAB behavior differs from the C compiler behavior, <code>fprintf</code> matches the C compiler behavior in the following cases: <ul style="list-style-type: none"> • The format specifier has a corresponding C format specifier, for example, <code>%e</code> or <code>%E</code>. • The <code>printf</code> call is inside a <code>parfor</code> loop. • Extrinsic calls are disabled. • When you call <code>fprintf</code> with the format specifier <code>%s</code>, do not put a null character in the middle of the input string. Use <code>fprintf(fid, '%c', char(0))</code> to write a null character. • When you call <code>fprintf</code> with an integer format specifier, the type of the integer argument must be a type that the target hardware can represent as a native C type. For example, if you call <code>fprintf('%d',</code>

Name	Product	Remarks and Limitations
		<code>int64(n)</code> , the target hardware must have a native C type that supports a 64-bit integer.

Name	Product	Remarks and Limitations
fread	MATLAB	<ul style="list-style-type: none"> • precision must be a constant. • The source and output that precision specifies cannot have values long, ulong, unsigned long, bitN, or ubitN. • You cannot use the machineformat input. • If the source or output that precision specifies is a C type, for example, int, the target and production sizes for that type must: <ul style="list-style-type: none"> • Match. • Map directly to a MATLAB type. • The source type that precision specifies must map directly to a C type on the target hardware. • If the fread call reads the entire file, all of the data must fit in the largest array available for code generation. • If sizeA is not constant or contains a nonfinite element, then dynamic memory allocation is required. • Treats a char value for source or output as a signed 8-bit integer. Use values between 0 and 127 only. • The generated code does not report file read errors. Write your own file read error handling in your MATLAB code. Test that the number of bytes read matches the number of bytes that you requested. For example: <pre style="margin-left: 20px;"> ... N = 100; [vals, numRead] = fread(fid, N, '*double'); if numRead ~= N % fewer elements read than expected </pre>

Name	Product	Remarks and Limitations
		<p style="text-align: center;">end ...</p>
freqspace	MATLAB	—
freqz	Signal Processing Toolbox	<p>When called with no output arguments, and without a semicolon at the end, <code>freqz</code> returns the complex frequency response of the input filter, evaluated at 512 points.</p> <p>If the semicolon is added, the function produces a plot of the magnitude and phase response of the filter.</p> <p>See “freqz With No Output Arguments”.</p>
frewind	MATLAB	—
frnd	Statistics and Machine Learning Toolbox	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
fspecial	Image Processing Toolbox	<p>Inputs must be compile-time constants. Expressions or variables are allowed if their values do not change.</p>
fsp1	Phased Array System Toolbox	Does not support variable-size inputs.
fstat	Statistics and Machine Learning Toolbox	—
full	MATLAB	—

Name	Product	Remarks and Limitations
fzero	MATLAB	<ul style="list-style-type: none"> • The first argument must be a function handle. Does not support structure, inline function, or string inputs for the first argument. • Supports up to three output arguments. Does not support the fourth output argument (the output structure).
gain2aperture	Phased Array System Toolbox	Does not support variable-size inputs.
gamcdf	Statistics and Machine Learning Toolbox	—
gaminv	Statistics and Machine Learning Toolbox	—
gamma	MATLAB	—
gammainc	MATLAB	Output is always complex.
gammaincinv	MATLAB	Output is always complex.
gammaIn	MATLAB	—
gampdf	Statistics and Machine Learning Toolbox	—
gamrnd	Statistics and Machine Learning Toolbox	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
gamstat	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
gausswin	Signal Processing Toolbox	<p>All inputs must be constant. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
gcd	MATLAB	—
ge	MATLAB	—
ge	Fixed-Point Designer	<ul style="list-style-type: none"> • Not supported for fixed-point signals with different biases.
geocdf	Statistics and Machine Learning Toolbox	—
geoinv	Statistics and Machine Learning Toolbox	—
geomean	Statistics and Machine Learning Toolbox	—
geopdf	Statistics and Machine Learning Toolbox	—
geornd	Statistics and Machine Learning Toolbox	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
geostat	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
get	Fixed-Point Designer	<ul style="list-style-type: none"> The syntax <code>structure = get(o)</code> is not supported.
getlsb	Fixed-Point Designer	—
getmsb	Fixed-Point Designer	—
getrangefromclass	Image Processing Toolbox	—
gevcdf	Statistics and Machine Learning Toolbox	—
gevinv	Statistics and Machine Learning Toolbox	—
gevpdf	Statistics and Machine Learning Toolbox	—
gevrnd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> The output is nonscalar. An input parameter is invalid for the distribution.
gevstat	Statistics and Machine Learning Toolbox	—
global2localcoord	Phased Array System Toolbox	Does not support variable-size inputs.
gpcdf	Statistics and Machine Learning Toolbox	—
gpinv	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
gppdf	Statistics and Machine Learning Toolbox	—
gprnd	Statistics and Machine Learning Toolbox	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
gpstat	Statistics and Machine Learning Toolbox	—
gradient	MATLAB	—
grazingang	Phased Array System Toolbox	Does not support variable-size inputs.
gt	MATLAB	—
gt	Fixed-Point Designer	<ul style="list-style-type: none"> • Not supported for fixed-point signals with different biases.
hadamard	MATLAB	—
hamming	Signal Processing Toolbox	<p>All inputs must be constant. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
hankel	MATLAB	—

Name	Product	Remarks and Limitations
hann	Signal Processing Toolbox	<p>All inputs must be constant. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
harmmean	Statistics and Machine Learning Toolbox	—
hdl.RAM	MATLAB	—
hex2dec	MATLAB	—
hex2num	MATLAB	<ul style="list-style-type: none"> For <code>n = hex2num(S)</code>, <code>size(S,2) <= length(num2hex(0))</code>
hilb	MATLAB	—

Name	Product	Remarks and Limitations
hist	MATLAB	<ul style="list-style-type: none"> • Histogram bar plotting not supported. Call with at least one output argument. • If supplied, the second argument <code>x</code> must be a scalar constant. • Inputs must be real. <p>For the syntax <code>[nout, xout] = hist(y,x)</code>:</p> <ul style="list-style-type: none"> • When <code>y</code> is a fixed-size vector or variable-length vector: <ul style="list-style-type: none"> • <code>nout</code> is always a row vector. • If <code>x</code> is a vector, <code>xout</code> is a vector with the same orientation as <code>x</code>. • If <code>x</code> is a scalar (fixed-size), <code>xout</code> is a row vector. • <code>nout</code> and <code>xout</code> are column vectors when the following conditions are true: <ul style="list-style-type: none"> • <code>y</code> is a matrix • <code>size(y,1)</code> and <code>size(y,2)</code> do not have fixed length 1 • One of <code>size(y,1)</code> and <code>size(y,2)</code> has length 1 at run time • A variable-size <code>x</code> is interpreted as a vector input even if it is a scalar at run time. • If at least one of the inputs is empty, vector orientations in the output can differ from MATLAB.
histc	MATLAB	<ul style="list-style-type: none"> • The output of a variable-size array that becomes a column vector at run time is a column-vector, not a row-vector. • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”

Name	Product	Remarks and Limitations
histeq	Image Processing Toolbox	All the syntaxes that include indexed images are not supported. This includes all syntaxes that accept <code>map</code> as input and return <code>newmap</code> . Generated code for this function uses a precompiled platform-specific shared library.
horizonrange	Phased Array System Toolbox	Does not support variable-size inputs.
horzcat	Fixed-Point Designer	—
hygecdf	Statistics and Machine Learning Toolbox	—
hygeinv	Statistics and Machine Learning Toolbox	—
hygepdf	Statistics and Machine Learning Toolbox	—
hygernd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
hygestat	Statistics and Machine Learning Toolbox	—
hypot	MATLAB	—
icdf	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
idct	Signal Processing Toolbox	<ul style="list-style-type: none"> • Code generation for this function requires the DSP System Toolbox software. • Length of transform dimension must be a power of two. If specified, the pad or truncation value must be constant. Expressions or variables are allowed if their values do not change. <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
if, elseif, else	MATLAB	—
idivide	MATLAB	<ul style="list-style-type: none"> • For efficient generated code, MATLAB rules for divide by zero are supported only for the 'round' option.
ifft	MATLAB	<ul style="list-style-type: none"> • Length of input vector must be a power of 2. • Output of <code>ifft</code> block is complex. • Does not support the 'symmetric' option. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
ifft2	MATLAB	<ul style="list-style-type: none"> • Length of input matrix dimensions must each be a power of 2. • Does not support the 'symmetric' option.
ifftn	MATLAB	<ul style="list-style-type: none"> • Length of input matrix dimensions must each be a power of 2. • Does not support the 'symmetric' option.
ifftshift	MATLAB	—
ifir	DSP System Toolbox	All inputs must be constant. Expressions or variables are allowed if their values do not change.

Name	Product	Remarks and Limitations
iircomb	DSP System Toolbox	All inputs must be constant. Expressions or variables are allowed if their values do not change.
iirgrpdelay	DSP System Toolbox	<ul style="list-style-type: none"> • All inputs must be constant. Expressions or variables are allowed if their values do not change. • Does not support syntaxes that have cell array input.
iirlpnorm	DSP System Toolbox	<ul style="list-style-type: none"> • All inputs must be constant. Expressions or variables are allowed if their values do not change. • Does not support syntaxes that have cell array input.
iirlpnormc	DSP System Toolbox	<ul style="list-style-type: none"> • All inputs must be constant. Expressions or variables are allowed if their values do not change. • Does not support syntaxes that have cell array input.
iirnotch	DSP System Toolbox	All inputs must be constant. Expressions or variables are allowed if their values do not change.
iirparameq	DSP System Toolbox	—
iirpeak	DSP System Toolbox	All inputs must be constant. Expressions or variables are allowed if their values do not change.
im2double	MATLAB	—
im2int16	Image Processing Toolbox	Generated code for this function uses a precompiled platform-specific shared library.
im2single	Image Processing Toolbox	—

Name	Product	Remarks and Limitations
im2uint8	Image Processing Toolbox	If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.
im2uint16	Image Processing Toolbox	Generated code for this function uses a precompiled platform-specific shared library.
imadjust	Image Processing Toolbox	Does not support syntaxes that include indexed images. This includes all syntaxes that accept <code>map</code> as input and return <code>newmap</code> . Generated code for this function uses a precompiled platform-specific shared library.
imag	MATLAB	—
imag	Fixed-Point Designer	—
imaq.VideoDevice	Image Acquisition Toolbox™	“Code Generation with VideoDevice System Object”
imbothat	Image Processing Toolbox	The input image <code>IM</code> must be either 2-D or 3-D image. The structuring element input argument <code>SE</code> must be a compile-time constant. If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.
imclearborder	Image Processing Toolbox	The optional second input argument, <code>conn</code> , must be a compile-time constant. Supports only up to 3-D inputs. If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.

Name	Product	Remarks and Limitations
imclose	Image Processing Toolbox	<p>The input image <code>IM</code> must be either 2-D or 3-D image. The structuring element input argument <code>SE</code> must be a compile-time constant.</p> <p>If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.</p>
imcomplement	Image Processing Toolbox	<p>Does not support <code>int64</code> and <code>uint64</code> data types.</p>
imdilate	Image Processing Toolbox	<p>The input image <code>IM</code> must be either 2-D or 3-D image. The <code>SE</code>, <code>PACKOPT</code>, and <code>SHAPE</code> input arguments must be a compile-time constant. The structuring element argument <code>SE</code> must be a single element—arrays of structuring elements are not supported. To obtain the same result as that obtained using an array of structuring elements, call the function sequentially.</p> <p>If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.</p>
imerode	Image Processing Toolbox	<p>The input image <code>IM</code> must be either 2-D or 3-D image. The <code>SE</code>, <code>PACKOPT</code>, and <code>SHAPE</code> input arguments must be a compile-time constant. The structuring element argument <code>SE</code> must be a single element—arrays of structuring elements are not supported. To obtain the same result as that obtained using an array of structuring elements, call the function sequentially.</p> <p>If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.</p>

Name	Product	Remarks and Limitations
imextendedmax	Image Processing Toolbox	<p>The optional third input argument, <code>conn</code>, must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
imextendedmin	Image Processing Toolbox	<p>The optional third input argument, <code>conn</code>, must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
imfill	Image Processing Toolbox	<p>The optional input connectivity, <code>conn</code> and the string <code>'holes'</code> must be compile-time constants.</p> <p>Supports only up to 3-D inputs.</p> <p>The interactive mode to select points, <code>imfill(BW,0,CONN)</code> is not supported in code generation.</p> <p><code>locations</code> can be a P-by-1 vector, in which case it contains the linear indices of the starting locations. <code>locations</code> can also be a P-by-<code>ndims(I)</code> matrix, in which case each row contains the array indices of one of the starting locations. Once you select a format at compile-time, you cannot change it at run time. However, the number of points in <code>locations</code> can be varied at run time.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>

Name	Product	Remarks and Limitations
imfilter	Image Processing Toolbox	<p>The input image can be either 2-D or 3-D. The value of the input argument, <code>options</code>, must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
imhist	Image Processing Toolbox	<p>The optional second input argument, <code>n</code>, must be a compile-time constant. In addition, nonprogrammatic syntaxes are not supported. For example, the syntaxes where <code>imhist</code> displays the histogram are not supported.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
imhmax	Image Processing Toolbox	<p>The optional third input argument, <code>conn</code>, must be a compile-time constant</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
imhmin	Image Processing Toolbox	<p>The optional third input argument, <code>conn</code>, must be a compile-time constant</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
imlincomb	Image Processing Toolbox	<p>The <code>output_class</code> argument must be a compile-time constant.</p> <p>Generated code for this function uses a precompiled platform-specific shared library.</p>

Name	Product	Remarks and Limitations
imopen	Image Processing Toolbox	<p>The input image <code>IM</code> must be either 2-D or 3-D image. The structuring element input argument <code>SE</code> must be a compile-time constant.</p> <p>If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.</p>
imquantize	Image Processing Toolbox	—
imreconstruct	Image Processing Toolbox	<p>The optional third input argument, <code>conn</code>, must be a compile-time constant.</p> <p>If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.</p>
imref2d	Image Processing Toolbox	<p>The <code>XWorldLimits</code>, <code>YWorldLimits</code> and <code>ImageSize</code> properties can be set only during object construction. When generating code, you can only specify single objects—arrays of objects are not supported.</p>
imref3d	Image Processing Toolbox	<p>The <code>XWorldLimits</code>, <code>YWorldLimits</code>, <code>ZWorldLimits</code> and <code>ImageSize</code> properties can be set only during object construction. When generating code, you can only specify single objects—arrays of objects are not supported.</p>
imregionalmax	Image Processing Toolbox	<p>The optional second input argument, <code>conn</code>, must be a compile-time constant.</p> <p>If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.</p>

Name	Product	Remarks and Limitations
imregionalmin	Image Processing Toolbox	<p>The optional second input argument, <code>conn</code>, must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
imtophat	Image Processing Toolbox	<p>The input image <code>IM</code> must be either 2-D or 3-D image. The structuring element input argument <code>SE</code> must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
imwarp	Image Processing Toolbox	<p>The geometric transformation object input, <code>tform</code>, must be either <code>affine2d</code> or <code>projective2d</code>. Additionally, the interpolation method and optional parameter names must be string constants.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
ind2sub	MATLAB	<ul style="list-style-type: none"> • The first argument should be a valid size vector. Size vectors for arrays with more than <code>intmax</code> elements are not supported. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
inf	MATLAB	<ul style="list-style-type: none"> • Dimensions must be real, nonnegative, integers.
insertMarker	Computer Vision System Toolbox	Compile-time constant input: marker Supports MATLAB Function block: Yes
insertShape	Computer Vision System Toolbox	Compile-time constant input: shape and SmoothEdges Supports MATLAB Function block: Yes

Name	Product	Remarks and Limitations
int8, int16, int32, int64	MATLAB	No integer overflow detection for int64 in MEX or MATLAB Function block simulation on Windows 32-bit platforms.
int8, int16, int32, int64	Fixed-Point Designer	—
integralImage	Computer Vision System Toolbox	Supports MATLAB Function block: Yes
interp1	MATLAB	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
interp1q	MATLAB	Might not match MATLAB when some Y values are Inf or NaN.
interp2	MATLAB	<ul style="list-style-type: none"> • Xq and Yq must be the same size. Use meshgrid to evaluate on a grid. • For best results, provide X and Y as vectors. • For the 'cubic' method, reports an error if the grid does not have uniform spacing. In this case, use the 'spline' method. • For best results when you use the 'spline' method: <ul style="list-style-type: none"> • Use meshgrid to create the inputs Xq and Yq. • Use a small number of interpolation points relative to the dimensions of V. Interpolating over a large set of scattered points can be inefficient.

Name	Product	Remarks and Limitations
interp3	MATLAB	<ul style="list-style-type: none"> • Xq, Yq, and Zq must be the same size. Use <code>meshgrid</code> to evaluate on a grid. • For best results, provide X, Y, and Z as vectors. • For the 'cubic' method, reports an error if the grid does not have uniform spacing. In this case, use the 'spline' method. • For best results when you use the 'spline' method: <ul style="list-style-type: none"> • Use <code>meshgrid</code> to create the inputs Xq, Yq, and Zq. • Use a small number of interpolation points relative to the dimensions of V. Interpolating over a large set of scattered points can be inefficient.

Name	Product	Remarks and Limitations
intersect	MATLAB	<ul style="list-style-type: none"> • When you do not specify the 'rows' option: <ul style="list-style-type: none"> • Inputs A and B must be vectors. If you specify the 'legacy' option, inputs A and B must be row vectors. • The first dimension of a variable-size row vector must have fixed length 1. The second dimension of a variable-size column vector must have fixed length 1. • The input [] is not supported. Use a 1-by-0 or 0-by-1 input, for example, <code>zeros(1,0)</code>, to represent the empty set. • If you specify the 'legacy' option, empty outputs are row vectors, 1-by-0, never 0-by-0. • When you specify both the 'legacy' option and the 'rows' option, the outputs <code>ia</code> and <code>ib</code> are column vectors. If these outputs are empty, they are 0-by-1, never 0-by-0, even if the output <code>C</code> is 0-by-0. • When the <code>setOrder</code> is 'sorted' or when you specify the 'legacy' option, the inputs must already be sorted in ascending order. The first output, <code>C</code>, is sorted in ascending order. • Complex inputs must be <code>single</code> or <code>double</code>. • When one input is complex and the other input is real, do one of the following: <ul style="list-style-type: none"> • Set <code>setOrder</code> to 'stable'. • Sort the real input in complex ascending order (by absolute value). Suppose the real input is <code>x</code>. Use <code>sort(complex(x))</code> or <code>sortrows(complex(x))</code>.

Name	Product	Remarks and Limitations
		<ul style="list-style-type: none"> • “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
intfilt	Signal Processing Toolbox	All inputs must be constant. Expressions or variables are allowed if their values do not change. Specifying constants To specify a constant input for <code>fiaccl</code> , use <code>coder.Constant</code> . For more information, see “Specify Constant Inputs at the Command Line”.
intlut	Image Processing Toolbox	Generated code for this function uses a precompiled platform-specific shared library.
intmax	MATLAB	—
intmin	MATLAB	—
inv	MATLAB	Singular matrix inputs can produce nonfinite values that differ from MATLAB results.
invhilb	MATLAB	—
ipermute	MATLAB	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
ipermute	Fixed-Point Designer	—
iptcheckconn	Image Processing Toolbox	Input arguments must be compile-time constants.
iptcheckmap	Image Processing Toolbox	—
iqcoef2imbal	Communications System Toolbox	—
iqimbal2coef	Communications System Toolbox	—
iqr	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
isa	MATLAB	—
isbanded	MATLAB	—
iscell	MATLAB	—
ischar	MATLAB	—
iscolumn	MATLAB	—
iscolumn	Fixed-Point Designer	—
isdeployed	MATLAB Compiler	<ul style="list-style-type: none"> • Returns true and false as appropriate for MEX and SIM targets • Returns false for other targets
isdiag	MATLAB	—
isempty	MATLAB	—
isempty	Fixed-Point Designer	—
isEpipoleInImage	Computer Vision System Toolbox	Compile-time constant input: No restrictions. Supports MATLAB Function block: Yes
isequal	MATLAB	—
isequal	Fixed-Point Designer	—
isequaln	MATLAB	—
isfi	Fixed-Point Designer	—
isfield	MATLAB	<ul style="list-style-type: none"> • Does not support cell input for second argument
isfimath	Fixed-Point Designer	—
isfimathlocal	Fixed-Point Designer	—
isfinite	MATLAB	—

Name	Product	Remarks and Limitations
isfinite	Fixed-Point Designer	—
isfloat	MATLAB	—
ishermitian	MATLAB	—
isinf	MATLAB	—
isinf	Fixed-Point Designer	—
isinteger	MATLAB	—
isletter	MATLAB	<ul style="list-style-type: none"> Input values from the <code>char</code> class must be in the range 0-127
islogical	MATLAB	—
ismac	MATLAB	<ul style="list-style-type: none"> Returns true or false based on the MATLAB version used for code generation. Use only when the code generation target is S-function (Simulation) or MEX-function.
ismatrix	MATLAB	—
ismcc	MATLAB Compiler	<ul style="list-style-type: none"> Returns true and false as appropriate for MEX and SIM targets. Returns false for other targets.
ismember	MATLAB	<ul style="list-style-type: none"> The second input, <code>B</code>, must be sorted in ascending order. Complex inputs must be <code>single</code> or <code>double</code>. “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
isnan	MATLAB	—
isnan	Fixed-Point Designer	—
isnumeric	MATLAB	—
isnumeric	Fixed-Point Designer	—

Name	Product	Remarks and Limitations
isnumericitype	Fixed-Point Designer	—
isobject	MATLAB	—
ispc	MATLAB	<ul style="list-style-type: none"> • Returns true or false based on the MATLAB version you use for code generation. • Use only when the code generation target is S-function (Simulation) or MEX-function.
isprime	MATLAB	<ul style="list-style-type: none"> • The maximum double precision input is 2^{33}. • The maximum single precision input is 2^{25}. • The input X cannot have type <code>int64</code> or <code>uint64</code>.
isreal	MATLAB	—
isreal	Fixed-Point Designer	—
isrow	MATLAB	—
isrow	Fixed-Point Designer	—
isscalar	MATLAB	—
isscalar	Fixed-Point Designer	—
assigned	Fixed-Point Designer	—
issorted	MATLAB	<ul style="list-style-type: none"> • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”. • “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
isspace	MATLAB	<ul style="list-style-type: none"> • Input values from the <code>char</code> class must be in the range 0–127.
issparse	MATLAB	—

Name	Product	Remarks and Limitations
isstrprop	MATLAB	<ul style="list-style-type: none"> • Supports only inputs from char and integer classes. • Input values must be in the range 0-127.
isstruct	MATLAB	—
issymmetric	MATLAB	—
istrellis	Communications System Toolbox	—
istril	MATLAB	—
istriu	MATLAB	—
isunix	MATLAB	<ul style="list-style-type: none"> • Returns true or false based on the MATLAB version used for code generation. • Use only when the code generation target is S-function (Simulation) or MEX-function.
isvector	MATLAB	—
isvector	Fixed-Point Designer	—
kaiser	Signal Processing Toolbox	<p>All inputs must be constant. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
kaiserord	Signal Processing Toolbox	—
kron	MATLAB	—
kurtosis	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
label2rgb	Image Processing Toolbox	Referring to the standard syntax: <code>RGB = label2rgb(L, map, zerocolor, order)</code> <ul style="list-style-type: none"> • Submit at least two input arguments: the label matrix, <code>L</code>, and the colormap matrix, <code>map</code>. • <code>map</code> must be an <code>n</code>-by-3, double, colormap matrix. You cannot use a string containing the name of a MATLAB colormap function or a function handle of a colormap function. • If you set the boundary color <code>zerocolor</code> to the same color as one of the regions, <code>label2rgb</code> will not issue a warning. • If you supply a value for <code>order</code>, it must be <code>'noshuffle'</code>.
lcm	MATLAB	—
lcmvweights	Phased Array System Toolbox	Does not support variable-size inputs.
ldivide	MATLAB	—
le	MATLAB	—
le	Fixed-Point Designer	<ul style="list-style-type: none"> • Not supported for fixed-point signals with different biases.
length	MATLAB	—
length	Fixed-Point Designer	—

Name	Product	Remarks and Limitations
levinson	Signal Processing Toolbox	<ul style="list-style-type: none"> • Code generation for this function requires the DSP System Toolbox software. • If specified, the order of recursion must be a constant. Expressions or variables are allowed if their values do not change. <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
lineToBorderPoints	Computer Vision System Toolbox	Compile-time constant input: No restrictions. Supports MATLAB Function block: Yes
linsolve	MATLAB	<ul style="list-style-type: none"> • The option structure must be a constant. • Supports only a scalar option structure input. It does not support arrays of option structures. • Only optimizes these cases: <ul style="list-style-type: none"> • UT • LT • UHESS = true (the TRANSA can be either true or false) • SYM = true and POSDEF = true <p>Other options are equivalent to using <code>mldivide</code>.</p>
linspace	MATLAB	—

Name	Product	Remarks and Limitations
load	MATLAB	<ul style="list-style-type: none"> • Use only when generating MEX or code for Simulink simulation. To load compile-time constants, use <code>coder.load</code>. • Does not support use of the function without assignment to a structure or array. For example, use <code>S = load(filename)</code>, not <code>load(filename)</code>. • The output <code>S</code> must be the name of a structure or array without any subscripting. For example, <code>S[i] = load('myFile.mat')</code> is not allowed. • Arguments to <code>load</code> must be compile-time constant strings. • Does not support loading objects. • If the MAT-file contains unsupported constructs, use <code>load(filename, variables)</code> to load only the supported constructs. • You cannot use <code>save</code> in a function intended for code generation. The code generation software does not support the <code>save</code> function. Furthermore, you cannot use <code>coder.extrinsic</code> with <code>save</code>. Prior to generating code, you can use <code>save</code> to save the workspace data to a MAT-file. <p>You must use <code>coder. varsized</code> to explicitly declare variable-size data loaded using the <code>load</code> function.</p>
local2globalcoord	Phased Array System Toolbox	Does not support variable-size inputs.

Name	Product	Remarks and Limitations
log	MATLAB	<ul style="list-style-type: none"> Generates an error during simulation and returns NaN in generated code when the input value x is real, but the output should be complex. To get the complex result, make the input value complex by passing in <code>complex(x)</code>.
log2	MATLAB	—
log10	MATLAB	—
log1p	MATLAB	—
logical	MATLAB	—
logical	Fixed-Point Designer	—
logncdf	Statistics and Machine Learning Toolbox	—
logninv	Statistics and Machine Learning Toolbox	—
lognpdf	Statistics and Machine Learning Toolbox	—
lognrnd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> The output is nonscalar. An input parameter is invalid for the distribution.
lognstat	Statistics and Machine Learning Toolbox	—
logspace	MATLAB	—
lower	MATLAB	<ul style="list-style-type: none"> Supports only <code>char</code> inputs. Input values must be in the range 0-127.

Name	Product	Remarks and Limitations
lowerbound	Fixed-Point Designer	—
lsb	Fixed-Point Designer	<ul style="list-style-type: none"> • Supported for scalar fixed-point signals only. • Supported for scalar, vector, and matrix, <code>fi</code> single and double signals.
lsqnonneg	MATLAB	<ul style="list-style-type: none"> • You must enable support for variable-size arrays. • The <code>message</code> string in the output structure output (the fifth output) is not translated.
lt	MATLAB	—
lteZadoffChuSeq	Communications System Toolbox	—
lt	Fixed-Point Designer	<ul style="list-style-type: none"> • Not supported for fixed-point signals with different biases.
lu	MATLAB	—
mad	Statistics and Machine Learning Toolbox	Input <code>dim</code> cannot be empty.
magic	MATLAB	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
matchFeatures	Computer Vision System Toolbox	<p>Generates platform-dependent library: Yes for MATLAB host. The function generates portable C code for non-host target.</p> <p>Compile-time constant input: Method and Metric.</p> <p>Supports MATLAB Function block: Yes</p> <p>Generated code for this function uses a precompiled platform-specific shared library.</p>

Name	Product	Remarks and Limitations
max	MATLAB	<ul style="list-style-type: none"> • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” • Does not support the <code>nanflag</code> argument. • “Code Generation for Complex Data with Zero-Valued Imaginary Parts”..
max	Fixed-Point Designer	—
maxflat	Signal Processing Toolbox	<p>Inputs must be constant. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
mdltest	Phased Array System Toolbox	Does not support variable-size inputs.
mean	MATLAB	<ul style="list-style-type: none"> • Does not support the 'native' output class option for integer types. • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” • Does not support the <code>nanflag</code> argument.
mean	Fixed-Point Designer	N/A
mean2	Image Processing Toolbox	—

Name	Product	Remarks and Limitations
medfilt2	Image Processing Toolbox	<p>The <code>padopt</code> argument must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
median	MATLAB	<ul style="list-style-type: none"> • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” • Does not support the <code>nanflag</code> argument. • “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
median	Fixed-Point Designer	—
meshgrid	MATLAB	—
mfilename	MATLAB	—
min	MATLAB	<ul style="list-style-type: none"> • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” • Does not support the <code>nanflag</code> argument. • “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
min	Fixed-Point Designer	—
minus	MATLAB	—
minus	Fixed-Point Designer	<ul style="list-style-type: none"> • Any non-<code>fi</code> input must be constant. Its value must be known at compile time so that it can be cast to a <code>fi</code> object.

Name	Product	Remarks and Limitations
mkpp	MATLAB	<ul style="list-style-type: none"> • The output structure <code>pp</code> differs from the <code>pp</code> structure in MATLAB. In MATLAB, <code>ppval</code> cannot use the <code>pp</code> structure from the code generation software. For code generation, <code>ppval</code> cannot use a <code>pp</code> structure created by MATLAB. <code>unmkpp</code> can use a MATLAB <code>pp</code> structure for code generation. <p>To create a MATLAB <code>pp</code> structure from a <code>pp</code> structure created by the code generation software:</p> <ul style="list-style-type: none"> • In code generation, use <code>unmkpp</code> to return the piecewise polynomial details to MATLAB. • In MATLAB, use <code>mkpp</code> to create the <code>pp</code> structure. <ul style="list-style-type: none"> • If you do not provide <code>d</code>, then <code>coefs</code> must be two-dimensional and have a fixed number of columns. In this case, the number of columns is the order. • To define a piecewise constant polynomial, <code>coefs</code> must be a column vector or <code>d</code> must have at least two elements. • If you provide <code>d</code> and <code>d</code> is 1, <code>d</code> must be a constant. Otherwise, if the input to <code>ppval</code> is nonscalar, the shape of the output of <code>ppval</code> can differ from <code>ppval</code> in MATLAB. • If you provide <code>d</code>, it must have a fixed length. One of the following sets of statements must be true: <ul style="list-style-type: none"> 1 Suppose that <code>m = length(d)</code> and <code>npieces = length(breaks) - 1</code>. <pre style="margin-left: 20px;"> size(coefs,j) = d(j) size(coefs,m+1) = npieces </pre>

Name	Product	Remarks and Limitations
		<p>size(coefs,m+2) = order j = 1,2,...,m. The dimension m+2 must be fixed length.</p> <p>2 Suppose that m = length(d) and npieces = length(breaks) - 1.</p> <p>size(coefs,1) = prod(d)*npieces size(coefs,2) = order The second dimension must be fixed length.</p> <ul style="list-style-type: none"> If you do not provide d, the following statements must be true: Suppose that m = length(d) and npieces = length(breaks) - 1. size(coefs,1) = prod(d)*npieces size(coefs,2) = order The second dimension must be fixed length.
mldivide	MATLAB	—
mnpdf	Statistics and Machine Learning Toolbox	—
mod	MATLAB	<ul style="list-style-type: none"> Performs the arithmetic using the output class. Results might not match MATLAB due to differences in rounding errors. <p>If one of the inputs has type int64 or uint64, then both inputs must have the same type.</p>
mode	MATLAB	<ul style="list-style-type: none"> Does not support third output argument C (cell array). If supplied, dim must be a constant. “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”

Name	Product	Remarks and Limitations
moment	Statistics and Machine Learning Toolbox	If <code>order</code> is nonintegral and <code>X</code> is real, use <code>moment(complex(X), order)</code> .
mpower	MATLAB	If <code>A</code> is a 2-by-2 or larger matrix and <code>B</code> is <code>Inf</code> or <code>-Inf</code> , <code>mpower(A,B)</code> returns a matrix of NaNs.
mpower	Fixed-Point Designer	<ul style="list-style-type: none"> • The exponent input, <code>k</code>, must be constant; that is, its value must be known at compile time. • Variable-size inputs are supported only when the <code>SumMode</code> property of the governing <code>fimath</code> is set to <code>Specify precision</code> or <code>Keep LSB</code>. • For variable-size signals, you can see different results between MATLAB and the generated code. <ul style="list-style-type: none"> • In generated code, the output for variable-size signals is computed using the <code>SumMode</code> property of the governing <code>fimath</code>. • In MATLAB, the output for variable-sized signals is computed using the <code>SumMode</code> property of the governing <code>fimath</code> when both inputs are nonscalar. However, if either input is a scalar, MATLAB computes the output using the <code>ProductMode</code> of the governing <code>fimath</code>.

Name	Product	Remarks and Limitations
mpy	Fixed-Point Designer	<ul style="list-style-type: none"> Code generation in MATLAB does not support the syntax <code>F.mpy(a,b)</code>. You must use the syntax <code>mpy(F,a,b)</code>. When you provide complex inputs to the <code>mpy</code> function inside a MATLAB Function block, you must declare the input as complex before running the simulation. To do so, go to the Ports and data manager and set the Complexity parameter for all known complex inputs to <code>On</code>.
mrdivide	MATLAB	—
mrdivide	Fixed-Point Designer	—
MSERRegions	Computer Vision System Toolbox	<p>Compile-time constant input: No restrictions. Supports MATLAB Function block: Yes For code generation, you must specify both the <code>pixellist</code> cell array and the length of each array, as the second input. The object outputs, <code>regions.PixelList</code> as an array. The region sizes are defined in <code>regions.Lengths</code>. Generated code for this function uses a precompiled platform-specific shared library.</p>
mtimes	MATLAB	<ul style="list-style-type: none"> Multiplication of pure imaginary numbers by non-finite numbers might not match MATLAB. The code generation software does not specialize multiplication by pure imaginary numbers—it does not eliminate calculations with the zero real part. For example, $(\text{Inf} + 1i) * 1i = (\text{Inf} * 0 - 1 * 1) + (\text{Inf} * 1 + 1 * 0)i = \text{NaN} + \text{Inf}i$. “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”

Name	Product	Remarks and Limitations
mtimes	Fixed-Point Designer	<ul style="list-style-type: none"> • Any non-<code>fi</code> input must be constant; that is, its value must be known at compile time so that it can be cast to a <code>fi</code> object. • Variable-sized inputs are only supported when the <code>SumMode</code> property of the governing <code>fimath</code> is set to <code>Specify precision</code> or <code>Keep LSB</code>. • For variable-sized signals, you may see different results between MATLAB and the generated code. <ul style="list-style-type: none"> • In generated code, the output for variable-sized signals is computed using the <code>SumMode</code> property of the governing <code>fimath</code>. • In MATLAB, the output for variable-sized signals is computed using the <code>SumMode</code> property of the governing <code>fimath</code> when both inputs are nonscalar. However, if either input is a scalar, MATLAB computes the output using the <code>ProductMode</code> of the governing <code>fimath</code>.
multithresh	Image Processing Toolbox	If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.
mvdweights	Phased Array System Toolbox	Does not support variable-size inputs.
NaN or nan	MATLAB	<ul style="list-style-type: none"> • Dimensions must be real, nonnegative, integers.
nancov	Statistics and Machine Learning Toolbox	If the input is variable-size and is <code>[]</code> at run time, returns <code>[]</code> not NaN.
nanmax	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
nanmean	Statistics and Machine Learning Toolbox	—
nanmedian	Statistics and Machine Learning Toolbox	—
nanmin	Statistics and Machine Learning Toolbox	—
nanstd	Statistics and Machine Learning Toolbox	—
nansum	Statistics and Machine Learning Toolbox	—
nanvar	Statistics and Machine Learning Toolbox	—
nargchk	MATLAB	<ul style="list-style-type: none"> Output structure does not include stack information. <hr/> <p>Note: nargchk will be removed in a future release.</p>
nargin	MATLAB	—
narginchk	MATLAB	—
nargout	MATLAB	<ul style="list-style-type: none"> For a function with no output arguments, returns 1 if called without a terminating semicolon. <hr/> <p>Note: This behavior also affects extrinsic calls with no terminating semicolon. nargout is 1 for the called function in MATLAB.</p>

Name	Product	Remarks and Limitations
nargoutchk	MATLAB	—
nbincdf	Statistics and Machine Learning Toolbox	—
nbininv	Statistics and Machine Learning Toolbox	—
nbinpdf	Statistics and Machine Learning Toolbox	—
nbinrnd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
nbinstat	Statistics and Machine Learning Toolbox	—
ncfcdf	Statistics and Machine Learning Toolbox	—
ncfinv	Statistics and Machine Learning Toolbox	—
ncfpdf	Statistics and Machine Learning Toolbox	—
ncfrnd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.

Name	Product	Remarks and Limitations
ncfstat	Statistics and Machine Learning Toolbox	—
nchoosek	MATLAB	<ul style="list-style-type: none"> • When the first input, <code>x</code>, is a scalar, <code>nchoosek</code> returns a binomial coefficient. In this case, <code>x</code> must be a nonnegative integer. It cannot have type <code>int64</code> or <code>uint64</code>. • When the first input, <code>x</code>, is a vector, <code>nchoosek</code> treats it as a set. In this case, <code>x</code> can have type <code>int64</code> or <code>uint64</code>. • The second input, <code>k</code>, cannot have type <code>int64</code> or <code>uint64</code>. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
nctcdf	Statistics and Machine Learning Toolbox	—
nctinv	Statistics and Machine Learning Toolbox	—
nctpdf	Statistics and Machine Learning Toolbox	—
nctrnd	Statistics and Machine Learning Toolbox	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
nctstat	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
ncx2cdf	Statistics and Machine Learning Toolbox	—
ncx2rnd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
ncx2stat	Statistics and Machine Learning Toolbox	—
ndgrid	MATLAB	—
ndims	MATLAB	—
ndims	Fixed-Point Designer	—
ne	MATLAB	—
ne	Fixed-Point Designer	<ul style="list-style-type: none"> • Not supported for fixed-point signals with different biases.
nearest	Fixed-Point Designer	—
nextpow2	MATLAB	—
nnz	MATLAB	—
noisepow	Phased Array System Toolbox	Does not support variable-size inputs.
nonzeros	MATLAB	—
norm	MATLAB	—
normcdf	Statistics and Machine Learning Toolbox	—
normest	MATLAB	—

Name	Product	Remarks and Limitations
norminv	Statistics and Machine Learning Toolbox	—
normpdf	Statistics and Machine Learning Toolbox	—
normrnd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
normstat	Statistics and Machine Learning Toolbox	—
not	MATLAB	—
npwgntresh	Phased Array System Toolbox	Does not support variable-size inputs.
nthroot	MATLAB	—
null	MATLAB	<ul style="list-style-type: none"> • Might return a different basis than MATLAB • Does not support rational basis option (second input)
num2hex	MATLAB	—
numberofelements	Fixed-Point Designer	numberofelements will be removed in a future release. Use numel instead.
numel	MATLAB	—
numel	Fixed-Point Designer	—

Name	Product	Remarks and Limitations
numerictype	Fixed-Point Designer	<ul style="list-style-type: none"> • Fixed-point signals coming into a MATLAB Function block from Simulink are assigned a <code>numerictype</code> object that is populated with the signal's data type and scaling information. • Returns the data type when the input is a nonfixed-point signal. • Use to create <code>numerictype</code> objects in the generated code. • All <code>numerictype</code> object properties related to the data type must be constant.
nutallwin	Signal Processing Toolbox	<p>Inputs must be constant. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
ocr	Computer Vision System Toolbox	<p>Compile-time constant input: TextLayout, Language, and CharacterSet.</p> <p>Supports MATLAB Function block: No</p> <p>Generated code for this function uses a precompiled platform-specific shared library.</p>
ocrText	Computer Vision System Toolbox	<p>Compile-time constant input: No restrictions.</p> <p>Supports MATLAB Function block: No</p>

Name	Product	Remarks and Limitations
ode23	MATLAB	<ul style="list-style-type: none"> • All <code>odeset</code> option arguments must be constant. • Does not support a constant mass matrix in the options structure. Provide a mass matrix as a function . • You must provide at least the two output arguments <code>T</code> and <code>Y</code>. • Input types must be homogeneous—all double or all single. • Variable-sizing support must be enabled. Requires dynamic memory allocation when <code>tspan</code> has two elements or you use event functions.
ode45	MATLAB	<ul style="list-style-type: none"> • All <code>odeset</code> option arguments must be constant. • Does not support a constant mass matrix in the options structure. Provide a mass matrix as a function . • You must provide at least the two output arguments <code>T</code> and <code>Y</code>. • Input types must be homogeneous—all double or all single. • Variable-sizing support must be enabled. Requires dynamic memory allocation when <code>tspan</code> has two elements or you use event functions.
odeget	MATLAB	The name argument must be constant.
odeset	MATLAB	All inputs must be constant.
ones	MATLAB	<ul style="list-style-type: none"> • Dimensions must be real, nonnegative integers. • The input <code>optimfun</code> must be a function supported for code generation.

Name	Product	Remarks and Limitations
opticalFlow	Computer Vision System Toolbox	Supports MATLAB Function block: Yes
opticalFlowHS	Computer Vision System Toolbox	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
opticalFlowLK	Computer Vision System Toolbox	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
opticalFlowLKDoG	Computer Vision System Toolbox	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
optimget	MATLAB	Input parameter names must be constant.
optimset	MATLAB	<ul style="list-style-type: none"> • Does not support the syntax that has no input or output arguments: <code>optimset</code> • Functions specified in the options must be supported for code generation. • The fields of the options structure <code>oldopts</code> must be fixed-size fields. • For code generation, optimization functions ignore the <code>Display</code> option. • Does not support the additional options in an options structure created by the Optimization Toolbox™ <code>optimset</code> function. If an input options structure includes the additional Optimization Toolbox options, the output structure does not include them.
ordfilt2	Image Processing Toolbox	<p>The <code>padopt</code> argument must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>

Name	Product	Remarks and Limitations
or	MATLAB	—
orth	MATLAB	<ul style="list-style-type: none"> • Can return a different basis than MATLAB
padarray	Image Processing Toolbox	<ul style="list-style-type: none"> • Support only up to 3-D inputs. • Input arguments, <code>padval</code> and <code>direction</code> are expected to be compile-time constants.
parfor	MATLAB	Treated as a <code>for</code> -loop when used with <code>fiaccl</code> .
parzenwin	Signal Processing Toolbox	<p>Inputs must be constant. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccl</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
pascal	MATLAB	—
pca	Statistics and Machine Learning Toolbox	<ul style="list-style-type: none"> • Ignores the 'Display' value for 'Options' when 'Algorithm' is 'als'. • If supplied, 'Weights' and 'VariableWeights' must be real. • Always returns the fifth output explained as a column vector. • Always returns the sixth output <code>mu</code> as a row vector. • If <code>mu</code> is empty, <code>pca</code> returns <code>mu</code> as a 1-by-0 array. <code>pca</code> does not convert <code>mu</code> to a 0-by-0 empty array. • Does not treat an input matrix <code>X</code> that has all NaN values as a special case. The outputs have the sizes that they have when some of the inputs are finite.

Name	Product	Remarks and Limitations
pchip	MATLAB	<ul style="list-style-type: none"> • Input x must be strictly increasing. • Does not remove y entries with NaN values. • If you generate code for the <code>pp = pchip(x,y)</code> syntax, you cannot input <code>pp</code> to the <code>ppval</code> function in MATLAB. To create a MATLAB <code>pp</code> structure from a <code>pp</code> structure created by the code generation software: <ul style="list-style-type: none"> • In code generation, use <code>unmkpp</code> to return the piecewise polynomial details to MATLAB. • In MATLAB, use <code>mkpp</code> to create the <code>pp</code> structure.
pdf	Statistics and Machine Learning Toolbox	—
pearsrnd	Statistics and Machine Learning Toolbox	Matches MATLAB only when generated output r is scalar.
permute	MATLAB	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
permute	Fixed-Point Designer	The dimensions argument must be a built-in type; it cannot be a <code>fi</code> object.
phased.ADPCACanceller	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.AngleDoppler-Response	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.ArrayGain	Phased Array System Toolbox	<ul style="list-style-type: none"> • Does not support arrays containing polarized antenna elements, that is, the <code>phased.ShortDipoleAntennaElement</code> or <code>phased.CrossedDipoleAntennaElement</code> antennas. • “System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
phased.ArrayResponse	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.BarrageJammer	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.Beamscan-Estimator	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.Beamscan-Estimator2D	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.Beamspace-ESPRITEstimator	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.CFARDetector	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.Collector	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.ConformalArray	Phased Array System Toolbox	<ul style="list-style-type: none"> • <code>pattern</code>, <code>patternAzimuth</code>, <code>patternElevation</code>, <code>plotResponse</code>, and <code>viewArray</code> methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.Constant-GammaClutter	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.Cosine-AntennaElement	Phased Array System Toolbox	<ul style="list-style-type: none"> • <code>pattern</code>, <code>patternAzimuth</code>, <code>patternElevation</code>, and <code>plotResponse</code> methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.Crossed-DipoleAntennaElement	Phased Array System Toolbox	<ul style="list-style-type: none"> • <code>pattern</code>, <code>patternAzimuth</code>, <code>patternElevation</code>, and <code>plotResponse</code> methods are not supported. • See “System Objects in MATLAB Code Generation”.

Name	Product	Remarks and Limitations
phased.Custom-AntennaElement	Phased Array System Toolbox	<ul style="list-style-type: none"> • pattern, patternAzimuth, patternElevation, and plotResponse methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.Custom-MicrophoneElement	Phased Array System Toolbox	<ul style="list-style-type: none"> • pattern, patternAzimuth, patternElevation, and plotResponse methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.DPCACanceller	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.ElementDelay	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.ESPRITEstimator	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.FMCWaveform	Phased Array System Toolbox	<ul style="list-style-type: none"> • plot method is not supported. • See “System Objects in MATLAB Code Generation”.
phased.FreeSpace	Phased Array System Toolbox	<ul style="list-style-type: none"> • Requires dynamic memory allocation. See “Limitations for System Objects that Require Dynamic Memory Allocation”. • “System Objects in MATLAB Code Generation”
phased.FrostBeamformer	Phased Array System Toolbox	<ul style="list-style-type: none"> • Requires dynamic memory allocation. See “Limitations for System Objects that Require Dynamic Memory Allocation”. • “System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
phased.Isotropic-AntennaElement	Phased Array System Toolbox	<ul style="list-style-type: none"> • pattern, patternAzimuth, patternElevation, and plotResponse methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.LCMVBeamformer	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.LinearFMWaveform	Phased Array System Toolbox	<ul style="list-style-type: none"> • plot method is not supported. • See “System Objects in MATLAB Code Generation”.
phased.MatchedFilter	Phased Array System Toolbox	<ul style="list-style-type: none"> • The CustomSpectrumWindow property is not supported. • “System Objects in MATLAB Code Generation”
phased.MFSKWaveform	Phased Array System Toolbox	<ul style="list-style-type: none"> • plot method is not supported. • See “System Objects in MATLAB Code Generation”.
phased.MVDRBeamformer	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.MVDREstimator	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.MVDREstimator2D	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.Omnidirectional-MicrophoneElement	Phased Array System Toolbox	<ul style="list-style-type: none"> • pattern, patternAzimuth, patternElevation, and plotResponse methods are not supported. • See “System Objects in MATLAB Code Generation”.

Name	Product	Remarks and Limitations
phased.PartitionedArray	Phased Array System Toolbox	<ul style="list-style-type: none"> • pattern, patternAzimuth, patternElevation, plotResponse, and viewArray methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.PhaseCoded-Waveform	Phased Array System Toolbox	<ul style="list-style-type: none"> • plot method is not supported. • See “System Objects in MATLAB Code Generation”.
phased.PhaseShift-Beamformer	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.Platform	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.RadarTarget	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.Radiator	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.Range-DopplerResponse	Phased Array System Toolbox	<ul style="list-style-type: none"> • The CustomRangeWindow and the CustomDopplerWindow properties are not supported. • “System Objects in MATLAB Code Generation”
phased.Rectangular-Waveform	Phased Array System Toolbox	<ul style="list-style-type: none"> • plot method is not supported. • See “System Objects in MATLAB Code Generation”.
phased.ReceiverPreamp	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.Replicated-Subarray	Phased Array System Toolbox	<ul style="list-style-type: none"> • pattern, patternAzimuth, patternElevation, plotResponse, and viewArray methods are not supported. • See “System Objects in MATLAB Code Generation”.

Name	Product	Remarks and Limitations
phased.RootMUSIC-Estimator	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.RootWSFEstimator	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.ShortDipole-AntennaElement	Phased Array System Toolbox	<ul style="list-style-type: none"> • <code>pattern</code>, <code>patternAzimuth</code>, <code>patternElevation</code>, and <code>plotResponse</code> methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.STAPSMI-Beamformer	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.StretchProcessor	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.SubbandPhase-ShiftBeamformer	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.SteeringVector	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.Stepped-FMWaveform	Phased Array System Toolbox	<ul style="list-style-type: none"> • <code>plot</code> method is not supported. • See “System Objects in MATLAB Code Generation”.
phased.SumDifference-MonopulseTracker	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.SumDifference-MonopulseTracker2D	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.TimeDelay-Beamformer	Phased Array System Toolbox	<ul style="list-style-type: none"> • Requires dynamic memory allocation. See “Limitations for System Objects that Require Dynamic Memory Allocation”. • “System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
phased.TimeDelayLCMV-Beamformer	Phased Array System Toolbox	<ul style="list-style-type: none"> • Requires dynamic memory allocation. See “Limitations for System Objects that Require Dynamic Memory Allocation”. • “System Objects in MATLAB Code Generation”
phased.TimeVaryingGain	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.Transmitter	Phased Array System Toolbox	“System Objects in MATLAB Code Generation”
phased.UCA	Phased Array System Toolbox	<ul style="list-style-type: none"> • <code>pattern</code>, <code>patternAzimuth</code>, <code>patternElevation</code>, <code>plotResponse</code>, and <code>viewArray</code> methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.ULA	Phased Array System Toolbox	<ul style="list-style-type: none"> • <code>pattern</code>, <code>patternAzimuth</code>, <code>patternElevation</code>, <code>plotResponse</code>, and <code>viewArray</code> methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.URA	Phased Array System Toolbox	<ul style="list-style-type: none"> • <code>pattern</code>, <code>patternAzimuth</code>, <code>patternElevation</code>, <code>plotResponse</code>, and <code>viewArray</code> methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.Wideband-Collector	Phased Array System Toolbox	<ul style="list-style-type: none"> • Requires dynamic memory allocation. See “Limitations for System Objects that Require Dynamic Memory Allocation”. • “System Objects in MATLAB Code Generation”
phitheta2azel	Phased Array System Toolbox	Does not support variable-size inputs.
phitheta2azelpat	Phased Array System Toolbox	Does not support variable-size inputs.

Name	Product	Remarks and Limitations
phitheta2uv	Phased Array System Toolbox	Does not support variable-size inputs.
phitheta2uvpat	Phased Array System Toolbox	Does not support variable-size inputs.
physconst	Phased Array System Toolbox	Does not support variable-size inputs.
pi	MATLAB	—
pilotcalib	Phased Array System Toolbox	Does not support variable-size inputs.
pinv	MATLAB	—
planerot	MATLAB	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
plus	MATLAB	—
plus	Fixed-Point Designer	<ul style="list-style-type: none"> • Any non-<code>fi</code> input must be constant; that is, its value must be known at compile time so that it can be cast to a <code>fi</code> object.
poisscdf	Statistics and Machine Learning Toolbox	—
poissinv	Statistics and Machine Learning Toolbox	—
poisspdf	Statistics and Machine Learning Toolbox	—
poissrnd	Statistics and Machine Learning Toolbox	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.

Name	Product	Remarks and Limitations
poisstat	Statistics and Machine Learning Toolbox	—
pol2cart	MATLAB	—
pol2circpol	Phased Array System Toolbox	Does not support variable-size inputs.
polellip	Phased Array System Toolbox	Does not support variable-size inputs.
polloss	Phased Array System Toolbox	Does not support variable-size inputs.
polratio	Phased Array System Toolbox	Does not support variable-size inputs.
polsignature	Phased Array System Toolbox	<ul style="list-style-type: none"> • Does not support variable-size inputs. • Supported only when output arguments are specified.
poly	MATLAB	<ul style="list-style-type: none"> • Does not discard nonfinite input values • Complex input produces complex output • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
polyarea	MATLAB	—
poly2trellis	Communications System Toolbox	—
polyder	MATLAB	The output can contain fewer NaNs than the MATLAB output. However, if the input contains a NaN, the output contains at least one NaN.
polyfit	MATLAB	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
polyint	MATLAB	—
polyval	MATLAB	—
polyvalm	MATLAB	—

Name	Product	Remarks and Limitations
pow2	Fixed-Point Designer	—
pow2db	Signal Processing Toolbox	—
power	MATLAB	<ul style="list-style-type: none"> • Generates an error during simulation. When both X and Y are real, but $\text{power}(X, Y)$ is complex, returns NaN in the generated code. To get the complex result, make the input value X complex by passing in $\text{complex}(X)$. For example, $\text{power}(\text{complex}(X), Y)$. • Generates an error during simulation. When both X and Y are real, but $X.^Y$ is complex, returns NaN in generated code. To get the complex result, make the input value X complex by using $\text{complex}(X)$. For example, $\text{complex}(X).^Y$.
power	Fixed-Point Designer	<ul style="list-style-type: none"> • The exponent input, k, must be constant. Its value must be known at compile time.

Name	Product	Remarks and Limitations
ppval	MATLAB	<p>The size of output v does not match MATLAB when both of the following statements are true:</p> <ul style="list-style-type: none"> • The input x is a variable-size array that is not a variable-length vector. • x becomes a row vector at run time. <p>The code generation software does not remove the singleton dimensions. However, MATLAB might remove singleton dimensions.</p> <p>For example, suppose that x is a $:4$-by-$:5$ array (the first dimension is variable size with an upper bound of 4 and the second dimension is variable size with an upper bound of 5). Suppose that <code>ppval(pp,0)</code> returns a 2-by-3 fixed-size array. v has size 2-by-3-by-$:4$-by-$:5$. At run time, suppose that, <code>size(x,1) = 1</code> and <code>size(x,2) = 5</code>. In the generated code, the <code>size(v)</code> is <code>[2,3,1,5]</code>. In MATLAB, the size is <code>[2,3,5]</code>.</p>
prctile	Statistics and Machine Learning Toolbox	<ul style="list-style-type: none"> • “Automatic dimension restriction” • If the output Y is a vector, the orientation of Y differs from MATLAB when all of the following are true: <ul style="list-style-type: none"> • You do not supply the <code>dim</code> input. • X is a variable-size array. • X is not a variable-length vector. • X is a vector at run time. • The orientation of the vector X does not match the orientation of the vector p. <p>In this case, the output Y matches the orientation of X not the orientation of p.</p>

Name	Product	Remarks and Limitations
primes	MATLAB	<ul style="list-style-type: none"> • The maximum double precision input is 2^{32}. • The maximum single precision input is 2^{24}. • The input n cannot have type <code>int64</code> or <code>uint64</code>.
prod	MATLAB	<ul style="list-style-type: none"> • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
projective2d	Image Processing Toolbox	When generating code, you can only specify single objects—arrays of objects are not supported.
psi	MATLAB	—
pulsint	Phased Array System Toolbox	Does not support variable-size inputs.
qr	MATLAB	—
quad2d	MATLAB	<ul style="list-style-type: none"> • Generates a warning if the size of the internal storage arrays is not large enough. If a warning occurs, a possible workaround is to divide the region of integration into pieces and sum the integrals over each piece.
quadgk	MATLAB	—
quantile	Statistics and Machine Learning Toolbox	—
quantize	Fixed-Point Designer	—
quatconj	Aerospace Toolbox	Code generation for this function requires the Aerospace Blockset™ software.
quatdivide	Aerospace Toolbox	Code generation for this function requires the Aerospace Blockset software.
quatinv	Aerospace Toolbox	Code generation for this function requires the Aerospace Blockset software.

Name	Product	Remarks and Limitations
quatmod	Aerospace Toolbox	Code generation for this function requires the Aerospace Blockset software.
quatmultiply	Aerospace Toolbox	Code generation for this function requires the Aerospace Blockset software.
quatnorm	Aerospace Toolbox	Code generation for this function requires the Aerospace Blockset software.
quatnormalize	Aerospace Toolbox	Code generation for this function requires the Aerospace Blockset software.
radareqpow	Phased Array System Toolbox	Does not support variable-size inputs.
radareqrng	Phased Array System Toolbox	Does not support variable-size inputs.
radareqsnr	Phased Array System Toolbox	Does not support variable-size inputs.
radarvcd	Phased Array System Toolbox	Does not support variable-size inputs.
radialspeed	Phased Array System Toolbox	Does not support variable-size inputs.
rand	MATLAB	<ul style="list-style-type: none"> • <code>classname</code> must be a built-in MATLAB numeric type. Does not invoke the static <code>rand</code> method for other classes. For example, <code>rand(sz, 'myclass')</code> does not invoke <code>myclass.rand(sz)</code>. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
randg	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
randi	MATLAB	<ul style="list-style-type: none"> • <code>classname</code> must be a built-in MATLAB numeric type. Does not invoke the static <code>randi</code> method for other classes. For example, <code>randi(imax,sz,'myclass')</code> does not invoke <code>myclass.randi(imax,sz)</code>. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
randn	MATLAB	<ul style="list-style-type: none"> • <code>classname</code> must be a built-in MATLAB numeric type. Does not invoke the static <code>randn</code> method for other classes. For example, <code>randn(sz,'myclass')</code> does not invoke <code>myclass.randn(sz)</code>. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
random	Statistics and Machine Learning Toolbox	—
randperm	MATLAB	—
range	Fixed-Point Designer	—
range2beat	Phased Array System Toolbox	Does not support variable-size inputs.
range2bw	Phased Array System Toolbox	Does not support variable-size inputs.
range2time	Phased Array System Toolbox	Does not support variable-size inputs.
rangeangle	Phased Array System Toolbox	Does not support variable-size inputs.
rank	MATLAB	—
raylcdf	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
raylinv	Statistics and Machine Learning Toolbox	—
raylpdf	Statistics and Machine Learning Toolbox	—
raylrnd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
raylstat	Statistics and Machine Learning Toolbox	—
rcond	MATLAB	—
rcosdesign	Signal Processing Toolbox	All inputs must be constant. Expressions or variables are allowed if their values do not change. Specifying constants To specify a constant input for <code>fiaccel</code> , use <code>coder.Constant</code> . For more information, see “Specify Constant Inputs at the Command Line”.
rdcoupling	Phased Array System Toolbox	Does not support variable-size inputs.
rdivide	MATLAB	—
rdivide	Fixed-Point Designer	—
real	MATLAB	—
real	Fixed-Point Designer	—
reallog	MATLAB	—

Name	Product	Remarks and Limitations
realmax	MATLAB	—
realmax	Fixed-Point Designer	—
realmin	MATLAB	—
realmin	Fixed-Point Designer	—
realpow	MATLAB	—
realsqrt	MATLAB	—
reconstructScene	Computer Vision System Toolbox	Supports MATLAB Function block: No
rectifyStereoImages	Computer Vision System Toolbox	Compile-time constant input restriction: 'interp' and 'OutputView' Supports MATLAB Function block: No
rectint	MATLAB	—
rectwin	Signal Processing Toolbox	All inputs must be constant. Expressions or variables are allowed if their values do not change. Specifying constants To specify a constant input for <code>fiaccel</code> , use <code>coder.Constant</code> . For more information, see “Specify Constant Inputs at the Command Line”.

Name	Product	Remarks and Limitations
regionprops	Image Processing Toolbox	<p>Supports only 2-D images. Does not accept the connected component structure (CC) returned by <code>bwconncomp</code>. Use <code>bwlabel</code> to create a label matrix, or pass the image to <code>regionprops</code> directly. Does not support the table output type. Does not accept cell arrays as input—use a comma-separated list instead. Does not support the properties <code>ConvexArea</code>, <code>ConvexHull</code>, <code>ConvexImage</code>, <code>Solidity</code>, and <code>SubarrayIdx</code>.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
reinterpretpcast	Fixed-Point Designer	—
rem	MATLAB	<ul style="list-style-type: none"> • Performs the arithmetic using the output class. Results might not match MATLAB due to differences in rounding errors. • If one of the inputs has type <code>int64</code> or <code>uint64</code>, then both inputs must have the same type.
removefimath	Fixed-Point Designer	—
repmat	MATLAB	—
repmat	Fixed-Point Designer	The dimensions argument must be a built-in type; it cannot be a <code>fi</code> object.
resample	Signal Processing Toolbox	<p>All inputs must be constant. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>

Name	Product	Remarks and Limitations
rescale	Fixed-Point Designer	—
reshape	MATLAB	<ul style="list-style-type: none"> • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
reshape	Fixed-Point Designer	—
return	MATLAB	—
rgb2gray	MATLAB	—
rgb2ycbcr	Image Processing Toolbox	—
rng	MATLAB	<ul style="list-style-type: none"> • For library code generation targets, executable code generation targets, and MEX targets with extrinsic calls disabled: <ul style="list-style-type: none"> • Does not support the 'shuffle' input. • For the generator input, supports 'twister', 'v4', and 'v5normal'. <p>For these targets, the output of <code>s=rng</code> in the generated code differs from the MATLAB output. You cannot return the output of <code>s=rng</code> from the generated code and pass it to <code>rng</code> in MATLAB.</p> • For MEX targets, if extrinsic calls are enabled, you cannot access the data in the structure returned by <code>rng</code>.
rocpfa	Phased Array System Toolbox	<ul style="list-style-type: none"> • Does not support variable-size inputs. • The <code>NonfluctuatingNoncoherent</code> signal type is not supported.
rocsnr	Phased Array System Toolbox	<ul style="list-style-type: none"> • Does not support variable-size inputs. • Does not support the <code>NonfluctuatingNoncoherent</code> signal type.
rootmusicdoa	Phased Array System Toolbox	Does not support variable-size inputs.

Name	Product	Remarks and Limitations
roots	MATLAB	<ul style="list-style-type: none"> • Output is variable size. • Output is complex. • Roots are not always in the same order as MATLAB. • Roots of poorly conditioned polynomials do not always match MATLAB. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
rosser	MATLAB	—
rot90	MATLAB	—
rot90	Fixed-Point Designer	In the syntax <code>rot90(A,k)</code> , the argument <code>k</code> must be a built-in type; it cannot be a <code>fi</code> object.
rotx	Phased Array System Toolbox	Does not support variable-size inputs.
roty	Phased Array System Toolbox	Does not support variable-size inputs.
rotz	Phased Array System Toolbox	Does not support variable-size inputs.
round	MATLAB	Supports only the syntax <code>Y = round(X)</code> .
round	Fixed-Point Designer	—
rsf2csf	MATLAB	—
schur	MATLAB	Can return a different Schur decomposition in generated code than in MATLAB.
sec	MATLAB	—
secd	MATLAB	<ul style="list-style-type: none"> • In some cases, returns <code>-Inf</code> when MATLAB returns <code>Inf</code>. • In some cases, returns <code>Inf</code> when MATLAB returns <code>-Inf</code>.
sech	MATLAB	—

Name	Product	Remarks and Limitations
<code>selectStrongestBbox</code>	Computer Vision System Toolbox	Compile-time constant input: No restriction Supports MATLAB Function block: No
<code>sensorcov</code>	Phased Array System Toolbox	Does not support variable-size inputs.
<code>sensorsig</code>	Phased Array System Toolbox	Does not support variable-size inputs.

Name	Product	Remarks and Limitations
setdiff	MATLAB	<ul style="list-style-type: none"> • When you do not specify the 'rows' option: <ul style="list-style-type: none"> • Inputs A and B must be vectors. If you specify the 'legacy' option, inputs A and B must be row vectors. • The first dimension of a variable-size row vector must have fixed length 1. The second dimension of a variable-size column vector must have fixed length 1. • Do not use [] to represent the empty set. Use a 1-by-0 or 0-by-1 input, for example, <code>zeros(1,0)</code>, to represent the empty set. • If you specify the 'legacy' option, empty outputs are row vectors, 1-by-0, never 0-by-0. • When you specify both the 'legacy' and 'rows' options, the output <code>ia</code> is a column vector. If <code>ia</code> is empty, it is 0-by-1, never 0-by-0, even if the output <code>C</code> is 0-by-0. • When the <code>setOrder</code> is 'sorted' or when you specify the 'legacy' option, the inputs must already be sorted in ascending order. The first output, <code>C</code>, is sorted in ascending order. • Complex inputs must be <code>single</code> or <code>double</code>. • When one input is complex and the other input is real, do one of the following: <ul style="list-style-type: none"> • Set <code>setOrder</code> to 'stable'. • Sort the real input in complex ascending order (by absolute value). Suppose the real input is <code>x</code>. Use <code>sort(complex(x))</code> or <code>sortrows(complex(x))</code>.

Name	Product	Remarks and Limitations
		• “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
setfimath	Fixed-Point Designer	—

Name	Product	Remarks and Limitations
setxor	MATLAB	<ul style="list-style-type: none"> • When you do not specify the 'rows' option: <ul style="list-style-type: none"> • Inputs <i>A</i> and <i>B</i> must be vectors with the same orientation. If you specify the 'legacy' option, inputs <i>A</i> and <i>B</i> must be row vectors. • The first dimension of a variable-size row vector must have fixed length 1. The second dimension of a variable-size column vector must have fixed length 1. • The input <code>[]</code> is not supported. Use a 1-by-0 or 0-by-1 input, for example , <code>zeros(1,0)</code>, to represent the empty set. • If you specify the 'legacy' option, empty outputs are row vectors, 1-by-0, never 0-by-0. • When you specify both the 'legacy' option and the 'rows' option, the outputs <i>ia</i> and <i>ib</i> are column vectors. If these outputs are empty, they are 0-by-1, never 0-by-0, even if the output <i>C</i> is 0-by-0. • When the <code>setOrder</code> is 'sorted' or when you specify the 'legacy' flag, the inputs must already be sorted in ascending order. The first output, <i>C</i>, is sorted in ascending order. • Complex inputs must be <code>single</code> or <code>double</code>. • When one input is complex and the other input is real, do one of the following: <ul style="list-style-type: none"> • Set <code>setOrder</code> to 'stable'. • Sort the real input in complex ascending order (by absolute value). Suppose the real input is <i>x</i>. Use <code>sort(complex(x))</code> or <code>sortrows(complex(x))</code>.

Name	Product	Remarks and Limitations
		<ul style="list-style-type: none"> • “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
sfi	Fixed-Point Designer	<ul style="list-style-type: none"> • All properties related to data type must be constant for code generation.
sgolay	Signal Processing Toolbox	<p>All inputs must be constant. Expressions or variables are allowed if their values do not change.</p> <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
shiftdim	MATLAB	<ul style="list-style-type: none"> • Second argument must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
shiftdim	Fixed-Point Designer	The dimensions argument must be a built-in type; it cannot be a <code>fi</code> object.
shnidman	Phased Array System Toolbox	Does not support variable-size inputs.
sign	MATLAB	—
sign	Fixed-Point Designer	—
sin	MATLAB	—
sin	Fixed-Point Designer	—
sind	MATLAB	—
single	MATLAB	—
single	Fixed-Point Designer	—
sinh	MATLAB	—
size	MATLAB	—

Name	Product	Remarks and Limitations
size	Fixed-Point Designer	—
skewness	Statistics and Machine Learning Toolbox	—
sort	MATLAB	If the input is a complex type, <code>sort</code> orders the output according to absolute value. When <code>x</code> is a complex type that has all zero imaginary parts, use <code>sort(real(x))</code> to compute the sort order for real types. See “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
sort	Fixed-Point Designer	The <code>dimensions</code> argument must be a built-in type; it cannot be a <code>fi</code> object.
sortrows	MATLAB	If the input is a complex type, <code>sortrows</code> orders the output according to absolute value. When <code>x</code> is a complex type that has all zero imaginary parts, use <code>sortrows(real(x))</code> to compute the sort order for real types. See “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
sosfilt	Signal Processing Toolbox	—
speed2dop	Phased Array System Toolbox	Does not support variable-size inputs.
sph2cart	MATLAB	—
sph2cartvec	Phased Array System Toolbox	Does not support variable-size inputs.

Name	Product	Remarks and Limitations
spline	MATLAB	<ul style="list-style-type: none"> • Input <code>x</code> must be strictly increasing. • Does not remove <code>Y</code> entries with NaN values. • Does not report an error for infinite endslopes in <code>Y</code>. • If you generate code for the <code>pp = spline(x,Y)</code> syntax, you cannot input <code>pp</code> to the <code>ppval</code> function in MATLAB. To create a MATLAB <code>pp</code> structure from a <code>pp</code> structure created by the code generation software: <ul style="list-style-type: none"> • In code generation, use <code>unmkpp</code> to return the piecewise polynomial details to MATLAB. • In MATLAB, use <code>mkpp</code> to create the <code>pp</code> structure.
spsmooth	Phased Array System Toolbox	Does not support variable-size inputs.
squeeze	MATLAB	—
squeeze	Fixed-Point Designer	—
sqrt	MATLAB	<ul style="list-style-type: none"> • Generates an error during simulation and returns NaN in generated code when the input value <code>x</code> is real, but the output should be complex. To get the complex result, make the input value complex by passing in <code>complex(x)</code>.
sqrt	Fixed-Point Designer	<ul style="list-style-type: none"> • Complex and [Slope Bias] inputs error out. • Negative inputs yield a 0 result.
sqrtm	MATLAB	—
std	MATLAB	<ul style="list-style-type: none"> • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” • Does not support the <code>nanflag</code> argument.

Name	Product	Remarks and Limitations
steervec	Phased Array System Toolbox	Does not support variable-size inputs.
stereoParameters	Computer Vision System Toolbox	Supports MATLAB Function block: No
stokes	Phased Array System Toolbox	<ul style="list-style-type: none"> • Does not support variable-size inputs. • Supported only when output arguments are specified.
storedInteger	Fixed-Point Designer	—
storedIntegerToDouble	Fixed-Point Designer	—
str2double	MATLAB	<ul style="list-style-type: none"> • Does not support cell arrays. • Always returns a complex result.
str2func	MATLAB	String must be constant/known at compile time.
strcmp	MATLAB	—
strcmpi	MATLAB	<ul style="list-style-type: none"> • Input values from the <code>char</code> class must be in the range 0-127.
strel	Image Processing Toolbox	Input arguments must be compile-time constants. The following methods are not supported for code generation: <code>getsequence</code> , <code>reflect</code> , <code>translate</code> , <code>disp</code> , <code>display</code> , <code>loadobj</code> . When generating code, you can only specify single objects—arrays of objects are not supported.
stretchfreq2rng	Phased Array System Toolbox	Does not support variable-size inputs.
stretchlim	Image Processing Toolbox	If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.
strfind	MATLAB	<ul style="list-style-type: none"> • Does not support cell arrays. • If <code>pattern</code> does not exist in <code>str</code>, returns <code>zeros(1,0)</code> not <code>[]</code>. To check for an empty return, use <code>isempty</code>.

Name	Product	Remarks and Limitations
		<ul style="list-style-type: none"> Inputs must be character row vectors.
strjust	MATLAB	—
strncmp	MATLAB	—
strncmpi	MATLAB	<ul style="list-style-type: none"> Input values from the <code>char</code> class must be in the range 0-127.
strrep	MATLAB	<ul style="list-style-type: none"> Does not support cell arrays. If <code>oldSubstr</code> does not exist in <code>origStr</code>, returns <code>blanks(0)</code>. To check for an empty return, use <code>isempty</code>. Inputs must be character row vectors.
strtok	MATLAB	—
strtrim	MATLAB	<ul style="list-style-type: none"> Supports only inputs from the <code>char</code> class. Input values must be in the range 0-127.
struct	MATLAB	—
structfun	MATLAB	<ul style="list-style-type: none"> Does not support the <code>ErrorHandler</code> option. The number of outputs must be less than or equal to three.
sub	Fixed-Point Designer	Code generation in MATLAB does not support the syntax <code>F.sub(a,b)</code> . You must use the syntax <code>sub(F,a,b)</code> .
sub2ind	MATLAB	<ul style="list-style-type: none"> The first argument must be a valid size vector. Size vectors for arrays with more than <code>intmax</code> elements are not supported. “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
subsasgn	Fixed-Point Designer	—
subspace	MATLAB	—
subsref	Fixed-Point Designer	—

Name	Product	Remarks and Limitations
sum	MATLAB	<ul style="list-style-type: none"> • Specify <code>dim</code> as a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” • Does not support the <code>nanflag</code> argument.
sum	Fixed-Point Designer	<ul style="list-style-type: none"> • Variable-sized inputs are only supported when the <code>SumMode</code> property of the governing <code>fimath</code> is set to <code>Specify precision</code> or <code>Keep LSB</code>.
surfacegamma	Phased Array System Toolbox	Does not support variable-size inputs.
surfcluttercs	Phased Array System Toolbox	Does not support variable-size inputs.
SURFPoints	Computer Vision System Toolbox	Compile-time constant input: No restrictions. Supports MATLAB Function block: No To index locations with this object, use the syntax: <code>points.Location(idx,:)</code> , for <code>points</code> object. See <code>visionRecovertransformCodeGeneration_kernel.m</code> , which is used in the “Introduction to Code Generation with Feature Matching and Registration” example.
svd	MATLAB	Uses a different SVD implementation than MATLAB. Because the singular value decomposition is not unique, left and right singular vectors might differ from those computed by MATLAB.
swapbytes	MATLAB	Inheritance of the class of the input to <code>swapbytes</code> in a MATLAB Function block is supported only when the class of the input is <code>double</code> . For non-double inputs, the input port data types must be specified, not inherited.

Name	Product	Remarks and Limitations
switch, case, otherwise	MATLAB	<ul style="list-style-type: none"> • If all case expressions are scalar integer values, generates a C <code>switch</code> statement. At run time, if the switch value is not an integer, generates an error. • When the case expressions contain noninteger or nonscalar values, the code generation software generates C <code>if</code> statements in place of a C <code>switch</code> statement.
systemp	Phased Array System Toolbox	Does not support variable-size inputs.
tan	MATLAB	—
tand	MATLAB	<ul style="list-style-type: none"> • In some cases, returns <code>-Inf</code> when MATLAB returns <code>Inf</code>. • In some cases, returns <code>Inf</code> when MATLAB returns <code>-Inf</code>.
tanh	MATLAB	—
taylorwin	Signal Processing Toolbox	Inputs must be constant Specifying constants To specify a constant input for <code>fiaccel</code> , use <code>coder.Constant</code> . For more information, see “Specify Constant Inputs at the Command Line”.
tcdf	Statistics and Machine Learning Toolbox	—
tf2ca	DSP System Toolbox	All inputs must be constant. Expressions or variables are allowed if their values do not change.
tf2cl	DSP System Toolbox	All inputs must be constant. Expressions or variables are allowed if their values do not change.
time2range	Phased Array System Toolbox	Does not support variable-size inputs.

Name	Product	Remarks and Limitations
times	MATLAB	Multiplication of pure imaginary numbers by non-finite numbers might not match MATLAB. The code generation software does not specialize multiplication by pure imaginary numbers—it does not eliminate calculations with the zero real part. For example, $(\text{Inf} + 1i) * 1i = (\text{Inf} * 0 - 1 * 1) + (\text{Inf} * 1 + 1 * 0)i = \text{NaN} + \text{Infi}$.
times	Fixed-Point Designer	<ul style="list-style-type: none"> • Any non-<code>fi</code> input must be constant; that is, its value must be known at compile time so that it can be cast to a <code>fi</code> object. • When you provide complex inputs to the <code>times</code> function inside a MATLAB Function block, you must declare the input as complex before running the simulation. To do so, go to the Ports and data manager and set the Complexity parameter for all known complex inputs to <code>On</code>.
tinv	Statistics and Machine Learning Toolbox	—
toeplitz	MATLAB	—
tpdf	Statistics and Machine Learning Toolbox	—
trace	MATLAB	—
transpose	MATLAB	—
transpose	Fixed-Point Designer	—
trapz	MATLAB	<ul style="list-style-type: none"> • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”

Name	Product	Remarks and Limitations
triang	Signal Processing Toolbox	Inputs must be constant Specifying constants To specify a constant input for <code>fiaccel</code> , use <code>coder.Constant</code> . For more information, see “Specify Constant Inputs at the Command Line”.
triangulate	Computer Vision System Toolbox	Supports MATLAB Function block: No
tril	MATLAB	<ul style="list-style-type: none"> If supplied, the argument representing the order of the diagonal matrix must be a real and scalar integer value.
tril	Fixed-Point Designer	<ul style="list-style-type: none"> If supplied, the index, k, must be a real and scalar integer value that is not a <code>fi</code> object.
triu	MATLAB	<ul style="list-style-type: none"> If supplied, the argument representing the order of the diagonal matrix must be a real and scalar integer value.
triu	Fixed-Point Designer	<ul style="list-style-type: none"> If supplied, the index, k, must be a real and scalar integer value that is not a <code>fi</code> object.
trnd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> The output is nonscalar. An input parameter is invalid for the distribution.
true	MATLAB	<ul style="list-style-type: none"> Dimensions must be real, nonnegative, integers.
tstat	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
tukeywin	Signal Processing Toolbox	Inputs must be constant. Specifying constants To specify a constant input for <code>fiaccel</code> , use <code>coder.Constant</code> . For more information, see “Specify Constant Inputs at the Command Line”.
typecast	MATLAB	<ul style="list-style-type: none"> • Value of string input argument <code>type</code> must be lowercase. • When you use <code>typecast</code> with inheritance of input port data types in MATLAB Function blocks, you can receive a size error. To avoid this error, specify the block input port data types explicitly. • Integer input or result classes must map directly to a C type on the target hardware. • The input must be a variable-length vector or a fixed-size vector. See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” • The output vector always has the same orientation as the input vector.
ufi	Fixed-Point Designer	<ul style="list-style-type: none"> • All properties related to data type must be constant for code generation.
uint8, uint16, uint32, uint64	MATLAB	No integer overflow detection for <code>int64</code> in MEX or MATLAB Function block simulation on Windows 32-bit platforms.
uint8, uint16, uint32, uint64	Fixed-Point Designer	—
uminus	MATLAB	—
uminus	Fixed-Point Designer	—

Name	Product	Remarks and Limitations
undistortImage	Computer Vision System Toolbox	Compile-time constant input restriction: 'interp' and 'OutputView' Supports MATLAB Function block: No
unidcdf	Statistics and Machine Learning Toolbox	—
unidinv	Statistics and Machine Learning Toolbox	—
unidpdf	Statistics and Machine Learning Toolbox	—
unidrnd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
unidstat	Statistics and Machine Learning Toolbox	—
unifcdf	Statistics and Machine Learning Toolbox	—
unifinv	Statistics and Machine Learning Toolbox	—
unifpdf	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
unifrnd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
unifstat	Statistics and Machine Learning Toolbox	—
unigrd	Phased Array System Toolbox	Does not support variable-size inputs.

Name	Product	Remarks and Limitations
union	MATLAB	<ul style="list-style-type: none"> • When you do not specify the 'rows' option: <ul style="list-style-type: none"> • Inputs A and B must be vectors with the same orientation. If you specify the 'legacy' option, inputs A and B must be row vectors. • The first dimension of a variable-size row vector must have fixed length 1. The second dimension of a variable-size column vector must have fixed length 1. • The input [] is not supported. Use a 1-by-0 or 0-by-1 input, for example , <code>zeros(1,0)</code>, to represent the empty set. • If you specify the 'legacy' option, empty outputs are row vectors, 1-by-0, never 0-by-0. • When you specify both the 'legacy' option and the 'rows' option, the outputs <code>ia</code> and <code>ib</code> are column vectors. If these outputs are empty, they are 0-by-1, never 0-by-0, even if the output <code>C</code> is 0-by-0. • When the <code>setOrder</code> is 'sorted' or when you specify the 'legacy' option, the inputs must already be sorted in ascending order. The first output, <code>C</code>, is sorted in ascending order. • Complex inputs must be <code>single</code> or <code>double</code>. • When one input is complex and the other input is real, do one of the following: <ul style="list-style-type: none"> • Set <code>setOrder</code> to 'stable'. • Sort the real input in complex ascending order (by absolute value). Suppose the real input is <code>x</code>. Use <code>sort(complex(x))</code> or <code>sortrows(complex(x))</code>.

Name	Product	Remarks and Limitations
unique	MATLAB	<ul style="list-style-type: none"> • “Code Generation for Complex Data with Zero-Valued Imaginary Parts”. • When you do not specify the 'rows' option: <ul style="list-style-type: none"> • The input A must be a vector. If you specify the 'legacy' option, the input A must be a row vector. • The first dimension of a variable-size row vector must have fixed length 1. The second dimension of a variable-size column vector must have fixed length 1. • The input <code>[]</code> is not supported. Use a 1-by-0 or 0-by-1 input, for example, <code>zeros(1,0)</code>, to represent the empty set. • If you specify the 'legacy' option, empty outputs are row vectors, 1-by-0, never 0-by-0. • When you specify both the 'rows' option and the 'legacy' option, outputs ia and ic are column vectors. If these outputs are empty, they are 0-by-1, even if the output C is 0-by-0. • When the <code>setOrder</code> is 'sorted' or when you specify the 'legacy' option, the input A must already be sorted in ascending order. The first output, C, is sorted in ascending order. • Complex inputs must be <code>single</code> or <code>double</code>.
unmkpp	MATLAB	<ul style="list-style-type: none"> • <code>pp</code> must be a valid piecewise polynomial structure created by <code>mkpp</code>, <code>spline</code>, or <code>pchip</code> in MATLAB or by the code generation software. • Does not support <code>pp</code> structures created by <code>interp1</code> in MATLAB.

Name	Product	Remarks and Limitations
unwrap	MATLAB	<ul style="list-style-type: none"> • Row vector input is only supported when the first two inputs are vectors and nonscalar • Performs arithmetic in the output class. Hence, results might not match MATLAB due to different rounding errors
upfirdn	Signal Processing Toolbox	<ul style="list-style-type: none"> • Code generation for this function requires the DSP System Toolbox software. • Filter coefficients, upsampling factor, and downsampling factor must be constants. Expressions or variables are allowed if their values do not change. <p>Specifying constants</p> <p>To specify a constant input for <code>fiaccel</code>, use <code>coder.Constant</code>. For more information, see “Specify Constant Inputs at the Command Line”.</p>
uplus	MATLAB	—
uplus	Fixed-Point Designer	—
upper	MATLAB	<ul style="list-style-type: none"> • Supports only char inputs. • Input values must be in the range 0-127.
upperbound	Fixed-Point Designer	—
upsample	Signal Processing Toolbox	<p>Either declare input <code>n</code> as constant, or use the <code>assert</code> function in the calling function to set upper bounds for <code>n</code>. For example,</p> <pre>assert(n<10)</pre>
uv2azel	Phased Array System Toolbox	Does not support variable-size inputs.
uv2azelpat	Phased Array System Toolbox	Does not support variable-size inputs.

Name	Product	Remarks and Limitations
uv2phitheta	Phased Array System Toolbox	Does not support variable-size inputs.
uv2phithetapat	Phased Array System Toolbox	Does not support variable-size inputs.
val2ind	Phased Array System Toolbox	Does not support variable-size inputs.
vander	MATLAB	—
var	MATLAB	<ul style="list-style-type: none"> • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” • Does not support the <code>nanflag</code> argument.
vertcat	Fixed-Point Designer	—
vision.AlphaBlender	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.Autocorrelator	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.Autothresher	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.BlobAnalysis	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.BoundaryTracer	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.CascadeObject-Detector	Computer Vision System Toolbox	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library. “System Objects in MATLAB Code Generation”
vision.ChromaResampler	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.Color-SpaceConverter	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
<code>vision.Connected-ComponentLabeler</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Convolver</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.ContrastAdjuster</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Crosscorrelator</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Demosaic-Interpolator</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.DCT</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Deinterlacer</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Deployable</code>	Computer Vision System Toolbox	Generates code on Windows host only. Generated code for this function uses a precompiled platform-specific shared library. “System Objects in MATLAB Code Generation”
<code>vision.DeployableVideo-Player</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes Generated code for this function uses a precompiled platform-specific shared library. “System Objects in MATLAB Code Generation”
<code>vision.EdgeDetector</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.FFT</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Foreground-Detector</code>	Computer Vision System Toolbox	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library. “System Objects in MATLAB Code Generation”
<code>vision.GammaCorrector</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
<code>vision.GeometricRotator</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.GeometricScaler</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.GeometricShearer</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Geometric-Transformer</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Geometric-Translator</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Histogram</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Histogram-BasedTracker</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Histogram-Equalizer</code>		Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.HoughLines</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.HoughTransform</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.IDCT</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.IFFT</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Image-Complementer</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.ImageFilter</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.ImageDataType-Converter</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.ImagePadder</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
<code>vision.KalmanFilter</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.LocalMaxima-Finder</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.MarkerInserter</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Maximum</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Median</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.MedianFilter</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Mean</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Minimum</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Morphological-Close</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Morphological-Dilate</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Morphological-Erode</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.Morphological-Open</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
<code>vision.PeopleDetector</code>	Computer Vision System Toolbox	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library. “System Objects in MATLAB Code Generation”
<code>vision.PointTracker</code>	Computer Vision System Toolbox	Supports MATLAB Function block: No “System Objects in MATLAB Code Generation”
<code>vision.PSNR</code>	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”

Name	Product	Remarks and Limitations
vision.Pyramid	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.ShapeInserter	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.Standard-Deviation	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.TemplateMatcher	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.TextInserter	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.Variance	Computer Vision System Toolbox	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.VideoFileReader	Computer Vision System Toolbox	Supports MATLAB Function block: Yes Generated code for this function uses a precompiled platform-specific shared library. “System Objects in MATLAB Code Generation”
vision.VideoFileWriter	Computer Vision System Toolbox	Supports MATLAB Function block: Yes Generated code for this function uses a precompiled platform-specific shared library. “System Objects in MATLAB Code Generation”
watershed	Image Processing Toolbox	Supports only 2-D images. Supports only 4- or 8-connectivity. Supports only up to 65,535 regions. The output type is always <code>uint16</code> . If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.
wblcdf	Statistics and Machine Learning Toolbox	—
wblinv	Statistics and Machine Learning Toolbox	—

Name	Product	Remarks and Limitations
wblpdf	Statistics and Machine Learning Toolbox	—
wblrnd	Statistics and Machine Learning Toolbox	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
wblstat	Statistics and Machine Learning Toolbox	—
while	MATLAB	—
wilkinson	MATLAB	—
xcorr	Signal Processing Toolbox	—
xor	MATLAB	—
ycbcr2rgb	Image Processing Toolbox	—
yulewalk	Signal Processing Toolbox	If specified, the order of recursion must be a constant. Expressions or variables are allowed if their values do not change. <p>Specifying constants</p> To specify a constant input for <code>fiaccl</code> , use <code>coder.Constant</code> . For more information, see “Specify Constant Inputs at the Command Line”.
zeros	MATLAB	<ul style="list-style-type: none"> • Dimensions must be real, nonnegative, integers.
zp2tf	MATLAB	—
zscore	Statistics and Machine Learning Toolbox	—

Functions and Objects Supported for C and C++ Code Generation — Category List

You can generate efficient C and C++ code for a subset of MATLAB built-in functions and toolbox functions, classes, and System objects that you call from MATLAB code. These functions, classes, and System objects are listed by MATLAB category or toolbox category in the following tables.

For an alphabetical list of supported functions, classes, and System objects, see “Functions and Objects Supported for C and C++ Code Generation — Alphabetical List”.

Note: For more information on code generation for fixed-point algorithms, refer to “Code Acceleration and Code Generation from MATLAB”.

In this section...

“Aerospace Toolbox” on page 25-149
“Arithmetic Operations in MATLAB” on page 25-149
“Bit-Wise Operations MATLAB” on page 25-150
“Casting in MATLAB” on page 25-151
“Communications System Toolbox” on page 25-151
“Complex Numbers in MATLAB” on page 25-157
“Computer Vision System Toolbox” on page 25-157
“Control Flow in MATLAB” on page 25-166
“Data and File Management in MATLAB” on page 25-167
“Data Types in MATLAB” on page 25-171
“Desktop Environment in MATLAB” on page 25-172
“Discrete Math in MATLAB” on page 25-172
“DSP System Toolbox” on page 25-173
“Error Handling in MATLAB” on page 25-180
“Exponents in MATLAB” on page 25-181
“Filtering and Convolution in MATLAB” on page 25-181
“Fixed-Point Designer” on page 25-182

In this section...

- “HDL Coder” on page 25-192
- “Histograms in MATLAB” on page 25-192
- “Image Acquisition Toolbox” on page 25-193
- “Image Processing in MATLAB” on page 25-193
- “Image Processing Toolbox” on page 25-193
- “Input and Output Arguments in MATLAB” on page 25-202
- “Interpolation and Computational Geometry in MATLAB” on page 25-202
- “Linear Algebra in MATLAB” on page 25-206
- “Logical and Bit-Wise Operations in MATLAB” on page 25-207
- “MATLAB Compiler” on page 25-208
- “Matrices and Arrays in MATLAB” on page 25-208
- “Neural Network Toolbox” on page 25-216
- “Nonlinear Numerical Methods in MATLAB” on page 25-217
- “Numerical Integration and Differentiation in MATLAB” on page 25-217
- “Optimization Functions in MATLAB” on page 25-218
- “Phased Array System Toolbox” on page 25-218
- “Polynomials in MATLAB” on page 25-228
- “Programming Utilities in MATLAB” on page 25-229
- “Relational Operators in MATLAB” on page 25-229
- “Rounding and Remainder Functions in MATLAB” on page 25-229
- “Set Operations in MATLAB” on page 25-230
- “Signal Processing in MATLAB” on page 25-235
- “Signal Processing Toolbox” on page 25-236
- “Special Values in MATLAB” on page 25-241
- “Specialized Math in MATLAB” on page 25-241
- “Statistics in MATLAB” on page 25-242
- “Statistics and Machine Learning Toolbox” on page 25-243
- “String Functions in MATLAB” on page 25-252
- “Structures in MATLAB” on page 25-253

In this section...

“Trigonometry in MATLAB” on page 25-254

Aerospace Toolbox

C and C++ code generation for the following Aerospace Toolbox quaternion functions requires the Aerospace Blockset software.

Function	Remarks and Limitations
quatconj	—
quatdivide	—
quatinv	—
quatmod	—
quatmultiply	—
quatnorm	—
quatnormalize	—

Arithmetic Operations in MATLAB

See “Array vs. Matrix Operations” for detailed descriptions of the following operator equivalent functions.

Function	Remarks and Limitations
ctranspose	—
idivide	• For efficient generated code, MATLAB rules for divide by zero are supported only for the 'round' option.
isa	—
ldivide	—
minus	—
mldivide	—
mpower	If A is a 2-by-2 or larger matrix and B is Inf or -Inf, mpower(A,B) returns a matrix of NaNs.

Function	Remarks and Limitations
mrdivide	—
mtimes	<ul style="list-style-type: none"> • Multiplication of pure imaginary numbers by non-finite numbers might not match MATLAB. The code generation software does not specialize multiplication by pure imaginary numbers—it does not eliminate calculations with the zero real part. For example, $(\text{Inf} + 1i) * 1i = (\text{Inf} * 0 - 1 * 1) + (\text{Inf} * 1 + 1 * 0)i = \text{NaN} + \text{Inf}i$. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
plus	—
power	<ul style="list-style-type: none"> • Generates an error during simulation. When both X and Y are real, but <code>power(X,Y)</code> is complex, returns NaN in the generated code. To get the complex result, make the input value X complex by passing in <code>complex(X)</code>. For example, <code>power(complex(X),Y)</code>. • Generates an error during simulation. When both X and Y are real, but <code>X.^Y</code> is complex, returns NaN in generated code. To get the complex result, make the input value X complex by using <code>complex(X)</code>. For example, <code>complex(X).^Y</code>.
rdivide	—
times	Multiplication of pure imaginary numbers by non-finite numbers might not match MATLAB. The code generation software does not specialize multiplication by pure imaginary numbers—it does not eliminate calculations with the zero real part. For example, $(\text{Inf} + 1i) * 1i = (\text{Inf} * 0 - 1 * 1) + (\text{Inf} * 1 + 1 * 0)i = \text{NaN} + \text{Inf}i$.
transpose	—
uminus	—
uplus	—

Bit-Wise Operations MATLAB

Function	Remarks and Limitations
flintmax	—
swapbytes	Inheritance of the class of the input to <code>swapbytes</code> in a MATLAB Function block is supported only when the class of the input is <code>double</code> . For non-double inputs, the input port data types must be specified, not inherited.

Casting in MATLAB

Function	Remarks and Limitations
cast	—
char	—
class	—
double	—
int8, int16, int32, int64	No integer overflow detection for <code>int64</code> in MEX or MATLAB Function block simulation on Windows 32-bit platforms.
logical	—
single	—
typecast	<ul style="list-style-type: none"> • Value of string input argument <code>type</code> must be lowercase. • When you use <code>typecast</code> with inheritance of input port data types in MATLAB Function blocks, you can receive a size error. To avoid this error, specify the block input port data types explicitly. • Integer input or result classes must map directly to a C type on the target hardware. • The input must be a variable-length vector or a fixed-size vector. See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” • The output vector always has the same orientation as the input vector.
uint8, uint16, uint32, uint64	No integer overflow detection for <code>int64</code> in MEX or MATLAB Function block simulation on Windows 32-bit platforms.

Communications System Toolbox

C and C++ code generation for the following functions and System objects requires the Communications System Toolbox software.

Name	Remarks and Limitations
Input and Output	
<code>comm.BarkerCode</code>	“System Objects in MATLAB Code Generation”
<code>comm.GoldSequence</code>	“System Objects in MATLAB Code Generation”
<code>comm.HadamardCode</code>	“System Objects in MATLAB Code Generation”

Name	Remarks and Limitations
comm.KasamiSequence	“System Objects in MATLAB Code Generation”
comm.WalshCode	“System Objects in MATLAB Code Generation”
comm.PNSequence	“System Objects in MATLAB Code Generation”
lteZadoffChuSeq	—
Signal and Delay Management	
bi2de	—
de2bi	—
Display and Visual Analysis	
comm.ConstellationDiagram	“System Objects in MATLAB Code Generation”
dsp.ArrayPlot	“System Objects in MATLAB Code Generation”
dsp.SpectrumAnalyzer	“System Objects in MATLAB Code Generation”
dsp.TimeScope	“System Objects in MATLAB Code Generation”
Source Coding	
comm.DifferentialDecoder	“System Objects in MATLAB Code Generation”
comm.DifferentialEncoder	“System Objects in MATLAB Code Generation”
Cyclic Redundancy Check Coding	
comm.CRCDetector	“System Objects in MATLAB Code Generation”
comm.CRCGenerator	“System Objects in MATLAB Code Generation”
comm.HDLCRCDetector	“System Objects in MATLAB Code Generation”
comm.HDLCRCGenerator	“System Objects in MATLAB Code Generation”
BCH Codes	
comm.BCHDecoder	“System Objects in MATLAB Code Generation”
comm.BCHEncoder	“System Objects in MATLAB Code Generation”
Reed-Solomon Codes	
comm.RSDecoder	“System Objects in MATLAB Code Generation”
comm.RSEncoder	“System Objects in MATLAB Code Generation”
comm.HDLRSDecoder	“System Objects in MATLAB Code Generation”
comm.HDLRSEncoder	“System Objects in MATLAB Code Generation”

Name	Remarks and Limitations
LDPC Codes	
comm.LDPCDecoder	“System Objects in MATLAB Code Generation”
comm.LDPCEncoder	“System Objects in MATLAB Code Generation”
Convolutional Coding	
comm.APPDecoder	“System Objects in MATLAB Code Generation”
comm.ConvolutionalEncoder	“System Objects in MATLAB Code Generation”
comm.TurboDecoder	“System Objects in MATLAB Code Generation”
comm.TurboEncoder	“System Objects in MATLAB Code Generation”
comm.ViterbiDecoder	“System Objects in MATLAB Code Generation”
istrellis	—
poly2trellis	—
Signal Operations	
comm.Descrambler	“System Objects in MATLAB Code Generation”
comm.Scrambler	“System Objects in MATLAB Code Generation”
Interleaving	
comm.AlgebraicDeinterleaver	“System Objects in MATLAB Code Generation”
comm.AlgebraicInterleaver	“System Objects in MATLAB Code Generation”
comm.BlockDeinterleaver	“System Objects in MATLAB Code Generation”
comm.BlockInterleaver	“System Objects in MATLAB Code Generation”
comm.ConvolutionalDeinterleaver	“System Objects in MATLAB Code Generation”
comm.ConvolutionalInterleaver	“System Objects in MATLAB Code Generation”
comm.HelicalDeinterleaver	“System Objects in MATLAB Code Generation”
comm.HelicalInterleaver	“System Objects in MATLAB Code Generation”
comm.MatrixDeinterleaver	“System Objects in MATLAB Code Generation”
comm.MatrixInterleaver	“System Objects in MATLAB Code Generation”
comm.MatrixHelicalScanDeinterleaver	“System Objects in MATLAB Code Generation”
comm.MatrixHelicalScanInterleaver	“System Objects in MATLAB Code Generation”
comm.MultiplexedDeinterleaver	“System Objects in MATLAB Code Generation”

Name	Remarks and Limitations
comm.MultplexedInterleaver	“System Objects in MATLAB Code Generation”
Frequency Modulation	
comm.FSKDemodulator	“System Objects in MATLAB Code Generation”
comm.FSKModulator	“System Objects in MATLAB Code Generation”
Phase Modulation	
comm.BPSKDemodulator	“System Objects in MATLAB Code Generation”
comm.BPSKModulator	“System Objects in MATLAB Code Generation”
comm.DBPSKDemodulator	“System Objects in MATLAB Code Generation”
comm.DBPSKModulator	“System Objects in MATLAB Code Generation”
comm.DPSKDemodulator	“System Objects in MATLAB Code Generation”
comm.DPSKModulator	“System Objects in MATLAB Code Generation”
comm.DQPSKDemodulator	“System Objects in MATLAB Code Generation”
comm.DQPSKModulator	“System Objects in MATLAB Code Generation”
comm.OQPSKDemodulator	“System Objects in MATLAB Code Generation”
comm.OQPSKModulator	“System Objects in MATLAB Code Generation”
comm.PSKDemodulator	“System Objects in MATLAB Code Generation”
comm.PSKModulator	“System Objects in MATLAB Code Generation”
comm.QPSKDemodulator	“System Objects in MATLAB Code Generation”
comm.QPSKModulator	“System Objects in MATLAB Code Generation”
Amplitude Modulation	
comm.GeneralQAMDemodulator	“System Objects in MATLAB Code Generation”
comm.GeneralQAMModulator	“System Objects in MATLAB Code Generation”
comm.PAMDemodulator	“System Objects in MATLAB Code Generation”
comm.PAMModulator	“System Objects in MATLAB Code Generation”
comm.RectangularQAMDemodulator	“System Objects in MATLAB Code Generation”
comm.RectangularQAMModulator	“System Objects in MATLAB Code Generation”
Continuous Phase Modulation	
comm.CPFSKDemodulator	“System Objects in MATLAB Code Generation”

Name	Remarks and Limitations
comm.CPFSKModulator	“System Objects in MATLAB Code Generation”
comm.CPMDemodulator	“System Objects in MATLAB Code Generation”
comm.CPMModulator	“System Objects in MATLAB Code Generation”
comm.GMSKDemodulator	“System Objects in MATLAB Code Generation”
comm.GMSKModulator	“System Objects in MATLAB Code Generation”
comm.MSKDemodulator	“System Objects in MATLAB Code Generation”
comm.MSKModulator	“System Objects in MATLAB Code Generation”
Trellis Coded Modulation	
comm.GeneralQAMTCMDemodulator	“System Objects in MATLAB Code Generation”
comm.GeneralQAMTCMModulator	“System Objects in MATLAB Code Generation”
comm.PSKTCMDemodulator	“System Objects in MATLAB Code Generation”
comm.PSKTCMModulator	“System Objects in MATLAB Code Generation”
comm.RectangularQAMTCMDemodulator	“System Objects in MATLAB Code Generation”
comm.RectangularQAMTCMModulator	“System Objects in MATLAB Code Generation”
Orthogonal Frequency-Division Modulation	
comm.OFDMDemodulator	“System Objects in MATLAB Code Generation”
comm.OFDMModulator	“System Objects in MATLAB Code Generation”
Analog Baseband Modulation	
comm.FMBroadcastDemodulator	“System Objects in MATLAB Code Generation”
comm.FMBroadcastModulator	“System Objects in MATLAB Code Generation”
comm.FMDemodulator	“System Objects in MATLAB Code Generation”
comm.FMModulator	“System Objects in MATLAB Code Generation”
Filtering	
comm.IntegrateAndDumpFilter	“System Objects in MATLAB Code Generation”
comm.RaisedCosineReceiveFilter	“System Objects in MATLAB Code Generation”
comm.RaisedCosineTransmitFilter	“System Objects in MATLAB Code Generation”
Carrier Phase Synchronization	
comm.CarrierSynchronizer	“System Objects in MATLAB Code Generation”

Name	Remarks and Limitations
comm.CPMCarrierPhaseSynchronizer	"System Objects in MATLAB Code Generation"
Timing Phase Synchronization	
comm.SymbolSynchronizer	"System Objects in MATLAB Code Generation"
comm.GMSKTimingSynchronizer	"System Objects in MATLAB Code Generation"
comm.MSKTimingSynchronizer	"System Objects in MATLAB Code Generation"
Synchronization Utilities	
comm.DiscreteTimeVCO	"System Objects in MATLAB Code Generation"
Equalization	
comm.MLSEEqualizer	"System Objects in MATLAB Code Generation"
MIMO	
comm.LTEMIMOChannel	"System Objects in MATLAB Code Generation"
comm.MIMOChannel	"System Objects in MATLAB Code Generation"
comm.OSTBCCombiner	"System Objects in MATLAB Code Generation"
comm.OSTBCEncoder	"System Objects in MATLAB Code Generation"
comm.SphereDecoder	"System Objects in MATLAB Code Generation"
Channel Modeling and RF Impairments	
comm.AGC	"System Objects in MATLAB Code Generation"
comm.AWGNChannel	"System Objects in MATLAB Code Generation"
comm.BinarySymmetricChannel	"System Objects in MATLAB Code Generation"
comm.IQImbalanceCompensator	"System Objects in MATLAB Code Generation"
comm.LTEMIMOChannel	"System Objects in MATLAB Code Generation"
comm.MemorylessNonlinearity	"System Objects in MATLAB Code Generation"
comm.MIMOChannel	"System Objects in MATLAB Code Generation"
comm.PhaseFrequencyOffset	"System Objects in MATLAB Code Generation"
comm.PhaseNoise	"System Objects in MATLAB Code Generation"
comm.RayleighChannel	"System Objects in MATLAB Code Generation"
comm.RicianChannel	"System Objects in MATLAB Code Generation"
comm.ThermalNoise	"System Objects in MATLAB Code Generation"

Name	Remarks and Limitations
comm.PSKCoarseFrequencyEstimator	“System Objects in MATLAB Code Generation”
comm.QAMCoarseFrequencyEstimator	“System Objects in MATLAB Code Generation”
iqcoef2imbal	—
iqimbal2coef	—
Measurements and Analysis	
comm.ACPR	“System Objects in MATLAB Code Generation”
comm.CCDF	“System Objects in MATLAB Code Generation”
comm.ErrorRate	“System Objects in MATLAB Code Generation”
comm.EVM	“System Objects in MATLAB Code Generation”
comm.MER	“System Objects in MATLAB Code Generation”

Complex Numbers in MATLAB

Function	Remarks and Limitations
complex	—
conj	—
imag	—
isnumeric	—
isreal	—
isscalar	—
real	—
unwrap	<ul style="list-style-type: none"> • Row vector input is only supported when the first two inputs are vectors and nonscalar • Performs arithmetic in the output class. Hence, results might not match MATLAB due to different rounding errors

Computer Vision System Toolbox

C and C++ code generation for the following functions and System objects requires the Computer Vision System Toolbox software.

Name	Remarks and Limitations
Feature Detection, Extraction, and Matching	
BRISKPoints	Supports MATLAB Function block: No To index locations with this object, use the syntax: <code>points.Location(idx, :)</code> , for <code>points</code> object. See <code>visionRecoverformCodeGeneration_kernel.m</code> , which is used in the “Introduction to Code Generation with Feature Matching and Registration” example.
cornerPoints	Supports MATLAB Function block: No To index locations with this object, use the syntax: <code>points.Location(idx, :)</code> , for <code>points</code> object. See <code>visionRecoverformCodeGeneration_kernel.m</code> , which is used in the “Introduction to Code Generation with Feature Matching and Registration” example.
detectBRISKFeatures	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
detectFASTFeatures	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
detectHarrisFeatures	Compile-time constant input: 'FilterSize' Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
detectMinEigenFeatures	Compile-time constant input: 'FilterSize' Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.

Name	Remarks and Limitations
detectMSERFeatures	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library. For code generation, the function outputs regions.PixelList as an array. The region sizes are defined in regions.Lengths.
detectSURFFeatures	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
extractFeatures	Generates platform-dependent library: Yes for BRISK, FREAK, and SURF methods only. Compile-time constant input restrictions: 'Method' Supports MATLAB Function block: Yes for Block method only. Generated code for this function uses a precompiled platform-specific shared library.
extractHOGFeatures	Supports MATLAB Function block: No
matchFeatures	Generates platform-dependent library: Yes for MATLAB host. Generates portable C code for non-host target. Compile-time constant input: 'Method' and 'Metric'. Supports MATLAB Function block: Yes
MSERRegions	Supports MATLAB Function block: Yes For code generation, you must specify both the pixellist cell array and the length of each array, as the second input. The object outputs, regions.PixelList as an array. The region sizes are defined in regions.Lengths. Generated code for this function uses a precompiled platform-specific shared library.

Name	Remarks and Limitations
SURFPoints	Supports MATLAB Function block: No To index locations with this object, use the syntax: <code>points.Location(idx, :)</code> , for <code>points</code> object. See <code>visionRecovertransformCodeGeneration_kernel.m</code> , which is used in the “Introduction to Code Generation with Feature Matching and Registration” example.
vision.BoundaryTracer	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.EdgeDetector	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
Image Registration and Geometric Transformations	
estimateGeometricTransform	Supports MATLAB Function block: No
vision.GeometricRotator	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.GeometricScaler	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.GeometricShearer	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.GeometricTransformer	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.GeometricTranslator	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
Object Detection and Recognition	
ocr	Compile-time constant input: 'TextLayout', 'Language', and 'CharacterSet'. Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
ocrText	Supports MATLAB Function block: No

Name	Remarks and Limitations
vision.PeopleDetector	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library. “System Objects in MATLAB Code Generation”
vision.CascadeObjectDetector	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library. “System Objects in MATLAB Code Generation”
Tracking and Motion Estimation	
assignDetectionsToTracks	Supports MATLAB Function block: Yes
opticalFlowHS	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
opticalFlowLKDoG	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
opticalFlowLK	Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
opticalFlow	Supports MATLAB Function block: Yes
vision.BlockMatcher	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.ForegroundDetector	Supports MATLAB Function block: No Generates platform-dependent library: Yes for MATLAB host. Generates portable C code for non-host target. Generated code for this function uses a precompiled platform-specific shared library. “System Objects in MATLAB Code Generation”
vision.HistogramBasedTracker	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.KalmanFilter	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”

Name	Remarks and Limitations
vision.PointTracker	Supports MATLAB Function block: No “System Objects in MATLAB Code Generation”
vision.TemplateMatcher	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
Camera Calibration and Stereo Vision	
bboxOverlapRatio	Supports MATLAB Function block: No
disparity	Compile-time constant input restriction: 'Method'. Supports MATLAB Function block: No Generated code for this function uses a precompiled platform-specific shared library.
cameraMatrix	Supports MATLAB Function block: No
cameraParameters	Supports MATLAB Function block: No
epipolarline	Supports MATLAB Function block: Yes
estimateFundamentalMatrix	Compile-time constant input restriction: 'Method', 'OutputClass', 'DistanceType', and 'ReportRuntimeError'. Supports MATLAB Function block: Yes
estimateUncalibratedRectification	Supports MATLAB Function block: Yes Only accepts input points as M -by-2 matrices for C code generation
extrinsics	Supports MATLAB Function block: No
isEpipoleInImage	Supports MATLAB Function block: Yes
lineToBorderPoints	Supports MATLAB Function block: Yes
reconstructScene	Supports MATLAB Function block: No
rectifyStereoImages	Compile-time constant input restriction: 'interp' and 'OutputView' Supports MATLAB Function block: No
selectStrongestBbox	Supports MATLAB Function block: No
stereoParameters	Supports MATLAB Function block: No
triangulate	Supports MATLAB Function block: No

Name	Remarks and Limitations
undistortImage	Compile-time constant input restriction: 'interp' and 'OutputView' Supports MATLAB Function block: No
Statistics	
vision.Autocorrelator	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.BlobAnalysis	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.Crosscorrelator	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.Histogram	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.LocalMaximaFinder	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.Maximum	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.Mean	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.Median	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.Minimum	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.PSNR	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.StandardDeviation	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.Variance	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
Morphological Operations	
vision.ConnectedComponentLabeler	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”

Name	Remarks and Limitations
vision.MorphologicalBottomHat	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.MorphologicalClose	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.MorphologicalDilate	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.MorphologicalErode	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.MorphologicalOpen	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.MorphologicalTopHat	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
Filters, Transforms, and Enhancements	
integralImage	Supports MATLAB Function block: Yes
vision.Convolver	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.ContrastAdjuster	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.DCT	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.Deinterlacer	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.EdgeDetector	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.FFT	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.HistogramEqualizer	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.HoughLines	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.HoughTransform	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”

Name	Remarks and Limitations
vision.IDCT	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.IFFT	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.ImageFilter	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.MedianFilter	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.Pyramid	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
Video Loading, Saving, and Streaming	
vision.DeployableVideoPlayer	Supports MATLAB Function block: Yes Generated code for this function uses a precompiled platform-specific shared library. “System Objects in MATLAB Code Generation”
vision.VideoFileReader	Supports MATLAB Function block: Yes Generated code for this function uses a precompiled platform-specific shared library. “System Objects in MATLAB Code Generation” Does not generate code for reading compressed images on the Mac.
vision.VideoFileWriter	Supports MATLAB Function block: Yes Generated code for this function uses a precompiled platform-specific shared library. “System Objects in MATLAB Code Generation”
Color Space Formatting and Conversions	
vision.Autothresolder	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.ChromaResampler	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.ColorSpaceConverter	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”

Name	Remarks and Limitations
vision.DemosaicInterpolator	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.GammaCorrector	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.ImageComplementer	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.ImageDataTypeConverter	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.ImagePadder	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
Graphics	
insertMarker	Compile-time constant input: 'Shape' and 'Color' Supports MATLAB Function block: Yes
insertShape	Compile-time constant input: 'Color' and 'SmoothEdges' Supports MATLAB Function block: Yes
vision.AlphaBlender	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.MarkerInserter	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.ShapeInserter	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”
vision.TextInserter	Supports MATLAB Function block: Yes “System Objects in MATLAB Code Generation”

Control Flow in MATLAB

Function	Remarks and Limitations
break	—
continue	—
end	—
for	—

Function	Remarks and Limitations
if, elseif, else	—
parfor	Treated as a for-loop when used with <code>fiaccl</code> .
return	—
switch, case, otherwise	<ul style="list-style-type: none"> • If all case expressions are scalar integer values, generates a C <code>switch</code> statement. At run time, if the switch value is not an integer, generates an error. • When the case expressions contain noninteger or nonscalar values, the code generation software generates C <code>if</code> statements in place of a C <code>switch</code> statement.
while	—

Data and File Management in MATLAB

Function	Remarks and Limitations
computer	<ul style="list-style-type: none"> • Information about the computer on which the code generation software is running. • Use only when the code generation target is S-function (Simulation) or MEX-function.
fclose	—
feof	—
fopen	<ul style="list-style-type: none"> • Does not support: <ul style="list-style-type: none"> • <code>machineformat</code>, <code>encoding</code>, or <code>fileID</code> inputs • message output • <code>fopen('all')</code> • If you disable extrinsic calls, you cannot return <code>fileIDs</code> created with <code>fopen</code> to MATLAB or extrinsic functions. You can use such <code>fileIDs</code> only internally. • When generating C/C++ executables, static libraries, or dynamic libraries, you can open up to 20 files. • The generated code does not report errors from invalid file identifiers. Write your own file open error handling in your MATLAB code. Test

Function	Remarks and Limitations
	<p>whether <code>fopen</code> returns <code>-1</code>, which indicates that the file open failed. For example:</p> <pre data-bbox="437 395 986 642">... fid = fopen(filename, 'r'); if fid == -1 % fopen failed else % fopen successful, okay to call fread A = fread(fid); ...</pre> <ul data-bbox="403 656 1305 720" style="list-style-type: none">• The behavior of the generated code for <code>fread</code> is compiler-dependent if you:<ol data-bbox="437 743 1283 850" style="list-style-type: none">1 Open a file using <code>fopen</code> with a permission of <code>a+</code>.2 Read the file using <code>fread</code> before calling an I/O function, such as <code>fseek</code> or <code>frewind</code>, that sets the file position indicator.

Function	Remarks and Limitations
fprintf	<ul style="list-style-type: none"> • Does not support: <ul style="list-style-type: none"> • <code>b</code> and <code>t</code> subtypes on <code>%u</code>, <code>%o</code>, <code>%x</code>, and <code>%X</code> formats. • <code>\$</code> flag for reusing input arguments. • printing arrays. • There is no automatic casting. Input arguments must match their format types for predictable results. • Escaped characters are limited to the decimal range of 0–127. • A call to <code>fprintf</code> with <code>fileID</code> equal to 1 or 2 becomes <code>printf</code> in the generated C/C++ code in the following cases: <ul style="list-style-type: none"> • The <code>fprintf</code> call is inside a <code>parfor</code> loop. • Extrinsic calls are disabled. • When the MATLAB behavior differs from the C compiler behavior, <code>fprintf</code> matches the C compiler behavior in the following cases: <ul style="list-style-type: none"> • The format specifier has a corresponding C format specifier, for example, <code>%e</code> or <code>%E</code>. • The <code>fprintf</code> call is inside a <code>parfor</code> loop. • Extrinsic calls are disabled. • When you call <code>fprintf</code> with the format specifier <code>%s</code>, do not put a null character in the middle of the input string. Use <code>fprintf(fid, '%c', char(0))</code> to write a null character. • When you call <code>fprintf</code> with an integer format specifier, the type of the integer argument must be a type that the target hardware can represent as a native C type. For example, if you call <code>fprintf('%d', int64(n))</code>, the target hardware must have a native C type that supports a 64-bit integer.

Function	Remarks and Limitations
fread	<ul style="list-style-type: none"> • precision must be a constant. • The source and output that precision specifies cannot have values long, ulong, unsigned long, bitN, or ubitN. • You cannot use the machineformat input. • If the source or output that precision specifies is a C type, for example, int, the target and production sizes for that type must: <ul style="list-style-type: none"> • Match. • Map directly to a MATLAB type. • The source type that precision specifies must map directly to a C type on the target hardware. • If the fread call reads the entire file, all of the data must fit in the largest array available for code generation. • If sizeA is not constant or contains a nonfinite element, then dynamic memory allocation is required. • Treats a char value for source or output as a signed 8-bit integer. Use values between 0 and 127 only. • The generated code does not report file read errors. Write your own file read error handling in your MATLAB code. Test that the number of bytes read matches the number of bytes that you requested. For example: <pre style="margin-left: 20px;"> ... N = 100; [vals, numRead] = fread(fid, N, '*double'); if numRead ~= N % fewer elements read than expected end ... </pre>
frewind	—

Function	Remarks and Limitations
load	<ul style="list-style-type: none"> • Use only when generating MEX or code for Simulink simulation. To load compile-time constants, use <code>coder.load</code>. • Does not support use of the function without assignment to a structure or array. For example, use <code>S = load(filename)</code>, not <code>load(filename)</code>. • The output <code>S</code> must be the name of a structure or array without any subscripting. For example, <code>S[i] = load('myFile.mat')</code> is not allowed. • Arguments to <code>load</code> must be compile-time constant strings. • Does not support loading objects. • If the MAT-file contains unsupported constructs, use <code>load(filename, variables)</code> to load only the supported constructs. • You cannot use <code>save</code> in a function intended for code generation. The code generation software does not support the <code>save</code> function. Furthermore, you cannot use <code>coder.extrinsic</code> with <code>save</code>. Prior to generating code, you can use <code>save</code> to save the workspace data to a MAT-file. <p>You must use <code>coder.varsizes</code> to explicitly declare variable-size data loaded using the <code>load</code> function.</p>

Data Types in MATLAB

Function	Remarks and Limitations
deal	—
iscell	—
isobject	—
nargchk	<ul style="list-style-type: none"> • Output structure does not include stack information. <hr/> <p>Note: <code>nargchk</code> will be removed in a future release.</p>
narginchk	—
nargoutchk	—

Function	Remarks and Limitations
str2func	<ul style="list-style-type: none"> String must be constant/known at compile time
structfun	<ul style="list-style-type: none"> Does not support the <code>ErrorHandler</code> option. The number of outputs must be less than or equal to three.

Desktop Environment in MATLAB

Function	Remarks and Limitations
ismac	<ul style="list-style-type: none"> Returns true or false based on the MATLAB version used for code generation. Use only when the code generation target is S-function (Simulation) or MEX-function.
ispc	<ul style="list-style-type: none"> Returns true or false based on the MATLAB version you use for code generation. Use only when the code generation target is S-function (Simulation) or MEX-function.
isunix	<ul style="list-style-type: none"> Returns true or false based on the MATLAB version used for code generation. Use only when the code generation target is S-function (Simulation) or MEX-function.

Discrete Math in MATLAB

Function	Remarks and Limitations
factor	<ul style="list-style-type: none"> The maximum double precision input is 2^{33}. The maximum single precision input is 2^{25}. The input n cannot have type <code>int64</code> or <code>uint64</code>.
gcd	—
isprime	<ul style="list-style-type: none"> The maximum double precision input is 2^{33}. The maximum single precision input is 2^{25}. The input X cannot have type <code>int64</code> or <code>uint64</code>.
lcm	—

Function	Remarks and Limitations
nchoosek	<ul style="list-style-type: none"> When the first input, x, is a scalar, nchoosek returns a binomial coefficient. In this case, x must be a nonnegative integer. It cannot have type <code>int64</code> or <code>uint64</code>. When the first input, x, is a vector, nchoosek treats it as a set. In this case, x can have type <code>int64</code> or <code>uint64</code>. The second input, k, cannot have type <code>int64</code> or <code>uint64</code>. “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
primes	<ul style="list-style-type: none"> The maximum double precision input is 2^{32}. The maximum single precision input is 2^{24}. The input n cannot have type <code>int64</code> or <code>uint64</code>.

DSP System Toolbox

C code generation for the following functions and System objects requires the DSP System Toolbox license. Many DSP System Toolbox functions require constant inputs for code generation. To specify a constant input for `fiaccl`, use `coder.Constant`. For more information, see “Specify Constant Inputs at the Command Line”.

Name	Remarks and Limitations
Estimation	
<code>dsp.BurgAREstimator</code>	“System Objects in MATLAB Code Generation”
<code>dsp.BurgSpectrumEstimator</code>	“System Objects in MATLAB Code Generation”
<code>dsp.CepstralToLPC</code>	“System Objects in MATLAB Code Generation”
<code>dsp.CrossSpectrumEstimator</code>	“System Objects in MATLAB Code Generation”
<code>dsp.LevinsonSolver</code>	“System Objects in MATLAB Code Generation”
<code>dsp.LPCToAutocorrelation</code>	“System Objects in MATLAB Code Generation”
<code>dsp.LPCToCepstral</code>	“System Objects in MATLAB Code Generation”
<code>dsp.LPCToLSF</code>	“System Objects in MATLAB Code Generation”
<code>dsp.LPCToLSP</code>	“System Objects in MATLAB Code Generation”
<code>dsp.LPCToRC</code>	“System Objects in MATLAB Code Generation”
<code>dsp.LSFToLPC</code>	“System Objects in MATLAB Code Generation”

Name	Remarks and Limitations
dsp.LSPToLPC	“System Objects in MATLAB Code Generation”
dsp.RCToAutocorrelation	“System Objects in MATLAB Code Generation”
dsp.RCToLPC	“System Objects in MATLAB Code Generation”
dsp.SpectrumEstimator	“System Objects in MATLAB Code Generation”
dsp.TransferFunctionEstimator	“System Objects in MATLAB Code Generation”
Filters	
ca2tf	All inputs must be constant. Expressions or variables are allowed if their values do not change.
cl2tf	All inputs must be constant. Expressions or variables are allowed if their values do not change.
dsp.AdaptiveLatticeFilter	“System Objects in MATLAB Code Generation”
dsp.AffineProjectionFilter	“System Objects in MATLAB Code Generation”
dsp.AllpoleFilter	<ul style="list-style-type: none"> • “System Objects in MATLAB Code Generation” • Only the Denominator property is tunable for code generation.
dsp.BiquadFilter	“System Objects in MATLAB Code Generation”
dsp.CICCompensationDecimator	“System Objects in MATLAB Code Generation”
dsp.CICCompensationInterpolator	“System Objects in MATLAB Code Generation”
dsp.CICDecimator	“System Objects in MATLAB Code Generation”
dsp.CICInterpolator	“System Objects in MATLAB Code Generation”
dsp.FarrowRateConverter	“System Objects in MATLAB Code Generation”
dsp.FastTransversalFilter	“System Objects in MATLAB Code Generation”

Name	Remarks and Limitations
dsp.FilterCascade	<ul style="list-style-type: none"> • You cannot generate code directly from dsp.FilterCascade. You can use the generateFilteringCode method to generate a MATLAB function. You can generate C/C++ code from this MATLAB function. • “System Objects in MATLAB Code Generation”
dsp.FilteredXLMSFilter	“System Objects in MATLAB Code Generation”
dsp.FIRDecimator	“System Objects in MATLAB Code Generation”
dsp.FIRFilter	<ul style="list-style-type: none"> • “System Objects in MATLAB Code Generation” • Only the Numerator property is tunable for code generation.
dsp.FIRHalfbandDecimator	“System Objects in MATLAB Code Generation”
dsp.FIRHalfbandInterpolator	“System Objects in MATLAB Code Generation”
dsp.FIRInterpolator	“System Objects in MATLAB Code Generation”
dsp.FIRRateConverter	“System Objects in MATLAB Code Generation”
dsp.FrequencyDomainAdaptiveFilter	“System Objects in MATLAB Code Generation”
dsp.HighpassFilter	“System Objects in MATLAB Code Generation”
dsp.IIRFilter	<ul style="list-style-type: none"> • Only the Numerator and Denominator properties are tunable for code generation. • “System Objects in MATLAB Code Generation”
dsp.KalmanFilter	“System Objects in MATLAB Code Generation”
dsp.LMSFilter	“System Objects in MATLAB Code Generation”
dsp.LowpassFilter	“System Objects in MATLAB Code Generation”
dsp.RLSFilter	“System Objects in MATLAB Code Generation”
dsp.SampleRateConverter	“System Objects in MATLAB Code Generation”

Name	Remarks and Limitations
firceqrip	All inputs must be constant. Expressions or variables are allowed if their values do not change.
fireqint	All inputs must be constant. Expressions or variables are allowed if their values do not change.
firgr	<ul style="list-style-type: none"> • All inputs must be constant. Expressions or variables are allowed if their values do not change. • Does not support syntaxes that have cell array input.
firhalfband	All inputs must be constant. Expressions or variables are allowed if their values do not change.
fir1pnorm	<ul style="list-style-type: none"> • All inputs must be constant. Expressions or variables are allowed if their values do not change. • Does not support syntaxes that have cell array input.
firminphase	All inputs must be constant. Expressions or variables are allowed if their values do not change.
firnyquist	All inputs must be constant. Expressions or variables are allowed if their values do not change.
firpr2chfb	All inputs must be constant. Expressions or variables are allowed if their values do not change.
ifir	All inputs must be constant. Expressions or variables are allowed if their values do not change.
iircomb	All inputs must be constant. Expressions or variables are allowed if their values do not change.

Name	Remarks and Limitations
iirgrpdelay	<ul style="list-style-type: none"> • All inputs must be constant. Expressions or variables are allowed if their values do not change. • Does not support syntaxes that have cell array input.
iirlpnorm	<ul style="list-style-type: none"> • All inputs must be constant. Expressions or variables are allowed if their values do not change. • Does not support syntaxes that have cell array input.
iirlpnormc	<ul style="list-style-type: none"> • All inputs must be constant. Expressions or variables are allowed if their values do not change. • Does not support syntaxes that have cell array input.
iirnotch	All inputs must be constant. Expressions or variables are allowed if their values do not change.
iirparameq	—
iirpeak	All inputs must be constant. Expressions or variables are allowed if their values do not change.
tf2ca	All inputs must be constant. Expressions or variables are allowed if their values do not change.
tf2cl	All inputs must be constant. Expressions or variables are allowed if their values do not change.
Math Operations	
dsp.ArrayVectorAdder	“System Objects in MATLAB Code Generation”
dsp.ArrayVectorDivider	“System Objects in MATLAB Code Generation”
dsp.ArrayVectorMultiplier	“System Objects in MATLAB Code Generation”

Name	Remarks and Limitations
dsp.ArrayVectorSubtractor	"System Objects in MATLAB Code Generation"
dsp.CumulativeProduct	"System Objects in MATLAB Code Generation"
dsp.CumulativeSum	"System Objects in MATLAB Code Generation"
dsp.LDLFactor	"System Objects in MATLAB Code Generation"
dsp.LevinsonSolver	"System Objects in MATLAB Code Generation"
dsp.LowerTriangularSolver	"System Objects in MATLAB Code Generation"
dsp.LUFactor	"System Objects in MATLAB Code Generation"
dsp.Normalizer	"System Objects in MATLAB Code Generation"
dsp.UpperTriangularSolver	"System Objects in MATLAB Code Generation"
Quantizers	
dsp.ScalarQuantizerDecoder	"System Objects in MATLAB Code Generation"
dsp.ScalarQuantizerEncoder	"System Objects in MATLAB Code Generation"
dsp.VectorQuantizerDecoder	"System Objects in MATLAB Code Generation"
dsp.VectorQuantizerEncoder	"System Objects in MATLAB Code Generation"
Scopes	
dsp.SpectrumAnalyzer	This System object does not generate code. It is automatically declared as an <i>extrinsic</i> variable using the <code>coder.extrinsic</code> function.
dsp.TimeScope	This System object does not generate code. It is automatically declared as an <i>extrinsic</i> variable using the <code>coder.extrinsic</code> function.
Signal Management	
dsp.Counter	"System Objects in MATLAB Code Generation"
dsp.DelayLine	"System Objects in MATLAB Code Generation"
Signal Operations	
dsp.Convolver	"System Objects in MATLAB Code Generation"
dsp.DCBlocker	"System Objects in MATLAB Code Generation"
dsp.Delay	"System Objects in MATLAB Code Generation"
dsp.DigitalDownConverter	"System Objects in MATLAB Code Generation"

Name	Remarks and Limitations
dsp.DigitalUpConverter	“System Objects in MATLAB Code Generation”
dsp.Interpolator	“System Objects in MATLAB Code Generation”
dsp.NCO	“System Objects in MATLAB Code Generation”
dsp.PeakFinder	“System Objects in MATLAB Code Generation”
dsp.PhaseExtractor	“System Objects in MATLAB Code Generation”
dsp.PhaseUnwrapper	“System Objects in MATLAB Code Generation”
dsp.VariableFractionalDelay	“System Objects in MATLAB Code Generation”
dsp.VariableIntegerDelay	“System Objects in MATLAB Code Generation”
dsp.Window	<ul style="list-style-type: none"> • This object has no tunable properties for code generation. • “System Objects in MATLAB Code Generation”
dsp.ZeroCrossingDetector	“System Objects in MATLAB Code Generation”
Sinks	
dsp.AudioPlayer	“System Objects in MATLAB Code Generation”
dsp.AudioFileWriter	“System Objects in MATLAB Code Generation”
dsp.UDPSEnder	“System Objects in MATLAB Code Generation”
Sources	
dsp.AudioFileReader	“System Objects in MATLAB Code Generation”
dsp.AudioRecorder	“System Objects in MATLAB Code Generation”
dsp.SignalSource	“System Objects in MATLAB Code Generation”
dsp.SineWave	<ul style="list-style-type: none"> • This object has no tunable properties for code generation. • “System Objects in MATLAB Code Generation”
dsp.UDPReceiver	“System Objects in MATLAB Code Generation”
Statistics	
dsp.Autocorrelator	“System Objects in MATLAB Code Generation”
dsp.Crosscorrelator	“System Objects in MATLAB Code Generation”

Name	Remarks and Limitations
dsp.Histogram	<ul style="list-style-type: none"> This object has no tunable properties for code generation. “System Objects in MATLAB Code Generation”
dsp.Maximum	“System Objects in MATLAB Code Generation”
dsp.Mean	“System Objects in MATLAB Code Generation”
dsp.Median	“System Objects in MATLAB Code Generation”
dsp.Minimum	“System Objects in MATLAB Code Generation”
dsp.PeakToPeak	“System Objects in MATLAB Code Generation”
dsp.PeakToRMS	“System Objects in MATLAB Code Generation”
dsp.RMS	“System Objects in MATLAB Code Generation”
dsp.StandardDeviation	“System Objects in MATLAB Code Generation”
dsp.StateLevels	“System Objects in MATLAB Code Generation”
dsp.Variance	“System Objects in MATLAB Code Generation”
Transforms	
dsp.AnalyticSignal	“System Objects in MATLAB Code Generation”
dsp.DCT	“System Objects in MATLAB Code Generation”
dsp.FFT	“System Objects in MATLAB Code Generation”
dsp.IDCT	“System Objects in MATLAB Code Generation”
dsp.IFFT	“System Objects in MATLAB Code Generation”

Error Handling in MATLAB

Function	Remarks and Limitations
assert	<ul style="list-style-type: none"> Generates specified error messages at compile time only if all input arguments are constants or depend on constants. Otherwise, generates specified error messages at run time. For standalone code generation, excluded from the generated code. See “Rules for Using assert Function”.
error	For standalone code generation, excluded from the generated code.

Exponents in MATLAB

Function	Remarks and Limitations
exp	—
expm	—
expm1	—
factorial	—
log	<ul style="list-style-type: none"> Generates an error during simulation and returns NaN in generated code when the input value x is real, but the output should be complex. To get the complex result, make the input value complex by passing in <code>complex(x)</code>.
log2	—
log10	—
log1p	—
nextpow2	—
nthroot	—
reallog	—
realpow	—
realsqrt	—
sqrt	<ul style="list-style-type: none"> Generates an error during simulation and returns NaN in generated code when the input value x is real, but the output should be complex. To get the complex result, make the input value complex by passing in <code>complex(x)</code>.

Filtering and Convolution in MATLAB

Function	Remarks and Limitations
conv	—
conv2	—
convn	—
deconv	—

Function	Remarks and Limitations
detrend	<ul style="list-style-type: none"> • If supplied and not empty, the input argument <code>bp</code> must satisfy the following requirements: <ul style="list-style-type: none"> • Be real. • Be sorted in ascending order. • Restrict elements to integers in the interval $[1, n-2]$. n is the number of elements in a column of input argument <code>X</code>, or the number of elements in <code>X</code> when <code>X</code> is a row vector. • Contain all unique values. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
filter	—
filter2	—

Fixed-Point Designer

In addition to function-specific limitations listed in the table, the following general limitations apply to the use of Fixed-Point Designer functions in generated code, with `fiaccel`:

- `fipref` and `quantizer` objects are not supported.
- Word lengths greater than 128 bits are not supported.
- You cannot change the `fimath` or `numericType` of a given `fi` variable after that variable has been created.
- The boolean value of the `DataTypeMode` and `DataType` properties are not supported.
- For all `SumMode` property settings other than `FullPrecision`, the `CastBeforeSum` property must be set to `true`.
- You can use parallel for (`parfor`) loops in code compiled with `fiaccel`, but those loops are treated like regular `for` loops.
- When you compile code containing `fi` objects with nontrivial slope and bias scaling, you may see different results in generated code than you achieve by running the same code in MATLAB.

Function	Remarks/Limitations
abs	N/A
accumneg	N/A
accumpos	N/A
add	<ul style="list-style-type: none"> Code generation in MATLAB does not support the syntax <code>F.add(a,b)</code>. You must use the syntax <code>add(F,a,b)</code>.
all	N/A
any	N/A
atan2	N/A
bitand	Not supported for slope-bias scaled <code>fi</code> objects.
bitandreduce	N/A
bitcmp	N/A
bitconcat	N/A
bitget	N/A
bitor	Not supported for slope-bias scaled <code>fi</code> objects.
bitorreduce	N/A
bitreplicate	N/A
bitrol	N/A
bitror	N/A
bitset	N/A
bitshift	N/A
bitsliceget	N/A
bitsll	Generated code may not handle out of range shifting.
bitsra	Generated code may not handle out of range shifting.
bitsrl	Generated code may not handle out of range shifting.
bitxor	Not supported for slope-bias scaled <code>fi</code> objects.
bitxorreduce	N/A
ceil	N/A
complex	N/A

Function	Remarks/Limitations
conj	N/A
conv	<ul style="list-style-type: none"> • Variable-sized inputs are only supported when the <code>SumMode</code> property of the governing <code>fimath</code> is set to <code>Specify precision</code> or <code>Keep LSB</code>. • For variable-sized signals, you may see different results between generated code and MATLAB. <ul style="list-style-type: none"> • In the generated code, the output for variable-sized signals is computed using the <code>SumMode</code> property of the governing <code>fimath</code>. • In MATLAB, the output for variable-sized signals is computed using the <code>SumMode</code> property of the governing <code>fimath</code> when both inputs are nonscalar. However, if either input is a scalar, MATLAB computes the output using the <code>ProductMode</code> of the governing <code>fimath</code>.
convergent	N/A
cordicabs	Variable-size signals are not supported.
cordicangle	Variable-size signals are not supported.
cordicatan2	Variable-size signals are not supported.
cordiccart2pol	Variable-size signals are not supported.
cordicccexp	Variable-size signals are not supported.
cordicccos	Variable-size signals are not supported.
cordicpol2cart	Variable-size signals are not supported.
cordicrotate	Variable-size signals are not supported.
cordicsin	Variable-size signals are not supported.
cordicsincos	Variable-size signals are not supported.
cos	N/A
ctranspose	N/A
diag	If supplied, the index, k , must be a real and scalar integer value that is not a <code>fi</code> object.

Function	Remarks/Limitations
divide	<ul style="list-style-type: none"> • Any non-<code>fi</code> input must be constant; that is, its value must be known at compile time so that it can be cast to a <code>fi</code> object. • Complex and imaginary divisors are not supported. • Code generation in MATLAB does not support the syntax <code>T.divide(a,b)</code>.
double	For the automated workflow, do not use explicit double or single casts in your MATLAB algorithm to insulate functions that do not support fixed-point data types. The automated conversion tool does not support these casts. Instead of using casts, supply a replacement function. For more information, see “Function Replacements”.
end	N/A
eps	<ul style="list-style-type: none"> • Supported for scalar fixed-point signals only. • Supported for scalar, vector, and matrix, <code>fi</code> single and <code>fi</code> double signals.
eq	Not supported for fixed-point signals with different biases.
fi	<ul style="list-style-type: none"> • The default constructor syntax without any input arguments is not supported. • If the <code>numericType</code> is not fully specified, the input to <code>fi</code> must be a constant, a <code>fi</code>, a single, or a built-in integer value. If the input is a built-in double value, it must be a constant. This limitation allows <code>fi</code> to autoscale its fraction length based on the known data type of the input. • All properties related to data type must be constant for code generation. • <code>numericType</code> object information must be available for nonfixed-point Simulink inputs.
filter	<ul style="list-style-type: none"> • Variable-sized inputs are only supported when the <code>SumMode</code> property of the governing <code>fimath</code> is set to <code>Specify precision</code> or <code>Keep LSB</code>.

Function	Remarks/Limitations
<code>fimath</code>	<ul style="list-style-type: none"> Fixed-point signals coming in to a MATLAB Function block from Simulink are assigned a <code>fimath</code> object. You define this object in the MATLAB Function block dialog in the Model Explorer. Use to create <code>fimath</code> objects in the generated code. If the <code>ProductMode</code> property of the <code>fimath</code> object is set to anything other than <code>FullPrecision</code>, the <code>ProductWordLength</code> and <code>ProductFractionLength</code> properties must be constant. If the <code>SumMode</code> property of the <code>fimath</code> object is set to anything other than <code>FullPrecision</code>, the <code>SumWordLength</code> and <code>SumFractionLength</code> properties must be constant.
<code>fix</code>	N/A
<code>fixed.Quantizer</code>	N/A
<code>flip</code>	The dimensions argument must be a built-in type; it cannot be a <code>fi</code> object.
<code>fliplr</code>	N/A
<code>flipud</code>	N/A
<code>floor</code>	N/A
<code>for</code>	N/A
<code>ge</code>	Not supported for fixed-point signals with different biases.
<code>get</code>	The syntax <code>structure = get(0)</code> is not supported.
<code>getlsb</code>	N/A
<code>getmsb</code>	N/A
<code>gt</code>	Not supported for fixed-point signals with different biases.
<code>horzcat</code>	N/A
<code>imag</code>	N/A
<code>int8, int16, int32, int64</code>	N/A
<code>ipermute</code>	N/A
<code>iscolumn</code>	N/A
<code>isempty</code>	N/A

Function	Remarks/Limitations
<code>isequal</code>	N/A
<code>isfi</code>	Avoid using the <code>isfi</code> function in code that you intend to convert using the automated workflow. The value returned by <code>isfi</code> in the fixed-point code might differ from the value returned in the original MATLAB algorithm. The behavior of the fixed-point code might differ from the behavior of the original algorithm.
<code>isfimath</code>	N/A
<code>isfimathlocal</code>	N/A
<code>isfinite</code>	N/A
<code>isinf</code>	N/A
<code>isnan</code>	N/A
<code>isnumeric</code>	N/A
<code>isnumericitype</code>	N/A
<code>isreal</code>	N/A
<code>isrow</code>	N/A
<code>isscalar</code>	N/A
<code>issigned</code>	N/A
<code>isvector</code>	N/A
<code>le</code>	Not supported for fixed-point signals with different biases.
<code>length</code>	N/A
<code>logical</code>	N/A
<code>lowerbound</code>	N/A
<code>lsb</code>	<ul style="list-style-type: none"> Supported for scalar fixed-point signals only. Supported for scalar, vector, and matrix, <code>fi</code> single and double signals.
<code>lt</code>	Not supported for fixed-point signals with different biases.
<code>max</code>	N/A
<code>mean</code>	N/A
<code>median</code>	N/A

Function	Remarks/Limitations
min	N/A
minus	Any non- <code>fi</code> input must be constant; that is, its value must be known at compile time so that it can be cast to a <code>fi</code> object.
mpower	<ul style="list-style-type: none"> • When the exponent <code>k</code> is a variable and the input is a scalar, the ProductMode property of the governing <code>fimath</code> must be SpecifyPrecision. • When the exponent <code>k</code> is a variable and the input is not scalar, the SumMode property of the governing <code>fimath</code> must be SpecifyPrecision. • Variable-sized inputs are only supported when the SumMode property of the governing <code>fimath</code> is set to SpecifyPrecision or Keep LSB. • For variable-sized signals, you may see different results between the generated code and MATLAB. <ul style="list-style-type: none"> • In the generated code, the output for variable-sized signals is computed using the SumMode property of the governing <code>fimath</code>. • In MATLAB, the output for variable-sized signals is computed using the SumMode property of the governing <code>fimath</code> when the first input, <code>a</code>, is nonscalar. However, when <code>a</code> is a scalar, MATLAB computes the output using the ProductMode of the governing <code>fimath</code>.
mpy	<ul style="list-style-type: none"> • Code generation in MATLAB does not support the syntax <code>F.mpy(a,b)</code>. You must use the syntax <code>mpy(F,a,b)</code>. • When you provide complex inputs to the <code>mpy</code> function inside of a MATLAB Function block, you must declare the input as complex before running the simulation. To do so, go to the Ports and data manager and set the Complexity parameter for all known complex inputs to On.
mrdivide	N/A

Function	Remarks/Limitations
mtimes	<ul style="list-style-type: none"> • Any non-<code>fi</code> input must be constant; that is, its value must be known at compile time so that it can be cast to a <code>fi</code> object. • Variable-sized inputs are only supported when the <code>SumMode</code> property of the governing <code>fimath</code> is set to <code>SpecifyPrecision</code> or <code>KeepLSB</code>. • For variable-sized signals, you may see different results between the generated code and MATLAB. <ul style="list-style-type: none"> • In the generated code, the output for variable-sized signals is computed using the <code>SumMode</code> property of the governing <code>fimath</code>. • In MATLAB, the output for variable-sized signals is computed using the <code>SumMode</code> property of the governing <code>fimath</code> when both inputs are nonscalar. However, if either input is a scalar, MATLAB computes the output using the <code>ProductMode</code> of the governing <code>fimath</code>.
ndims	N/A
ne	Not supported for fixed-point signals with different biases.
nearest	N/A
numberofelements	<code>numberofelements</code> will be removed in a future release. Use <code>numel</code> instead.
numel	N/A
numerictype	<ul style="list-style-type: none"> • Fixed-point signals coming in to a MATLAB Function block from Simulink are assigned a <code>numerictype</code> object that is populated with the signal's data type and scaling information. • Returns the data type when the input is a nonfixed-point signal. • Use to create <code>numerictype</code> objects in generated code. • All <code>numerictype</code> object properties related to the data type must be constant.
permute	The dimensions argument must be a built-in type; it cannot be a <code>fi</code> object.
plus	Any non- <code>fi</code> inputs must be constant; that is, its value must be known at compile time so that it can be cast to a <code>fi</code> object.
pow2	N/A

Function	Remarks/Limitations
power	When the exponent <code>k</code> is a variable, the <code>ProductMode</code> property of the governing <code>fimath</code> must be <code>SpecifyPrecision</code> .
qr	N/A
quantize	N/A
range	N/A
rdivide	N/A
real	N/A
realmax	N/A
realmin	N/A
reinterpretcast	N/A
removefimath	N/A
repmat	The <code>dimensions</code> argument must be a built-in type; it cannot be a <code>fi</code> object.
rescale	N/A
reshape	N/A
rot90	In the syntax <code>rot90(A,k)</code> , the argument <code>k</code> must be a built-in type; it cannot be a <code>fi</code> object.
round	N/A
setfimath	N/A
sfi	<ul style="list-style-type: none"> All properties related to data type must be constant for code generation.
shiftdim	The <code>dimensions</code> argument must be a built-in type; it cannot be a <code>fi</code> object.
sign	N/A
sin	N/A
single	For the automated workflow, do not use explicit double or single casts in your MATLAB algorithm to insulate functions that do not support fixed-point data types. The automated conversion tool does not support these casts. Instead of using casts, supply a replacement function. For more information, see “Function Replacements”.

Function	Remarks/Limitations
size	N/A
sort	The dimensions argument must be a built-in type; it cannot be a <code>fi</code> object.
squeeze	N/A
sqrt	<ul style="list-style-type: none"> Complex and [Slope Bias] inputs error out. Negative inputs yield a 0 result.
storedInteger	N/A
storedIntegerToDouble	N/A
sub	<ul style="list-style-type: none"> Code generation in MATLAB does not support the syntax <code>F.sub(a,b)</code>. You must use the syntax <code>sub(F,a,b)</code>.
subsasgn	N/A
subsref	N/A
sum	Variable-sized inputs are only supported when the <code>SumMode</code> property of the governing <code>fimath</code> is set to <code>Specify precision</code> or <code>Keep LSB</code> .
times	<ul style="list-style-type: none"> Any non-<code>fi</code> input must be constant; that is, its value must be known at compile time so that it can be cast to a <code>fi</code> object. When you provide complex inputs to the <code>times</code> function inside of a MATLAB Function block, you must declare the input as complex before running the simulation. To do so, go to the Ports and data manager and set the Complexity parameter for all known complex inputs to <code>On</code>.
transpose	N/A
tril	If supplied, the index, k , must be a real and scalar integer value that is not a <code>fi</code> object.
triu	If supplied, the index, k , must be a real and scalar integer value that is not a <code>fi</code> object.
ufi	<ul style="list-style-type: none"> All properties related to data type must be constant for code generation.
uint8, uint16, uint32, uint64	N/A
uminus	N/A

Function	Remarks/Limitations
uplus	N/A
upperbound	N/A
vertcat	N/A

HDL Coder

Function	Remarks and Limitations
hdl.RAM	This System object is available with MATLAB.

Histograms in MATLAB

Function	Remarks and Limitations
hist	<ul style="list-style-type: none"> • Histogram bar plotting not supported. Call with at least one output argument. • If supplied, the second argument <code>x</code> must be a scalar constant. • Inputs must be real. <p>For the syntax <code>[nout, xout] = hist(y,x)</code>:</p> <ul style="list-style-type: none"> • When <code>y</code> is a fixed-size vector or variable-length vector: <ul style="list-style-type: none"> • <code>nout</code> is always a row vector. • If <code>x</code> is a vector, <code>xout</code> is a vector with the same orientation as <code>x</code>. • If <code>x</code> is a scalar (fixed-size), <code>xout</code> is a row vector. • <code>nout</code> and <code>xout</code> are column vectors when the following conditions are true: <ul style="list-style-type: none"> • <code>y</code> is a matrix • <code>size(y,1)</code> and <code>size(y,2)</code> do not have fixed length 1 • One of <code>size(y,1)</code> and <code>size(y,2)</code> has length 1 at run time • A variable-size <code>x</code> is interpreted as a vector input even if it is a scalar at run time. • If at least one of the inputs is empty, vector orientations in the output can differ from MATLAB.

Function	Remarks and Limitations
histc	<ul style="list-style-type: none"> • The output of a variable-size array that becomes a column vector at run time is a column-vector, not a row-vector. • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”

Image Acquisition Toolbox

If you install Image Acquisition Toolbox software, you can generate C and C++ code for the VideoDevice System object. See `imaq.VideoDevice` and “Code Generation with VideoDevice System Object”.

Image Processing in MATLAB

Function	Remarks and Limitations
im2double	—
rgb2gray	—

Image Processing Toolbox

The following table lists the Image Processing Toolbox functions that have been enabled for code generation. You must have the MATLAB Coder software installed to generate C code from MATLAB for these functions.

Image Processing Toolbox provides three types of code generation support:

- Functions that generate C code.
- Functions that generate C code that depends on a platform-specific shared library (`.dll`, `.so`, or `.dylib`). Use of a shared library preserves performance optimizations in these functions, but this limits the target platforms for which you can generate code. For more information, see “Code Generation for Image Processing”.
- Functions that generate C code or C code that depends on a shared library, depending on which target platform you specify in MATLAB Coder. If you specify the generic **MATLAB Host Computer** target platform, these functions generate C code that depends on a shared library. If you specify any other target platform, these functions generate C code.

In generated code, each supported toolbox function has the same name, arguments, and functionality as its Image Processing Toolbox counterpart. However, some functions have limitations. The following table includes information about code generation limitations that might exist for each function. In the following table, all the functions generate C code. The table identifies those functions that generate C code that depends on a shared library, and those functions that can do both, depending on which target platform you choose.

Function	Remarks/Limitations
<code>affine2d</code>	When generating code, you can only specify single objects—arrays of objects are not supported.
<code>bwdist</code>	The <code>method</code> argument must be a compile-time constant. Input images must have fewer than 2^{32} pixels. Generated code for this function uses a precompiled, platform-specific shared library.
<code>bweuler</code>	If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.
<code>bwlabel</code>	When generating code, the parameter <code>n</code> must be a compile-time constant.
<code>bwlookup</code>	For best results, specify an input image of class <code>logical</code> . If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.
<code>bwmorph</code>	The text string specifying the operation must be a constant and, for best results, specify an input image of class <code>logical</code> . If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.
<code>bwpack</code>	Generated code for this function uses a precompiled platform-specific shared library.
<code>bwperim</code>	Supports only 2-D images. Does not support any no-output-argument syntaxes. The connectivity matrix input argument, <code>conn</code> , must be a compile-time constant. If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.

Function	Remarks/Limitations
<code>bwselect</code>	<p>Supports only the 3 and 4 input argument syntaxes: <code>BW2 = bwselect(BW, c, r)</code> and <code>BW2 = bwselect(BW, c, r, n)</code>. The optional fourth input argument, <code>n</code>, must be a compile-time constant. In addition, with code generation, <code>bwselect</code> only supports only the 1 and 2 output argument syntaxes: <code>BW2 = bwselect(____)</code> or <code>[BW2, idx] = bwselect(____)</code>.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
<code>bwtraceboundary</code>	The <code>dir</code> , <code>fstep</code> , and <code>conn</code> arguments must be compile-time constants.
<code>bwunpack</code>	Generated code for this function uses a precompiled platform-specific shared library.
<code>conndef</code>	Input arguments must be compile-time constants.
<code>edge</code>	<p>The <code>method</code>, <code>direction</code>, and <code>sigma</code> arguments must be a compile-time constants. In addition, nonprogrammatic syntaxes are not supported. For example, the syntax <code>edge(im)</code>, where <code>edge</code> does not return a value but displays an image instead, is not supported.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
<code>fitgeotrans</code>	<p>The <code>transformtype</code> argument must be a compile-time constant. The function supports the following transformation types: 'nonreflectivesimilarity', 'similarity', 'affine', or 'projective'.</p>
<code>fspecial</code>	Inputs must be compile-time constants. Expressions or variables are allowed if their values do not change.
<code>getrangefromclass</code>	—
<code>histeq</code>	<p>All the syntaxes that include indexed images are not supported. This includes all syntaxes that accept <code>map</code> as input and return <code>newmap</code>.</p> <p>Generated code for this function uses a precompiled platform-specific shared library.</p>
<code>im2uint8</code>	If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.

Function	Remarks/Limitations
im2uint16	Generated code for this function uses a precompiled platform-specific shared library.
im2int16	Generated code for this function uses a precompiled platform-specific shared library.
im2single	—
im2double	—
imadjust	<p>Does not support syntaxes that include indexed images. This includes all syntaxes that accept <code>map</code> as input and return <code>newmap</code>.</p> <p>Generated code for this function uses a precompiled platform-specific shared library.</p>
imbothat	<p>The input image <code>IM</code> must be either 2-D or 3-D image. The structuring element input argument <code>SE</code> must be a compile-time constant.</p> <p>If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.</p>
imclearborder	<p>The optional second input argument, <code>conn</code>, must be a compile-time constant. Supports only up to 3-D inputs.</p> <p>If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.</p>
imclose	<p>The input image <code>IM</code> must be either 2-D or 3-D image. The structuring element input argument <code>SE</code> must be a compile-time constant.</p> <p>If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.</p>
imcomplement	Does not support <code>int64</code> and <code>uint64</code> data types.

Function	Remarks/Limitations
imdilate	<p>The input image <code>IM</code> must be either 2-D or 3-D image. The <code>SE</code>, <code>PACKOPT</code>, and <code>SHAPE</code> input arguments must be a compile-time constant. The structuring element argument <code>SE</code> must be a single element—arrays of structuring elements are not supported. To obtain the same result as that obtained using an array of structuring elements, call the function sequentially.</p> <p>If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.</p>
imerode	<p>The input image <code>IM</code> must be either 2-D or 3-D image. The <code>SE</code>, <code>PACKOPT</code>, and <code>SHAPE</code> input arguments must be a compile-time constant. The structuring element argument <code>SE</code> must be a single element—arrays of structuring elements are not supported. To obtain the same result as that obtained using an array of structuring elements, call the function sequentially.</p> <p>If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.</p>
imextendedmax	<p>The optional third input argument, <code>conn</code>, must be a compile-time constant.</p> <p>If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.</p>
imextendedmin	<p>The optional third input argument, <code>conn</code>, must be a compile-time constant.</p> <p>If you choose the generic <code>MATLAB Host Computer</code> target platform, generated code uses a precompiled, platform-specific shared library.</p>

Function	Remarks/Limitations
<p><code>imfill</code></p>	<p>The optional input connectivity, <code>conn</code> and the string 'holes' must be compile-time constants.</p> <p>Supports only up to 3-D inputs.</p> <p>The interactive mode to select points, <code>imfill(BW,0,CONN)</code> is not supported in code generation.</p> <p><code>locations</code> can be a P-by-1 vector, in which case it contains the linear indices of the starting locations. <code>locations</code> can also be a P-by-<code>ndims(I)</code> matrix, in which case each row contains the array indices of one of the starting locations. Once you select a format at compile-time, you cannot change it at run time. However, the number of points in <code>locations</code> can be varied at run time.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
<p><code>imfilter</code></p>	<p>The input image can be either 2-D or 3-D. The value of the input argument, <code>options</code>, must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
<p><code>imhist</code></p>	<p>The optional second input argument, <code>n</code>, must be a compile-time constant. In addition, nonprogrammatic syntaxes are not supported. For example, the syntaxes where <code>imhist</code> displays the histogram are not supported.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
<p><code>imhmax</code></p>	<p>The optional third input argument, <code>conn</code>, must be a compile-time constant</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>

Function	Remarks/Limitations
imhmin	<p>The optional third input argument, <code>conn</code>, must be a compile-time constant</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
imlincomb	<p>The <code>output_class</code> argument must be a compile-time constant.</p> <p>Generated code for this function uses a precompiled platform-specific shared library.</p>
imopen	<p>The input image <code>IM</code> must be either 2-D or 3-D image. The structuring element input argument <code>SE</code> must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
imquantize	—
imreconstruct	<p>The optional third input argument, <code>conn</code>, must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
imref2d	<p>The <code>XWorldLimits</code>, <code>YWorldLimits</code> and <code>ImageSize</code> properties can be set only during object construction. When generating code, you can only specify single objects—arrays of objects are not supported.</p>
imref3d	<p>The <code>XWorldLimits</code>, <code>YWorldLimits</code>, <code>ZWorldLimits</code> and <code>ImageSize</code> properties can be set only during object construction. When generating code, you can only specify single objects—arrays of objects are not supported.</p>
imregionalmax	<p>The optional second input argument, <code>conn</code>, must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>

Function	Remarks/Limitations
imregionalmin	<p>The optional second input argument, <code>conn</code>, must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
imtophat	<p>The input image <code>IM</code> must be either 2-D or 3-D image. The structuring element input argument <code>SE</code> must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
imwarp	<p>The geometric transformation object input, <code>tform</code>, must be either <code>affine2d</code> or <code>projective2d</code>. Additionally, the interpolation method and optional parameter names must be string constants.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
intlut	Generated code for this function uses a precompiled platform-specific shared library.
iptcheckconn	Input arguments must be compile-time constants.
iptcheckmap	—
label2rgb	<p>Referring to the standard syntax:</p> <pre>RGB = label2rgb(L, map, zerocolor, order)</pre> <ul style="list-style-type: none"> • Submit at least two input arguments: the label matrix, <code>L</code>, and the colormap matrix, <code>map</code>. • <code>map</code> must be an <code>n-by-3, double</code>, colormap matrix. You cannot use a string containing the name of a MATLAB colormap function or a function handle of a colormap function. • If you set the boundary color <code>zerocolor</code> to the same color as one of the regions, <code>label2rgb</code> will not issue a warning. • If you supply a value for <code>order</code>, it must be <code>'noshuffle'</code>.
mean2	—

Function	Remarks/Limitations
<code>medfilt2</code>	<p>The <code>padopt</code> argument must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
<code>multithresh</code>	<p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
<code>ordfilt2</code>	<p>The <code>padopt</code> argument must be a compile-time constant.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
<code>padarray</code>	<p>Support only up to 3-D inputs.</p> <p>Input arguments, <code>padval</code> and <code>direction</code> are expected to be compile-time constants.</p>
<code>projective2d</code>	<p>When generating code, you can only specify single objects—arrays of objects are not supported.</p>
<code>regionprops</code>	<p>Supports only 2-D images. Does not accept the connected component structure (CC) returned by <code>bwconncomp</code>. Use <code>bwlabel</code> to create a label matrix, or pass the image to <code>regionprops</code> directly. Does not support the table output type. Does not accept cell arrays as input—use a comma-separated list instead. Does not support the properties <code>ConvexArea</code>, <code>ConvexHull</code>, <code>ConvexImage</code>, <code>Solidity</code>, and <code>SubarrayIdx</code>.</p> <p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>
<code>rgb2gray</code>	—
<code>rgb2ycbcr</code>	—
<code>strel</code>	<p>Input arguments must be compile-time constants. The following methods are not supported for code generation: <code>getsequence</code>, <code>reflect</code>, <code>translate</code>, <code>disp</code>, <code>display</code>, <code>loadobj</code>. When generating code, you can only specify single objects—arrays of objects are not supported.</p>
<code>stretchlim</code>	<p>If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.</p>

Function	Remarks/Limitations
watershed	Supports only 2-D images. Supports only 4- or 8-connectivity. Supports only up to 65,535 regions. The output type is always <code>uint16</code> . If you choose the generic MATLAB Host Computer target platform, generated code uses a precompiled, platform-specific shared library.
ycbcr2rgb	—

Input and Output Arguments in MATLAB

Function	Remarks and Limitations
nargin	—
nargout	<ul style="list-style-type: none"> For a function with no output arguments, returns 1 if called without a terminating semicolon. <p>Note: This behavior also affects extrinsic calls with no terminating semicolon. <code>nargout</code> is 1 for the called function in MATLAB.</p>

Interpolation and Computational Geometry in MATLAB

Function	Remarks and Limitations
cart2pol	—
cart2sph	—
interp1	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
interp1q	Might not match MATLAB when some Y values are <code>Inf</code> or <code>NaN</code> .
interp2	<ul style="list-style-type: none"> <code>Xq</code> and <code>Yq</code> must be the same size. Use <code>meshgrid</code> to evaluate on a grid. For best results, provide <code>X</code> and <code>Y</code> as vectors. For the <code>'cubic'</code> method, reports an error if the grid does not have uniform spacing. In this case, use the <code>'spline'</code> method. For best results when you use the <code>'spline'</code> method: <ul style="list-style-type: none"> Use <code>meshgrid</code> to create the inputs <code>Xq</code> and <code>Yq</code>.

Function	Remarks and Limitations
	<ul style="list-style-type: none"> • Use a small number of interpolation points relative to the dimensions of V. Interpolating over a large set of scattered points can be inefficient.
interp3	<ul style="list-style-type: none"> • Xq, Yq, and Zq must be the same size. Use <code>meshgrid</code> to evaluate on a grid. • For best results, provide X, Y, and Z as vectors. • For the 'cubic' method, reports an error if the grid does not have uniform spacing. In this case, use the 'spline' method. • For best results when you use the 'spline' method: <ul style="list-style-type: none"> • Use <code>meshgrid</code> to create the inputs Xq, Yq, and Zq. • Use a small number of interpolation points relative to the dimensions of V. Interpolating over a large set of scattered points can be inefficient.
meshgrid	—

Function	Remarks and Limitations
mkpp	<ul style="list-style-type: none"> • The output structure <code>pp</code> differs from the <code>pp</code> structure in MATLAB. In MATLAB, <code>ppval</code> cannot use the <code>pp</code> structure from the code generation software. For code generation, <code>ppval</code> cannot use a <code>pp</code> structure created by MATLAB. <code>unmkpp</code> can use a MATLAB <code>pp</code> structure for code generation. <p>To create a MATLAB <code>pp</code> structure from a <code>pp</code> structure created by the code generation software:</p> <ul style="list-style-type: none"> • In code generation, use <code>unmkpp</code> to return the piecewise polynomial details to MATLAB. • In MATLAB, use <code>mkpp</code> to create the <code>pp</code> structure. <ul style="list-style-type: none"> • If you do not provide <code>d</code>, then <code>coefs</code> must be two-dimensional and have a fixed number of columns. In this case, the number of columns is the order. • To define a piecewise constant polynomial, <code>coefs</code> must be a column vector or <code>d</code> must have at least two elements. • If you provide <code>d</code> and <code>d</code> is 1, <code>d</code> must be a constant. Otherwise, if the input to <code>ppval</code> is nonscalar, the shape of the output of <code>ppval</code> can differ from <code>ppval</code> in MATLAB. • If you provide <code>d</code>, it must have a fixed length. One of the following sets of statements must be true: <ol style="list-style-type: none"> 1 Suppose that <code>m = length(d)</code> and <code>npieces = length(breaks) - 1</code>. <pre style="margin-left: 40px;">size(coefs,j) = d(j) size(coefs,m+1) = npieces size(coefs,m+2) = order j = 1,2,...,m. The dimension m+2 must be fixed length.</pre> 2 Suppose that <code>m = length(d)</code> and <code>npieces = length(breaks) - 1</code>. <pre style="margin-left: 40px;">size(coefs,1) = prod(d)*npieces size(coefs,2) = order The second dimension must be fixed length.</pre> <ul style="list-style-type: none"> • If you do not provide <code>d</code>, the following statements must be true:

Function	Remarks and Limitations
	Suppose that $m = \text{length}(d)$ and $\text{npieces} = \text{length}(\text{breaks}) - 1$. $\text{size}(\text{coefs},1) = \text{prod}(d) * \text{npieces}$ $\text{size}(\text{coefs},2) = \text{order}$ The second dimension must be fixed length.
pchip	<ul style="list-style-type: none"> • Input x must be strictly increasing. • Does not remove y entries with NaN values. • If you generate code for the <code>pp = pchip(x,y)</code> syntax, you cannot input <code>pp</code> to the <code>ppval</code> function in MATLAB. To create a MATLAB <code>pp</code> structure from a <code>pp</code> structure created by the code generation software: <ul style="list-style-type: none"> • In code generation, use <code>unmkpp</code> to return the piecewise polynomial details to MATLAB. • In MATLAB, use <code>mkpp</code> to create the <code>pp</code> structure.
pol2cart	—
polyarea	—
ppval	The size of output v does not match MATLAB when both of the following statements are true: <ul style="list-style-type: none"> • The input x is a variable-size array that is not a variable-length vector. • x becomes a row vector at run time. The code generation software does not remove the singleton dimensions. However, MATLAB might remove singleton dimensions. For example, suppose that x is a :4-by-:5 array (the first dimension is variable size with an upper bound of 4 and the second dimension is variable size with an upper bound of 5). Suppose that <code>ppval(pp,0)</code> returns a 2-by-3 fixed-size array. v has size 2-by-3-by-:4-by-:5. At run time, suppose that, $\text{size}(x,1) = 1$ and $\text{size}(x,2) = 5$. In the generated code, the $\text{size}(v)$ is [2,3,1,5]. In MATLAB, the size is [2,3,5].
rectint	—
sph2cart	—

Function	Remarks and Limitations
spline	<ul style="list-style-type: none"> • Input <code>x</code> must be strictly increasing. • Does not remove <code>Y</code> entries with NaN values. • Does not report an error for infinite end slopes in <code>Y</code>. • If you generate code for the <code>pp = spline(x, Y)</code> syntax, you cannot input <code>pp</code> to the <code>ppval</code> function in MATLAB. To create a MATLAB <code>pp</code> structure from a <code>pp</code> structure created by the code generation software: <ul style="list-style-type: none"> • In code generation, use <code>unmkpp</code> to return the piecewise polynomial details to MATLAB. • In MATLAB, use <code>mkpp</code> to create the <code>pp</code> structure.
unmkpp	<ul style="list-style-type: none"> • <code>pp</code> must be a valid piecewise polynomial structure created by <code>mkpp</code>, <code>spline</code>, or <code>pchip</code> in MATLAB or by the code generation software. • Does not support <code>pp</code> structures created by <code>interp1</code> in MATLAB.

Linear Algebra in MATLAB

Function	Remarks and Limitations
bandwidth	—
isbanded	—
isdiag	—
ishermitian	—
istril	—
istriu	—
issymmetric	—
linsolve	<ul style="list-style-type: none"> • The option structure must be a constant. • Supports only a scalar option structure input. It does not support arrays of option structures. • Only optimizes these cases: <ul style="list-style-type: none"> • UT • LT

Function	Remarks and Limitations
	<ul style="list-style-type: none"> • <code>UHESS = true</code> (the <code>TRANSA</code> can be either <code>true</code> or <code>false</code>) • <code>SYM = true</code> and <code>POSDEF = true</code> Other options are equivalent to using <code>mldivide</code> .
<code>lsqnonneg</code>	<ul style="list-style-type: none"> • You must enable support for variable-size arrays. • The message string in the output structure <code>output</code> (the fifth output) is not translated.
<code>null</code>	<ul style="list-style-type: none"> • Might return a different basis than MATLAB • Does not support rational basis option (second input)
<code>orth</code>	<ul style="list-style-type: none"> • Can return a different basis than MATLAB
<code>rsf2csf</code>	—
<code>schur</code>	Can return a different Schur decomposition in generated code than in MATLAB.
<code>sqrtn</code>	—

Logical and Bit-Wise Operations in MATLAB

Function	Remarks and Limitations
<code>and</code>	—
<code>bitand</code>	—
<code>bitcmp</code>	—
<code>bitget</code>	—
<code>bitor</code>	—
<code>bitset</code>	—
<code>bitshift</code>	—
<code>bitxor</code>	—
<code>not</code>	—
<code>or</code>	—
<code>xor</code>	—

MATLAB Compiler

C and C++ code generation for the following functions requires the MATLAB Compiler software.

Function	Remarks and Limitations
isdeployed	<ul style="list-style-type: none"> Returns true and false as appropriate for MEX and SIM targets Returns false for other targets
ismcc	<ul style="list-style-type: none"> Returns true and false as appropriate for MEX and SIM targets. Returns false for other targets.

Matrices and Arrays in MATLAB

Function	Remarks and Limitations
abs	—
all	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
angle	—
any	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
blkdiag	—
bsxfun	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
cat	<ul style="list-style-type: none"> If supplied, <code>dim</code> must be a constant. “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
circshift	—
colon	<ul style="list-style-type: none"> Does not accept complex inputs. The input <code>i</code> cannot have a logical value. Does not accept vector inputs. Inputs must be constants. Uses single-precision arithmetic to produce single-precision results.
compan	—
cond	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”

Function	Remarks and Limitations
cov	<ul style="list-style-type: none"> • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” • Does not support the <code>nanflag</code> argument.
cross	<ul style="list-style-type: none"> • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
cumprod	Does not support logical inputs. Cast input to <code>double</code> first.
cumsum	Does not support logical inputs. Cast input to <code>double</code> first.
det	—

Function	Remarks and Limitations
diag	<ul style="list-style-type: none"> • If supplied, the argument representing the order of the diagonal matrix must be a real and scalar integer value. • For variable-size inputs that are variable-length vectors (1-by-: or :-by-1), diag: <ul style="list-style-type: none"> • Treats the input as a vector input. • Returns a matrix with the given vector along the specified diagonal. • For variable-size inputs that are not variable-length vectors, diag: <ul style="list-style-type: none"> • Treats the input as a matrix. • Does not support inputs that are vectors at run time. • Returns a variable-length vector. <p>If the input is variable-size (:m-by-:n) and has shape 0-by-0 at run time, the output is 0-by-1 not 0-by-0. However, if the input is a constant size 0-by-0, the output is [].</p> • For variable-size inputs that are not variable-length vectors (1-by-: or :-by-1), diag treats the input as a matrix from which to extract a diagonal vector. This behavior occurs even if the input array is a vector at run time. To force diag to build a matrix from variable-size inputs that are not 1-by-: or :-by-1, use: <ul style="list-style-type: none"> • <code>diag(x(:))</code> instead of <code>diag(x)</code> • <code>diag(x(:),k)</code> instead of <code>diag(x,k)</code> • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
diff	<ul style="list-style-type: none"> • If supplied, the arguments representing the number of times to apply diff and the dimension along which to calculate the difference must be constants. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
dot	—

Function	Remarks and Limitations
eig	<ul style="list-style-type: none"> • For code generation, QZ algorithm is used in all cases. MATLAB can use different algorithms for different inputs. Consequently, V might represent a different basis of eigenvectors. The eigenvalues in D might not be in the same order as in MATLAB. • With one input, $[V,D] = \text{eig}(A)$, the results are similar to those obtained using $[V,D] = \text{eig}(A, \text{eye}(\text{size}(A)), 'qz')$ in MATLAB, except that for code generation, the columns of V are normalized. • Options 'balance', and 'nobalance' are not supported for the standard eigenvalue problem. 'chol' is not supported for the symmetric generalized eigenvalue problem. • Outputs are of complex type. • Does not support the option to calculate left eigenvectors.
eye	<p>classname must be a built-in MATLAB numeric type. Does not invoke the static eye method for other classes. For example, <code>eye(m, n, 'myclass')</code> does not invoke <code>myclass.eye(m,n)</code>.</p>
false	<ul style="list-style-type: none"> • Dimensions must be real, nonnegative, integers.
find	<ul style="list-style-type: none"> • Issues an error if a variable-size input becomes a row vector at run time. <hr/> <p>Note: This limitation does not apply when the input is scalar or a variable-length row vector.</p> <hr/> <ul style="list-style-type: none"> • For variable-size inputs, the shape of empty outputs, 0-by-0, 0-by-1, or 1-by-0, depends on the upper bounds of the size of the input. The output might not match MATLAB when the input array is a scalar or [] at run time. If the input is a variable-length row vector, the size of an empty output is 1-by-0, otherwise it is 0-by-1. • Always returns a variable-length vector. Even when you provide the output vector k, the output cannot be fixed-size because the output can contain fewer than k elements. For example, <code>find(x, 1)</code> returns a variable-length vector with 1 or 0 elements.
flip	—
flipdim	<p>Note: flipdim will be removed in a future release. Use flip instead.</p>

Function	Remarks and Limitations
flip1r	—
flipud	—
full	—
hadamard	—
hankel	—
hilb	—
ind2sub	<ul style="list-style-type: none"> • The first argument should be a valid size vector. Size vectors for arrays with more than <code>intmax</code> elements are not supported. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
inv	Singular matrix inputs can produce nonfinite values that differ from MATLAB results.
invhilb	—
ipermute	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
iscolumn	—
isempty	—
isequal	—
isequaln	—
isfinite	—
isfloat	—
isinf	—
isinteger	—
islogical	—
ismatrix	—
isnan	—
isrow	—
issparse	—
isvector	—

Function	Remarks and Limitations
kron	—
length	—
linspace	—
logspace	—
lu	—
magic	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”.
max	<ul style="list-style-type: none"> • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”. • Does not support the <code>nanflag</code> argument. • “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
min	<ul style="list-style-type: none"> • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”. • Does not support the <code>nanflag</code> argument. • “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
ndgrid	—
ndims	—
nnz	—
nonzeros	—
norm	—
normest	—
numel	—
ones	<ul style="list-style-type: none"> • Dimensions must be real, nonnegative integers. • The input <code>optimfun</code> must be a function supported for code generation.

Function	Remarks and Limitations
pascal	—
permute	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
pinv	—
planerot	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
prod	<ul style="list-style-type: none"> • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
qr	—
rand	<ul style="list-style-type: none"> • <code>classname</code> must be a built-in MATLAB numeric type. Does not invoke the static <code>rand</code> method for other classes. For example, <code>rand(sz, 'myclass')</code> does not invoke <code>myclass.rand(sz)</code>. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
randi	<ul style="list-style-type: none"> • <code>classname</code> must be a built-in MATLAB numeric type. Does not invoke the static <code>randi</code> method for other classes. For example, <code>randi(imax, sz, 'myclass')</code> does not invoke <code>myclass.randi(imax, sz)</code>. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
randn	<ul style="list-style-type: none"> • <code>classname</code> must be a built-in MATLAB numeric type. Does not invoke the static <code>randn</code> method for other classes. For example, <code>randn(sz, 'myclass')</code> does not invoke <code>myclass.randn(sz)</code>. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
randperm	—
rank	—
rcond	—
repmat	—
reshape	• “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”

Function	Remarks and Limitations
rng	<ul style="list-style-type: none"> • For library code generation targets, executable code generation targets, and MEX targets with extrinsic calls disabled: <ul style="list-style-type: none"> • Does not support the 'shuffle' input. • For the generator input, supports 'twister', 'v4', and 'v5normal'. <p>For these targets, the output of <code>s=rng</code> in the generated code differs from the MATLAB output. You cannot return the output of <code>s=rng</code> from the generated code and pass it to <code>rng</code> in MATLAB.</p> <ul style="list-style-type: none"> • For MEX targets, if extrinsic calls are enabled, you cannot access the data in the structure returned by <code>rng</code>.
rosser	—
rot90	—
shiftdim	<ul style="list-style-type: none"> • Second argument must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
sign	—
size	—
sort	If the input is a complex type, <code>sort</code> orders the output according to absolute value. When <code>x</code> is a complex type that has all zero imaginary parts, use <code>sort(real(x))</code> to compute the sort order for real types. See “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
sortrows	If the input is a complex type, <code>sortrows</code> orders the output according to absolute value. When <code>x</code> is a complex type that has all zero imaginary parts, use <code>sortrows(real(x))</code> to compute the sort order for real types. See “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
squeeze	—

Function	Remarks and Limitations
sub2ind	<ul style="list-style-type: none"> The first argument must be a valid size vector. Size vectors for arrays with more than <code>intmax</code> elements are not supported. “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
subspace	—
sum	<ul style="list-style-type: none"> Specify <code>dim</code> as a constant. “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” Does not support the <code>nanflag</code> argument.
toeplitz	—
trace	—
tril	<ul style="list-style-type: none"> If supplied, the argument representing the order of the diagonal matrix must be a real and scalar integer value.
triu	<ul style="list-style-type: none"> If supplied, the argument representing the order of the diagonal matrix must be a real and scalar integer value.
true	<ul style="list-style-type: none"> Dimensions must be real, nonnegative, integers.
vander	—
wilkinson	—
zeros	<ul style="list-style-type: none"> Dimensions must be real, nonnegative, integers.

Neural Network Toolbox

You can use `genFunction` in the Neural Network Toolbox™ to generate a standalone MATLAB function for a trained neural network. You can generate C/C++ code from this standalone MATLAB function. To generate Simulink blocks, use `thegenSim` function. See “Deploy Neural Network Functions”.

Nonlinear Numerical Methods in MATLAB

Function	Remarks and Limitations
quad2d	<ul style="list-style-type: none"> Generates a warning if the size of the internal storage arrays is not large enough. If a warning occurs, a possible workaround is to divide the region of integration into pieces and sum the integrals over each piece.
quadgk	—

Numerical Integration and Differentiation in MATLAB

Function	Remarks and Limitations
cumtrapz	—
de12	—
diff	<ul style="list-style-type: none"> If supplied, the arguments representing the number of times to apply <code>diff</code> and the dimension along which to calculate the difference must be constants.
gradient	—
ode23	<ul style="list-style-type: none"> All <code>odeset</code> option arguments must be constant. Does not support a constant mass matrix in the options structure. Provide a mass matrix as a function . You must provide at least the two output arguments <code>T</code> and <code>Y</code>. Input types must be homogeneous—all double or all single. Variable-sizing support must be enabled. Requires dynamic memory allocation when <code>tspan</code> has two elements or you use event functions.
ode45	<ul style="list-style-type: none"> All <code>odeset</code> option arguments must be constant. Does not support a constant mass matrix in the options structure. Provide a mass matrix as a function . You must provide at least the two output arguments <code>T</code> and <code>Y</code>. Input types must be homogeneous—all double or all single. Variable-sizing support must be enabled. Requires dynamic memory allocation when <code>tspan</code> has two elements or you use event functions.
odeget	The <code>name</code> argument must be constant.

Function	Remarks and Limitations
odeset	All inputs must be constant.
trapz	<ul style="list-style-type: none"> • If supplied, <code>dim</code> must be a constant. • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”

Optimization Functions in MATLAB

Function	Remarks and Limitations
fminsearch	<ul style="list-style-type: none"> • Ignores the <code>Display</code> option. Does not print status information during execution. Test the <code>exitflag</code> output for the exit condition. • The output structure does not include the <code>algorithm</code> or <code>message</code> fields. • Ignores the <code>OutputFcn</code> and <code>PlotFcns</code> options.
fzero	<ul style="list-style-type: none"> • The first argument must be a function handle. Does not support structure, inline function, or string inputs for the first argument. • Supports up to three output arguments. Does not support the fourth output argument (the <code>output</code> structure).
optimget	Input parameter names must be constant.
optimset	<ul style="list-style-type: none"> • Does not support the syntax that has no input or output arguments: <code>optimset</code> • Functions specified in the options must be supported for code generation. • The fields of the options structure <code>oldopts</code> must be fixed-size fields. • For code generation, optimization functions ignore the <code>Display</code> option. • Does not support the additional options in an options structure created by the Optimization Toolbox <code>optimset</code> function. If an input options structure includes the additional Optimization Toolbox options, the output structure does not include them.

Phased Array System Toolbox

C and C++ code generation for the following functions requires the Phased Array System Toolbox software.

Name	Remarks and Limitations
Antenna and Microphone Elements	
aperture2gain	Does not support variable-size inputs.
azel2phithetapat	Does not support variable-size inputs.
azel2uvpat	Does not support variable-size inputs.
circpol2pol	Does not support variable-size inputs.
gain2aperture	Does not support variable-size inputs.
phased.CosineAntennaElement	<ul style="list-style-type: none"> • pattern, patternAzimuth, patternElevation, and plotResponse methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.CrossedDipoleAntennaElement	<ul style="list-style-type: none"> • pattern, patternAzimuth, patternElevation, and plotResponse methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.CustomAntennaElement	<ul style="list-style-type: none"> • pattern, patternAzimuth, patternElevation, and plotResponse methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.CustomMicrophoneElement	<ul style="list-style-type: none"> • pattern, patternAzimuth, patternElevation, and plotResponse methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.IsotropicAntennaElement	<ul style="list-style-type: none"> • pattern, patternAzimuth, patternElevation, and plotResponse methods are not supported. • See “System Objects in MATLAB Code Generation”.

Name	Remarks and Limitations
phased.OmnidirectionalMicrophoneElement	<ul style="list-style-type: none"> • pattern, patternAzimuth, patternElevation, and plotResponse methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.ShortDipoleAntennaElement	<ul style="list-style-type: none"> • pattern, patternAzimuth, patternElevation, and plotResponse methods are not supported. • See “System Objects in MATLAB Code Generation”.
phitheta2azelpat	Does not support variable-size inputs.
phitheta2uvpat	Does not support variable-size inputs.
pol2circpol	Does not support variable-size inputs.
polellip	Does not support variable-size inputs.
polloss	Does not support variable-size inputs.
polratio	Does not support variable-size inputs.
polsignature	<ul style="list-style-type: none"> • Does not support variable-size inputs. • Supported only when output arguments are specified.
stokes	<ul style="list-style-type: none"> • Does not support variable-size inputs. • Supported only when output arguments are specified.
uv2azelpat	Does not support variable-size inputs.
uv2phithetapat	Does not support variable-size inputs.
Array Geometries and Analysis	
az2broadside	Does not support variable-size inputs.
broadside2az	Does not support variable-size inputs.
pilotcalib	Does not support variable-size inputs.

Name	Remarks and Limitations
phased.ArrayGain	<ul style="list-style-type: none"> • Does not support arrays containing polarized antenna elements, that is, the <code>phased.ShortDipoleAntennaElement</code> or <code>phased.CrossedDipoleAntennaElement</code> antennas. • See “System Objects in MATLAB Code Generation”.
phased.ArrayResponse	See “System Objects in MATLAB Code Generation”.
phased.ConformalArray	<ul style="list-style-type: none"> • <code>pattern</code>, <code>patternAzimuth</code>, <code>patternElevation</code>, <code>plotResponse</code>, and <code>viewArray</code> methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.ElementDelay	See “System Objects in MATLAB Code Generation”.
phased.PartitionedArray	<ul style="list-style-type: none"> • <code>pattern</code>, <code>patternAzimuth</code>, <code>patternElevation</code>, <code>plotResponse</code>, and <code>viewArray</code> methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.ReplicatedSubarray	<ul style="list-style-type: none"> • <code>pattern</code>, <code>patternAzimuth</code>, <code>patternElevation</code>, <code>plotResponse</code>, and <code>viewArray</code> methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.SteeringVector	See “System Objects in MATLAB Code Generation”.
phased.UCA	<ul style="list-style-type: none"> • <code>pattern</code>, <code>patternAzimuth</code>, <code>patternElevation</code>, <code>plotResponse</code>, and <code>viewArray</code> methods are not supported. • See “System Objects in MATLAB Code Generation”.

Name	Remarks and Limitations
phased.ULA	<ul style="list-style-type: none"> • pattern, patternAzimuth, patternElevation, plotResponse, and viewArray methods are not supported. • See “System Objects in MATLAB Code Generation”.
phased.URA	<ul style="list-style-type: none"> • pattern, patternAzimuth, patternElevation, plotResponse, and viewArray methods are not supported. • See “System Objects in MATLAB Code Generation”.
Signal Radiation and Collection	
phased.Collector	See “System Objects in MATLAB Code Generation”.
phased.Radiator	See “System Objects in MATLAB Code Generation”.
phased.WidebandCollector	<ul style="list-style-type: none"> • Requires dynamic memory allocation. See “Limitations for System Objects that Require Dynamic Memory Allocation”. • See “System Objects in MATLAB Code Generation”.
sensormsg	Does not support variable-size inputs.
Waveforms	
ambgfun	Does not support variable-size inputs.
phased.FMCWWaveform	<ul style="list-style-type: none"> • plot method is not supported. • See “System Objects in MATLAB Code Generation”.
phased.LinearFMWaveform	<ul style="list-style-type: none"> • plot method is not supported. • See “System Objects in MATLAB Code Generation”.

Name	Remarks and Limitations
phased.MFSKWaveform	<ul style="list-style-type: none"> • plot method is not supported. • See “System Objects in MATLAB Code Generation”.
phased.PhaseCodedWaveform	<ul style="list-style-type: none"> • plot method is not supported. • See “System Objects in MATLAB Code Generation”.
phased.RectangularWaveform	<ul style="list-style-type: none"> • plot method is not supported. • See “System Objects in MATLAB Code Generation”.
phased.SteppedFMWaveform	<ul style="list-style-type: none"> • plot method is not supported. • See “System Objects in MATLAB Code Generation”.
range2bw	Does not support variable-size inputs.
range2time	Does not support variable-size inputs.
time2range	Does not support variable-size inputs.
unigrid	Does not support variable-size inputs.
Transmitters and Receivers	
delayseq	Does not support variable-size inputs.
noisepow	Does not support variable-size inputs.
phased.ReceiverPreamp	See “System Objects in MATLAB Code Generation”.
phased.Transmitter	See “System Objects in MATLAB Code Generation”.
systemp	Does not support variable-size inputs.
Beamforming	
cbfweights	Does not support variable-size inputs.
lcmvweights	Does not support variable-size inputs.
mvdrweights	Does not support variable-size inputs.

Name	Remarks and Limitations
phased.FrostBeamformer	<ul style="list-style-type: none"> • Requires dynamic memory allocation. See “Limitations for System Objects that Require Dynamic Memory Allocation”. • See “System Objects in MATLAB Code Generation”.
phased.LCMVBeamformer	See “System Objects in MATLAB Code Generation”.
phased.MVDRBeamformer	See “System Objects in MATLAB Code Generation”.
phased.PhaseShiftBeamformer	See “System Objects in MATLAB Code Generation”.
phased.SteeringVector	See “System Objects in MATLAB Code Generation”.
phased.SubbandPhaseShiftBeamformer	See “System Objects in MATLAB Code Generation”.
phased.TimeDelayBeamformer	<ul style="list-style-type: none"> • Requires dynamic memory allocation. See “Limitations for System Objects that Require Dynamic Memory Allocation”. • See “System Objects in MATLAB Code Generation”.
phased.TimeDelayLCMVBeamformer	<ul style="list-style-type: none"> • Requires dynamic memory allocation. See “Limitations for System Objects that Require Dynamic Memory Allocation”. • See “System Objects in MATLAB Code Generation”.
sensorcov	Does not support variable-size inputs.
steervec	Does not support variable-size inputs.
Direction of Arrival (DOA) Estimation	
aicstest	Does not support variable-size inputs.
espritdoa	Does not support variable-size inputs.
mdltest	Does not support variable-size inputs.

Name	Remarks and Limitations
phased.BeamscanEstimator	See “System Objects in MATLAB Code Generation”.
phased.BeamscanEstimator2D	See “System Objects in MATLAB Code Generation”.
phased.BeamspaceESPRITEstimator	See “System Objects in MATLAB Code Generation”.
phased.ESPRITEstimator	See “System Objects in MATLAB Code Generation”.
phased.MVDREstimator	See “System Objects in MATLAB Code Generation”.
phased.MVDREstimator2D	See “System Objects in MATLAB Code Generation”.
phased.RootMUSICEstimator	See “System Objects in MATLAB Code Generation”.
phased.RootWSFEstimator	See “System Objects in MATLAB Code Generation”.
phased.SumDifferenceMonopulseTracker	See “System Objects in MATLAB Code Generation”.
phased.SumDifferenceMonopulseTracker2D	See “System Objects in MATLAB Code Generation”.
rootmusicdoa	Does not support variable-size inputs.
spsmooth	Does not support variable-size inputs.
Space-Time Adaptive Processing (STAP)	
dopsteeringvec	Does not support variable-size inputs.
phased.ADPCACanceller	See “System Objects in MATLAB Code Generation”.
phased.AngleDopplerResponse	See “System Objects in MATLAB Code Generation”.
phased.DPCACanceller	See “System Objects in MATLAB Code Generation”.
phased.STAPSMIBeamformer	See “System Objects in MATLAB Code Generation”.

Name	Remarks and Limitations
val2ind	Does not support variable-size inputs.
Signal Propagation and Environment	
billingsleyicm	Does not support variable-size inputs.
depressionang	Does not support variable-size inputs.
effearthradius	Does not support variable-size inputs.
fspl	Does not support variable-size inputs.
grazingang	Does not support variable-size inputs.
horizonrange	Does not support variable-size inputs.
phased.BarrageJammer	See “System Objects in MATLAB Code Generation”.
phased.ConstantGammaClutter	See “System Objects in MATLAB Code Generation”.
phased.FreeSpace	<ul style="list-style-type: none"> • Requires dynamic memory allocation. See “Limitations for System Objects that Require Dynamic Memory Allocation”. • See “System Objects in MATLAB Code Generation”.
phased.RadarTarget	See “System Objects in MATLAB Code Generation”.
physconst	Does not support variable-size inputs.
surfacegamma	Does not support variable-size inputs.
surfclutterrcs	Does not support variable-size inputs.
Detection and System Analysis	
albersheim	Does not support variable-size inputs.
beat2range	Does not support variable-size inputs.
dechirp	Does not support variable-size inputs.
npwgnthresh	Does not support variable-size inputs.
phased.CFARDetector	See “System Objects in MATLAB Code Generation”.

Name	Remarks and Limitations
phased.MatchedFilter	<ul style="list-style-type: none"> • The CustomSpectrumWindow property is not supported. • See “System Objects in MATLAB Code Generation”.
phased.RangeDopplerResponse	<ul style="list-style-type: none"> • The CustomRangeWindow and the CustomDopplerWindow properties are not supported. • See “System Objects in MATLAB Code Generation”.
phased.StretchProcessor	See “System Objects in MATLAB Code Generation”.
phased.TimeVaryingGain	See “System Objects in MATLAB Code Generation”.
pulsint	Does not support variable-size inputs.
radareqpow	Does not support variable-size inputs.
radareqrng	Does not support variable-size inputs.
radareqsnr	Does not support variable-size inputs.
radarvcd	Does not support variable-size inputs.
range2beat	Does not support variable-size inputs.
rdcoupling	Does not support variable-size inputs.
rocpfa	<ul style="list-style-type: none"> • Does not support variable-size inputs. • The NonfluctuatingNoncoherent signal type is not supported.
rocsnr	<ul style="list-style-type: none"> • Does not support variable-size inputs. • The NonfluctuatingNoncoherent signal type is not supported.
shnidman	Does not support variable-size inputs.
stretchfreq2rng	Does not support variable-size inputs.
Motion Modeling and Coordinate Systems	
azel2phitheta	Does not support variable-size inputs.

Name	Remarks and Limitations
azel2uv	Does not support variable-size inputs.
azelaxes	Does not support variable-size inputs.
cart2sphvec	Does not support variable-size inputs.
dop2speed	Does not support variable-size inputs.
global2localcoord	Does not support variable-size inputs.
local2globalcoord	Does not support variable-size inputs.
phased.Platform	See “System Objects in MATLAB Code Generation”.
phitheta2azel	Does not support variable-size inputs.
phitheta2uv	Does not support variable-size inputs.
radialspeed	Does not support variable-size inputs.
rangeangle	Does not support variable-size inputs.
rotx	Does not support variable-size inputs.
roty	Does not support variable-size inputs.
rotz	Does not support variable-size inputs.
speed2dop	Does not support variable-size inputs.
sph2cartvec	Does not support variable-size inputs.
uv2azel	Does not support variable-size inputs.
uv2phitheta	Does not support variable-size inputs.

Polynomials in MATLAB

Function	Remarks and Limitations
poly	<ul style="list-style-type: none"> Does not discard nonfinite input values Complex input produces complex output “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
polyder	The output can contain fewer NaNs than the MATLAB output. However, if the input contains a NaN, the output contains at least one NaN.
polyfit	“Variable-Sizing Restrictions for Code Generation of Toolbox Functions”

Function	Remarks and Limitations
polyint	—
polyval	—
polyvalm	—
roots	<ul style="list-style-type: none"> • Output is variable size. • Output is complex. • Roots are not always in the same order as MATLAB. • Roots of poorly conditioned polynomials do not always match MATLAB.

Programming Utilities in MATLAB

Function	Remarks and Limitations
mfilename	—

Relational Operators in MATLAB

Function	Remarks and Limitations
eq	—
ge	—
gt	—
le	—
lt	—
ne	—

Rounding and Remainder Functions in MATLAB

Function	Remarks and Limitations
ceil	—
fix	—
floor	—
mod	<ul style="list-style-type: none"> • Performs the arithmetic using the output class. Results might not match MATLAB due to differences in rounding errors.

Function	Remarks and Limitations
	If one of the inputs has type <code>int64</code> or <code>uint64</code> , then both inputs must have the same type.
<code>rem</code>	<ul style="list-style-type: none"> Performs the arithmetic using the output class. Results might not match MATLAB due to differences in rounding errors. If one of the inputs has type <code>int64</code> or <code>uint64</code>, then both inputs must have the same type.
<code>round</code>	Supports only the syntax <code>Y = round(X)</code> .

Set Operations in MATLAB

Function	Remarks and Limitations
<code>intersect</code>	<ul style="list-style-type: none"> When you do not specify the <code>'rows'</code> option: <ul style="list-style-type: none"> Inputs <code>A</code> and <code>B</code> must be vectors. If you specify the <code>'legacy'</code> option, inputs <code>A</code> and <code>B</code> must be row vectors. The first dimension of a variable-size row vector must have fixed length 1. The second dimension of a variable-size column vector must have fixed length 1. The input <code>[]</code> is not supported. Use a 1-by-0 or 0-by-1 input, for example, <code>zeros(1,0)</code>, to represent the empty set. If you specify the <code>'legacy'</code> option, empty outputs are row vectors, 1-by-0, never 0-by-0. When you specify both the <code>'legacy'</code> option and the <code>'rows'</code> option, the outputs <code>ia</code> and <code>ib</code> are column vectors. If these outputs are empty, they are 0-by-1, never 0-by-0, even if the output <code>C</code> is 0-by-0. When the <code>setOrder</code> is <code>'sorted'</code> or when you specify the <code>'legacy'</code> option, the inputs must already be sorted in ascending order. The first output, <code>C</code>, is sorted in ascending order. Complex inputs must be <code>single</code> or <code>double</code>. When one input is complex and the other input is real, do one of the following: <ul style="list-style-type: none"> Set <code>setOrder</code> to <code>'stable'</code>.

Function	Remarks and Limitations
	<ul style="list-style-type: none"> • Sort the real input in complex ascending order (by absolute value). Suppose the real input is x. Use <code>sort(complex(x))</code> or <code>sortrows(complex(x))</code>. • “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
ismember	<ul style="list-style-type: none"> • The second input, B, must be sorted in ascending order. • Complex inputs must be <code>single</code> or <code>double</code>. • “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
issorted	<ul style="list-style-type: none"> • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”. • “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.

Function	Remarks and Limitations
setdiff	<ul style="list-style-type: none"> • When you do not specify the 'rows' option: <ul style="list-style-type: none"> • Inputs A and B must be vectors. If you specify the 'legacy' option, inputs A and B must be row vectors. • The first dimension of a variable-size row vector must have fixed length 1. The second dimension of a variable-size column vector must have fixed length 1. • Do not use [] to represent the empty set. Use a 1-by-0 or 0-by-1 input, for example, <code>zeros(1,0)</code>, to represent the empty set. • If you specify the 'legacy' option, empty outputs are row vectors, 1-by-0, never 0-by-0. • When you specify both the 'legacy' and 'rows' options, the output <code>ia</code> is a column vector. If <code>ia</code> is empty, it is 0-by-1, never 0-by-0, even if the output <code>C</code> is 0-by-0. • When the <code>setOrder</code> is 'sorted' or when you specify the 'legacy' option, the inputs must already be sorted in ascending order. The first output, <code>C</code>, is sorted in ascending order. • Complex inputs must be <code>single</code> or <code>double</code>. • When one input is complex and the other input is real, do one of the following: <ul style="list-style-type: none"> • Set <code>setOrder</code> to 'stable'. • Sort the real input in complex ascending order (by absolute value). Suppose the real input is <code>x</code>. Use <code>sort(complex(x))</code> or <code>sortrows(complex(x))</code>. • “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.

Function	Remarks and Limitations
setxor	<ul style="list-style-type: none"> • When you do not specify the 'rows' option: <ul style="list-style-type: none"> • Inputs A and B must be vectors with the same orientation. If you specify the 'legacy' option, inputs A and B must be row vectors. • The first dimension of a variable-size row vector must have fixed length 1. The second dimension of a variable-size column vector must have fixed length 1. • The input [] is not supported. Use a 1-by-0 or 0-by-1 input, for example , <code>zeros(1,0)</code> , to represent the empty set. • If you specify the 'legacy' option, empty outputs are row vectors, 1-by-0, never 0-by-0. • When you specify both the 'legacy' option and the 'rows' option, the outputs ia and ib are column vectors. If these outputs are empty, they are 0-by-1, never 0-by-0, even if the output C is 0-by-0. • When the <code>setOrder</code> is 'sorted' or when you specify the 'legacy' flag, the inputs must already be sorted in ascending order. The first output, C, is sorted in ascending order. • Complex inputs must be <code>single</code> or <code>double</code>. • When one input is complex and the other input is real, do one of the following: <ul style="list-style-type: none"> • Set <code>setOrder</code> to 'stable'. • Sort the real input in complex ascending order (by absolute value). Suppose the real input is x. Use <code>sort(complex(x))</code> or <code>sortrows(complex(x))</code>. • “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.

Function	Remarks and Limitations
union	<ul style="list-style-type: none"> • When you do not specify the 'rows' option: <ul style="list-style-type: none"> • Inputs A and B must be vectors with the same orientation. If you specify the 'legacy' option, inputs A and B must be row vectors. • The first dimension of a variable-size row vector must have fixed length 1. The second dimension of a variable-size column vector must have fixed length 1. • The input <code>[]</code> is not supported. Use a 1-by-0 or 0-by-1 input, for example, <code>zeros(1,0)</code>, to represent the empty set. • If you specify the 'legacy' option, empty outputs are row vectors, 1-by-0, never 0-by-0. • When you specify both the 'legacy' option and the 'rows' option, the outputs ia and ib are column vectors. If these outputs are empty, they are 0-by-1, never 0-by-0, even if the output C is 0-by-0. • When the <code>setOrder</code> is 'sorted' or when you specify the 'legacy' option, the inputs must already be sorted in ascending order. The first output, C, is sorted in ascending order. • Complex inputs must be <code>single</code> or <code>double</code>. • When one input is complex and the other input is real, do one of the following: <ul style="list-style-type: none"> • Set <code>setOrder</code> to 'stable'. • Sort the real input in complex ascending order (by absolute value). Suppose the real input is x. Use <code>sort(complex(x))</code> or <code>sortrows(complex(x))</code>. • “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.

Function	Remarks and Limitations
unique	<ul style="list-style-type: none"> When you do not specify the 'rows' option: <ul style="list-style-type: none"> The input A must be a vector. If you specify the 'legacy' option, the input A must be a row vector. The first dimension of a variable-size row vector must have fixed length 1. The second dimension of a variable-size column vector must have fixed length 1. The input <code>[]</code> is not supported. Use a 1-by-0 or 0-by-1 input, for example, <code>zeros(1,0)</code>, to represent the empty set. If you specify the 'legacy' option, empty outputs are row vectors, 1-by-0, never 0-by-0. When you specify both the 'rows' option and the 'legacy' option, outputs ia and ic are column vectors. If these outputs are empty, they are 0-by-1, even if the output C is 0-by-0. When the <code>setOrder</code> is 'sorted' or when you specify the 'legacy' option, the input A must already be sorted in ascending order. The first output, C, is sorted in ascending order. Complex inputs must be <code>single</code> or <code>double</code>.

Signal Processing in MATLAB

Function	Remarks and Limitations
chol	—
conv	—
fft	<ul style="list-style-type: none"> Length of input vector must be a power of 2. “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
fft2	<ul style="list-style-type: none"> Length of input matrix dimensions must each be a power of 2.
fftn	<ul style="list-style-type: none"> Length of input matrix dimensions must each be a power of 2.
fftshift	—
filter	<ul style="list-style-type: none"> If supplied, <code>dim</code> must be a constant. <code>v</code>
freqspace	—

Function	Remarks and Limitations
<code>ifft</code>	<ul style="list-style-type: none"> Length of input vector must be a power of 2. Output of <code>ifft</code> block is complex. Does not support the <code>'symmetric'</code> option. “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
<code>ifft2</code>	<ul style="list-style-type: none"> Length of input matrix dimensions must each be a power of 2. Does not support the <code>'symmetric'</code> option.
<code>ifftn</code>	<ul style="list-style-type: none"> Length of input matrix dimensions must each be a power of 2. Does not support the <code>'symmetric'</code> option.
<code>ifftshift</code>	—
<code>svd</code>	Uses a different SVD implementation than MATLAB. Because the singular value decomposition is not unique, left and right singular vectors might differ from those computed by MATLAB.
<code>zp2tf</code>	—

Signal Processing Toolbox

C and C++ code generation for the following functions requires the Signal Processing Toolbox software. These functions do not support variable-size inputs, you must define the size and type of the function inputs. For more information, see “Specifying Inputs in Code Generation from MATLAB”.

Note: Many Signal Processing Toolbox functions require constant inputs in generated code. To specify a constant input for `codegen`, use `coder.Constant`.

Function	Remarks/Limitations
<code>barthannwin</code>	Window length must be a constant. Expressions or variables are allowed if their values do not change.
<code>bartlett</code>	Window length must be a constant. Expressions or variables are allowed if their values do not change.
<code>besselap</code>	Filter order must be a constant. Expressions or variables are allowed if their values do not change.

Function	Remarks/Limitations
bitrevorder	—
blackman	Window length must be a constant. Expressions or variables are allowed if their values do not change.
blackmanharris	Window length must be a constant. Expressions or variables are allowed if their values do not change.
bohmanwin	Window length must be a constant. Expressions or variables are allowed if their values do not change.
buttap	Filter order must be a constant. Expressions or variables are allowed if their values do not change.
butter	Filter coefficients must be constants. Expressions or variables are allowed if their values do not change.
buttord	All inputs must be constants. Expressions or variables are allowed if their values do not change.
cfirpm	All inputs must be constants. Expressions or variables are allowed if their values do not change.
cheb1ap	All inputs must be constants. Expressions or variables are allowed if their values do not change.
cheb2ap	All inputs must be constants. Expressions or variables are allowed if their values do not change.
cheb1ord	All inputs must be constants. Expressions or variables are allowed if their values do not change.
cheb2ord	All inputs must be constants. Expressions or variables are allowed if their values do not change.
chebwin	All inputs must be constants. Expressions or variables are allowed if their values do not change.
cheby1	All Inputs must be constants. Expressions or variables are allowed if their values do not change.
cheby2	All inputs must be constants. Expressions or variables are allowed if their values do not change.
db2pow	—

Function	Remarks/Limitations
dct	<p>C and C++ code generation for <code>dct</code> requires DSP System Toolbox software.</p> <p>Length of transform dimension must be a power of two. If specified, the <code>pad</code> or <code>truncation</code> value must be constant. Expressions or variables are allowed if their values do not change.</p>
downsample	—
dpss	All inputs must be constants. Expressions or variables are allowed if their values do not change.
ellip	Inputs must be constant. Expressions or variables are allowed if their values do not change.
ellipap	All inputs must be constants. Expressions or variables are allowed if their values do not change.
ellipord	All inputs must be constants. Expressions or variables are allowed if their values do not change.
filtfilt	Filter coefficients must be constants. Expressions or variables are allowed if their values do not change.
findpeaks	—
fir1	All inputs must be constants. Expressions or variables are allowed if their values do not change.
fir2	All inputs must be constants. Expressions or variables are allowed if their values do not change.
fircls	All inputs must be constants. Expressions or variables are allowed if their values do not change.
fircls1	All inputs must be constants. Expressions or variables are allowed if their values do not change.
firls	All inputs must be constants. Expressions or variables are allowed if their values do not change.
firpm	All inputs must be constants. Expressions or variables are allowed if their values do not change.
firpmord	All inputs must be constants. Expressions or variables are allowed if their values do not change.

Function	Remarks/Limitations
<code>flattopwin</code>	All inputs must be constants. Expressions or variables are allowed if their values do not change.
<code>freqz</code>	<p>When called with no output arguments, and without a semicolon at the end, <code>freqz</code> returns the complex frequency response of the input filter, evaluated at 512 points.</p> <p>If the semicolon is added, the function produces a plot of the magnitude and phase response of the filter.</p> <p>See “<code>freqz</code> With No Output Arguments”.</p>
<code>gausswin</code>	All inputs must be constant. Expressions or variables are allowed if their values do not change.
<code>hamming</code>	All inputs must be constant. Expressions or variables are allowed if their values do not change.
<code>hann</code>	All inputs must be constant. Expressions or variables are allowed if their values do not change.
<code>idct</code>	<p>C and C++ code generation for <code>idct</code> requires DSP System Toolbox software.</p> <p>Length of transform dimension must be a power of two. If specified, the <code>pad</code> or <code>truncation</code> value must be constant. Expressions or variables are allowed if their values do not change.</p>
<code>intfilt</code>	All inputs must be constant. Expressions or variables are allowed if their values do not change.
<code>kaiser</code>	All inputs must be constant. Expressions or variables are allowed if their values do not change.
<code>kaiserord</code>	—
<code>levinson</code>	<p>C and C++ code generation for <code>levinson</code> requires DSP System Toolbox software.</p> <p>If specified, the order of recursion must be a constant. Expressions or variables are allowed if their values do not change.</p>
<code>maxflat</code>	All inputs must be constant. Expressions or variables are allowed if their values do not change.

Function	Remarks/Limitations
nuttallwin	All inputs must be constant. Expressions or variables are allowed if their values do not change.
parzenwin	All inputs must be constant. Expressions or variables are allowed if their values do not change.
pow2db	—
rcosdesign	All inputs must be constant. Expressions or variables are allowed if their values do not change.
rectwin	All inputs must be constant. Expressions or variables are allowed if their values do not change.
resample	The upsampling and downsampling factors must be specified as constants. Expressions or variables are allowed if their values do not change.
sgolay	All inputs must be constant. Expressions or variables are allowed if their values do not change.
sosfilt	—
taylorwin	All inputs must be constant. Expressions or variables are allowed if their values do not change.
triang	All inputs must be constant. Expressions or variables are allowed if their values do not change.
tukeywin	All inputs must be constant. Expressions or variables are allowed if their values do not change.
upfirdn	C and C++ code generation for <code>upfirdn</code> requires DSP System Toolbox software. Filter coefficients, upsampling factor, and downsampling factor must be constants. Expressions or variables are allowed if their values do not change. Variable-size inputs are not supported.
upsample	Either declare input <code>n</code> as constant, or use the <code>assert</code> function in the calling function to set upper bounds for <code>n</code> . For example, <code>assert(n<10)</code>
xcorr	—

Function	Remarks/Limitations
yulewalk	If specified, the order of recursion must be a constant. Expressions or variables are allowed if their values do not change.

Special Values in MATLAB

Function	Remarks and Limitations
eps	<ul style="list-style-type: none"> Supported for scalar fixed-point signals only. Supported for scalar, vector, and matrix, <code>fi</code> single and <code>fi</code> double signals.
inf	<ul style="list-style-type: none"> Dimensions must be real, nonnegative, integers.
intmax	—
intmin	—
NaN or nan	<ul style="list-style-type: none"> Dimensions must be real, nonnegative, integers.
pi	—
realmax	—
realmin	—

Specialized Math in MATLAB

Function	Remarks and Limitations
beta	—
betainc	Always returns a complex result.
betaincinv	Always returns a complex result.
betaln	—
ellipke	—
erf	—
erfc	—
erfcinv	—
erfcx	—
erfinv	—

Function	Remarks and Limitations
expint	—
gamma	—
gammainc	Output is always complex.
gammaincinv	Output is always complex.
gamma1n	—
psi	—

Statistics in MATLAB

Function	Remarks and Limitations
corrcoef	<ul style="list-style-type: none"> Row-vector input is only supported when the first two inputs are vectors and nonscalar.
cummin	—
cummax	—
mean	<ul style="list-style-type: none"> Does not support the 'native' output class option for integer types. If supplied, <code>dim</code> must be a constant. “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” Does not support the <code>nanflag</code> argument.
median	<ul style="list-style-type: none"> If supplied, <code>dim</code> must be a constant. “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”“Variable-Sizing Restrictions for Code Generation of Toolbox Functions” Does not support the <code>nanflag</code> argument. “Code Generation for Complex Data with Zero-Valued Imaginary Parts”.
mode	<ul style="list-style-type: none"> Does not support third output argument <code>C</code> (cell array). If supplied, <code>dim</code> must be a constant. “Variable-Sizing Restrictions for Code Generation of Toolbox Functions”
std	<ul style="list-style-type: none"> “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” Does not support the <code>nanflag</code> argument.
var	<ul style="list-style-type: none"> If supplied, <code>dim</code> must be a constant.

Function	Remarks and Limitations
	<ul style="list-style-type: none"> • “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” • Does not support the <code>nanflag</code> argument.

Statistics and Machine Learning Toolbox

C and C++ code generation for the following functions requires the Statistics and Machine Learning Toolbox software.

Function	Remarks and Limitations
<code>betacdf</code>	—
<code>betafit</code>	—
<code>betainv</code>	—
<code>betalike</code>	—
<code>betapdf</code>	—
<code>betarnd</code>	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
<code>betastat</code>	—
<code>binocdf</code>	—
<code>binoinv</code>	—
<code>binopdf</code>	—
<code>binornd</code>	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
<code>binostat</code>	—
<code>cdf</code>	—
<code>chi2cdf</code>	—
<code>chi2inv</code>	—

Function	Remarks and Limitations
chi2pdf	—
chi2rnd	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
chi2stat	—
evcdf	—
evinv	—
evpdf	—
evrnd	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
evstat	—
expcdf	—
expinv	—
exppdf	—
exprnd	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
expstat	—
fcdf	—
finv	—
fpdf	—

Function	Remarks and Limitations
frnd	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
fstat	—
gamcdf	—
gaminv	—
gampdf	—
gamrnd	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
gamstat	—
geocdf	—
geoinv	—
geomean	—
geopdf	—
geornd	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
geostat	—
gevcdf	—
gevinv	—
gevpdf	—

Function	Remarks and Limitations
gevrnd	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
gevstat	—
gpcdf	—
gpinv	—
gppdf	—
gprnd	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
gpstat	—
harmmean	—
hygecdf	—
hygeinv	—
hygepdf	—
hygernd	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
hygestat	—
icdf	—
iqr	—
kurtosis	—
logncdf	—
logninv	—
lognpdf	—

Function	Remarks and Limitations
lognrnd	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
lognstat	—
mad	Input <code>dim</code> cannot be empty.
mnpdf	Input <code>dim</code> cannot be empty.
moment	If <code>order</code> is nonintegral and <code>X</code> is real, use <code>moment(complex(X), order)</code> .
nancov	If the input is variable-size and is <code>[]</code> at run time, returns <code>[]</code> not NaN.
nanmax	—
nanmean	—
nanmedian	—
nanmin	—
nanstd	—
nansum	—
nanvar	—
nbincdf	—
nbinv	—
nbincpdf	—
nbincrnd	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
nbinstat	—
ncfcdf	—
ncfinv	—
ncfpdf	—

Function	Remarks and Limitations
ncfrnd	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
ncfstat	—
nctcdf	—
nctinv	—
nctpdf	—
nctrnd	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
nctstat	—
ncx2cdf	—
ncx2rnd	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
ncx2stat	—
normcdf	—
norminv	—
normpdf	—
normrnd	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
normstat	—

Function	Remarks and Limitations
pca	<ul style="list-style-type: none"> • Ignores the 'Display' value for 'Options' when 'Algorithm' is 'als'. • If supplied, 'Weights' and 'VariableWeights' must be real. • Always returns the fifth output explained as a column vector. • Always returns the sixth output mu as a row vector. • If mu is empty, pca returns mu as a 1-by-0 array. pca does not convert mu to a 0-by-0 empty array. • Does not treat an input matrix X that has all NaN values as a special case. The outputs have the sizes that they have when some of the inputs are finite.
pdf	—
pearsrnd	Matches MATLAB only when generated output r is scalar.
poisscdf	—
poissinv	—
poisspdf	—
poissrnd	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
poisstat	—

Function	Remarks and Limitations
prctile	<ul style="list-style-type: none"> • “Automatic dimension restriction” • If the output Y is a vector, the orientation of Y differs from MATLAB when all of the following are true: <ul style="list-style-type: none"> • You do not supply the <code>dim</code> input. • X is a variable-size array. • X is not a variable-length vector. • X is a vector at run time. • The orientation of the vector X does not match the orientation of the vector <code>p</code>. <p>In this case, the output Y matches the orientation of X not the orientation of <code>p</code>.</p>
quantile	—
randg	—
random	—
raylcdf	—
raylinv	—
raylpdf	—
raylrnd	<p>Can return a different sequence of numbers than MATLAB if either of the following is true:</p> <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
raylstat	—
skewness	—
tcdf	—
tinv	—
tpdf	—

Function	Remarks and Limitations
trnd	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
tstat	—
unidcdf	—
unidinv	—
unidpdf	—
unidrnd	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
unidstat	—
unifcdf	—
unifinv	—
unifpdf	—
unifrnd	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.
unifstat	—
wblcdf	—
wblinv	—
wblpdf	—
wblrnd	Can return a different sequence of numbers than MATLAB if either of the following is true: <ul style="list-style-type: none"> • The output is nonscalar. • An input parameter is invalid for the distribution.

Function	Remarks and Limitations
wblstat	—
zscore	—

String Functions in MATLAB

Function	Remarks and Limitations
bin2dec	<ul style="list-style-type: none"> Does not match MATLAB when the input is empty.
blanks	—
char	—
deblank	<ul style="list-style-type: none"> Supports only inputs from the <code>char</code> class. Input values must be in the range 0-127.
dec2bin	<ul style="list-style-type: none"> If input <code>d</code> is <code>double</code>, <code>d</code> must be less than 2^{52}. If input <code>d</code> is <code>single</code>, <code>d</code> must be less than 2^{23}. Unless you specify input <code>n</code> to be constant and <code>n</code> is large enough that the output has a fixed number of columns regardless of the input values, this function requires variable-sizing support. Without variable-sizing support, <code>n</code> must be at least 52 for <code>double</code>, 23 for <code>single</code>, 16 for <code>char</code>, 32 for <code>int32</code>, 16 for <code>int16</code>, and so on.
dec2hex	<ul style="list-style-type: none"> If input <code>d</code> is <code>double</code>, <code>d</code> must be less than 2^{52}. If input <code>d</code> is <code>single</code>, <code>d</code> must be less than 2^{23}. Unless you specify input <code>n</code> to be constant and <code>n</code> is large enough that the output has a fixed number of columns regardless of the input values, this function requires variable-sizing support. Without variable-sizing support, <code>n</code> must be at least 13 for <code>double</code>, 6 for <code>single</code>, 4 for <code>char</code>, 8 for <code>int32</code>, 4 for <code>int16</code>, and so on.
hex2dec	—
hex2num	<ul style="list-style-type: none"> For <code>n = hex2num(S)</code>, <code>size(S,2) <= length(num2hex(0))</code>
ischar	—
isletter	<ul style="list-style-type: none"> Input values from the <code>char</code> class must be in the range 0-127
isspace	<ul style="list-style-type: none"> Input values from the <code>char</code> class must be in the range 0–127.
isstrprop	<ul style="list-style-type: none"> Supports only inputs from <code>char</code> and <code>integer</code> classes.

Function	Remarks and Limitations
	<ul style="list-style-type: none"> Input values must be in the range 0-127.
lower	<ul style="list-style-type: none"> Supports only char inputs. Input values must be in the range 0-127.
num2hex	—
str2double	<ul style="list-style-type: none"> Does not support cell arrays. Always returns a complex result.
strcmp	—
strcmpi	Input values from the char class must be in the range 0-127.
strfind	<ul style="list-style-type: none"> Does not support cell arrays. If <code>pattern</code> does not exist in <code>str</code>, returns <code>zeros(1,0)</code> not <code>[]</code>. To check for an empty return, use <code>isempty</code>. Inputs must be character row vectors.
strjust	—
strncmp	—
strncmpi	<ul style="list-style-type: none"> Input values from the char class must be in the range 0-127.
strrep	<ul style="list-style-type: none"> Does not support cell arrays. If <code>oldSubstr</code> does not exist in <code>origStr</code>, returns <code>blanks(0)</code>. To check for an empty return, use <code>isempty</code>. Inputs must be character row vectors.
strtok	—
strtrim	<ul style="list-style-type: none"> Supports only inputs from the char class. Input values must be in the range 0-127.
upper	<ul style="list-style-type: none"> Supports only char inputs. Input values must be in the range 0-127.

Structures in MATLAB

Function	Remarks and Limitations
isfield	<ul style="list-style-type: none"> Does not support cell input for second argument

Function	Remarks and Limitations
isstruct	—
struct	—

Trigonometry in MATLAB

Function	Remarks and Limitations
acos	<ul style="list-style-type: none"> Generates an error during simulation and returns NaN in generated code when the input value x is real, but the output should be complex. To get the complex result, make the input value complex by passing in <code>complex(x)</code>.
acosd	—
acosh	<ul style="list-style-type: none"> Generates an error during simulation and returns NaN in generated code when the input value x is real, but the output should be complex. To get the complex result, make the input value complex by passing in <code>complex(x)</code>.
acot	—
acotd	—
acoth	—
acsc	—
acscd	—
acsch	—
asec	—
asecd	—
asech	—
asin	<ul style="list-style-type: none"> Generates an error during simulation and returns NaN in generated code when the input value x is real, but the output should be complex. To get the complex result, make the input value complex by passing in <code>complex(x)</code>.
asind	—
asinh	—
atan	—

Function	Remarks and Limitations
atan2	—
atan2d	—
atand	—
atanh	Generates an error during simulation and returns NaN in generated code when the input value x is real, but the output should be complex. To get the complex result, make the input value complex by passing in <code>complex(x)</code> .
cos	—
cosd	—
cosh	—
cot	—
cotd	<ul style="list-style-type: none"> • In some cases, returns <code>-Inf</code> when MATLAB returns <code>Inf</code>. • In some cases, returns <code>Inf</code> when MATLAB returns <code>-Inf</code>.
coth	—
csc	—
cscd	<ul style="list-style-type: none"> • In some cases, returns <code>-Inf</code> when MATLAB returns <code>Inf</code>. • In some cases, returns <code>Inf</code> when MATLAB returns <code>-Inf</code>.
csch	—
hypot	—
sec	—
secd	<ul style="list-style-type: none"> • In some cases, returns <code>-Inf</code> when MATLAB returns <code>Inf</code>. • In some cases, returns <code>Inf</code> when MATLAB returns <code>-Inf</code>.
sech	—
sin	—
sind	—
sinh	—
tan	—
tand	<ul style="list-style-type: none"> • In some cases, returns <code>-Inf</code> when MATLAB returns <code>Inf</code>. • In some cases, returns <code>Inf</code> when MATLAB returns <code>-Inf</code>.

Function	Remarks and Limitations
tanh	—

Code Generation for Variable-Size Data

- “What Is Variable-Size Data?” on page 26-2
- “Variable-Size Data Definition for Code Generation” on page 26-3
- “Bounded Versus Unbounded Variable-Size Data” on page 26-4
- “Control Memory Allocation of Variable-Size Data” on page 26-5
- “Specify Variable-Size Data Without Dynamic Memory Allocation” on page 26-6
- “Variable-Size Data in Code Generation Reports” on page 26-9
- “Define Variable-Size Data for Code Generation” on page 26-11
- “C Code Interface for Arrays” on page 26-17
- “Diagnose and Fix Variable-Size Data Errors” on page 26-22
- “Incompatibilities with MATLAB in Variable-Size Support for Code Generation” on page 26-26
- “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” on page 26-34

What Is Variable-Size Data?

Variable-size data is data whose size can change at run time. By contrast, fixed-size data is data whose size is known and locked at compile time and, therefore, cannot change at run time.

For example, in the following MATLAB function `nway`, `B` is a variable-size array; its length is not known at compile time.

```
function B = nway(A,n)
% Compute average of every N elements of A and put them in B.
if ((mod(numel(A),n) == 0) && (n >= 1 && n <= numel(A)))
    B = ones(1,numel(A)/n);
    k = 1;
    for i = 1 : numel(A)/n
        B(i) = mean(A(k + (0:n-1)));
        k = k + n;
    end
else
    error('n <= 0 or does not divide number of elements evenly');
end
```

Variable-Size Data Definition for Code Generation

In the MATLAB language, data can vary in size. By contrast, the semantics of generated code constrains the class, complexity, and shape of every expression, variable, and structure field. Therefore, for code generation, you must use each variable consistently. Each variable must:

- Be either complex or real (determined at first assignment)
- Have a consistent shape

For fixed-size data, the shape is the same as the size returned in MATLAB. For example, if `size(A) == [4 5]`, the shape of variable `A` is 4 x 5. For variable-size data, the shape can be abstract. That is, one or more dimensions can be unknown (such as `4x?` or `?x?`).

By default, the compiler detects code logic that attempts to change these fixed attributes after initial assignments, and flags these occurrences as errors during code generation. However, you can override this behavior by defining variables or structure fields as variable-size data.

For more information, see “Bounded Versus Unbounded Variable-Size Data” on page 26-4

Bounded Versus Unbounded Variable-Size Data

You can generate code for bounded and unbounded variable-size data. *Bounded variable-size data* has fixed upper bounds; this data can be allocated statically on the stack or dynamically on the heap. *Unbounded variable-size data* does not have fixed upper bounds; this data *must* be allocated on the heap. If you use unbounded data, you must use dynamic memory allocation so that the compiler:

- Does not check for upper bounds
- Allocates memory on the heap instead of the stack

You can control the memory allocation of variable-size data. For more information, see “Control Memory Allocation of Variable-Size Data” on page 26-5.

Control Memory Allocation of Variable-Size Data

Data whose size (in bytes) is greater than or equal to the dynamic memory allocation threshold is allocated on the heap. The default dynamic memory allocation threshold is 64 kilobytes. Data whose size is less than this threshold is allocated on the stack.

Dynamic memory allocation is an expensive operation; the performance cost might be too high for small data sets. If you use small variable-size data sets or data that does not change size at run time, disable dynamic memory allocation. See “Control Dynamic Memory Allocation”.

. You can control memory allocation for individual variables by specifying upper bounds. See “Specifying Upper Bounds for Variable-Size Data” on page 26-6.

Specify Variable-Size Data Without Dynamic Memory Allocation

In this section...

“Fixing Upper Bounds Errors” on page 26-6

“Specifying Upper Bounds for Variable-Size Data” on page 26-6

Fixing Upper Bounds Errors

If MATLAB cannot determine or compute the upper bound, you must specify an upper bound. See “Specifying Upper Bounds for Variable-Size Data” on page 26-6 and “Diagnosing and Fixing Errors in Detecting Upper Bounds” on page 26-24

Specifying Upper Bounds for Variable-Size Data

- “When to Specify Upper Bounds for Variable-Size Data” on page 26-6
- “Specifying Upper Bounds on the Command Line for Variable-Size Inputs” on page 26-6
- “Specifying Unknown Upper Bounds for Variable-Size Inputs” on page 26-7
- “Specifying Upper Bounds for Local Variable-Size Data” on page 26-7
- “Using a Matrix Constructor with Nonconstant Dimensions” on page 26-8

When to Specify Upper Bounds for Variable-Size Data

When using static allocation on the stack during code generation, MATLAB must be able to determine upper bounds for variable-size data. Specify the upper bounds explicitly for variable-size data from external sources, such as inputs and outputs.

Specifying Upper Bounds on the Command Line for Variable-Size Inputs

Use the `coder.typeof` construct with the `-args` option on the `codegen` command line (requires a MATLAB Coder license). For example:

```
codegen foo -args {coder.typeof(double(0),[3 100],1)}
```

This command specifies that the input to function `foo` is a matrix of real doubles with two variable dimensions. The upper bound for the first dimension is 3; the upper bound for the second dimension is 100. For a detailed explanation of this syntax, see `coder.typeof`.

Specifying Unknown Upper Bounds for Variable-Size Inputs

If you use dynamic memory allocation, you can specify that you don't know the upper bounds of inputs. To specify an unknown upper bound, use the infinity constant `Inf` in place of a numeric value. For example:

```
codegen foo -args {coder.typeof(double(0), [1 Inf])}
```

In this example, the input to function `foo` is a vector of real doubles without an upper bound.

Specifying Upper Bounds for Local Variable-Size Data

When using static allocation, MATLAB uses a sophisticated analysis to calculate the upper bounds of local data at compile time. However, when the analysis fails to detect an upper bound or calculates an upper bound that is not precise enough for your application, you need to specify upper bounds explicitly for local variables.

You do not need to specify upper bounds when using dynamic allocation on the heap. In this case, MATLAB assumes variable-size data is unbounded and does not attempt to determine upper bounds.

Constraining the Value of a Variable That Specifies Dimensions of Variable-Size Data

Use the `assert` function with relational operators to constrain the value of variables that specify the dimensions of variable-size data. For example:

```
function y = dim_need_bound(n) %#codegen
assert (n <= 5);
L = ones(n,n);
M = zeros(n,n);
M = [L; M];
y = M;
```

This `assert` statement constrains input `n` to a maximum size of 5, defining `L` and `M` as variable-sized matrices with upper bounds of 5 for each dimension.

Specifying the Upper Bounds for All Instances of a Local Variable

Use the `coder. varsizes` function to specify the upper bounds for all instances of a local variable in a function. For example:

```
function Y = example_bounds1(u) %#codegen
Y = [1 2 3 4 5];
```

```
coder.varsize('Y',[1 10]);  
if (u > 0)  
    Y = [Y Y+u];  
else  
    Y = [Y Y*u];  
end
```

The second argument of `coder. varsize` specifies the upper bound for each instance of the variable specified in the first argument. In this example, the argument `[1 10]` indicates that for every instance of `Y`:

- First dimension is fixed at size 1
- Second dimension can grow to an upper bound of 10

By default, `coder. varsize` assumes dimensions of 1 are fixed size. For more information, see the `coder. varsize` reference page.

Using a Matrix Constructor with Nonconstant Dimensions

You can define a variable-size matrix by using a constructor with nonconstant dimensions. For example:

```
function y = var_by_assign(u) %#codegen  
if (u > 0)  
    y = ones(3,u);  
else  
    y = zeros(3,1);  
end
```

If you are not using dynamic memory allocation, you must also add an `assert` statement to provide upper bounds for the dimensions. For example:

```
function y = var_by_assign(u) %#codegen  
assert (u < 20);  
if (u > 0)  
    y = ones(3,u);  
else  
    y = zeros(3,1);  
end
```

Variable-Size Data in Code Generation Reports

In this section...
“What Reports Tell You About Size” on page 26-9
“How Size Appears in Code Generation Reports” on page 26-10
“How to Generate a Code Generation Report” on page 26-10

What Reports Tell You About Size

Code generation reports:

- Differentiate fixed-size from variable-size data
- Identify variable-size data with unknown upper bounds
- Identify variable-size data with fixed dimensions

If you define a variable-size array and then subsequently fix the dimensions of this array in the code, the report appends * to the size of the variable. In the generated C code, this variable appears as a variable-size array, but the size of its dimensions does not change during execution.

- Provide guidance on how to fix size mismatch and upper bounds errors.

How Size Appears in Code Generation Reports

Variable	Type	Size
B	Output	1 x :?
A	Input	1 x :100
n	Input	1 x 1

:? means variable size, unknown upper bound

No colon prefix (:) means fixed size

:100 means variable size, upper bound = 100

Variable	Type	Size
y	Output	1 x 10 *

* means that you declared y as variable size, but subsequently fixed its dimensions

How to Generate a Code Generation Report

Add the `-report` option to your `fiaccl` command.

Define Variable-Size Data for Code Generation

In this section...

“When to Define Variable-Size Data Explicitly” on page 26-11

“Using a Matrix Constructor with Nonconstant Dimensions” on page 26-11

“Inferring Variable Size from Multiple Assignments” on page 26-12

“Defining Variable-Size Data Explicitly Using `coder.varsizes`” on page 26-13

When to Define Variable-Size Data Explicitly

For code generation, you must assign variables to have a specific class, size, and complexity before using them in operations or returning them as outputs. Generally, you cannot reassign variable properties after the initial assignment. Therefore, attempts to grow a variable or structure field after assigning it a fixed size might cause a compilation error. In these cases, you must explicitly define the data as variable sized using one of these methods:

Method	See
Assign the data from a variable-size matrix constructor such as <ul style="list-style-type: none"> • <code>ones</code> • <code>zeros</code> • <code>repmat</code> 	“Using a Matrix Constructor with Nonconstant Dimensions” on page 26-11
Assign multiple, constant sizes to the same variable before using (reading) the variable.	“Inferring Variable Size from Multiple Assignments” on page 26-12
Define all instances of a variable to be variable sized	“Defining Variable-Size Data Explicitly Using <code>coder.varsizes</code> ” on page 26-13

Using a Matrix Constructor with Nonconstant Dimensions

You can define a variable-size matrix by using a constructor with nonconstant dimensions. For example:

```
function y = var_by_assign(u) %#codegen
if (u > 0)
    y = ones(3,u);
else
    y = zeros(3,1);
end
```

If you are not using dynamic memory allocation, you must also add an `assert` statement to provide upper bounds for the dimensions. For example:

```
function y = var_by_assign(u) %#codegen
assert (u < 20);
if (u > 0)
    y = ones(3,u);
else
    y = zeros(3,1);
end
```

Inferring Variable Size from Multiple Assignments

You can define variable-size data by assigning multiple, constant sizes to the same variable before you use (read) the variable in your code. When MATLAB uses static allocation on the stack for code generation, it infers the upper bounds from the largest size specified for each dimension. When you assign the same size to a given dimension across all assignments, MATLAB assumes that the dimension is fixed at that size. The assignments can specify different shapes as well as sizes.

When dynamic memory allocation is used, MATLAB does not check for upper bounds; it assumes variable-size data is unbounded.

Inferring Upper Bounds from Multiple Definitions with Different Shapes

```
function y = var_by_multiassign(u) %#codegen
if (u > 0)
    y = ones(3,4,5);
else
    y = zeros(3,1);
end
```

When static allocation is used, this function infers that `y` is a matrix with three dimensions, where:

- First dimension is fixed at size 3

- Second dimension is variable with an upper bound of 4
- Third dimension is variable with an upper bound of 5

The code generation report represents the size of matrix `y` like this:

Variable	Type	Size
<code>y</code>	Output	<code>3 x :4 x :5</code>

When dynamic allocation is used, the function analyzes the dimensions of `y` differently:

- First dimension is fixed at size 3
- Second and third dimensions are unbounded

In this case, the code generation report represents the size of matrix `y` like this:

Variable	Type	Size
<code>y</code>	Output	<code>3 x :? x :?</code>

Defining Variable-Size Data Explicitly Using `coder.varsize`

Use the function `coder. varsize` to define one or more variables or structure fields as variable-size data. Optionally, you can also specify which dimensions vary along with their upper bounds (see “Specifying Which Dimensions Vary” on page 26-14). For example:

- Define `B` as a variable-size 2-by-2 matrix, where each dimension has an upper bound of 64:

```
coder. varsize('B', [64 64]);
```

- Define `B` as a variable-size matrix:

```
coder. varsize('B');
```

When you supply only the first argument, `coder. varsize` assumes all dimensions of `B` can vary and that the upper bound is `size(B)`.

For more information, see the `coder. varsize` reference page.

Specifying Which Dimensions Vary

You can use the function `coder. varsize` to specify which dimensions vary. For example, the following statement defines `B` as a row vector whose first dimension is fixed at 2, but whose second dimension can grow to an upper bound of 16:

```
coder. varsize('B',[2, 16],[0 1])
```

The third argument specifies which dimensions vary. This argument must be a logical vector or a double vector containing only zeros and ones. Dimensions that correspond to zeros or `false` have fixed size; dimensions that correspond to ones or `true` vary in size. `coder. varsize` usually treats dimensions of size 1 as fixed (see “Defining Variable-Size Matrices with Singleton Dimensions” on page 26-14).

For more information about the syntax, see the `coder. varsize` reference page.

Allowing a Variable to Grow After Defining Fixed Dimensions

Function `var_by_if` defines matrix `Y` with fixed 2-by-2 dimensions before first use (where the statement `Y = Y + u` reads from `Y`). However, `coder. varsize` defines `Y` as a variable-size matrix, allowing it to change size based on decision logic in the `else` clause:

```
function Y = var_by_if(u) %#codegen
if (u > 0)
    Y = zeros(2,2);
    coder. varsize('Y');
    if (u < 10)
        Y = Y + u;
    end
else
    Y = zeros(5,5);
end
```

Without `coder. varsize`, MATLAB infers `Y` to be a fixed-size, 2-by-2 matrix and generates a size mismatch error during code generation.

Defining Variable-Size Matrices with Singleton Dimensions

A singleton dimension is a dimension for which `size(A,dim) = 1`. Singleton dimensions are fixed in size when:

- You specify a dimension with an upper bound of 1 in `coder. varsize` expressions.

For example, in this function, `Y` behaves like a vector with one variable-size dimension:

```
function Y = dim_singleton(u) %#codegen
Y = [1 2];
coder. varsize('Y', [1 10]);
if (u > 0)
    Y = [Y 3];
else
    Y = [Y u];
end
```

- You initialize variable-size data with singleton dimensions using matrix constructor expressions or matrix functions.

For example, in this function, both `X` and `Y` behave like vectors where only their second dimensions are variable sized:

```
function [X,Y] = dim_singleton_vects(u) %#codegen
Y = ones(1,3);
X = [1 4];
coder. varsize('Y','X');
if (u > 0)
    Y = [Y u];
else
    X = [X u];
end
```

You can override this behavior by using `coder. varsize` to specify explicitly that singleton dimensions vary. For example:

```
function Y = dim_singleton_vary(u) %#codegen
Y = [1 2];
coder. varsize('Y', [1 10], [1 1]);
if (u > 0)
    Y = [Y Y+u];
else
    Y = [Y Y*u];
end
```

In this example, the third argument of `coder. varsize` is a vector of ones, indicating that each dimension of `Y` varies in size. For more information, see the `coder. varsize` reference page.

Defining Variable-Size Structure Fields

To define structure fields as variable-size arrays, use colon (:) as the index expression. The colon (:) indicates that all elements of the array are variable sized. For example:

```
function y=struct_example() %#codegen

d = struct('values', zeros(1,0), 'color', 0);
data = repmat(d, [3 3]);
coder.varsize('data(:).values');

for i = 1:numel(data)
    data(i).color = rand-0.5;
    data(i).values = 1:i;
end

y = 0;
for i = 1:numel(data)
    if data(i).color > 0
        y = y + sum(data(i).values);
    end;
end
```

The expression `coder. varsize('data(:).values')` defines the field `values` inside each element of matrix `data` to be variable sized.

Here are other examples:

- `coder. varsize('data.A(:).B')`

In this example, `data` is a scalar variable that contains matrix `A`. Each element of matrix `A` contains a variable-size field `B`.

- `coder. varsize('data(:).A(:).B')`

This expression defines field `B` inside each element of matrix `A` inside each element of matrix `data` to be variable sized.

C Code Interface for Arrays

In this section...

“C Code Interface for Statically Allocated Arrays” on page 26-17

“C Code Interface for Dynamically Allocated Arrays” on page 26-18

“Utility Functions for Creating emxArray Data Structures” on page 26-19

C Code Interface for Statically Allocated Arrays

In generated code, MATLAB contains two pieces of information about statically allocated arrays: the maximum size of the array and its actual size.

For example, consider the MATLAB function `uniquetol`:

```
function B = uniquetol(A, tol) %#codegen
A = sort(A);
coder.varsize('B');
B = A(1);
k = 1;
for i = 2:length(A)
    if abs(A(k) - A(i)) > tol
        B = [B A(i)];
        k = i;
    end
end
```

Generate code for `uniquetol` specifying that input `A` is a variable-size real double vector whose first dimension is fixed at 1 and second dimension can vary up to 100 elements.

```
codegen -config:lib -report uniquetol -args {coder.typeof(0,[1 100],1),coder.typeof(0)}
```

In the generated code, the function declaration is:

```
extern void uniquetol(const double A_data[100], const int A_size[2],...
    double tol, emxArray_real_T *B);
```

There are two pieces of information about `A`:

- `double A_data[100]`: the maximum size of input `A` (where 100 is the maximum size specified using `coder.typeof`).
- `int A_size[2]`: the actual size of the input.

C Code Interface for Dynamically Allocated Arrays

In generated code, MATLAB represents dynamically allocated data as a structure type called `emxArray`. An embeddable version of the MATLAB `mxArray`, the `emxArray` is a family of data types, specialized for all base types.

`emxArray` Structure Definition

```
typedef struct emxArray_<baseTypedef>
{
    <baseType> *data;
    int *size;
    int allocatedSize;
    int numDimensions;
    boolean_T canFreeData;
} emxArray_<baseTypedef>;
```

`baseTypedef` is the predefined type in `rtwtypes.h` corresponding to `baseType`. For example, here is the definition for an `emxArray` of base type `double` with unknown upper bounds:

```
typedef struct emxArray_real_T
{
    double *data;
    int *size;
    int allocatedSize;
    int numDimensions;
    boolean_T canFreeData;
} emxArray_real_T;
```

The predefined type corresponding to `double` is `real_T`. For more information on the correspondence between built-in data types and predefined types in `rtwtypes.h`, see “How MATLAB Coder Infers C/C++ Data Types”.

To define two variables, `in1` and `in2`, of this type, use this statement:

```
emxArray_real_T *in1, *in2;
```

C Code Interface for Structure Fields

Field	Description
<code>*data</code>	Pointer to data of type <code><baseType></code> .
<code>*size</code>	Pointer to first element of size vector. Length of the vector equals the number of dimensions.

Field	Description
<code>allocatedSize</code>	Number of elements currently allocated for the array. If the size changes, MATLAB reallocates memory based on the new size.
<code>numDimensions</code>	Number of dimensions of the size vector, that is, the number of dimensions you can access without crossing into unallocated or unused memory.
<code>canFreeData</code>	Boolean flag indicating how to deallocate memory: <ul style="list-style-type: none"> • <code>true</code> – MATLAB deallocates memory automatically • <code>false</code> – Calling program determines when to deallocate memory

Utility Functions for Creating `emxArray` Data Structures

When you generate code that uses variable-size data, the code generation software exports a set of utility functions that you can use to create and interact with `emxArrays` in your generated code. To call these functions in your main C function, include the generated header file. For example, when you generate code for function `foo`, include `foo_emxAPI.h` in your main C function. .

Note: The code generation software exports `emxArray` utility functions only for variable-size arrays that are entry-point function arguments or that are used by functions called by `coder.ceval`.

Function	Arguments	Description
<code>emxArray_<baseType></code> <code>*emxCreateWrapper_<baseType></code> <code>(...)</code>	<code>*data</code> <code>num_rows</code> <code>num_cols</code>	Creates a new 2-dimensional <code>emxArray</code> , but does not allocate it on the heap. Instead uses memory provided by the user and sets <code>canFreeData</code> to

Function	Arguments	Description
		false so it does not inadvertently free user memory, such as the stack.
emxArray_<baseType> *emxCreateWrapperND_<baseType> (...)	*data numDimensions *size	Same as emxCreateWrapper_<baseType>, except it creates a new N-dimensional emxArray.
emxArray_<baseType> *emxCreate_<baseType> (...)	num_rows num_cols	Creates a new two-dimensional emxArray on the heap, initialized to zero. All data elements have the data type specified by <baseType>.
emxArray_<baseType> *emxCreateND_<baseType> (...)	numDimensions *size	Same as emxCreate_<baseType>, except it creates a new N-dimensional emxArray on the heap.
void emxInitArray_<baseType> (...)	**emxArray numDimensions	Creates a new empty emxArray on the heap. All data elements have the data type specified by <baseType>.
void emxInitArray_<structType> (...)	*structure	Creates empty emxArrays in a structure.
void emxDestroyArray_<baseType> (...)	*emxArray	Frees dynamic memory allocated by emxCreate_<baseType>, emxCreateND_<baseType>, and emxInitArray_baseType functions.

Function	Arguments	Description
<code>void emxDestroyArray_<structType> (...)</code>	<code>*structure</code>	Frees dynamic memory allocated by <code>emxInitArray_<structType></code> functions.

By default, when you generate C/C++ source code, static libraries, dynamic libraries, and executables, MATLAB Coder generates an example C/C++ main function. The example main function is a template that can help you to incorporate generated C/C++ code into your application. If you generate code that uses dynamically allocated data, the example main function includes calls to `emxArray` utility functions that create `emxArrays` required for this data. The example main function also initializes `emxArray` data to zero values. For more information, see “Incorporate Generated Code Using an Example Main Function”.

Diagnose and Fix Variable-Size Data Errors

In this section...

“Diagnosing and Fixing Size Mismatch Errors” on page 26-22

“Diagnosing and Fixing Errors in Detecting Upper Bounds” on page 26-24

Diagnosing and Fixing Size Mismatch Errors

Check your code for these issues:

Assigning Variable-Size Matrices to Fixed-Size Matrices

You cannot assign variable-size matrices to fixed-size matrices in generated code. Consider this example:

```
function Y = example_mismatch1(n) %#codegen
assert(n < 10);
B = ones(n,n);
A = magic(3);
A(1) = mean(A(:));
if (n == 3)
    A = B;
end
Y = A;
```

Compiling this function produces this error:

```
??? Dimension 1 is fixed on the left-hand side
but varies on the right ...
```

There are several ways to fix this error:

- Allow matrix A to grow by adding the `coder.varsize` construct:

```
function Y = example_mismatch1_fix1(n) %#codegen
coder.varsize('A');
assert(n < 10);
B = ones(n,n);
A = magic(3);
A(1) = mean(A(:));
if (n == 3)
```

```

    A = B;
end
Y = A;

```

- Explicitly restrict the size of matrix B to 3-by-3 by modifying the `assert` statement:

```

function Y = example_mismatch1_fix2(n) %#codegen
coder.varsize('A');
assert(n == 3)
B = ones(n,n);
A = magic(3);
A(1) = mean(A(:));
if (n == 3)
    A = B;
end
Y = A;

```

- Use explicit indexing to make B the same size as A:

```

function Y = example_mismatch1_fix3(n) %#codegen
assert(n < 10);
B = ones(n,n);
A = magic(3);
A(1) = mean(A(:));
if (n == 3)
    A = B(1:3, 1:3);
end
Y = A;

```

Empty Matrix Reshaped to Match Variable-Size Specification

If you assign an empty matrix `[]` to variable-size data, MATLAB might silently reshape the data in generated code to match a `coder. varsize` specification. For example:

```

function Y = test(u) %#codegen
Y = [];
coder. varsize('Y', [1 10]);
if u < 0
    Y = [Y u];
end

```

In this example, `coder. varsize` defines Y as a column vector of up to 10 elements, so its first dimension is fixed at size 1. The statement `Y = []` designates the first dimension of Y as 0, creating a mismatch. The right hand side of the assignment is an empty matrix and the left hand side is a variable-size vector. In this case, MATLAB

reshapes the empty matrix $Y = []$ in generated code to $Y = \text{zeros}(1,0)$ so it matches the `coder.ysize` specification.

Performing Binary Operations on Fixed and Variable-Size Operands

You cannot perform binary operations on operands of different sizes. Operands have different sizes if one has fixed dimensions and the other has variable dimensions. For example:

```
function z = mismatch_operands(n) %#codegen
assert(n >= 3 && n < 10);
x = ones(n,n);
y = magic(3);
z = x + y;
```

When you compile this function, you get an error because y has fixed dimensions (3 x 3), but x has variable dimensions. Fix this problem by using explicit indexing to make x the same size as y :

```
function z = mismatch_operands_fix(n) %#codegen
assert(n >= 3 && n < 10);
x = ones(n,n);
y = magic(3);
z = x(1:3,1:3) + y;
```

Diagnosing and Fixing Errors in Detecting Upper Bounds

Check your code for these issues:

Using Nonconstant Dimensions in a Matrix Constructor

You can define variable-size data by assigning a variable to a matrix with nonconstant dimensions. For example:

```
function y = dims_vary(u) %#codegen
if (u > 0)
    y = ones(3,u);
else
    y = zeros(3,1);
end
```

However, compiling this function generates an error because you did not specify an upper bound for u .

There are several ways to fix the problem:

- Enable dynamic memory allocation and recompile. During code generation, MATLAB does not check for upper bounds when it uses dynamic memory allocation for variable-size data.
- If you do not want to use dynamic memory allocation, add an `assert` statement before the first use of `u`:

```
function y = dims_vary_fix(u) %#codegen
assert (u < 20);
if (u > 0)
    y = ones(3,u);
else
    y = zeros(3,1);
end
```

Incompatibilities with MATLAB in Variable-Size Support for Code Generation

In this section...

“Incompatibility with MATLAB for Scalar Expansion” on page 26-26

“Incompatibility with MATLAB in Determining Size of Variable-Size N-D Arrays” on page 26-28

“Incompatibility with MATLAB in Determining Size of Empty Arrays” on page 26-29

“Incompatibility with MATLAB in Determining Class of Empty Arrays” on page 26-30

“Incompatibility with MATLAB in Vector-Vector Indexing” on page 26-31

“Incompatibility with MATLAB in Matrix Indexing Operations for Code Generation” on page 26-31

“Incompatibility with MATLAB in Concatenating Variable-Size Matrices” on page 26-32

“Dynamic Memory Allocation Not Supported for MATLAB Function Blocks” on page 26-33

Incompatibility with MATLAB for Scalar Expansion

Scalar expansion is a method of converting scalar data to match the dimensions of vector or matrix data. Except for some matrix operators, MATLAB arithmetic operators work on corresponding elements of arrays with equal dimensions. For vectors and rectangular arrays, both operands must be the same size unless one is a scalar. If one operand is a scalar and the other is not, MATLAB applies the scalar to every element of the other operand—this property is known as *scalar expansion*.

During code generation, the standard MATLAB scalar expansion rules apply except when operating on two variable-size expressions. In this case, both operands must be the same size. The generated code does not perform scalar expansion even if one of the variable-size expressions turns out to be scalar at run time. Instead, it generates a size mismatch error at run time for MEX functions. Run-time error checking does not occur for non-MEX builds; the generated code will have unspecified behavior.


For example, in the following function, `z` is scalar for the `switch` statement `case 0` and `case 1`. MATLAB applies scalar expansion when evaluating `y(:) = z;` for these two cases.

```

function y = scalar_exp_test_err1(u) %#codegen
y = ones(3);
switch u
    case 0
        z = 0;
    case 1
        z = 1;
    otherwise
        z = zeros(3);
end
y(:) = z;

```

When you generate code for this function, the code generation software determines that z is variable size with an upper bound of 3.

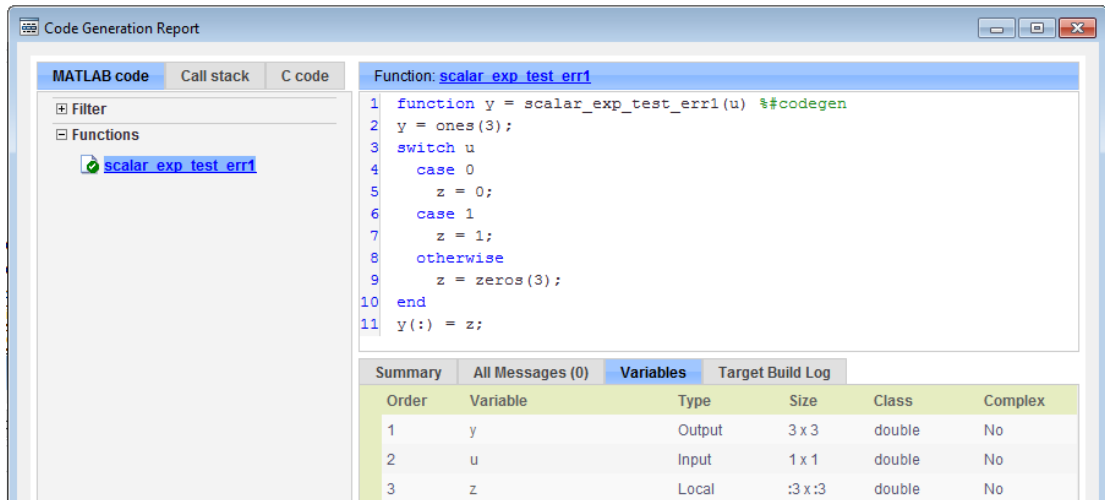

If you run the MEX function with u equal to zero or one, even though z is scalar at run time, the generated code does not perform scalar expansion and a run-time error occurs.

```

scalar_exp_test_err1_mex(0)
Sizes mismatch: 9 ~= 1.

```

```

Error in scalar_exp_test_err1 (line 11)
y(:) = z;

```

Workaround

Use indexing to force z to be a scalar value:

```
function y = scalar_exp_test_err1(u) %#codegen
y = ones(3);
switch u
    case 0
        z = 0;
    case 1
        z = 1;
    otherwise
        z = zeros(3);
end
y(:) = z(1);
```

Incompatibility with MATLAB in Determining Size of Variable-Size N-D Arrays

For variable-size N-D arrays, the `size` function can return a different result in generated code than in MATLAB. In generated code, `size(A)` returns a fixed-length output because it does not drop trailing singleton dimensions of variable-size N-D arrays. By contrast, `size(A)` in MATLAB returns a variable-length output because it drops trailing singleton dimensions.

For example, if the shape of array `A` is `:?x:?x:?` and `size(A,3)==1`, `size(A)` returns:

- Three-element vector in generated code
- Two-element vector in MATLAB code

Workarounds

If your application requires generated code to return the same size of variable-size N-D arrays as MATLAB code, consider one of these workarounds:

- Use the two-argument form of `size`.

For example, `size(A,n)` returns the same answer in generated code and MATLAB code.

- Rewrite `size(A)`:

```
B = size(A);
X = B(1:ndims(A));
```


This version returns X with a variable-length output. However, you cannot pass a variable-size X to matrix constructors such as `zeros` that require a fixed-size argument.

Incompatibility with MATLAB in Determining Size of Empty Arrays

The size of an empty array in generated code might be different from its size in MATLAB source code. The size might be 1×0 or 0×1 in generated code, but 0×0 in MATLAB. Therefore, you should not write code that relies on the specific size of empty matrices.

For example, consider the following code:

```
function y = foo(n) %#codegen
x = [];
i = 0;
while (i < 10)
    x = [5 x];
    i = i + 1;
end
if n > 0
    x = [];
end
y = size(x);
end
```

Concatenation requires its operands to match on the size of the dimension that is not being concatenated. In the preceding concatenation the scalar value has size 1×1 and x has size 0×0 . To support this use case, the code generation software determines the size for x as $[1 \times ?]$. Because there is another assignment `x = []` after the concatenation, the size of x in the generated code is 1×0 instead of 0×0 .

Workaround

If your application checks whether a matrix is empty, use one of these workarounds:

- Rewrite your code to use the `isempty` function instead of the `size` function.
- Instead of using `x=[]` to create empty arrays, create empty arrays of a specific size using `zeros`. For example:

```
function y = test_empty(n) %#codegen
x = zeros(1,0);
```

```
i=0;
while (i < 10)
    x = [5 x];
    i = i + 1;
end
if n > 0
    x = zeros(1,0);
end
y=size(x);
end
```

Incompatibility with MATLAB in Determining Class of Empty Arrays

The class of an empty array in generated code can be different from its class in MATLAB source code. Therefore, do not write code that relies on the class of empty matrices.

For example, consider the following code:

```
function y = fun(n)
x = [];
if n > 1
    x = ['a' x];
end
y=class(x);
end
```

`fun(0)` returns `double` in MATLAB, but `char` in the generated code. When the statement `n > 1` is false, MATLAB does not execute `x = ['a' x]`. The class of `x` is `double`, the class of the empty array. However, the code generation software considers all execution paths. It determines that based on the statement `x = ['a' x]`, the class of `x` is `char`.

Workaround

Instead of using `x=[]` to create an empty array, create an empty array of a specific class. For example, use `blanks(0)` to create an empty array of characters.

```
function y = fun(n)
x = blanks(0);
if n > 1
    x = ['a' x];
end
y=class(x);
end
```

Incompatibility with MATLAB in Vector-Vector Indexing

In vector-vector indexing, you use one vector as an index into another vector. When either vector is variable sized, you might get a run-time error during code generation. Consider the index expression `A(B)`. The general rule for indexing is that `size(A(B)) == size(B)`. However, when both `A` and `B` are vectors, MATLAB applies a special rule: use the orientation of `A` as the orientation of the output. For example, if `size(A) == [1 5]` and `size(B) == [3 1]`, then `size(A(B)) == [1 3]`.

In this situation, if the code generation software detects that both `A` and `B` are vectors at compile time, it applies the special rule and gives the same result as MATLAB. However, if either `A` or `B` is a variable-size matrix (has shape `?x?`) at compile time, the code generation software applies only the general indexing rule. Then, if both `A` and `B` become vectors at run time, the code generation software reports a run-time error when you run the MEX function. Run-time error checking does not occur for non-MEX builds; the generated code will have unspecified behavior. It is best practice to generate and test a MEX function before generating C code.

Workaround

Force your data to be a vector by using the colon operator for indexing: `A(B(:))`. For example, suppose your code intentionally toggles between vectors and regular matrices at run time. You can do an explicit check for vector-vector indexing:

```
...
if isvector(A) && isvector(B)
    C = A(:);
    D = C(B(:));
else
    D = A(B);
end
...
```

The indexing in the first branch specifies that `C` and `B(:)` are compile-time vectors. As a result, the code generation software applies the standard vector-vector indexing rule.

Incompatibility with MATLAB in Matrix Indexing Operations for Code Generation

The following limitation applies to matrix indexing operations for code generation:

- Initialization of the following style:

```
for i = 1:10
    M(i) = 5;
end
```

In this case, the size of `M` changes as the loop is executed. Code generation does not support increasing the size of an array over time.

For code generation, preallocate `M` as highlighted in the following code.

```
M = zeros(1,10);
for i = 1:10
    M(i) = 5;
end
```

The following limitation applies to matrix indexing operations for code generation when dynamic memory allocation is disabled:

- `M(i:j)` where `i` and `j` change in a loop

During code generation, memory is not dynamically allocated for the size of the expressions that change as the program executes. To implement this behavior, use `for`-loops as shown in the following example:

```
...
M = ones(10,10);
for i=1:10
    for j = i:10
        M(i,j) = 2*M(i,j);
    end
end
...
```

Note: The matrix `M` must be defined before entering the loop, as shown in the highlighted code.

Incompatibility with MATLAB in Concatenating Variable-Size Matrices

For code generation, when you concatenate variable-sized arrays, the dimensions that are not being concatenated must match exactly.

Dynamic Memory Allocation Not Supported for MATLAB Function Blocks

You cannot use dynamic memory allocation for variable-size data in MATLAB Function blocks. Use bounded instead of unbounded variable-size data.

Variable-Sizing Restrictions for Code Generation of Toolbox Functions

In this section...

“Common Restrictions” on page 26-34

“Toolbox Functions with Variable Sizing Restrictions” on page 26-35

Common Restrictions

The following common restrictions apply to multiple toolbox functions, but only for code generation. To determine which of these restrictions apply to specific library functions, see the table in “Toolbox Functions with Variable Sizing Restrictions” on page 26-35.

Variable-length vector restriction

Inputs to the library function must be variable-length vectors or fixed-size vectors. A variable-length vector is a variable-size array that has the shape $1 \times n$ or $n \times 1$ (one dimension is variable sized and the other is fixed at size 1). Other shapes are not permitted, even if they are vectors at run time.

Automatic dimension restriction

When the function selects the working dimension automatically, it bases the selection on the upper bounds for the dimension sizes. In the case of the `sum` function, `sum(X)` selects its working dimension automatically, while `sum(X, dim)` uses `dim` as the explicit working dimension.

For example, if `X` is a variable-size matrix with dimensions $1 \times 3 \times 5$, `sum(x)` behaves like `sum(X,2)` in generated code. In MATLAB, it behaves like `sum(X,2)` provided `size(X,2)` is not 1. In MATLAB, when `size(X,2)` is 1, `sum(X)` behaves like `sum(X,3)`. Consequently, you get a run-time error if an automatically selected working dimension assumes a length of 1 at run time.

To avoid the issue, specify the intended working dimension explicitly as a constant value.

Array-to-vector restriction

The function issues an error when a variable-size array that is not a variable-length vector assumes the shape of a vector at run time. To avoid the issue, specify the input explicitly as a variable-length vector instead of a variable-size array.

Array-to-scalar restriction

The function issues an error if a variable-size array assumes a scalar value at run time. To avoid this issue, specify scalars as fixed size.

Toolbox Functions with Variable Sizing Restrictions

The following restrictions apply to specific toolbox functions, but only for code generation.

Function	Restrictions with Variable-Size Data
all	<ul style="list-style-type: none"> • See “Automatic dimension restriction” on page 26-34. • An error occurs if you pass the first argument a variable-size matrix that is 0-by-0 at run time.
any	<ul style="list-style-type: none"> • See “Automatic dimension restriction” on page 26-34. • An error occurs if you pass the first argument a variable-size matrix that is 0-by-0 at run time.
bsxfun	<ul style="list-style-type: none"> • Dimensions expand only where one input array or the other has a fixed length of 1.
cat	<ul style="list-style-type: none"> • Dimension argument must be a constant. • An error occurs if variable-size inputs are empty at run time.
conv	<ul style="list-style-type: none"> • See “Variable-length vector restriction” on page 26-34. • Input vectors must have the same orientation, either both row vectors or both column vectors.
cov	<ul style="list-style-type: none"> • For <code>cov(X)</code>, see “Array-to-vector restriction” on page 26-34.
cross	<ul style="list-style-type: none"> • Variable-size array inputs that become vectors at run time must have the same orientation.
deconv	<ul style="list-style-type: none"> • For both arguments, see “Variable-length vector restriction” on page 26-34.
detrend	<ul style="list-style-type: none"> • For first argument for row vectors only, see “Array-to-vector restriction” on page 26-34 .

Function	Restrictions with Variable-Size Data
diag	<ul style="list-style-type: none"> • See “Array-to-vector restriction” on page 26-34 .
diff	<ul style="list-style-type: none"> • See “Automatic dimension restriction” on page 26-34. • Length of the working dimension must be greater than the difference order input when the input is variable sized. For example, if the input is a variable-size matrix that is 3-by-5 at run time, <code>diff(x,2,1)</code> works but <code>diff(x,5,1)</code> generates a run-time error.
fft	<ul style="list-style-type: none"> • See “Automatic dimension restriction” on page 26-34.
filter	<ul style="list-style-type: none"> • For first and second arguments, see “Variable-length vector restriction” on page 26-34. • See “Automatic dimension restriction” on page 26-34.
hist	<ul style="list-style-type: none"> • For second argument, see “Variable-length vector restriction” on page 26-34. • For second input argument, see “Array-to-scalar restriction” on page 26-35.
histc	<ul style="list-style-type: none"> • See “Automatic dimension restriction” on page 26-34.
ifft	<ul style="list-style-type: none"> • See “Automatic dimension restriction” on page 26-34.
ind2sub	<ul style="list-style-type: none"> • First input (the size vector input) must be fixed size.
interp1	<ul style="list-style-type: none"> • For the Y input and xi input, see “Array-to-vector restriction” on page 26-34. • Y input can become a column vector dynamically. • A run-time error occurs if Y input is not a variable-length vector and becomes a row vector at run time.
ipermute	<ul style="list-style-type: none"> • Order input must be fixed size.
issorted	<ul style="list-style-type: none"> • For optional rows input, see “Variable-length vector restriction” on page 26-34.

Function	Restrictions with Variable-Size Data
magic	<ul style="list-style-type: none"> • Argument must be a constant. • Output can be fixed-size matrices only.
max	<ul style="list-style-type: none"> • See “Automatic dimension restriction” on page 26-34.
mean	<ul style="list-style-type: none"> • See “Automatic dimension restriction” on page 26-34. • An error occurs if you pass as the first argument a variable-size matrix that is 0-by-0 at run time.
median	<ul style="list-style-type: none"> • See “Automatic dimension restriction” on page 26-34. • An error occurs if you pass as the first argument a variable-size matrix that is 0-by-0 at run time.
min	<ul style="list-style-type: none"> • See “Automatic dimension restriction” on page 26-34.
mode	<ul style="list-style-type: none"> • See “Automatic dimension restriction” on page 26-34. • An error occurs if you pass as the first argument a variable-size matrix that is 0-by-0 at run time.
mtimes	<ul style="list-style-type: none"> • When an input is variable-size, MATLAB determines whether to generate code for a general matrix*matrix multiplication or a scalar*matrix multiplication, based on whether one of the arguments is a fixed-size scalar. If neither argument is a fixed-size scalar, the inner dimensions of the two arguments must agree even if a variable-size matrix input is a scalar at run time.
nchoosek	<ul style="list-style-type: none"> • The second input, k, must be a fixed-size scalar. • The second input, k, must be a constant for static allocation. If you enable dynamic allocation, the second input can be a variable. • You cannot create a variable-size array by passing in a variable, k, unless you enable dynamic allocation.
permute	<ul style="list-style-type: none"> • Order input must be fixed-size.

Function	Restrictions with Variable-Size Data
planerot	<ul style="list-style-type: none"> Input must be a fixed-size, two-element column vector. It cannot be a variable-size array that takes on the size 2-by-1 at run time.
poly	<ul style="list-style-type: none"> See “Variable-length vector restriction” on page 26-34.
polyfit	<ul style="list-style-type: none"> For first and second arguments, see “Variable-length vector restriction” on page 26-34.
prod	<ul style="list-style-type: none"> See “Automatic dimension restriction” on page 26-34. An error occurs if you pass as the first argument a variable-size matrix that is 0-by-0 at run time.
rand	<ul style="list-style-type: none"> For an upper-bounded variable N, <code>rand(1,N)</code> produces a variable-length vector of $1 \times M$ where M is the upper bound on N. For an upper-bounded variable N, <code>rand([1 N])</code> may produce a variable-length vector of $:1 \times M$ where M is the upper bound on N.
Generated fixed-point code enhancements	<ul style="list-style-type: none"> For an upper-bounded variable N, <code>randn(1,N)</code> produces a variable-length vector of $1 \times M$ where M is the upper bound on N. For an upper-bounded variable N, <code>randn([1 N])</code> may produce a variable-length vector of $:1 \times M$ where M is the upper bound on N.
Generated fixed-point code enhancements	<ul style="list-style-type: none"> For an upper-bounded variable N, <code>randn(1,N)</code> produces a variable-length vector of $1 \times M$ where M is the upper bound on N. For an upper-bounded variable N, <code>randn([1 N])</code> may produce a variable-length vector of $:1 \times M$ where M is the upper bound on N.

Function	Restrictions with Variable-Size Data
reshape	<ul style="list-style-type: none"> • If the input is a variable-size array and the output array has at least one fixed-length dimension, do not specify the output dimension sizes in a size vector SZ. Instead, specify the output dimension sizes as scalar values, SZ1, . . . , SZN. Specify fixed-size dimensions as constants. • When the input is a variable-size empty array, the maximum dimension size of the output array (also empty) cannot be larger than that of the input.
roots	<ul style="list-style-type: none"> • See “Variable-length vector restriction” on page 26-34.
shiftdim	<ul style="list-style-type: none"> • If you do not supply the second argument, the number of shifts is determined at compilation time by the upper bounds of the dimension sizes. Consequently, at run time the number of shifts is constant. • An error occurs if the dimension that is shifted to the first dimension has length 1 at run time. To avoid the error, supply the number of shifts as the second input argument (must be a constant). • First input argument must have the same number of dimensions when you supply a positive number of shifts.
std	<ul style="list-style-type: none"> • See “Automatic dimension restriction” on page 26-34. • An error occurs if you pass a variable-size matrix with 0-by-0 dimensions at run time.
sub2ind	<ul style="list-style-type: none"> • First input (the size vector input) must be fixed size.
sum	<ul style="list-style-type: none"> • See “Automatic dimension restriction” on page 26-34. • An error occurs if you pass as the first argument a variable-size matrix that is 0-by-0 at run time.
trapz	<ul style="list-style-type: none"> • See “Automatic dimension restriction” on page 26-34. • An error occurs if you pass as the first argument a variable-size matrix that is 0-by-0 at run time.

Function	Restrictions with Variable-Size Data
typecast	<ul style="list-style-type: none">• See “Variable-length vector restriction” on page 26-34 on first argument.
var	<ul style="list-style-type: none">• See “Automatic dimension restriction” on page 26-34.• An error occurs if you pass a variable-size matrix with 0-by-0 dimensions at run time.

Primary Functions

Primary Function Input Specification

In this section...

“Why You Must Specify Input Properties” on page 27-2

“Properties to Specify” on page 27-2

“Rules for Specifying Properties of Primary Inputs” on page 27-4

“Methods for Defining Properties of Primary Inputs” on page 27-4

“Define Input Properties by Example at the Command Line” on page 27-5

“Specify Constant Inputs at the Command Line” on page 27-7

“Specify Variable-Size Inputs at the Command Line” on page 27-9

Why You Must Specify Input Properties

Fixed-Point Designer must determine the properties of all variables in the MATLAB files at compile time. To infer variable properties in MATLAB files, Fixed-Point Designer must be able to identify the properties of the inputs to the *primary* function, also known as the *top-level* or *entry-point* function. Therefore, if your primary function has inputs, you must specify the properties of these inputs, to Fixed-Point Designer. If your primary function has no input parameters, Fixed-Point Designer can compile your MATLAB file without modification. You do not need to specify properties of inputs to local functions or external functions called by the primary function.

Properties to Specify

If your primary function has inputs, you must specify the following properties for each input.

For	Specify properties				
	Class	Size	Complexity	numerictype	fimath
Fixed-point inputs	✓	✓	✓	✓	✓
Each field in a structure input	Specify properties for each field according to its class When a primary input is a structure, the code generation software treats each field as a separate input. Therefore, you must specify properties for all fields of a primary structure input in the order that they appear in the structure definition:				

For	Specify properties				
	<ul style="list-style-type: none"> For each field of input structures, specify class, size, and complexity. For each field that is fixed-point class, also specify <code>numerictype</code>, and <code>fimath</code>. 				
Other inputs	✓	✓	✓		

Default Property Values

Fixed-Point Designer assigns the following default values for properties of primary function inputs.

Property	Default
class	double
size	scalar
complexity	real
numerictype	No default
fimath	MATLAB default <code>fimath</code> object

Supported Classes

The following table presents the class names supported by Fixed-Point Designer.

Class Name	Description
logical	Logical array of true and false values
char	Character array
int8	8-bit signed integer array
uint8	8-bit unsigned integer array
int16	16-bit signed integer array
uint16	16-bit unsigned integer array
int32	32-bit signed integer array
uint32	32-bit unsigned integer array
int64	64-bit signed integer array
uint64	64-bit unsigned integer array

Class Name	Description
<code>single</code>	Single-precision floating-point or fixed-point number array
<code>double</code>	Double-precision floating-point or fixed-point number array
<code>struct</code>	Structure array
<code>embedded.fi</code>	Fixed-point number array

Rules for Specifying Properties of Primary Inputs

When specifying the properties of primary inputs, follow these rules.

- You must specify the class of all primary inputs. If you do not specify the size or complexity of primary inputs, they default to real scalars.
- For each primary function input whose class is fixed point (`fi`), you must specify the input `numericity` and `fimath` properties.
- For each primary function input whose class is `struct`, you must specify the properties of each of its fields in the order that they appear in the structure definition.

Methods for Defining Properties of Primary Inputs

Method	Advantages	Disadvantages
	<ul style="list-style-type: none"> • If you are working in a project, easy to use • Does not alter original MATLAB code • saves the definitions in the project file 	<ul style="list-style-type: none"> • Not efficient for specifying memory-intensive inputs such as large structures and arrays
“Define Input Properties by Example at the Command Line” on page 27-5	<ul style="list-style-type: none"> • Easy to use • Does not alter original MATLAB code • Designed for prototyping a function that has a few primary inputs 	<ul style="list-style-type: none"> • Must be specified at the command line every time you invoke <code>fiaccel</code> (unless you use a script) • Not efficient for specifying memory-intensive inputs such as large structures and arrays

Method	Advantages	Disadvantages
Note: If you define input properties programmatically in the MATLAB file, you cannot use this method		
“Define Input Properties Programmatically in the MATLAB File”	<ul style="list-style-type: none"> • Integrated with MATLAB code; no need to redefine properties each time you invoke • Provides documentation of property specifications in the MATLAB code • Efficient for specifying memory-intensive inputs such as large structures 	<ul style="list-style-type: none"> • Uses complex syntax • project files do not currently recognize properties defined programmatically. If you are using a project, you must reenter the input types in the project.

Define Input Properties by Example at the Command Line

- “Command-Line Option `-args`” on page 27-5
- “Rules for Using the `-args` Option” on page 27-5
- “Specifying Properties of Primary Inputs by Example” on page 27-6
- “Specifying Properties of Primary Fixed-Point Inputs by Example” on page 27-6

Command-Line Option `-args`

The `fiaccl` function provides a command-line option `-args` for specifying the properties of primary (entry-point) function inputs as a cell array of example values. The cell array can be a variable or literal array of constant values. Using this option, you specify the properties of inputs at the same time as you generate code for the MATLAB function with `fiaccl`.

Rules for Using the `-args` Option

When using the `-args` command-line option to define properties by example, follow these rules:

- The cell array of sample values must contain the same number of elements as primary function inputs.

- The order of elements in the cell array must correspond to the order in which inputs appear in the primary function signature — for example, the first element in the cell array defines the properties of the first primary function input.

Note: If you specify an empty cell array with the `-args` option, `fiaccel` interprets this to mean that the function takes no inputs; a compile-time error occurs if the function does have inputs.

Specifying Properties of Primary Inputs by Example

Consider a function that adds its two inputs:

```
function y = emcf(u,v) %#codegen
% The directive %#codegen indicates that you
% intend to generate code for this algorithm
y = u + v;
```

The following examples show how to specify different properties of the primary inputs `u` and `v` by example at the command line:

- Use a literal cell array of constants to specify that both inputs are real, scalar, fixed-point values:

```
fiaccel -o emcfx emcf ...
    -args {fi(0,1,16,15),fi(0,1,16,15)}
```

- Use a literal cell array of constants to specify that input `u` is an unsigned 16-bit, 1-by-4 vector and input `v` is a scalar, fixed-point value:

```
fiaccel -o emcfx emcf ...
    -args {zeros(1,4,'uint16'),fi(0,1,16,15)}
```

- Assign sample values to a cell array variable to specify that both inputs are real, unsigned 8-bit integer vectors:

```
a = fi([1;2;3;4],0,8,0)
b = fi([5;6;7;8],0,8,0)
ex = {a,b}
fiaccel -o emcfx emcf -args ex
```

Specifying Properties of Primary Fixed-Point Inputs by Example

Consider a function that calculates the square root of a fixed-point number:

```
function y = sqrtfi(x) %#codegen
y = sqrt(x);
```

To specify the properties of the primary fixed-point input `x` by example on the MATLAB command line, follow these steps:

- 1 Define the `numerictype` properties for `x`, as in this example:

```
T = numerictype('WordLength',32,...
'FractionLength',23,'Signed',true);
```

- 2 Define the `fimath` properties for `x`, as in this example:

```
F = fimath('SumMode','SpecifyPrecision',...
'SumWordLength',32,'SumFractionLength',23,...
'ProductMode','SpecifyPrecision', ...
ProductWordLength',32,'ProductFractionLength',23);
```

- 3 Create a fixed-point variable with the `numerictype` and `fimath` properties you defined, as in this example:

```
myeg = { fi(4.0,T,F) };
```

- 4 Compile the function `sqrtfi` using the `fiaccel` command, passing the variable `myeg` as the argument to the `-args` option, as in this example:

```
fiaccel sqrtfi -args myeg;
```

Specify Constant Inputs at the Command Line

If you know that your primary inputs do not change at run time, you can reduce overhead in the generated code by specifying that the primary inputs are constant values.

Constant inputs are commonly used for flags that control how an algorithm executes and values that specify the sizes or types of data.

To specify that inputs are constants, use the `-args` command-line option with a `coder.Constant` object. To specify that an input is a constant with the size, class, complexity, and value of `constant_input`, use the following syntax:

```
-args {coder.Constant(constant_input)}
```

Calling Functions with Constant Inputs

`fiaccel` compiles constant function inputs into the generated code. As a result, the MEX function signature differs from the MATLAB function signature. At run time, you supply the constant argument to the MATLAB function, but not to the MEX function.

For example, consider the following function `identity` which copies its input to its output:

```
function y = identity(u) %#codegen
y = u;
```

To generate a MEX function `identity_mex` with a constant input, type the following command at the MATLAB prompt:

```
fiaccel -o identity_mex identity...
    -args {coder.Constant(fi(0.1,1,16,15))}
```

To run the MATLAB function, supply the constant argument as follows:

```
identity(fi(0.1,1,16,15))
```

You get the following result:

```
ans =

    0.1000
```

Now, try running the MEX function with this command:

```
identity_mex
```

You should get the same answer.

Specifying a Structure as a Constant Input

Suppose that you define a structure `tmp` in the MATLAB workspace to specify the dimensions of a matrix, as follows:

```
tmp = struct('rows', 2, 'cols', 3);
```

The following MATLAB function `rowcol` accepts a structure input `p` to define matrix `y`:

```
function y = rowcol(u,p) %#codegen
y = fi(zeros(p.rows,p.cols),1,16,15) + u;
```

The following example shows how to specify that primary input `u` is a double scalar variable and primary input `p` is a constant structure:

```
fiaccel rowcol ...
    -args {fi(0,1,16,15),coder.Constant(tmp)}
```

To run this code, use

```
u = fi(0.5,1,16,15)
y_m = rowcol(u,tmp)

y_mex = rowcol_mex(u)
```

Specify Variable-Size Inputs at the Command Line

Variable-size data is data whose size might change at run time. MATLAB supports bounded and unbounded variable-size data for code generation. *Bounded variable-size data* has fixed upper bounds. This data can be allocated statically on the stack or dynamically on the heap. *Unbounded variable-size data* does not have fixed upper bounds. This data must be allocated on the heap. You can define inputs to have one or more variable-size dimensions — and specify their upper bounds — using the `-args` option and `coder.typeof` function:

```
-args {coder.typeof(example_value, size_vector, variable_dims)}
```

Specifies a variable-size input with:

- Same class and complexity as *example_value*
- Same size and upper bounds as *size_vector*
- Variable dimensions specified by *variable_dims*

When you enable dynamic memory allocation, you can specify `Inf` in the size vector for dimensions with unknown upper bounds at compile time.

When *variable_dims* is a scalar, it is applied to all the dimensions, with the following exceptions:

- If the dimension is 1 or 0, which are fixed.
- If the dimension is unbounded, which is always variable size.

Specifying a Variable-Size Vector Input

- 1 Write a function that computes the sum of every `n` elements of a vector `A` and stores them in a vector `B`:

```
function B = nway(A,n) %#codegen
% Compute sum of every N elements of A and put them in B.
```

```
coder.extrinsic('error');
Tb = numerictype(1,32,24);
if ((mod(numel(A),n) == 0) && ...
    (n>=1 && n<=numel(A)))
    B = fi(zeros(1,numel(A)/n),Tb);
    k = 1;
    for i = 1 : numel(A)/n
        B(i) = sum(A(k + (0:n-1)));
        k = k + n;
    end
else
    B = fi(zeros(1,0),Tb);
    error('n<=0 or does not divide evenly');
end
```

- 2 Specify the first input `A` as a `fi` object. Its first dimension stays fixed in size and its second dimension can grow to an upper bound of 100. Specify the second input `n` as a double scalar.

```
fiaccel nway ...
-args {coder.typeof(fi(0,1,16,15,'SumMode','KeepLSB'),[1 100],1),0}...
-report
```

- 3 As an alternative, assign the `coder.typeof` expression to a MATLAB variable, then pass the variable as an argument to `-args`:

```
vareg = coder.typeof(fi(0,1,16,15,'SumMode','KeepLSB'),[1 100],1)
fiaccel nway -args {vareg, double(0)} -report
```

Define Input Properties Programmatically in the MATLAB File

With MATLAB Coder, you use the MATLAB `assert` function to define properties of primary function inputs directly in your MATLAB file.

In this section...

“How to Use `assert` with MATLAB Coder” on page 27-11

“Rules for Using `assert` Function” on page 27-17

“Specifying General Properties of Primary Inputs” on page 27-17

“Specifying Properties of Primary Fixed-Point Inputs” on page 27-18

“Specifying Class and Size of Scalar Structure” on page 27-19

“Specifying Class and Size of Structure Array” on page 27-20

How to Use `assert` with MATLAB Coder

Use the `assert` function to invoke standard MATLAB functions for specifying the class, size, and complexity of primary function inputs.

You must use one of the following methods when specifying input properties using the `assert` function. Use the exact syntax that is provided; do not modify it.

- “Specify Any Class” on page 27-12
- “Specify `fi` Class” on page 27-12
- “Specify Structure Class” on page 27-13
- “Specify Fixed Size” on page 27-13
- “Specify Scalar Size” on page 27-13
- “Specify Upper Bounds for Variable-Size Inputs” on page 27-14
- “Specify Inputs with Fixed- and Variable-Size Dimensions” on page 27-14
- “Specify Size of Individual Dimensions” on page 27-14
- “Specify Real Input” on page 27-15
- “Specify Complex Input” on page 27-15
- “Specify `numericType` of Fixed-Point Input” on page 27-15
- “Specify `fimath` of Fixed-Point Input” on page 27-16

- “Specify Multiple Properties of Input” on page 27-16

Specify Any Class

```
assert ( isa ( param, 'class_name' ) )
```

Sets the input parameter *param* to the MATLAB class *class_name*. For example, to set the class of input *U* to a 32-bit signed integer, call:

```
...
assert(isa(U, 'int32'));
...
```

If you set the class of an input parameter to *fi*, you must also set its *numericType*, see “Specify numericType of Fixed-Point Input” on page 27-15. You can also set its *fimath* properties, see “Specify fimath of Fixed-Point Input” on page 27-16. If you do not set the *fimath* properties, *codegen* uses the MATLAB default *fimath* value.

If you set the class of an input parameter to *struct*, you must specify the properties of all fields in the order that they appear in the structure definition.

Specify fi Class

```
assert ( isfi ( param ) )
assert ( isa ( param, 'embedded.fi' ) )
```

Sets the input parameter *param* to the MATLAB class *fi* (fixed-point numeric object). For example, to set the class of input *U* to *fi*, call:

```
...
assert(isfi(U));
...

or

...
assert(isa(U, 'embedded.fi'));
...
```

If you set the class of an input parameter to *fi*, you must also set its *numericType*, see “Specify numericType of Fixed-Point Input” on page 27-15. You can also set its *fimath* properties, see “Specify fimath of Fixed-Point Input” on page 27-16. If you do not set the *fimath* properties, *codegen* uses the MATLAB default *fimath* value.

Specify Structure Class

```
assert ( isstruct ( param ) )  
assert ( isa ( param, 'struct' ) )
```

Sets the input parameter *param* to the MATLAB class `struct` (structure). For example, to set the class of input `U` to a `struct`, call:

```
...  
assert(isstruct(U));  
...
```

or

```
...  
assert(isa(U, 'struct'));  
...
```

If you set the class of an input parameter to `struct`, you must specify the properties of all fields in the order they appear in the structure definition.

Specify Fixed Size

```
assert ( all ( size ( param ) == [ dims ] ) )
```

Sets the input parameter *param* to the size specified by dimensions *dims*. For example, to set the size of input `U` to a 3-by-2 matrix, call:

```
...  
assert(all(size(U)== [3 2]));  
...
```

Specify Scalar Size

```
assert ( isscalar ( param ) )  
assert ( all ( size ( param ) == [ 1 ] ) )
```

Sets the size of input parameter *param* to scalar. To set the size of input `U` to scalar, call:

```
...  
assert(isscalar(U));  
...  
or  
...  
...
```

```
assert(all(size(U)== [1]));  
...
```

Specify Upper Bounds for Variable-Size Inputs

```
assert ( all(size(param)<=[N0 N1 ...]));  
assert ( all(size(param)<[N0 N1 ...]));
```

Sets the upper-bound size of each dimension of input parameter *param*. To set the upper-bound size of input *U* to be less than or equal to a 3-by-2 matrix, call:

```
assert(all(size(U)<=[3 2]));
```

Note: You can also specify upper bounds for variable-size inputs using `coder. varsize`.

Specify Inputs with Fixed- and Variable-Size Dimensions

```
assert ( all(size(param)>=[M0 M1 ...]));  
assert ( all(size(param)<=[N0 N1 ...]));
```

When you use `assert(all(size(param)>=[M0 M1 ...]))` to specify the lower-bound size of each dimension of an input parameter:

- You must also specify an upper-bound size for each dimension of the input parameter.
- For each dimension, *k*, the lower-bound *M_k* must be less than or equal to the upper-bound *N_k*.
- To specify a fixed-size dimension, set the lower and upper bound of a dimension to the same value.
- Bounds must be non-negative.

To fix the size of the first dimension of input *U* to 3 and set the second dimension as variable size with upper-bound of 2, call:

```
assert(all(size(U)>=[3 0]));  
assert(all(size(U)<=[3 2]));
```

Specify Size of Individual Dimensions

```
assert (size(param, k)==Nk);  
assert (size(param, k)<=Nk);  
assert (size(param, k)<Nk);
```

You can specify individual dimensions as well as specifying all dimensions simultaneously or instead of specifying all dimensions simultaneously. The following rules apply:

- You must specify the size of each dimension at least once.
- The last dimension specification takes precedence over earlier specifications.

Sets the upper-bound size of dimension *k* of input parameter *param*. To set the upper-bound size of the first dimension of input *U* to 3, call:

```
assert(size(U,1)<=3)
```

To fix the size of the second dimension of input *U* to 2, call:

```
assert(size(U,2)==2)
```

Specify Real Input

```
assert ( isreal ( param ) )
```

Specifies that the input parameter *param* is real. To specify that input *U* is real, call:

```
...
assert(isreal(U));
...
```

Specify Complex Input

```
assert ( ~isreal ( param ) )
```

Specifies that the input parameter *param* is complex. To specify that input *U* is complex, call:

```
...
assert(~isreal(U));
...
```

Specify numerictype of Fixed-Point Input

```
assert ( isequal ( numerictype ( fiparam ), T ) )
```

Sets the `numerictype` properties of `fi` input parameter *fiparam* to the `numerictype` object *T*. For example, to specify the `numerictype` property of fixed-point input *U* as a signed `numerictype` object *T* with 32-bit word length and 30-bit fraction length, use the following code:

```
%#codegen
...
% Define the numerictype object.
T = numerictype(1, 32, 30);

% Set the numerictype property of input U to T.
assert(isequal(numerictype(U),T));
...
```

Specify fimath of Fixed-Point Input

```
assert ( isequal ( fimath ( fiparam ), F ) )
```

Sets the `fimath` properties of `fi` input parameter *fiparam* to the `fimath` object *F*. For example, to specify the `fimath` property of fixed-point input *U* so that it saturates on integer overflow, use the following code:

```
%#codegen
...
% Define the fimath object.
F = fimath('OverflowMode','saturate');

% Set the fimath property of input U to F.
assert(isequal(fimath(U),F));
...
```

If you do not specify the `fimath` properties using `assert`, `codegen` uses the MATLAB default `fimath` value.

Specify Multiple Properties of Input

```
assert ( function1 ( params ) &&
         function2 ( params ) &&
         function3 ( params ) && ... )
```

Specifies the class, size, and complexity of one or more inputs using a single `assert` function call. For example, the following code specifies that input *U* is a double, complex, 3-by-3 matrix, and input *V* is a 16-bit unsigned integer:

```
%#codegen
...
assert(isa(U,'double') &&
       ~isreal(U) &&
       all(size(U) == [3 3]) &&
       isa(V,'uint16'));
...
```

Rules for Using `assert` Function

When using the `assert` function to specify the properties of primary function inputs, follow these rules:

- Call `assert` functions at the beginning of the primary function, before control-flow operations such as `if` statements or subroutine calls.
- Do not call `assert` functions inside conditional constructs, such as `if`, `for`, `while`, and `switch` statements.
- Use the `assert` function with MATLAB Coder only for specifying properties of primary function inputs before converting your MATLAB code to C/C++ code.
- If you set the class of an input parameter to `fi`, you must also set its `numerictype`. See “Specify `numerictype` of Fixed-Point Input” on page 27-15. You can also set its `fimath` properties. See “Specify `fimath` of Fixed-Point Input” on page 27-16. If you do not set the `fimath` properties, `codegen` uses the MATLAB default `fimath` value.
- If you set the class of an input parameter to `struct`, you must specify the class, size, and complexity of all fields in the order that they appear in the structure definition.
- When you use `assert(all(size(param) >= [M0 M1 ...]))` to specify the lower-bound size of each dimension of an input parameter:
 - You must also specify an upper-bound size for each dimension of the input parameter.
 - For each dimension, k , the lower-bound M_k must be less than or equal to the upper-bound N_k .
 - To specify a fixed-size dimension, set the lower and upper bound of a dimension to the same value.
 - Bounds must be non-negative.
- If you specify individual dimensions, the following rules apply:
 - You must specify the size of each dimension at least once.
 - The last dimension specification takes precedence over earlier specifications.

Specifying General Properties of Primary Inputs

In the following code excerpt, a primary MATLAB function `mcspecgram` takes two inputs: `pennywhistle` and `win`. The code specifies the following properties for these inputs:

Input	Property	Value
pennywhistle	class	int16
	size	220500-by-1 vector
	complexity	real (by default)
win	class	double
	size	1024-by-1 vector
	complexity	real (by default)

```

%#codegen
function y = mcspecgram(pennywhistle,win)
nx = 220500;
nfft = 1024;
assert(isa(pennywhistle,'int16'));
assert(all(size(pennywhistle) == [nx 1]));
assert(isa(win, 'double'));
assert(all(size(win) == [nfft 1]));
...

```

Alternatively, you can combine property specifications for one or more inputs inside `assert` commands:

```

%#codegen
function y = mcspecgram(pennywhistle,win)
nx = 220500;
nfft = 1024;
assert(isa(pennywhistle,'int16') && all(size(pennywhistle) == [nx 1]));
assert(isa(win, 'double') && all(size(win) == [nfft 1]));
...

```

Specifying Properties of Primary Fixed-Point Inputs

To specify fixed-point inputs, you must install Fixed-Point Designer software.

In the following example, the primary MATLAB function `mcsqrtfi` takes one fixed-point input `x`. The code specifies the following properties for this input.

Property	Value
class	fi

Property	Value
numericity	numericity object T, as specified in the primary function
fimath	fimath object F, as specified in the primary function
size	scalar
complexity	real (by default)

```
function y = mcsqrtfi(x) %#codegen
T = numericity('WordLength',32,'FractionLength',23,...
              'Signed',true);
F = fimath('SumMode','SpecifyPrecision',...
          'SumWordLength',32,'SumFractionLength',23,...
          'ProductMode','SpecifyPrecision',...
          'ProductWordLength',32,'ProductFractionLength',23);
assert(isfi(x));
assert(isequal(numericity(x),T));
assert(isequal(fimath(x),F));

y = sqrt(x);
```

Specifying Class and Size of Scalar Structure

Assume you have defined **S** as the following scalar MATLAB structure:

```
S = struct('r',double(1),'i',int8(4));
```

Here is code that specifies the class and size of **S** and its fields when passed as an input to your MATLAB function:

```
function y = fcn(S) %#codegen

% Specify the class of the input as struct.
assert(isstruct(S));

% Specify the class and size of the fields r and i
% in the order in which you defined them.
assert(isa(S.r,'double'));
assert(isa(S.i,'int8'));
...
```

In most cases, when you don't explicitly specify values for properties, MATLAB Coder uses defaults — except for structure fields. The only way to name a field in a structure

is to set at least one of its properties. As a minimum, you must specify the class of a structure field

Specifying Class and Size of Structure Array

For structure arrays, you must choose a representative element of the array for specifying the properties of each field. For example, assume you have defined **S** as the following 1-by-2 array of MATLAB structures:

```
S = struct('r',{double(1), double(2)},'i',{int8(4), int8(5)});
```

The following code specifies the class and size of each field of structure input **S** using the first element of the array:

```
 %#codegen
function y = fcn(S)

% Specify the class of the input S as struct.
assert(isstruct(S));

% Specify the size of the fields r and i
% based on the first element of the array.
assert(all(size(S) == [1 2]));
assert(isa(S(1).r,'double'));
assert(isa(S(1).i,'int8'));
```

The only way to name a field in a structure is to set at least one of its properties. As a minimum, you must specify the class of all fields.

System Objects Supported for Code Generation

Code Generation for System Objects

You can generate C and C++ code for a subset of System objects provided by the following toolboxes.

Toolbox Name	See
Communications System Toolbox	“System Objects in MATLAB Code Generation” in the DSP System Toolbox documentation.
Computer Vision System Toolbox	“System Objects in MATLAB Code Generation” in the Computer Vision System Toolbox documentation.
DSP System Toolbox	“System Objects in MATLAB Code Generation” in the DSP System Toolbox documentation.
Image Acquisition Toolbox	<ul style="list-style-type: none"> • <code>imaq.VideoDevice</code>. • “Code Generation with VideoDevice System Object” in the Image Acquisition Toolbox documentation.
Phased Array System Toolbox	“Code Generation” in the Phased Array System Toolbox documentation.

To use these System objects, you need to install the requisite toolbox. For a list of System objects supported for C and C++ code generation, see “Functions and Objects Supported for C and C++ Code Generation — Alphabetical List” and “Functions and Objects Supported for C and C++ Code Generation — Category List”.

System objects are MATLAB object-oriented implementations of algorithms. They extend MATLAB by enabling you to model dynamic systems represented by time-varying algorithms. System objects are well integrated into the MATLAB language, regardless of whether you are writing simple functions, working interactively in the command window, or creating large applications.

In contrast to MATLAB functions, System objects automatically manage state information, data indexing, and buffering, which is particularly useful for iterative computations or stream data processing. This enables efficient processing of long data sets. For general information about MATLAB objects, see “Begin Using Object-Oriented Programming”.


System Objects

- “What Are System Objects?” on page 29-2
- “System Objects in MATLAB Code Generation” on page 29-3
- “System Objects in Simulink” on page 29-10
- “System Object Methods” on page 29-11

What Are System Objects?

A System object is a specialized kind of MATLAB object. System Toolboxes include System objects and most System Toolboxes also have MATLAB functions and Simulink blocks. System objects are designed specifically for implementing and simulating dynamic systems with inputs that change over time. Many signal processing, communications, and controls systems are dynamic. In a dynamic system, the values of the output signals depend on both the instantaneous values of the input signals and on the past behavior of the system. System objects use internal states to store that past behavior, which is used in the next computational step. As a result, System objects are optimized for iterative computations that process large streams of data, such as video and audio processing systems.

For example, you could use System objects in a system that reads data from a file, filters that data and then writes the filtered output to another file. Typically, a specified amount of data is passed to the filter in each loop iteration. The file reader object uses a state to keep track of where in the file to begin the next data read. Likewise, the file writer object keeps tracks of where it last wrote data to the output file so that data is not overwritten. The filter object maintains its own internal states to assure that the filtering is performed correctly. This diagram represents a single loop of the system.



Many System objects support:

- Fixed-point arithmetic (requires a Fixed-Point Designer license)
- C code generation (requires a MATLAB Coder or Simulink Coder license)
- HDL code generation (requires an HDL Coder license)
- Executable files or shared libraries generation (requires a MATLAB Compiler license)

Note: Check your product documentation to confirm fixed-point, code generation, and MATLAB Compiler support for the specific System objects you want to use.

System Objects in MATLAB Code Generation

In this section...

“System Objects in Generated Code” on page 29-3

“System Objects in codegen” on page 29-8

“System Objects in the MATLAB Function Block” on page 29-8

“System Objects in the MATLAB System Block” on page 29-8

“System Objects and MATLAB Compiler Software” on page 29-9

System Objects in Generated Code

You can generate C/C++ code in MATLAB from your system that contains System objects by using the MATLAB Coder product. Using this product, you can generate efficient and compact code for deployment in desktop and embedded systems and accelerate fixed-point algorithms. You do not need the MATLAB Coder product to generate code in Simulink.

Note: Most, but not all, System objects support code generation. Refer to the particular object’s reference page for information.

System Objects Code with Persistent Objects for Code Generation

This example shows how to use System objects to make MATLAB code suitable for code generation. The example highlights key factors to consider, such as passing property values and using extrinsic functions. It also shows that by using persistent objects, the object states are maintained between calls.

```
function w = lmssystem(x, d)
% LMSSYSTEMIDENTIFICATION System identification using
% LMS adaptive filter
% #codegen

    % Declare System objects as persistent
    persistent hlms;

    % Initialize persistent System objects only once.
    % Do this with 'if isempty(persistent variable).'
```

```

if isempty(hlms)
    % Create LMS adaptive filter used for system
    % identification. Pass property value arguments
    % as constructor arguments. Property values must
    % be constants during compile time.

    hlms = dsp.LMSFilter(11,'StepSize',0.01);
end

[~,~,w] = step(hlms,x,d);    % Filter weights
end

```

This example shows how to compile the `lmssystem` function and produce a MEX file with the same name in the current directory.

```

% LMSSYSTEMIDENTIFICATION System identification using
% LMS adaptive filter

coefs = fir1(10,.25);
hfilt = dsp.FIRFilter('Numerator', coefs);

x = randn(1000,1);          % Input signal
hSrc = dsp.SignalSource(x,100); % Use x as input-signal with
                                % 100 samples per frame

% Generate code for lmssystem
codegen lmssystem -args {ones(100,1),ones(100,1)}

while ~isDone(hSrc)
    in = step(hSrc);
    d = step(hfilt,in) + 0.01*randn(100,1); % Desired signal
    w = lmssystem_mex(in,d);                % Call generated mex file
    stem([coefs.',w]);
end

```

For another detailed code generation example, see “Generate Code for MATLAB Handle Classes and System Objects” in the MATLAB Coder product documentation.

System Objects Code Without Persistent Objects for Code Generation

The following example, using System objects, does not use the persistent keyword because calling a persistent object with different data types causes a data type mismatch error. This example filters the input and then performs a discrete cosine transform on

the filtered output. Each call to the `FilterAndDCTLib` function is independent and state information is not retained between calls.

```
function [out] = FilterAndDCTLib(in)
    hFIR = dsp.FIRFilter('Numerator',fir1(10,0.5));
    DCT = dsp.DCT;

    % Run the objects to get the filtered spectrum
    firOut = hFIR.step(in);
    out = hDCT.step(firOut);

function [out1, out2] = CompareRealInt(in1)
    % Call the library function, FilterAndDCTLib, which can
    % generate code for multiple calls each with a different data type.

    % Convert input data from double to int16
    in2 = int16(in1);

    % Call the library function for both data types, double and int16
    out1 = FilterAndDCTLib(in1);
    out2 = FilterAndDCTLib(in2);

function RunDCTExample
    % Execute everything needed at the command line to run the example

    warnState = warning('off','SimulinkFixedPoint:util:fxpParameterUnderflow');

    % Create vector, length 256, of data containing noise and sinusoids
    dataLength = 256;
    sampleData = rand(dataLength,1) + 3*sin(2*pi*[1:dataLength]*.085)' ...
        + 2*cos(2*pi*[1:dataLength]*.02)';

    % Generate code and run generated file
    codegen CompareRealInt -args {sampleData}
    [out1,out2] = CompareRealInt_mex(sampleData);

    % Compare the the floating point results, in blue
    % with the int16 results, in red
    plot(out1,'b')
    hold on
    plot(out2,'r')
    hold off
```

```
warning(warnState.state,warnState.identifier);  
end
```

Usage Rules and Limitations for System Objects in Generated MATLAB Code

The following usage rules and limitations apply to using System objects in code generated from MATLAB.

Object Construction and Initialization

- If objects are stored in persistent variables, initialize System objects once by embedding the object handles in an `if` statement with a call to `isempty()`.
- Set arguments to System object constructors as compile-time constants.
- You cannot initialize System objects properties with other MATLAB class objects as default values in code generation. You must initialize these properties in the constructor.

Inputs and Outputs

- System objects accept a maximum of 32 inputs. A maximum of 8 dimensions per input is supported.
- The data type of the inputs should not change.
- If you want the size of inputs to change, verify that variable-size is enabled. Code generation support for variable-size data also requires that the `Enable variable sizing` option is enabled, which is the default in MATLAB.

Note: Variable-size properties in MATLAB Function block in Simulink are not supported. System objects predefined in the software do not support variable-size if their data exceeds the `DynamicMemoryAllocationThreshold` value.

- Do not set System objects to become outputs from the MATLAB Function block.
- Do not use the Save and Restore Simulation State as `SimState` option for any System object in a MATLAB Function block.
- Do not pass a System object as an example input argument to a function being compiled with `codegen`.
- Do not pass a System object to functions declared as extrinsic (functions called in interpreted mode) using the `coder.extrinsic` function. System objects returned from extrinsic functions and scope System objects that automatically become extrinsic can be used as inputs to another extrinsic function, but do not generate code.

Tunable and Nontunable Properties

- The value assigned to a nontunable property must be a constant and there can be at most one assignment to that property (including the assignment in the constructor).
- For most System objects, the only time you can set their nontunable properties during code generation is when you construct the objects.
 - For System objects that are predefined in the software, you can set their tunable properties at construction time or using dot notation after the object is locked.
 - For System objects that you define, you can change their tunable properties at construction time or using dot notation during code generation. For `getNumInputsImpl` and `getNumOutputsImpl` methods, if you set the return argument from an object property, that object property must have the `Nontunable` attribute.
- Objects cannot be used as default values for properties.
- In MATLAB simulations, default values are shared across all instances of an object. Two instances of a class can access the same default value if that property has not been overwritten by either instance.

Cell Arrays and Global Variables

- Do not use cell arrays.
- Global variables are not supported. To avoid syncing global variables between a MEX file and the workspace, use a coder configuration object. For example:

```
f = coder.MEXConfig;  
f.GlobalSyncMethod = 'NoSync'  
Then, include '-config f' in your codegen command.
```

Methods

- Code generation support is available only for these System object methods:
 - `get`
 - `getNumInputs`
 - `getNumOutputs`
 - `isDone` (for sources only)
 - `release`

- reset
- set (for tunable properties)
- step
- Code generation support for using dot notation depends on whether the System object is predefined in the software or is one that you defined.
 - For System objects that are predefined in the software, you cannot use dot notation to call methods.
 - For System objects that you define, you can use dot notation or function call notation, with the System object as first argument, to call methods.

System Objects in codegen

You can include System objects in MATLAB code in the same way you include any other elements. You can then compile a MEX file from your MATLAB code by using the `codegen` command, which is available if you have a MATLAB Coder license. This compilation process, which involves a number of optimizations, is useful for accelerating simulations. See “Getting Started with MATLAB Coder” and “MATLAB Classes” for more information.

Note: Most, but not all, System objects support code generation. Refer to the particular object’s reference page for information.

System Objects in the MATLAB Function Block

Using the MATLAB Function block, you can include any System object and any MATLAB language function in a Simulink model. This model can then generate embeddable code. System objects provide higher-level algorithms for code generation than do most associated blocks. For more information, see “What Is a MATLAB Function Block?” in the Simulink documentation.

System Objects in the MATLAB System Block

Using the MATLAB System block, you can include in a Simulink model individual System objects that you create with a class definition file. The model can then generate embeddable code. For more information, see “What Is the MATLAB System Block?” in the Simulink documentation.

System Objects and MATLAB Compiler Software

MATLAB Compiler software supports System objects for use inside MATLAB functions. The compiler product does not support System objects for use in MATLAB scripts.

System Objects in Simulink

System Objects in the MATLAB Function Block

You can include System object code in Simulink models using the MATLAB Function block. Your function can include one or more System objects. Portions of your system may be easier to implement in the MATLAB environment than directly in Simulink. Many System objects have Simulink block counterparts with equivalent functionality. Before writing MATLAB code to include in a Simulink model, check for existing blocks that perform the desired operation.

System Object Methods

In this section...

“What Are System Object Methods?” on page 29-11

“The Step Method” on page 29-11

“Common Methods” on page 29-12

What Are System Object Methods?

After you create a System object, you use various object methods to process data or obtain information from or about the object. All methods that are applicable to an object are described in the reference pages for that object. System object method names begin with a lowercase letter and class and property names begin with an uppercase letter. The syntax for using methods is `<method>(<handle>)`, such as `step(H)`, plus possible extra input arguments.

System objects use a minimum of two commands to process data—a constructor to create the object and the step method to run data through the object. This separation of declaration from execution lets you create multiple, persistent, reusable objects, each with different settings. Using this approach avoids repeated input validation and verification, allows for easy use within a programming loop, and improves overall performance. In contrast, MATLAB functions must validate parameters every time you call the function.

These advantages make System objects particularly well suited for processing streaming data, where segments of a continuous data stream are processed iteratively. This ability to process streaming data provides the advantage of not having to hold large amounts of data in memory. Use of streaming data also allows you to use simplified programs that use loops efficiently.

The Step Method

The `step` method is the key System object method. You use `step` to process data using the algorithm defined by that object. The `step` method performs other important tasks related to data processing, such as initialization and handling object states. Every System object has its own customized `step` method, which is described in detail on the `step` reference page for that object. For more information about the step method and other available methods, see the descriptions in “Common Methods” on page 29-12.

Common Methods

All System objects support the following methods, each of which is described in a method reference page associated with the particular object. In cases where a method is not applicable to a particular object, calling that method has no effect on the object.

Method	Description
<code>step</code>	Processes data using the algorithm defined by the object. As part of this processing, it initializes needed resources, returns outputs, and updates the object states. After you call the <code>step</code> method, you cannot change any input specifications (i.e., dimensions, data type, complexity). During execution, you can change only tunable properties. The <code>step</code> method returns regular MATLAB variables. Example: <code>Y = step(H,X)</code>
<code>release</code>	Releases any special resources allocated by the object, such as file handles and device drivers, and unlocks the object. For System objects, use the <code>release</code> method instead of a destructor.
<code>reset</code>	Resets the internal states of a locked object to the initial values for that object and leaves the object locked
<code>getNumInputs</code>	Returns the number of inputs (excluding the object itself) expected by the <code>step</code> method. This number varies for an object depending on whether any properties enable additional inputs.
<code>getNumOutputs</code>	Returns the number of outputs expected from the <code>step</code> method. This number varies for an object depending on whether any properties enable additional outputs.
<code>getDiscreteState</code>	Returns the discrete states of the object in a structure. If the object is unlocked (when the object is first created and before you have run the <code>step</code> method on it or after you have released the object), the states are empty. If the object has no discrete states, <code>getDiscreteState</code> returns an empty structure.
<code>clone</code>	Creates another object of the same type with the same property values
<code>isLocked</code>	Returns a logical value indicating whether the object is locked.

Method	Description
isDone	Applies to source objects only. Returns a logical value indicating whether the step method has reached the end of the data file. If a particular object does not have end-of-data capability, this method value returns false .
info	Returns a structure containing characteristic information about the object. The fields of this structure vary depending on the object. If a particular object does not have characteristic information, the structure is empty.

Fixed-Point Designer for Simulink Models

Getting Started

- “Product Description” on page 30-2
- “What You Need to Get Started” on page 30-3
- “Physical Quantities and Measurement Scales” on page 30-5
- “Why Use Fixed-Point Hardware?” on page 30-13
- “Why Use the Fixed-Point Designer Software?” on page 30-14
- “Developing and Testing Fixed-Point Systems” on page 30-15
- “Supported Data Types” on page 30-18
- “Configure Blocks with Fixed-Point Output” on page 30-19
- “Configure Blocks with Fixed-Point Parameters” on page 30-29
- “Pass Fixed-Point Data Between Simulink Models and MATLAB” on page 30-32
- “Cast from Doubles to Fixed Point” on page 30-36

Product Description

Design and simulate fixed-point systems

Fixed-Point Designer enables the fixed-point capabilities of the Simulink product family, letting you use those products to design, simulate, and implement fixed-point control and signal processing algorithms.

With Fixed-Point Designer, you specify fixed-point data attributes, including word length and scaling for signals and parameters, in your model. You can perform bit-true simulations to observe the effects of limited range and precision on designs built with Simulink, Stateflow, DSP System Toolbox, and other Simulink products. Automated fixed-point advisors guide you through the steps of converting floating-point models to fixed point. Additional tools analyze your model or use simulation results to recommend data types and scaling.

Fixed-Point Designer supports C, HDL, and PLC code generation with Simulink code-generation products.

Key Features

- Fixed-point modeling and simulation in Simulink, Stateflow, and other Simulink products
- Bit-true, fixed-point arithmetic for code generated by Simulink C, HDL, and PLC code generation products
- Automated advisors that convert models from floating- to fixed-point data types
- Analysis tools for deriving ranges for all signals based on design information
- Data type tools that use range data to recommend word length and scaling
- Control of fixed-point data type and of scaling from 1- to 128-bit word sizes
- Customizable fixed-point operators and math functions for embedded code generation

What You Need to Get Started

In this section...

“Installation” on page 30-3

“Sharing Fixed-Point Models” on page 30-3

Installation

To determine if the Fixed-Point Designer software is installed on your system, type

```
ver
```

at the MATLAB command line. When you enter this command, the MATLAB Command Window displays information about the version of MATLAB software you are running, including a list of installed add-on products and their version numbers. Check the list to see if the Fixed-Point Designer software appears.

For information about installing this product, refer to the installation documentation.

If you experience installation difficulties and have Web access, look for the installation and license information at the MathWorks Web site (<http://www.mathworks.com/support>).

Sharing Fixed-Point Models

You can edit a model containing fixed-point blocks without the Fixed-Point Designer software. However, you must have a Fixed-Point Designer software license to

- Update a Simulink diagram (**Ctrl+D**) containing fixed-point data types
- Run a model containing fixed-point data types
- Generate code from a model containing fixed-point data types
- Log the minimum and maximum values produced by a simulation
- Automatically scale the output of a model

If you do not have the Fixed-Point Designer software, you can work with a model containing Simulink blocks with fixed-point settings as follows:

- 1 In the **Model Hierarchy** pane, select the root model.

- 2 From the Simulink model **Analysis** menu, select **Fixed-Point Tool**.

In the Fixed-Point Tool:

- Set the **Fixed-point instrumentation mode** parameter to **Force Off**.
 - Set the **Data type override** parameter to **Double** or **Single**.
 - Set the **Data type override applies to** parameter to **All numeric types**.
- 3 If you use `fi` objects or embedded numeric data types in your model, set the `fipref` `DataTypeOverride` property to `TrueDoubles` and the `DataTypeOverride` property to `All numeric types`.

At the MATLAB command line, enter:

```
p = fipref('DataTypeOverride', 'TrueDoubles', ...  
         'DataTypeOverrideAppliesTo', 'AllNumericTypes');
```

Note: If you use `fi` objects or embedded numeric data types in your model or workspace, you might introduce fixed-point data types into your model. You can set `fipref` to prevent the checkout of a Fixed-Point Designer license.

Physical Quantities and Measurement Scales

In this section...

“Introduction” on page 30-5

“Selecting a Measurement Scale” on page 30-6

“Select a Measurement Scale for Temperature” on page 30-7

Introduction

The decision to use fixed-point hardware is simply a choice to represent numbers in a particular form. This representation often offers advantages in terms of the power consumption, size, memory usage, speed, and cost of the final product.

A measurement of a physical quantity can take many numerical forms. For example, the boiling point of water is 100 degrees Celsius, 212 degrees Fahrenheit, 373 kelvin, or 671.4 degrees Rankine. No matter what number is given, the physical quantity is exactly the same. The numbers are different because four different scales are used.

Well known standard scales like Celsius are very convenient for the exchange of information. However, there are situations where it makes sense to create and use unique nonstandard scales. These situations usually involve making the most of a limited resource.

For example, nonstandard scales allow map makers to get the maximum detail on a fixed size sheet of paper. A typical road atlas of the USA will show each state on a two-page display. The scale of inches to miles will be unique for most states. By using a large ratio of miles to inches, all of Texas can fit on two pages. Using the same scale for Rhode Island would make poor use of the page. Using a much smaller ratio of miles to inches would allow Rhode Island to be shown with the maximum possible detail.

Fitting measurements of a variable inside an embedded processor is similar to fitting a state map on a piece of paper. The map scale should allow all the boundaries of the state to fit on the page. Similarly, the binary scale for a measurement should allow the maximum and minimum possible values to fit. The map scale should also make the most of the paper in order to get maximum detail. Similarly, the binary scale for a measurement should make the most of the processor in order to get maximum precision.

Use of standard scales for measurements has definite compatibility advantages. However, there are times when it is worthwhile to break convention and use a unique

nonstandard scale. There are also occasions when a mix of uniqueness and compatibility makes sense. See the sections that follow for more information.

Selecting a Measurement Scale

Suppose that you want to make measurements of the temperature of liquid water, and that you want to represent these measurements using 8-bit unsigned integers. Fortunately, the temperature range of liquid water is limited. No matter what scale you use, liquid water can only go from the freezing point to the boiling point. Therefore, this is the range of temperatures that you must capture using just the 256 possible 8-bit values: 0,1,2,...,255.

One approach to representing the temperatures is to use a standard scale. For example, the units for the integers could be Celsius. Hence, the integers 0 and 100 represent water at the freezing point and at the boiling point, respectively. On the upside, this scale gives a trivial conversion from the integers to degrees Celsius. On the downside, the numbers 101 to 255 are unused. By using this standard scale, more than 60% of the number range has been wasted.

A second approach is to use a nonstandard scale. In this scale, the integers 0 and 255 represent water at the freezing point and at the boiling point, respectively. On the upside, this scale gives maximum precision since there are 254 values between freezing and boiling instead of just 99. On the downside, the units are roughly 0.3921568 degree Celsius per bit so the conversion to Celsius requires division by 2.55, which is a relatively expensive operation on most fixed-point processors.

A third approach is to use a “semistandard” scale. For example, the integers 0 and 200 could represent water at the freezing point and at the boiling point, respectively. The units for this scale are 0.5 degrees Celsius per bit. On the downside, this scale doesn't use the numbers from 201 to 255, which represents a waste of more than 21%. On the upside, this scale permits relatively easy conversion to a standard scale. The conversion to Celsius involves division by 2, which is a very easy shift operation on most processors.

Measurement Scales: Beyond Multiplication

One of the key operations in converting from one scale to another is multiplication. The preceding case study gave three examples of conversions from a quantized integer value Q to a real-world Celsius value V that involved only multiplication:

$$V = \begin{cases} \frac{100^\circ\text{C}}{100} Q_1 & \text{Conversion 1} \\ \frac{100^\circ\text{C}}{255} Q_2 & \text{Conversion 2} \\ \frac{100^\circ\text{C}}{200} Q_3 & \text{Conversion 3} \end{cases}$$

Graphically, the conversion is a line with slope S , which must pass through the origin. A line through the origin is called a purely linear conversion. Restricting yourself to a purely linear conversion can be very wasteful and it is often better to use the general equation of a line:

$$V = SQ + B.$$

By adding a bias term B , you can obtain greater precision when quantizing to a limited number of bits.

The general equation of a line gives a very useful conversion to a quantized scale. However, like all quantization methods, the precision is limited and errors can be introduced by the conversion. The general equation of a line with quantization error is given by

$$V = SQ + B \pm \text{Error}.$$

If the quantized value Q is rounded to the nearest representable number, then

$$-\frac{S}{2} \leq \text{Error} \leq \frac{S}{2}.$$

That is, the amount of quantization error is determined by both the number of bits and by the scale. This scenario represents the best-case error. For other rounding schemes, the error can be twice as large.

Select a Measurement Scale for Temperature

On typical electronically controlled internal combustion engines, the flow of fuel is regulated to obtain the desired ratio of air to fuel in the cylinders just prior to


combustion. Therefore, knowledge of the current air flow rate is required. Some manufacturers use sensors that directly measure air flow, while other manufacturers calculate air flow from measurements of related signals. The relationship of these variables is derived from the ideal gas equation. The ideal gas equation involves division by air temperature. For proper results, an absolute temperature scale such as kelvin or Rankine must be used in the equation. However, quantization directly to an absolute temperature scale would cause needlessly large quantization errors.

The temperature of the air flowing into the engine has a limited range. On a typical engine, the radiator is designed to keep the block below the boiling point of the cooling fluid. Assume a maximum of 225°F (380 K). As the air flows through the intake manifold, it can be heated to this maximum temperature. For a cold start in an extreme climate, the temperature can be as low as -60°F (222 K). Therefore, using the absolute kelvin scale, the range of interest is 222 K to 380 K.

The air temperature needs to be quantized for processing by the embedded control system. Assuming an unrealistic quantization to 3-bit unsigned numbers: 0,1,2,...,7, the purely linear conversion with maximum precision is

$$V = \frac{380 \text{ K}}{7.5 \text{ bit}} Q.$$


The quantized conversion and range of interest are shown in the following figure.

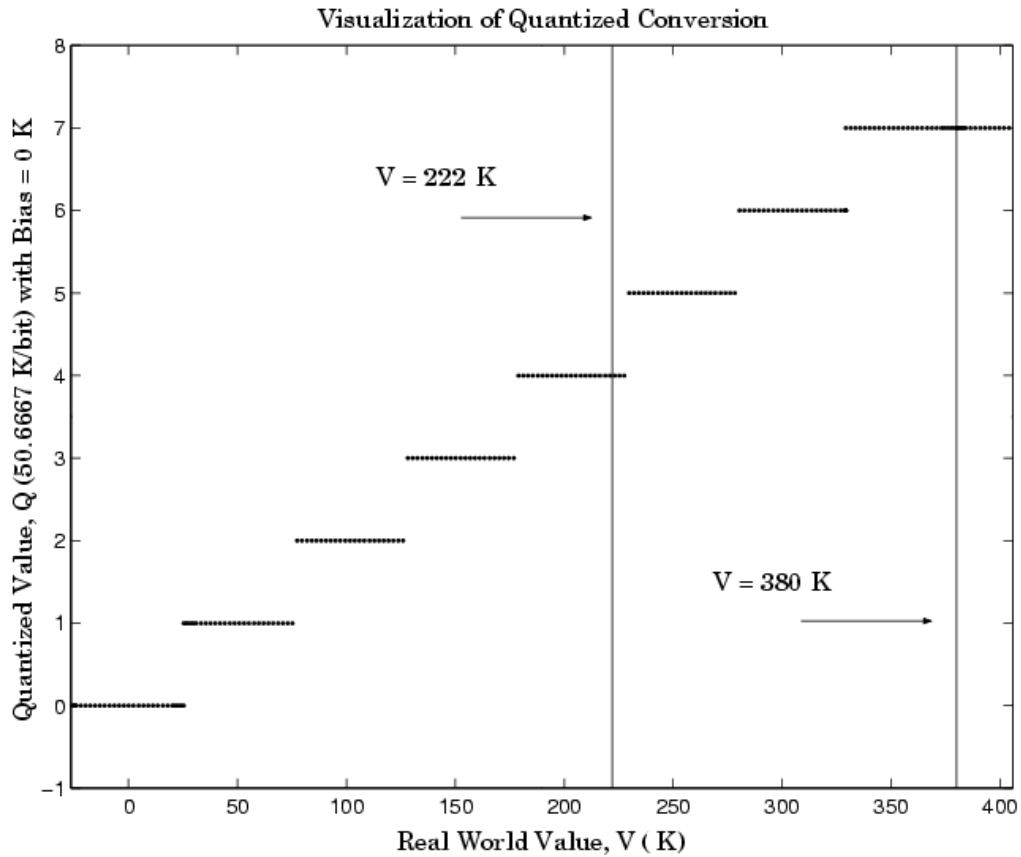

Notice that there are 7.5 possible quantization values. This is because only half of the first bit corresponds to temperatures (real-world values) greater than zero.

The quantization error is $-25.33 \text{ K/bit} \leq \text{Error} \leq 25.33 \text{ K/bit}$.


The range of interest of the quantized conversion and the absolute value of the quantized error are shown in the following figure.

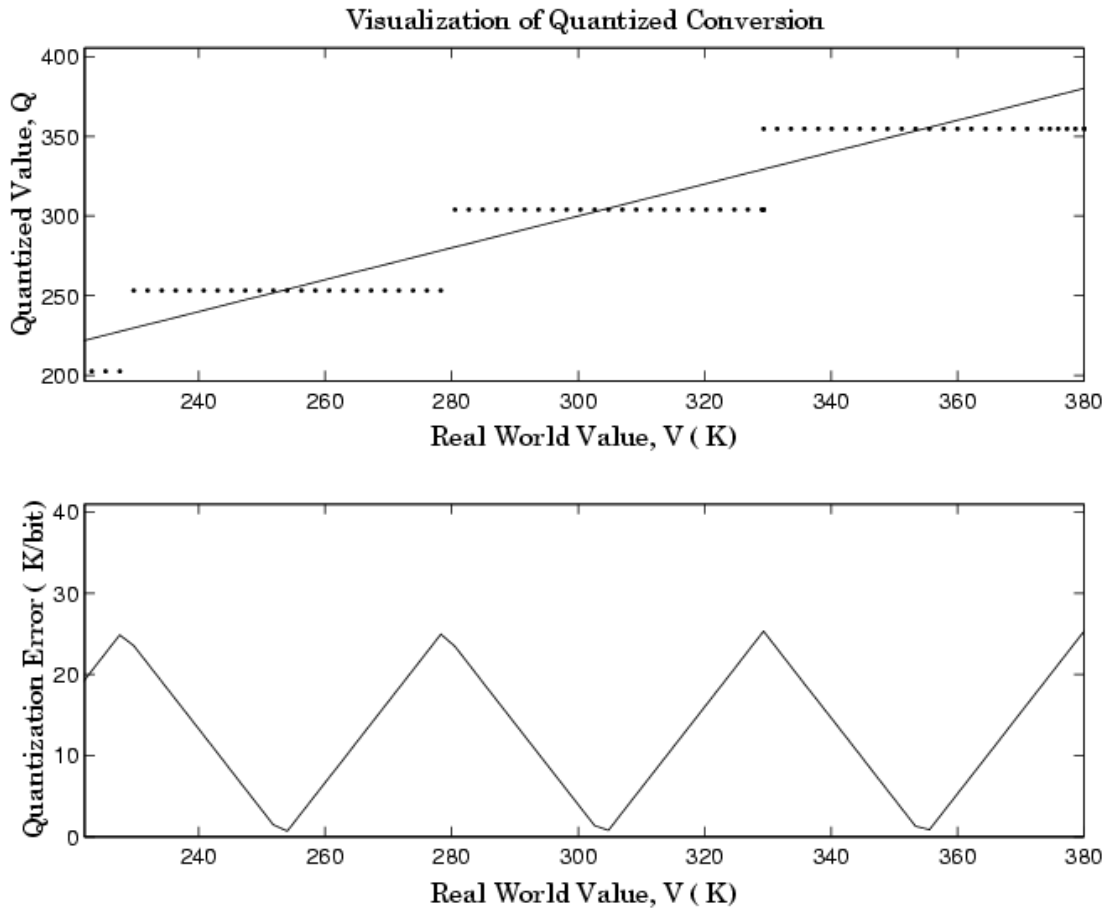

As an alternative to the purely linear conversion, consider the general linear conversion with maximum precision:


$$V = \left(\frac{380 \text{ K} - 222 \text{ K}}{8} \right) Q + 222 \text{ K} + 0.5 \left(\frac{380 \text{ K} - 222 \text{ K}}{8} \right)$$

The quantized conversion and range of interest are shown in the following figure.

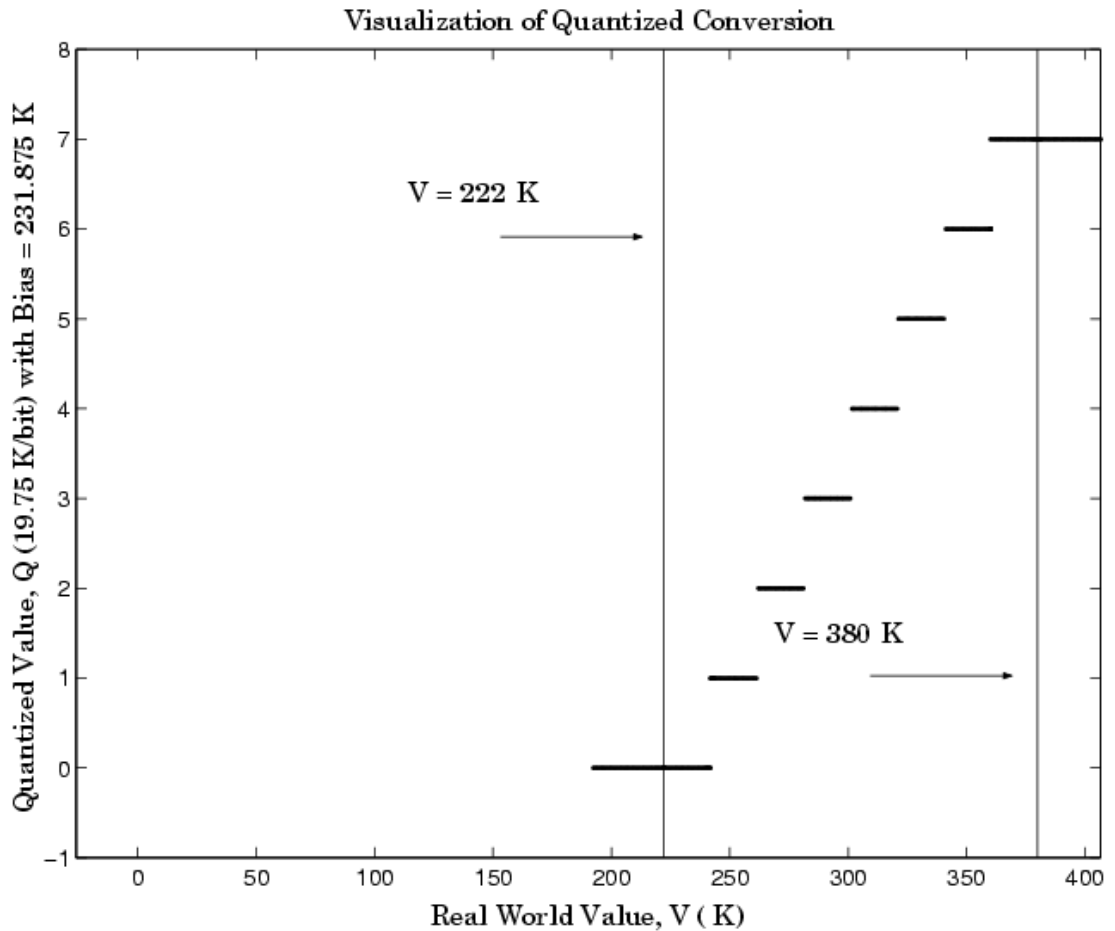

The quantization error is $-9.875 \text{ K/bit} \leq \text{Error} \leq 9.875 \text{ K/bit}$, which is approximately 2.5 times smaller than the error associated with the purely linear conversion.

The range of interest of the quantized conversion and the absolute value of the quantized error are shown in the following figure.

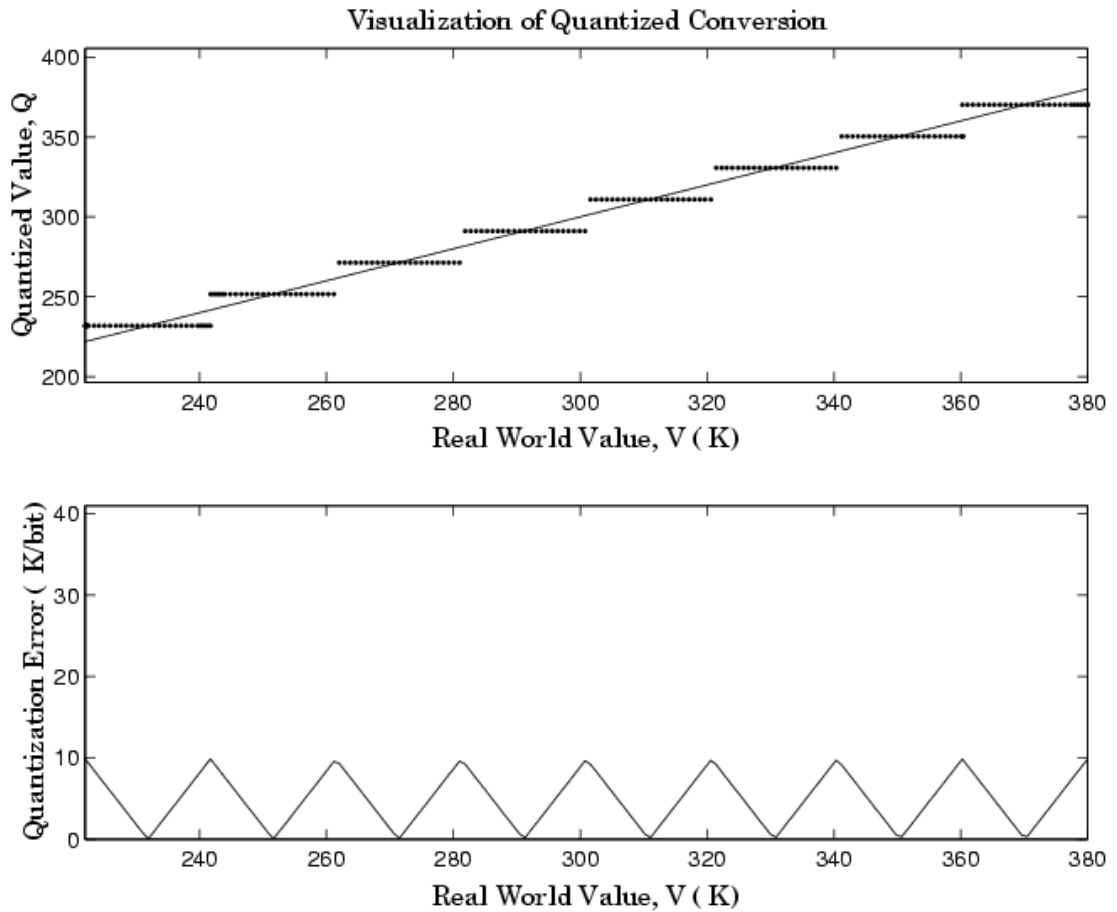

Clearly, the general linear scale gives much better precision than the purely linear scale over the range of interest.

Why Use Fixed-Point Hardware?

Digital hardware is becoming the primary means by which control systems and signal processing filters are implemented. Digital hardware can be classified as either off-the-shelf hardware (for example, microcontrollers, microprocessors, general-purpose processors, and digital signal processors) or custom hardware. Within these two types of hardware, there are many architecture designs. These designs range from systems with a single instruction, single data stream processing unit to systems with multiple instruction, multiple data stream processing units.

Within digital hardware, numbers are represented as either fixed-point or floating-point data types. For both these data types, word sizes are fixed at a set number of bits. However, the dynamic range of fixed-point values is much less than floating-point values with equivalent word sizes. Therefore, in order to avoid overflow or unreasonable quantization errors, fixed-point values must be scaled. Since floating-point processors can greatly simplify the real-time implementation of a control law or digital filter, and floating-point numbers can effectively approximate real-world numbers, then why use a microcontroller or processor with fixed-point hardware support?

- **Size and Power Consumption** — The logic circuits of fixed-point hardware are much less complicated than those of floating-point hardware. This means that the fixed-point chip size is smaller with less power consumption when compared with floating-point hardware. For example, consider a portable telephone where one of the product design goals is to make it as portable (small and light) as possible. If one of today's high-end floating-point, general-purpose processors is used, a large heat sink and battery would also be needed, resulting in a costly, large, and heavy portable phone.
- **Memory Usage and Speed** — In general fixed-point calculations require less memory and less processor time to perform.
- **Cost** — Fixed-point hardware is more cost effective where price/cost is an important consideration. When digital hardware is used in a product, especially mass-produced products, fixed-point hardware costs much less than floating-point hardware and can result in significant savings.

After making the decision to use fixed-point hardware, the next step is to choose a method for implementing the dynamic system (for example, control system or digital filter). Floating-point software emulation libraries are generally ruled out because of timing or memory size constraints. Therefore, you are left with fixed-point math where binary integer values are scaled.

Why Use the Fixed-Point Designer Software?


The Fixed-Point Designer software allows you to efficiently design control systems and digital filters that you will implement using fixed-point arithmetic. With the Fixed-Point Designer software, you can construct Simulink and Stateflow models that contain detailed fixed-point information about your systems. You can then perform bit-true simulations with the models to observe the effects of limited range and precision on your designs.

You can configure the Fixed-Point Tool to automatically log the overflows, saturations, and signal extremes of your simulations. You can also use it to automate data typing and scaling decisions and to compare your fixed-point implementations against idealized, floating-point benchmarks.

You can use the Fixed-Point Designer software with the Simulink Coder product to automatically generate efficient, integer-only C code representations of your designs. You can use this C code in a production target or for rapid prototyping. In addition, you can use the Fixed-Point Designer software with the Embedded Coder product to generate real-time C code for use on an integer production, embedded target. You can also use Fixed-Point Designer with HDL Coder to generate portable, synthesizable VHDL and Verilog code from Simulink models and Stateflow charts.

Developing and Testing Fixed-Point Systems

The Fixed-Point Designer software provides tools that aid in the development and testing of fixed-point dynamic systems. You directly design dynamic system models in the Simulink software that are ready for implementation on fixed-point hardware. The development cycle is illustrated below.

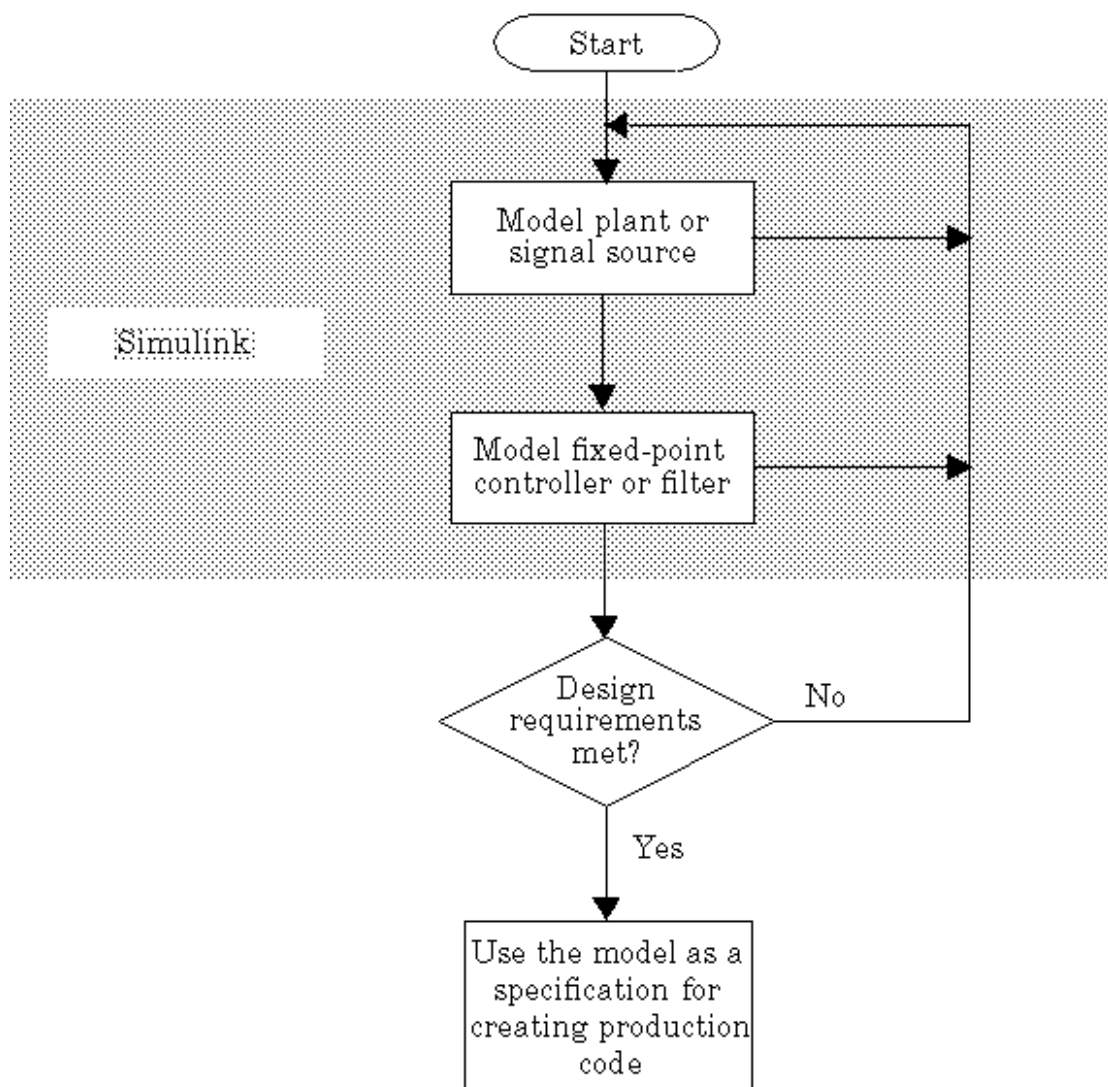

Using the MATLAB, Simulink, and Fixed-Point Designer software, you follow these steps of the development cycle:

- 1** Model the system (plant or signal source) within the Simulink software using double-precision numbers. Typically, the model will contain nonlinear elements.
- 2** Design and simulate a fixed-point dynamic system (for example, a control system or digital filter) with fixed-point Simulink blocks that meets the design, performance, and other constraints.
- 3** Analyze the results and go back to step 1 if needed.

When you have met the design requirements, you can use the model as a specification for creating production code using the Simulink Coder product or generating HDL code using the HDL Coder product.

The above steps interact strongly. In steps 1 and 2, there is a significant amount of freedom to select different solutions. Generally, you fine-tune the model based upon feedback from the results of the current implementation (step 3). There is no specific modeling approach. For example, you may obtain models from first principles such as equations of motion, or from a frequency response such as a sine sweep. There are many controllers that meet the same frequency-domain or time-domain specifications. Additionally, for each controller there are an infinite number of realizations.

The Fixed-Point Designer software helps expedite the design cycle by allowing you to simulate the effects of various fixed-point controller and digital filter structures.

Supported Data Types

The Fixed-Point Designer software supports the following integer and fixed-point data types for simulation and code generation:


- Unsigned data types from 1 to 128 bits
- Signed data types from 2 to 128 bits
- Boolean, double, and single
- Scaled doubles

The software supports all scaling choices including pure integer, binary point, and slope bias. For slope bias scaling, it does not support complex fixed-point types that have non-zero bias or non-trivial slope.

The save data type support extends to signals, parameters, and states.

Configure Blocks with Fixed-Point Output

To create a fixed-point model, configure Simulink blocks to output fixed-point signals. Simulink blocks that support fixed-point output provide parameters that allow you to specify whether a block should output fixed-point signals and, if so, the size, scaling, and other attributes of the fixed-point output. These parameters typically appear on the **Signal Attributes** pane of the block's parameter dialog box.

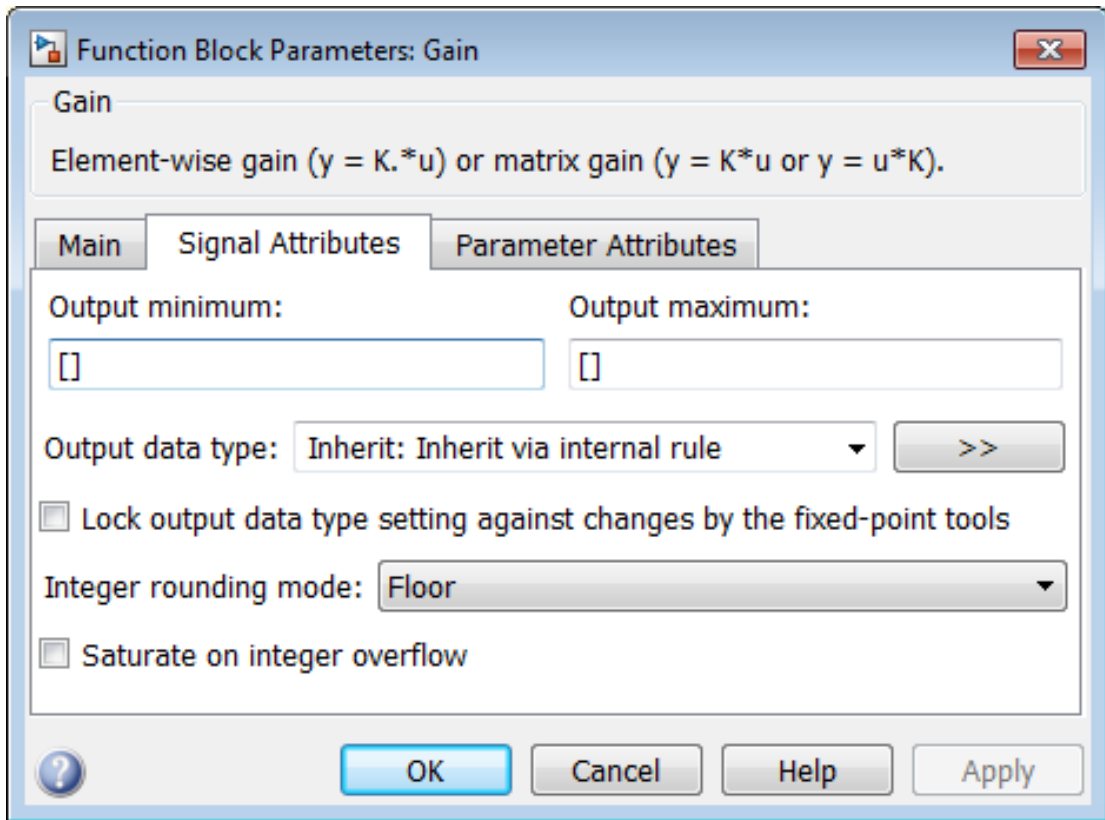

The following sections explain how to use these parameters to configure a block for fixed-point output.

In this section...

“Specify the Output Data Type and Scaling” on page 30-20

In this section...

“Specify Fixed-Point Data Types with the Data Type Assistant” on page 30-22

“Rounding” on page 30-25

“Overflow Handling” on page 30-25

“Lock the Output Data Type Setting” on page 30-26

“Real-World Values Versus Stored Integer Values” on page 30-26

Specify the Output Data Type and Scaling

Many Simulink blocks allow you to specify an output data type and scaling using a parameter that appears on the block dialog box. This parameter (typically named **Output data type**) provides a pull-down menu that lists the data types a particular block supports. In general, you can specify the output data type as a rule that inherits a data type, a built-in data type, an expression that evaluates to a data type, or a Simulink data type object. For more information, see “Specify Block Output Data Types”.

The Fixed-Point Designer software enables you to configure Simulink blocks with:

- **Fixed-point data types**

Fixed-point data types are characterized by their word size in bits and by their binary point—the means by which fixed-point values are scaled. See for more information.

- **Floating-point data types**

Floating-point data types are characterized by their sign bit, fraction (mantissa) field, and exponent field. See “Floating-Point Numbers” on page 31-26 for more information.

To configure blocks with Fixed-Point Designer data types, specify the data type parameter on a block dialog box as an expression that evaluates to a data type. Alternatively, you can use an assistant that simplifies the task of entering data type expressions (see “Specify Fixed-Point Data Types with the Data Type Assistant” on page 30-22). The sections that follow describe varieties of fixed-point and floating-point data types, and the corresponding functions that you use to specify them.

Integers

To specify unsigned and signed integers, use the `uint` and `sint` functions, respectively.

For example, to configure a 16-bit unsigned integer via the block dialog box, specify the **Output data type** parameter as `uint(16)`. To configure a 16-bit signed integer, specify the **Output data type** parameter as `sint(16)`.

For integer data types, the default binary point is assumed to lie to the right of all bits.

Fractional Numbers

To specify unsigned and signed fractional numbers, use the `ufrac` and `sfrac` functions, respectively.

For example, to configure the output as a 16-bit unsigned fractional number via the block dialog box, specify the **Output data type** parameter to be `ufrac(16)`. To configure a 16-bit signed fractional number, specify **Output data type** to be `sfrac(16)`.

Fractional numbers are distinguished from integers by their default scaling. Whereas signed and unsigned integer data types have a default binary point to the right of all bits, unsigned fractional data types have a default binary point to the left of all bits, while signed fractional data types have a default binary point to the right of the sign bit.

Both unsigned and signed fractional data types support *guard bits*, which act to guard against overflow. For example, `sfrac(16,4)` specifies a 16-bit signed fractional number with 4 guard bits. The guard bits lie to the left of the default binary point.

Generalized Fixed-Point Numbers

You can specify unsigned and signed generalized fixed-point numbers with the `ufix` and `sfix` functions, respectively.

For example, to configure the output as a 16-bit unsigned generalized fixed-point number via the block dialog box, specify the **Output data type** parameter to be `ufix(16)`. To configure a 16-bit signed generalized fixed-point number, specify **Output data type** to be `sfix(16)`.

Generalized fixed-point numbers are distinguished from integers and fractionals by the absence of a default scaling. For these data types, a block typically inherits its scaling from another block.

Note: Alternatively, you can use the `fixdt` function to create integer, fractional, and generalized fixed-point objects. The `fixdt` function also allows you to specify scaling for fixed-point data types.

Floating-Point Numbers


The Fixed-Point Designer software supports single-precision and double-precision floating-point numbers as defined by the IEEE[®] Standard 754-1985 for Binary Floating-Point Arithmetic. You can specify floating-point numbers with the Simulink `float` function.

For example, to configure the output as a single-precision floating-point number via the block dialog box, specify the **Output data type** parameter as `float('single')`. To configure a double-precision floating-point number, specify **Output data type** as `float('double')`.

Specify Fixed-Point Data Types with the Data Type Assistant

The **Data Type Assistant** is an interactive graphical tool that simplifies the task of specifying data types for Simulink blocks and data objects. The assistant appears on block and object dialog boxes, adjacent to parameters that provide data type control, such as the **Output data type** parameter. For more information about accessing and interacting with the assistant, see “Specify Data Types Using Data Type Assistant”.

You can use the **Data Type Assistant** to specify a fixed-point data type. When you select **Fixed point** in the **Mode** field, the assistant displays fields for describing additional attributes of a fixed-point data type, as shown in this example:

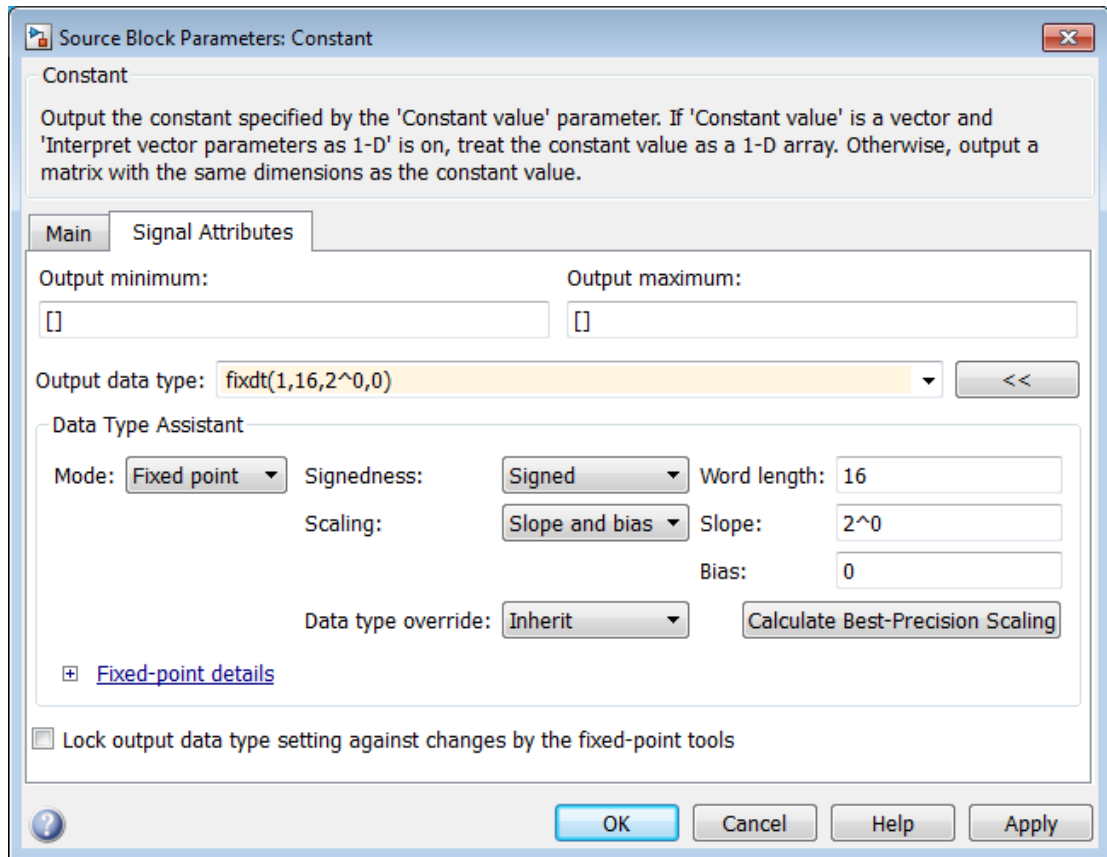

You can set the following fixed-point attributes:

Signedness


Select whether you want the fixed-point data to be **Signed** or **Unsigned**. Signed data can represent positive and negative quantities. Unsigned data represents positive values only.

Word length

Specify the size (in bits) of the word that will hold the quantized integer. Large word sizes represent large quantities with greater precision than small word sizes. Fixed-point word sizes up to 128 bits are supported for simulation.

Scaling

Specify the method for scaling your fixed-point data to avoid overflow conditions and minimize quantization errors. You can select the following scaling modes:

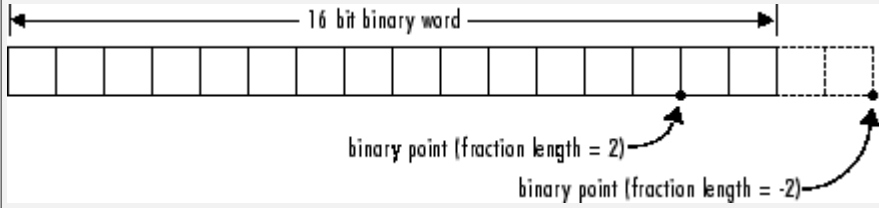Scaling Mode	Description
Binary point	<p>If you select this mode, the assistant displays the Fraction length field, specifying the binary point location.</p> <p>Binary points can be positive or negative integers. A positive integer moves the binary point left of the rightmost bit by that amount. For example, an entry of 2 sets the binary point in front of the second bit from the right. A negative integer moves the binary point further right of the rightmost bit by that amount, as in this example:</p>  <p>The diagram shows a horizontal row of 16 boxes representing bits. Above the row, a double-headed arrow spans the entire length, labeled "16 bit binary word". Below the row, two arrows point to specific bit positions. The first arrow points to the second bit from the right and is labeled "binary point (fraction length = 2)". The second arrow points to the right of the rightmost bit and is labeled "binary point (fraction length = -2)".</p> <p>See “Binary-Point-Only Scaling” on page 31-8 for more information.</p>
Slope and bias	<p>If you select this mode, the assistant displays fields for entering the Slope and Bias.</p> <ul style="list-style-type: none"> • Slope can be any <i>positive</i> real number. • Bias can be any real number. <p>See “Slope and Bias Scaling” on page 31-8 for more information.</p>
Best precision	<p>If you select this mode, the block scales a constant vector or matrix such that the precision of its elements is maximized. This mode is available only for particular blocks.</p> <p>See “Constant Scaling for Best Precision” on page 31-15 for more information.</p>

Calculate Best-Precision Scaling

The Fixed-Point Designer software can automatically calculate “best-precision” values for both **Binary point** and **Slope and bias** scaling, based on the values that you

specify for other parameters on the dialog box. To calculate best-precision-scaling values automatically, enter values for the block's **Output minimum** and **Output maximum** parameters. Afterward, click the **Calculate Best-Precision Scaling** button in the assistant.

Rounding

You specify how fixed-point numbers are rounded with the **Integer rounding mode** parameter. The following rounding modes are supported:

- **Ceiling** — This mode rounds toward positive infinity and is equivalent to the MATLAB `ceil` function.
- **Convergent** — This mode rounds toward the nearest representable number, with ties rounding to the nearest even integer. Convergent rounding is equivalent to the Fixed-Point Designer `convergent` function.
- **Floor** — This mode rounds toward negative infinity and is equivalent to the MATLAB `floor` function.
- **Nearest** — This mode rounds toward the nearest representable number, with the exact midpoint rounded toward positive infinity. Rounding toward nearest is equivalent to the Fixed-Point Designer `nearest` function.
- **Round** — This mode rounds to the nearest representable number, with ties for positive numbers rounding in the direction of positive infinity and ties for negative numbers rounding in the direction of negative infinity. This mode is equivalent to the Fixed-Point Designer `round` function.
- **Simplest** — This mode automatically chooses between round toward floor and round toward zero to produce generated code that is as efficient as possible.
- **Zero** — This mode rounds toward zero and is equivalent to the MATLAB `fix` function.

For more information about each of these rounding modes, see “Rounding” on page 32-5.

Overflow Handling

To control how overflow conditions are handled for fixed-point operations, use the **Saturate on integer overflow** check box.

If this box is selected, overflows saturate to either the maximum or minimum value represented by the data type. For example, an overflow associated with a signed 8-bit integer can saturate to -128 or 127.

If this box is not selected, overflows wrap to the appropriate value that is representable by the data type. For example, the number 130 does not fit in a signed 8-bit integer, and would wrap to -126.


Lock the Output Data Type Setting

If the output data type is a generalized fixed-point number, you have the option of locking its output data type setting by selecting the **Lock output data type setting against changes by the fixed-point tools** check box.

When locked, the Fixed-Point Tool and automatic scaling script `autofixexp` do not change the output data type setting. Otherwise, the Fixed-Point Tool and `autofixexp` script are free to adjust the output data type setting.

Real-World Values Versus Stored Integer Values

You can configure Data Type Conversion blocks to treat signals as real-world values or as stored integers with the **Input and output to have equal** parameter.

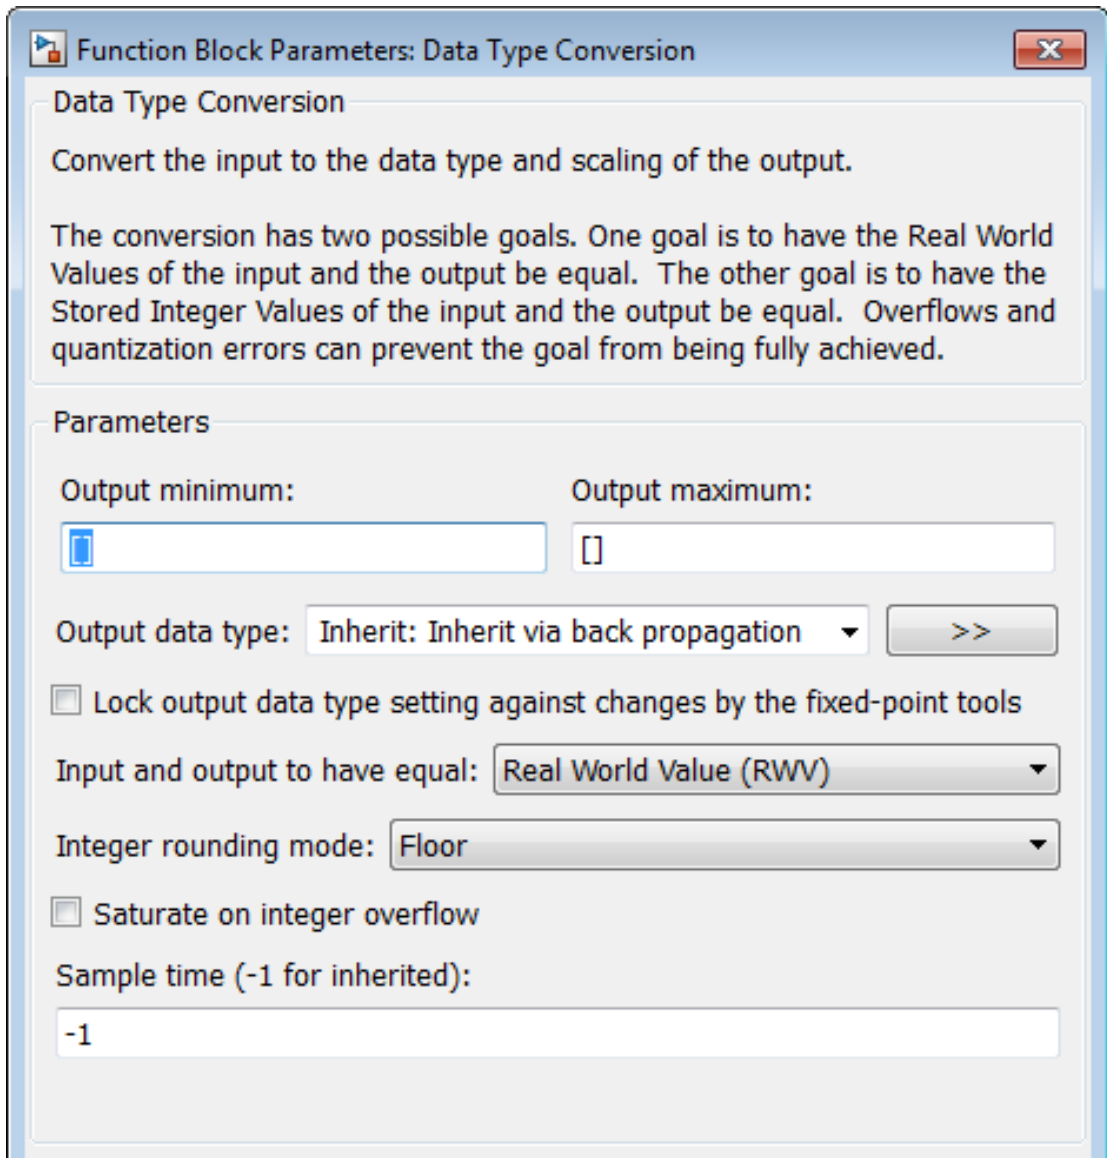

The possible values are Real World Value (RWV) and Stored Integer (SI).

In terms of the variables defined in “Scaling” on page 31-7, the real-world value is given by V and the stored integer value is given by Q . You may want to treat numbers as stored integer values if you are modeling hardware that produces integers as output.

Configure Blocks with Fixed-Point Parameters

Certain Simulink blocks allow you to specify fixed-point numbers as the values of parameters used to compute the block's output, e.g., the **Gain** parameter of a Gain block.

Note: S-functions and the Stateflow Chart block do not support fixed-point parameters.

You can specify a fixed-point parameter value either directly by setting the value of the parameter to an expression that evaluates to a `fi` object, or indirectly by setting the value of the parameter to an expression that refers to a fixed-point `Simulink.Parameter` object.

In this section...
“Specify Fixed-Point Values Directly” on page 30-29
“Specify Fixed-Point Values Via Parameter Objects” on page 30-30

Note: Simulating or performing data type override on a model with `fi` objects requires a Fixed-Point Designer software license. See “Sharing Fixed-Point Models” on page 30-3 for more information.


Specify Fixed-Point Values Directly

You can specify fixed-point values for block parameters using `fi` objects. In the block dialog's parameter field, simply enter the name of a `fi` object or an expression that includes the `fi` constructor function.

For example, entering the expression

```
fi(3.3,1,8,3)
```

as the **Constant value** parameter for the Constant block specifies a signed fixed-point value of 3.3, with a word length of 8 bits and a fraction length of 3 bits.

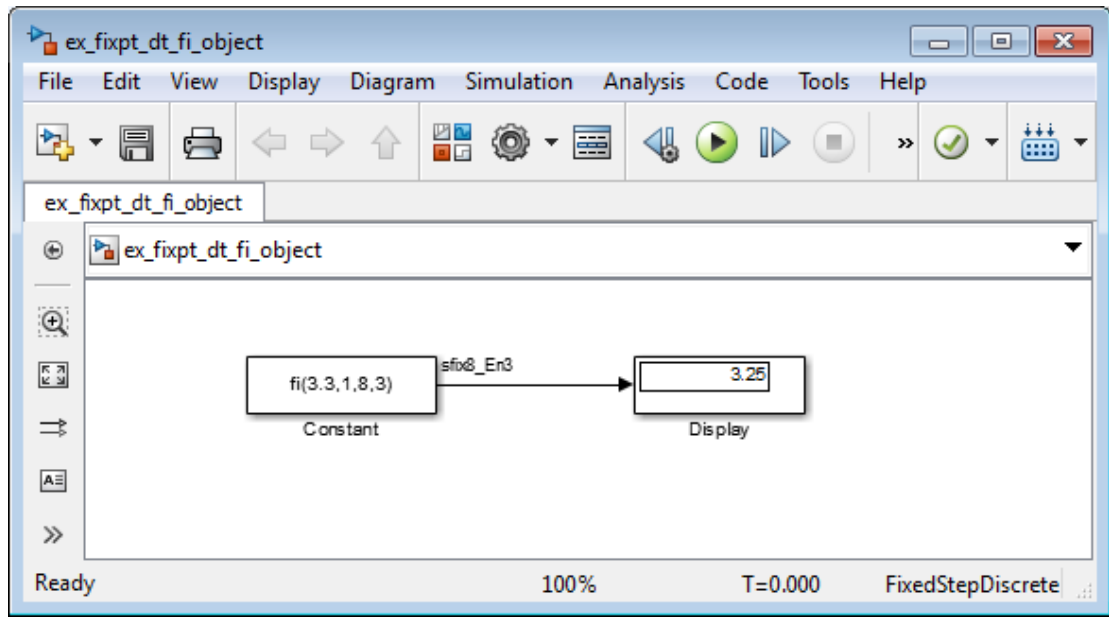

Specify Fixed-Point Values Via Parameter Objects

You can specify fixed-point parameter objects for block parameters using instances of the `Simulink.Parameter` class. To create a fixed-point parameter object, either specify a `fi` object as the parameter object's `Value` property, or specify the relevant fixed-point data type for the parameter object's `DataType` property.

For example, suppose you want to create a fixed-point constant in your model. You could do this using a fixed-point parameter object and a Constant block as follows:

- 1 Enter the following command at the MATLAB prompt to create an instance of the `Simulink.Parameter` class:

```
my_fixpt_param = Simulink.Parameter
```


- 2 Specify either the name of a `fi` object or an expression that includes the `fi` constructor function as the parameter object's `Value` property:

```
my_fixpt_param.Value = fi(3.3,1,8,3)
```


Alternatively, you can set the parameter object's **Value** and **DataType** properties separately. In this case, specify the relevant fixed-point data type using a `Simulink.AliasType` object, a `Simulink.NumericType` object, or a `fixdt` expression. For example, the following commands independently set the parameter object's value and data type, using a `fixdt` expression as the **DataType** string:

```
my_fixpt_param.Value = 3.3;
my_fixpt_param.DataType = 'fixdt(1,8,2^-3,0)'
```

- 3 Specify the parameter object as the value of a block's parameter. For example, `my_fixpt_param` specifies the **Constant value** parameter for the Constant block in the following model:

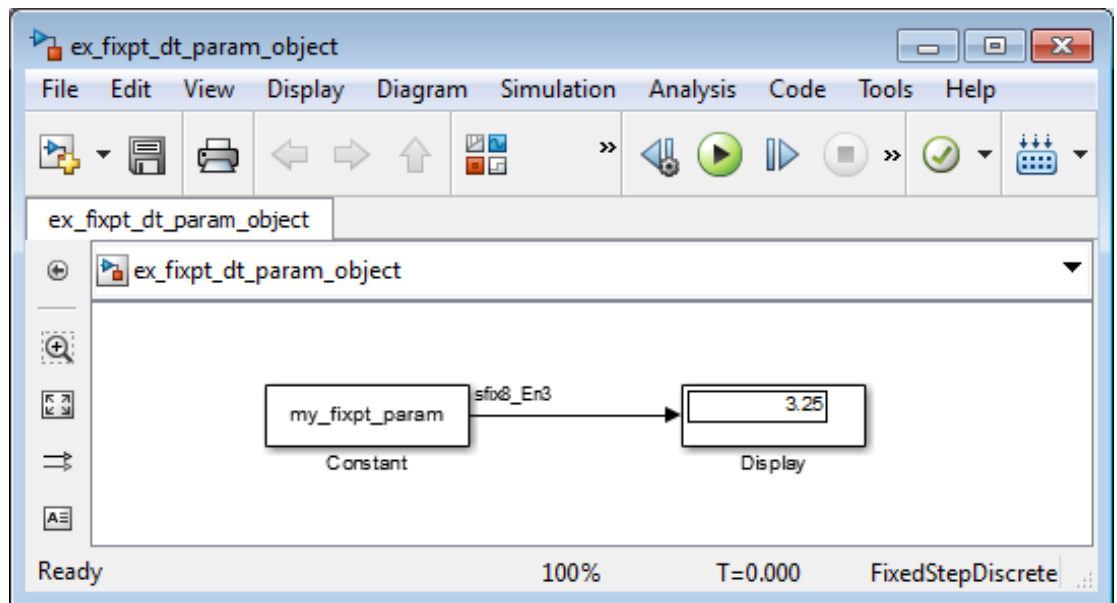

Consequently, the Constant block outputs a signed fixed-point value of 3.3, with a word length of 8 bits and a fraction length of 3 bits.

Pass Fixed-Point Data Between Simulink Models and MATLAB

You can read fixed-point data from the MATLAB software into your Simulink models, and there are a number of ways in which you can log fixed-point information from your models and simulations to the workspace.

Read Fixed-Point Data from the Workspace

Use the From Workspace block to read fixed-point data from the MATLAB workspace into a Simulink model. To do this, the data must be in structure format with a Fixed-Point Designer `fi` object in the `values` field. In array format, the From Workspace block only accepts real, double-precision data.

To read in `fi` data, the **Interpolate data** parameter of the From Workspace block must not be selected, and the **Form output after final data value by** parameter must be set to anything other than `Extrapolation`.

Write Fixed-Point Data to the Workspace

You can write fixed-point output from a model to the MATLAB workspace via the To Workspace block in either array or structure format. Fixed-point data written by a To Workspace block to the workspace in structure format can be read back into a Simulink model in structure format by a From Workspace block.

Note: To write fixed-point data to the workspace as a `fi` object, select the **Log fixed-point data as a `fi` object** check box on the To Workspace block dialog. Otherwise, fixed-point data is converted to `double` and written to the workspace as `double`.

For example, you can use the following code to create a structure in the MATLAB workspace with a `fi` object in the `values` field. You can then use the From Workspace block to bring the data into a Simulink model.

```
a = fi([sin(0:10)' sin(10:-1:0)'])  
  
a =  
  
      0   -0.5440  
0.8415   0.4121
```

```

    0.9093    0.9893
    0.1411    0.6570
   -0.7568   -0.2794
   -0.9589   -0.9589
   -0.2794   -0.7568
    0.6570    0.1411
    0.9893    0.9093
    0.4121    0.8415
   -0.5440     0

        DataTypeMode: Fixed-point: binary point scaling
          Signedness: Signed
            WordLength: 16
      FractionLength: 15
s.signals.values = a

s =

    signals: [1x1 struct]

s.signals.dimensions = 2

s =

    signals: [1x1 struct]

s.time = [0:10]'


s =

    signals: [1x1 struct]
    time: [11x1 double]

```

The From Workspace block in the following model has the `fi` structure `s` in the **Data** parameter. In the model, the following parameters in the **Solver** pane of the Configuration Parameters dialog box have the indicated settings:

- **Start time** — 0.0
- **Stop time** — 10.0
- **Type** — Fixed-step
- **Solver** — Discrete (no continuous states)
- **Fixed-step size (fundamental sample time)** — 1.0

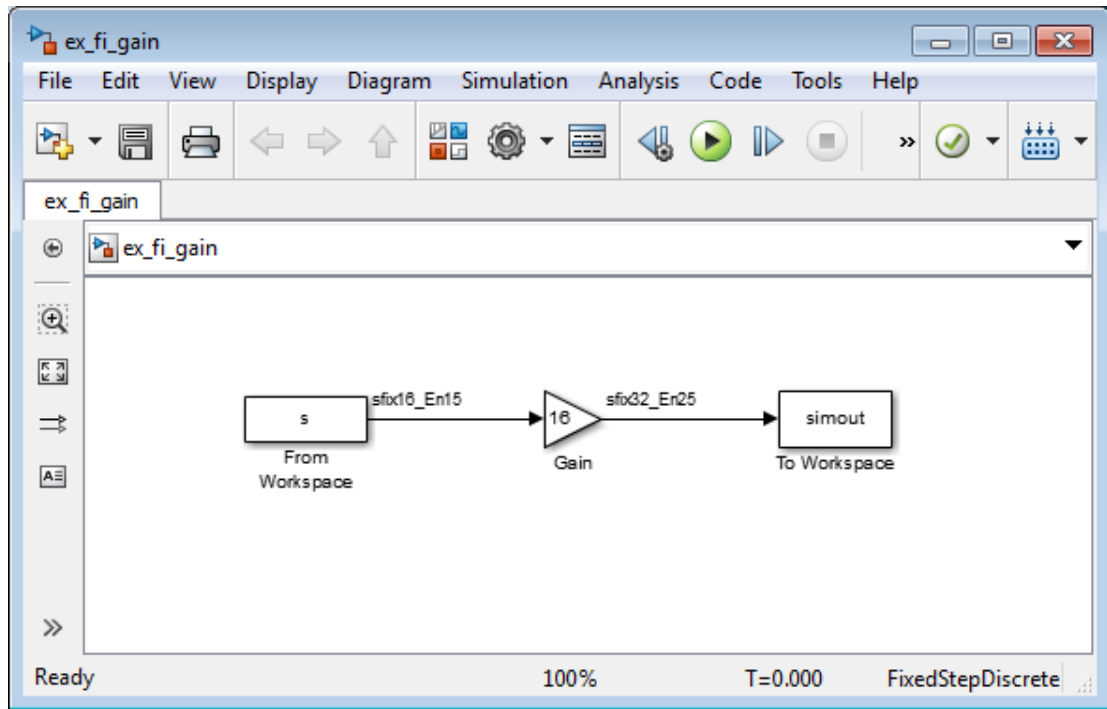

The To Workspace block writes the result of the simulation to the MATLAB workspace as a `fi` structure.

```
simout.signals.values
```

```
ans =
```

```

      0    -8.7041
 13.4634    6.5938
 14.5488   15.8296
  2.2578   10.5117
-12.1089   -4.4707
-15.3428  -15.3428
 -4.4707  -12.1089
 10.5117    2.2578
 15.8296   14.5488
  6.5938   13.4634
 -8.7041         0
```

Log Fixed-Point Signals

When fixed-point signals are logged to the MATLAB workspace via signal logging, they are always logged as Fixed-Point Designer `fi` objects.

To enable signal logging for a signal:

- 1 Select the signal.
- 2 Click the **Simulation Data Inspector** button arrow.
- 3 Select **Log Selected Signals to Workspace**.

For more information, refer to “Signal Logging”.

When you log signals from a referenced model or Stateflow chart in your model, the word lengths of `fi` objects may be larger than you expect. The word lengths of fixed-point signals in referenced models and Stateflow charts are logged as the next larger data storage container size.

Access Fixed-Point Block Data During Simulation

Simulink provides an application programming interface (API) that enables programmatic access to block data, such as block inputs and outputs, parameters, states, and work vectors, while a simulation is running. You can use this interface to develop MATLAB programs capable of accessing block data while a simulation is running or to access the data from the MATLAB command line. Fixed-point signal information is returned to you via this API as `fi` objects. For more information about the API, refer to “Access Block Data During Simulation”.

Cast from Doubles to Fixed Point

In this section...
“About This Example” on page 30-36
“Block Descriptions” on page 30-37
“Simulations” on page 30-38


About This Example

The purpose of this example is to show you how to simulate a continuous real-world doubles signal using a generalized fixed-point data type. Although simple in design, the model gives you an opportunity to explore many of the important features of the Fixed-Point Designer software, including

- Data types
- Scaling
- Rounding
- Logging minimum and maximum simulation values to the workspace
- Overflow handling

This example uses the `fxpdemo_dbl2fix` model. Open the model:

```
fxpdemo_dbl2fix
```

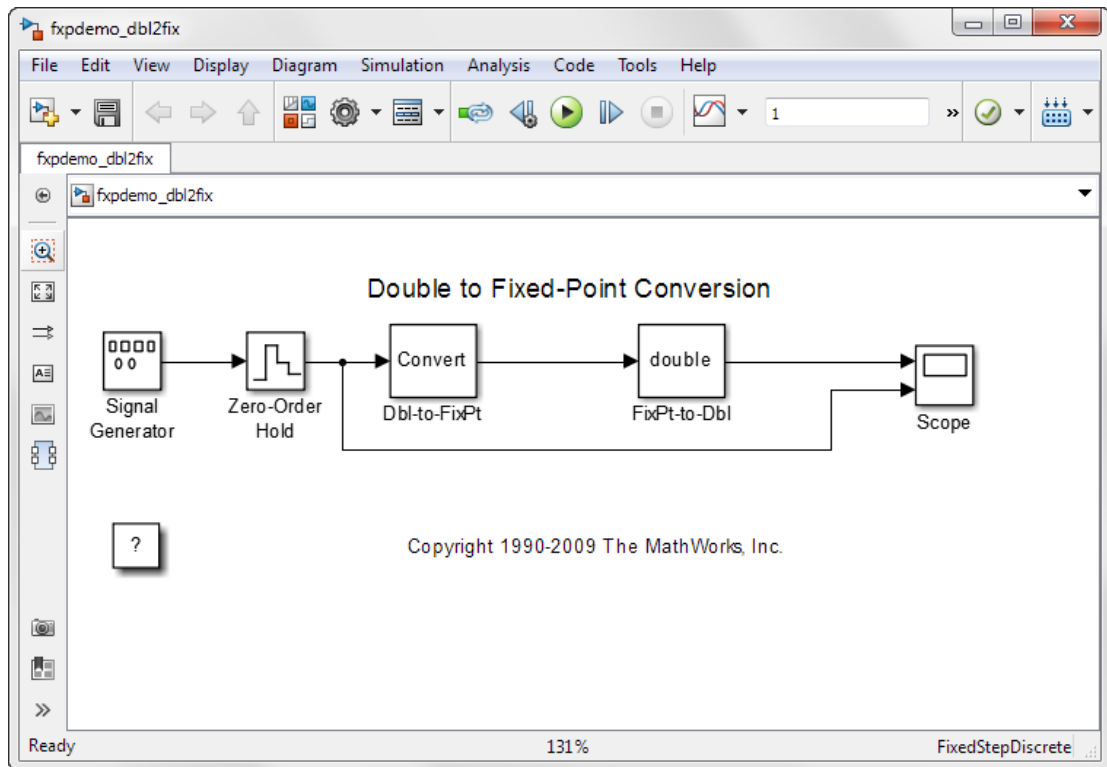

The sections that follow describe the model and its simulation results.

Block Descriptions

In this example, you configure the Signal Generator block to output a sine wave signal with an amplitude defined on the interval $[-5 \ 5]$. The Signal Generator block always outputs double-precision numbers.

The Data Type Conversion (Dbl-to-FixPt) block converts the double-precision numbers from the Signal Generator block into one of the Fixed-Point Designer data types. For simplicity, the size of the output signal is 5 bits in this example.

The Data Type Conversion (FixPt-to-Dbl) block converts one of the Fixed-Point Designer data types into a Simulink data type. In this example, it outputs double-precision numbers.

Simulations

The following sections describe how to simulate the model using binary-point-only scaling and [Slope Bias] scaling.


Binary-Point-Only Scaling

When using binary-point-only scaling, your goal is to find the optimal power-of-two exponent E , as defined in “Scaling” on page 31-7. For this scaling mode, the fractional slope F is 1 and there is no bias.

To run the simulation:

- 1 Configure the Signal Generator block to output a sine wave signal with an amplitude defined on the interval $[-5 \ 5]$.
 - a Double-click the Signal Generator block to open the **Block Parameters** dialog.
 - b Set the **Wave form** parameter to **sine**.
 - c Set the **Amplitude** parameter to **5**.
 - d Click **OK**.
- 2 Configure the Data Type Conversion (Dbl-to-FixPt) block.
 - a Double-click the **Dbl-to-FixPt** block to open the **Block Parameters** dialog.
 - b Verify that the **Output data type** parameter is `fixdt(1,5,2)`. `fixdt(1,5,2)` specifies a 5-bit, signed, fixed-point number with scaling 2^{-2} , which puts the binary point two places to the left of the rightmost bit. Hence the maximum value is $011.11 = 3.75$, a minimum value of $100.00 = -4.00$, and the precision is $(1/2)^2 = 0.25$.
 - c Verify that the **Integer rounding mode** parameter is **Floor**. **Floor** rounds the fixed-point result toward negative infinity.
 - d Select the **Saturate on integer overflow** checkbox to prevent the block from wrapping on overflow.
 - e Click **OK**.
- 3 Select **Simulation > Run** in your Simulink model window.

The Scope displays the real-world and fixed-point simulation results.

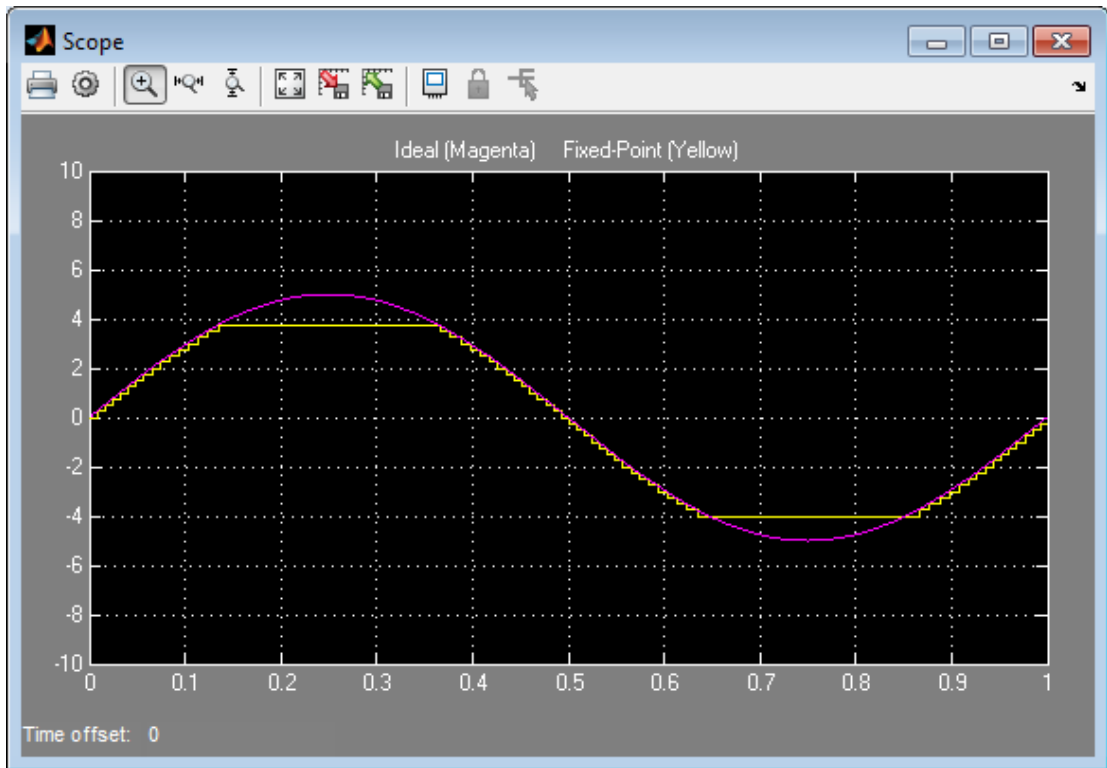

The simulation shows the quantization effects of fixed-point arithmetic. Using a 5-bit word with a precision of $(1/2)^2 = 0.25$ produces a discretized output that does not span the full range of the input signal.

If you want to span the complete range of the input signal with 5 bits using binary-point-only scaling, then your only option is to sacrifice precision. Hence, the output scaling is 2^{-1} , which puts the binary point one place to the left of the rightmost bit. This scaling gives a maximum value of $0111.1 = 7.5$, a minimum value of $1000.0 = -8.0$, and a precision of $(1/2)^1 = 0.5$.

To simulate using a precision of 0.5, set the **Output data type** parameter of the Data Type Conversion (Dbl-to-FixPt) block to `fixdt(1,5,1)` and rerun the simulation.

[Slope Bias] Scaling

When using [Slope Bias] scaling, your goal is to find the optimal fractional slope F and fixed power-of-two exponent E , as defined in “Scaling” on page 31-7. There is no bias for this example because the sine wave is on the interval $[-5 \ 5]$.


To arrive at a value for the slope, you begin by assuming a fixed power-of-two exponent of -2. To find the fractional slope, you divide the maximum value of the sine wave by the maximum value of the scaled 5-bit number. The result is $5.00/3.75 = 1.3333$. The slope (and precision) is $1.3333 \cdot (0.25) = 0.3333$. You specify the [Slope Bias] scaling as `[0.3333 0]` by entering the expression `fixdt(1,5,0.3333,0)` as the value of the **Output data type** parameter.

You could also specify a fixed power-of-two exponent of -1 and a corresponding fractional slope of 0.6667. The resulting slope is the same since E is reduced by 1 bit but F is increased by 1 bit. The Fixed-Point Designer software would automatically store F as 1.3332 and E as -2 because of the normalization condition of $1 \leq F < 2$.

To run the simulation:

- 1 Configure the Signal Generator block to output a sine wave signal with an amplitude defined on the interval $[-5 \ 5]$.
 - a Double-click the Signal Generator block to open the **Block Parameters** dialog.
 - b Set the **Wave form** parameter to `sine`.
 - c Set the **Amplitude** parameter to 5.
 - d Click **OK**.
- 2 Configure the Data Type Conversion (Dbl-to-FixPt) block.
 - a Double-click the **Dbl-to-FixPt** block to open the **Block Parameters** dialog.
 - b Set the **Output data type** parameter to `fixdt(1,5,0.3333,0)` to specify [Slope Bias] scaling as `[0.3333 0]`.
 - c Verify that the **Integer rounding mode** parameter is `Floor`. `Floor` rounds the fixed-point result toward negative infinity.
 - d Select the **Saturate on integer overflow** checkbox to prevent the block from wrapping on overflow.
 - e Click **OK**.
- 3 Select **Simulation > Run** in your Simulink model window.

The Scope displays the real-world and fixed-point simulation results.

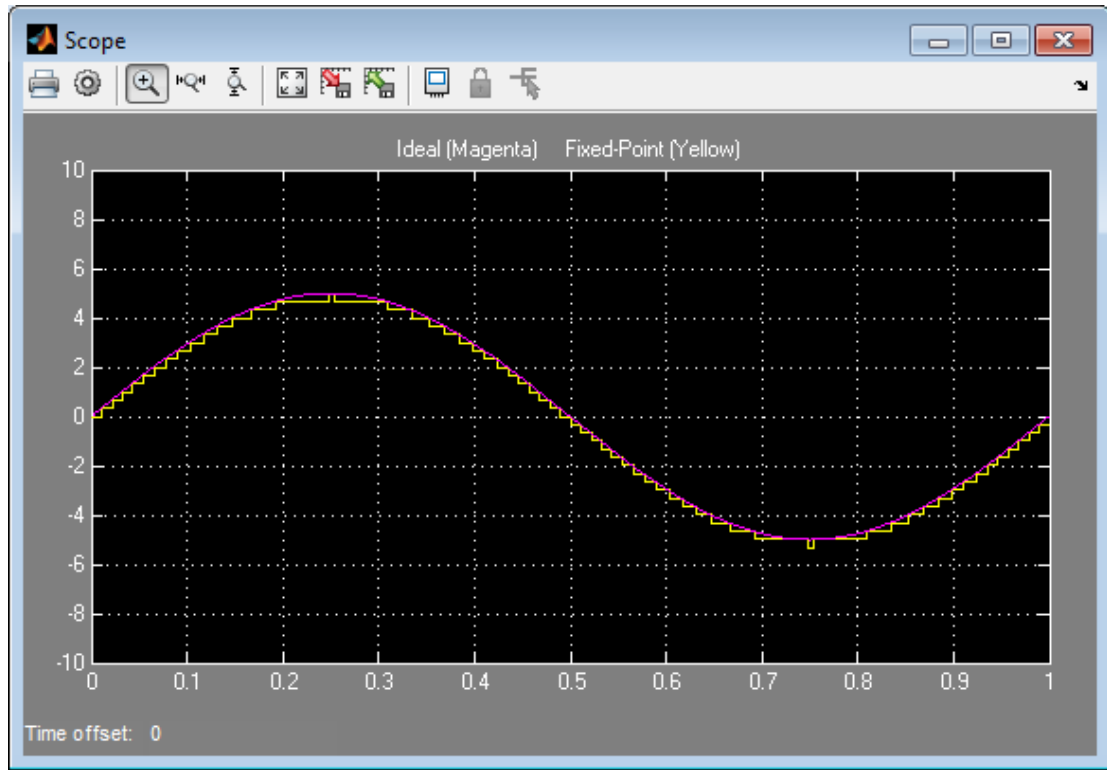

You do not need to find the slope using this method. You need only the range of the data you are simulating and the size of the fixed-point word used in the simulation. You can achieve reasonable simulation results by selecting your scaling based on the formula

$$\frac{(max_value - min_value)}{2^{ws} - 1},$$

where

- *max_value* is the maximum value to be simulated.
- *min_value* is the minimum value to be simulated.
- *ws* is the word size in bits.

- $2^{ws} - 1$ is the largest value of a word with size ws .

For this example, the formula produces a slope of 0.32258.

Data Types and Scaling

- “Data Types and Scaling in Digital Hardware” on page 31-2
- “Fixed-Point Numbers” on page 31-3
- “Signed Fixed-Point Numbers” on page 31-4
- “Binary Point Interpretation” on page 31-5
- “Scaling” on page 31-7
- “Quantization” on page 31-10
- “Range and Precision” on page 31-12
- “Fixed-Point Numbers in Simulink” on page 31-15
- “Display Port Data Types” on page 31-20
- “Scaled Doubles” on page 31-22
- “Use Scaled Doubles to Avoid Precision Loss” on page 31-24
- “Floating-Point Numbers” on page 31-26

Data Types and Scaling in Digital Hardware

In digital hardware, numbers are stored in binary words. A binary word is a fixed-length sequence of binary digits (1's and 0's). The way in which hardware components or software functions interpret this sequence of 1's and 0's is described by a data type.

Binary numbers are represented as either fixed-point or floating-point data types. A fixed-point data type is characterized by the word size in bits, the binary point, and whether it is signed or unsigned. The binary point is the means by which fixed-point values are scaled. With the Fixed-Point Designer software, fixed-point data types can be integers, fractionals, or generalized fixed-point numbers. The main difference between these data types is their default binary point.

Floating-point data types are characterized by a sign bit, a fraction (or mantissa) field, and an exponent field. The blockset adheres to the IEEE Standard 754-1985 for Binary Floating-Point Arithmetic (referred to simply as the IEEE Standard 754 throughout this guide) and supports singles, doubles, and a nonstandard IEEE-style floating-point data type.

When choosing a data type, you must consider these factors:

- The numerical range of the result
- The precision required of the result
- The associated quantization error (i.e., the rounding mode)
- The method for dealing with exceptional arithmetic conditions

These choices depend on your specific application, the computer architecture used, and the cost of development, among others.


With the Fixed-Point Designer software, you can explore the relationship between data types, range, precision, and quantization error in the modeling of dynamic digital systems. With the Simulink Coder product, you can generate production code based on that model. With HDL Coder, you can generate portable, synthesizable VHDL and Verilog code from Simulink models and Stateflow charts.

Fixed-Point Numbers

Fixed-point numbers and their data types are characterized by their word size in bits, binary point, and whether they are signed or unsigned. The Fixed-Point Designer software supports integers and fixed-point numbers. The main difference among these data types is their binary point.

Note: Fixed-point numbers can have a word size up to 128 bits.

A common representation of a binary fixed-point number, either signed or unsigned, is shown in the following figure.



where

- b_i are the binary digits (bits)
- ws is the word length in bits
- The most significant bit (MSB) is the leftmost bit, and is represented by location b_{ws-1}
- The least significant bit (LSB) is the rightmost bit, and is represented by location b_0
- The binary point is shown four places to the left of the LSB

Signed Fixed-Point Numbers

Computer hardware typically represents the negation of a binary fixed-point number in three different ways: sign/magnitude, one's complement, and two's complement. Two's complement is the preferred representation of signed fixed-point numbers and supported by the Fixed-Point Designer software.

Negation using two's complement consists of a bit inversion (translation into one's complement) followed by the addition of a one. For example, the two's complement of 000101 is 111011.

Whether a fixed-point value is signed or unsigned is usually not encoded explicitly within the binary word; that is, there is no sign bit. Instead, the sign information is implicitly defined within the computer architecture.

Binary Point Interpretation

The binary point is the means by which fixed-point numbers are scaled. It is usually the software that determines the binary point. When performing basic math functions such as addition or subtraction, the hardware uses the same logic circuits regardless of the value of the scale factor. In essence, the logic circuits have no knowledge of a scale factor. They are performing signed or unsigned fixed-point binary algebra as if the binary point is to the right of b_0 .

Fixed-Point Designer supports the general binary point scaling $V = Q * 2^E$. V is the real-world value, Q is the stored integer value, and E is equal to $-FractionLength$. In other words, $RealWorldValue = StoredInteger * 2^{-FractionLength}$.

$FractionLength$ defines the scaling of the stored integer value. The word length limits the values that the stored integer can take, but it does not limit the values $FractionLength$ can take. The software does not restrict the value of exponent E based on the word length of the stored integer Q . Because E is equal to $-FractionLength$, restricting the binary point to being contiguous with the fraction is unnecessary; the fraction length can be negative or greater than the word length.

For example, a word consisting of three unsigned bits is usually represented in scientific notation in one of the following ways.

$$bbb. = bbb. \times 2^0$$

$$bb.b = bbb. \times 2^{-1}$$

$$b.bb = bbb. \times 2^{-2}$$

$$.bbb = bbb. \times 2^{-3}$$

If the exponent were greater than 0 or less than -3, then the representation would involve lots of zeros.

$$bbb00000. = bbb. \times 2^5$$

$$bbb00. = bbb. \times 2^2$$

$$.00bbb = bbb. \times 2^{-5}$$

$$.00000bbb = bbb. \times 2^{-8}$$

These extra zeros never change to ones, however, so they don't show up in the hardware. Furthermore, unlike floating-point exponents, a fixed-point exponent never shows up in the hardware, so fixed-point exponents are not limited by a finite number of bits.

Consider a signed value with a word length of 8, a fraction length of 10, and a stored integer value of 5 (binary value 00000101). The real-world value is calculated using the formula

$\text{RealWorldValue} = \text{StoredInteger} * 2^{-\text{FractionLength}}$. In this case, $\text{RealWorldValue} = 5 * 2^{-10} = 0.0048828125$. Because the fraction length is 2 bits longer than the word length, the binary value of the stored integer is $x.xx00000101$, where x is a placeholder for implicit zeros. 0.0000000101 (binary) is equivalent to 0.0048828125 (decimal). For an example using a `fi` object, see “Create a `fi` Object With Fraction Length Greater Than Word Length”.

Scaling

The dynamic range of fixed-point numbers is much less than floating-point numbers with equivalent word sizes. To avoid overflow conditions and minimize quantization errors, fixed-point numbers must be scaled.

With the Fixed-Point Designer software, you can select a fixed-point data type whose scaling is defined by its binary point, or you can select an arbitrary linear scaling that suits your needs. This section presents the scaling choices available for fixed-point data types.

You can represent a fixed-point number by a general slope and bias encoding scheme

$$V \approx \tilde{V} = SQ + B,$$

where

- V is an arbitrarily precise real-world value.
- \tilde{V} is the approximate real-world value.
- Q , the stored value, is an integer that encodes V .
- $S = F2^E$ is the slope.
- B is the bias.

The slope is partitioned into two components:

- 2^E specifies the binary point. E is the fixed power-of-two exponent.
- F is the slope adjustment factor. It is normalized such that $1 \leq F < 2$.

Note: S and B are constants and do not show up in the computer hardware directly. Only the quantization value Q is stored in computer memory.

The scaling modes available to you within this encoding scheme are described in the sections that follow. For detailed information about how the supported scaling modes effect fixed-point operations, refer to “Recommendations for Arithmetic and Scaling” on page 32-40.

Binary-Point-Only Scaling

Binary-point-only or power-of-two scaling involves moving the binary point within the fixed-point word. The advantage of this scaling mode is to minimize the number of processor arithmetic operations.

With binary-point-only scaling, the components of the general slope and bias formula have the following values:

- $F = 1$
- $S = F 2^E = 2^E$
- $B = 0$

The scaling of a quantized real-world number is defined by the slope S , which is restricted to a power of two. The negative of the power-of-two exponent is called the fraction length. The fraction length is the number of bits to the right of the binary point. For Binary-Point-Only scaling, specify fixed-point data types as

- signed types — `fixdt(1, WordLength, FractionLength)`
- unsigned types — `fixdt(0, WordLength, FractionLength)`

Integers are a special case of fixed-point data types. Integers have a trivial scaling with slope 1 and bias 0, or equivalently with fraction length 0. Specify integers as

- signed integer — `fixdt(1, WordLength, 0)`
- unsigned integer — `fixdt(0, WordLength, 0)`

Slope and Bias Scaling

When you scale by slope and bias, the slope S and bias B of the quantized real-world number can take on any value. The slope must be a positive number. Using slope and bias, specify fixed-point data types as

- `fixdt(Signed, WordLength, Slope, Bias)`

Unspecified Scaling

Specify fixed-point data types with an unspecified scaling as

- `fixdt(Signed, WordLength)`

Simulink signals, parameters, and states must never have unspecified scaling. When scaling is unspecified, you must use some other mechanism such as automatic best precision scaling to determine the scaling that the Simulink software uses.

Quantization

The quantization Q of a real-world value V is represented by a weighted sum of bits. Within the context of the general slope and bias encoding scheme, the value of an unsigned fixed-point quantity is given by

$$\tilde{V} = S \cdot \left[\sum_{i=0}^{ws-1} b_i 2^i \right] + B,$$

while the value of a signed fixed-point quantity is given by

$$\tilde{V} = S \cdot \left[-b_{ws-1} 2^{ws-1} + \sum_{i=0}^{ws-2} b_i 2^i \right] + B,$$


where

- b_i are binary digits, with $b_i = 1, 0$, for $i = 0, 1, \dots, ws-1$
- The word size in bits is given by ws , with $ws = 1, 2, 3, \dots, 128$.
- S is given by $F = 2^E$, where the scaling is unrestricted because the binary point does not have to be contiguous with the word.

b_i are called *bit multipliers* and 2^i are called the *weights*.

Fixed-Point Format

Formats for 8-bit signed and unsigned fixed-point values are shown in the following figure.



Note that you cannot discern whether these numbers are signed or unsigned data types merely by inspection since this information is not explicitly encoded within the word.

The binary number **0011.0101** yields the same value for the unsigned and two's complement representation because the MSB = 0. Setting $B = 0$ and using the appropriate weights, bit multipliers, and scaling, the value is

$$\begin{aligned}\tilde{V} &= (F 2^E)Q = 2^E \left[\sum_{i=0}^{ws-1} b_i 2^i \right] \\ &= 2^{-4} (0 \times 2^7 + 0 \times 2^6 + 1 \times 2^5 + 1 \times 2^4 + 0 \times 2^3 + 1 \times 2^2 + 0 \times 2^1 + 1 \times 2^0) \\ &= 3.3125.\end{aligned}$$

Conversely, the binary number **1011.0101** yields different values for the unsigned and two's complement representation since the MSB = 1.

Setting $B = 0$ and using the appropriate weights, bit multipliers, and scaling, the unsigned value is

$$\begin{aligned}\tilde{V} &= (F 2^E)Q = 2^E \left[\sum_{i=0}^{ws-1} b_i 2^i \right] \\ &= 2^{-4} (1 \times 2^7 + 0 \times 2^6 + 1 \times 2^5 + 1 \times 2^4 + 0 \times 2^3 + 1 \times 2^2 + 0 \times 2^1 + 1 \times 2^0) \\ &= 11.3125,\end{aligned}$$

while the two's complement value is


$$\begin{aligned}\tilde{V} &= (F 2^E)Q = 2^E \left[-b_{ws-1} 2^{ws-1} + \sum_{i=0}^{ws-2} b_i 2^i \right] \\ &= 2^{-4} (-1 \times 2^7 + 0 \times 2^6 + 1 \times 2^5 + 1 \times 2^4 + 0 \times 2^3 + 1 \times 2^2 + 0 \times 2^1 + 1 \times 2^0) \\ &= -4.6875.\end{aligned}$$

Range and Precision

The *range* of a number gives the limits of the representation, while the *precision* gives the distance between successive numbers in the representation. The range and precision of a fixed-point number depend on the length of the word and the scaling.

Range

The following figure illustrates the range of representable numbers for an unsigned fixed-point number of size ws , scaling S , and bias B .



The following figure illustrates the range of representable numbers for a two's complement fixed-point number of size ws , scaling S , and bias B where the values of ws , scaling S , and bias B allow for both negative and positive numbers.



For both the signed and unsigned fixed-point numbers of any data type, the number of different bit patterns is 2^{ws} .

For example, if the fixed-point data type is an integer with scaling defined as $S = 1$ and $B = 0$, then the maximum unsigned value is 2^{ws-1} , because zero must be represented. In two's complement, negative numbers must be represented as well as zero, so the maximum value is $2^{ws-1} - 1$. Additionally, since there is only one representation for zero, there must be an unequal number of positive and negative numbers. This means there is a representation for -2^{ws-1} but not for 2^{ws-1} .

Precision

The precision of a data type is given by the slope. In this usage, precision means the difference between neighboring representable values.

Fixed-Point Data Type Parameters

The low limit, high limit, and default binary-point-only scaling for the supported fixed-point data types discussed in “Binary Point Interpretation” on page 31-5 are given in the following table. See and for more information.

Fixed-Point Data Type Range and Default Scaling

Name	Data Type	Low Limit	High Limit	Default Scaling (~Precision)
Unsigned Integer	<code>fixdt(0,ws,0)</code>	0	$2^{ws} - 1$	1
Signed Integer	<code>fixdt(1,ws,0)</code>	-2^{ws-1}	$2^{ws-1} - 1$	1
Unsigned Binary Point	<code>fixdt(0,ws,fl)</code>	0	$(2^{ws} - 1)2^{-fl}$	2^{-fl}
Signed Binary Point	<code>fixdt(1,ws,fl)</code>	$-2^{ws-1}2^{-fl}$	$(2^{ws-1} - 1)2^{-fl}$	2^{-fl}
Unsigned Slope Bias	<code>fixdt(0,ws,s,b)</code>	b	$s(2^{ws} - 1) + b$	s
Signed Slope Bias	<code>fixdt(1,ws,s,b)</code>	$-s(2^{ws-1}) + b$	$s(2^{ws-1} - 1) + b$	s

s = Slope, b = Bias, ws = WordLength, fl = FractionLength

Range of an 8-Bit Fixed-Point Data Type — Binary-Point-Only Scaling

The precisions, range of signed values, and range of unsigned values for an 8-bit generalized fixed-point data type with binary-point-only scaling are listed in the follow table. Note that the first scaling value (2^1) represents a binary point that is not contiguous with the word.

Scaling	Precision	Range of Signed Values (Low, High)	Range of Unsigned Values (Low, High)
2^1	2.0	-256, 254	0, 510
2^0	1.0	-128, 127	0, 255
2^{-1}	0.5	-64, 63.5	0, 127.5
2^{-2}	0.25	-32, 31.75	0, 63.75
2^{-3}	0.125	-16, 15.875	0, 31.875
2^{-4}	0.0625	-8, 7.9375	0, 15.9375
2^{-5}	0.03125	-4, 3.96875	0, 7.96875
2^{-6}	0.015625	-2, 1.984375	0, 3.984375
2^{-7}	0.0078125	-1, 0.9921875	0, 1.9921875
2^{-8}	0.00390625	-0.5, 0.49609375	0, 0.99609375

Range of an 8-Bit Fixed-Point Data Type — Slope and Bias Scaling

The precision and ranges of signed and unsigned values for an 8-bit fixed-point data type using slope and bias scaling are listed in the following table. The slope starts at a value of 1.25 with a bias of 1.0 for all slopes. Note that the slope is the same as the precision.

Bias	Slope/Precision	Range of Signed Values (low, high)	Range of Unsigned Values (low, high)
1	1.25	-159, 159.75	1, 319.75
1	0.625	-79, 80.375	1, 160.375
1	0.3125	-39, 40.6875	1, 80.6875
1	0.15625	-19, 20.84375	1, 40.84375
1	0.078125	-9, 10.921875	1, 20.921875
1	0.0390625	-4, 5.9609375	1, 10.9609375
1	0.01953125	-1.5, 3.48046875	1, 5.98046875
1	0.009765625	-0.25, 2.240234375	1, 3.490234375
1	0.0048828125	0.375, 1.6201171875	1, 2.2451171875

Fixed-Point Numbers in Simulink

In this section...

“Constant Scaling for Best Precision” on page 31-15

“Fixed-Point Data Type and Scaling Notation” on page 31-17


Constant Scaling for Best Precision

The following fixed-point Simulink blocks provide a mode for scaling parameters whose values are constant vectors or matrices:

- Constant
- Discrete FIR Filter
- Gain
- Relay
- Repeating Sequence Stair

This scaling mode is based on binary-point-only scaling. Using this mode, you can scale a constant vector or matrix such that a common binary point is found based on the best precision for the largest value in the vector or matrix.

Constant scaling for best precision is available only for fixed-point data types with unspecified scaling. All other fixed-point data types use their specified scaling. You can use the **Data Type Assistant** (see “Specify Data Types Using Data Type Assistant”) on a block dialog box to enable the best precision scaling mode.

- 1 On a block dialog box, click the **Show data type assistant** button  .

The **Data Type Assistant** appears.

- 2 In the **Data Type Assistant**, and from the **Mode** list, select **Fixed point**.

The **Data Type Assistant** displays additional options associated with fixed-point data types.

- 3 From the **Scaling** list, select **Best precision**.

Data Type Assistant

Mode: Fixed point Signedness: Signed Word length: 16

Scaling: Best precision

Data type override: Inherit

[+ Fixed-point details](#)

To understand how you might use this scaling mode, consider a 3-by-3 matrix of doubles, M , defined as

```

3.3333e-003  3.3333e-004  3.3333e-005
3.3333e-002  3.3333e-003  3.3333e-004
3.3333e-001  3.3333e-002  3.3333e-003

```

Now suppose you specify M as the value of the **Gain** parameter for a Gain block. The results of specifying your own scaling versus using the constant scaling mode are described here:

- **Specified Scaling**

Suppose the matrix elements are converted to a signed, 10-bit generalized fixed-point data type with binary-point-only scaling of 2^{-7} (that is, the binary point is located seven places to the left of the right most bit). With this data format, M becomes

```

0          0          0
3.1250e-002  0          0
3.3594e-001  3.1250e-002  0

```

Note that many of the matrix elements are zero, and for the nonzero entries, the scaled values differ from the original values. This is because a double is converted to a binary word of fixed size and limited precision for each element. The larger and more precise the conversion data type, the more closely the scaled values match the original values.

- **Constant Scaling for Best Precision**

If M is scaled based on its largest matrix value, you obtain

```

2.9297e-003  0          0
3.3203e-002  2.9297e-003  0
3.3301e-001  3.3203e-002  2.9297e-003

```

Best precision would automatically select the fraction length that minimizes the quantization error. Even though precision was maximized for the given word length, quantization errors can still occur. In this example, a few elements still quantize to zero.

Fixed-Point Data Type and Scaling Notation

Simulink data type names must be valid MATLAB identifiers with less than 128 characters. The data type name provides information about container type, number encoding, and scaling.

You can represent a fixed-point number using the fixed-point scaling equation

$$V \approx \tilde{V} = SQ + B,$$

where

- V is the real-world value.
- \tilde{V} is the approximate real-world value.
- $S = F2^E$ is the slope.
- F is the slope adjustment factor.
- E is the fixed power-of-two exponent.
- Q is the stored integer.
- B is the bias.

For more information, see “Scaling” on page 31-7.

The following table provides a key for various symbols that appear in Simulink products to indicate the data type and scaling of a fixed-point value.

Symbol	Description	Example
Container Type		
<code>ufix</code>	Unsigned fixed-point data type	<code>ufix8</code> is an 8-bit unsigned fixed-point data type
<code>sfix</code>	Signed fixed-point data type	<code>sfix128</code> is a 128-bit signed fixed-point data type

Symbol	Description	Example
<code>flt_u</code>	Scaled Doubles override of an unsigned fixed-point data type (<code>ufix</code>)	<code>flt_u32</code> is a scaled doubles override of <code>ufix32</code>
<code>flt_s</code>	Scaled Doubles override of a signed fixed-point data type (<code>sfix</code>)	<code>flt_s64</code> is a scaled doubles override of <code>sfix64</code>
Number Encoding		
<code>e</code>	10^{\wedge}	<code>125e8</code> equals $125 * (10^{\wedge}(8))$
<code>n</code>	Negative	<code>n31</code> equals <code>-31</code>
<code>p</code>	Decimal point	<code>1p5</code> equals <code>1.5</code> <code>p2</code> equals <code>0.2</code>
Scaling Encoding		
<code>S</code>	Slope	<code>ufix16_S5_B7</code> is a 16-bit unsigned fixed-point data type with <code>Slope</code> of 5 and <code>Bias</code> of 7
<code>B</code>	Bias	<code>ufix16_S5_B7</code> is a 16-bit unsigned fixed-point data type with <code>Slope</code> of 5 and <code>Bias</code> of 7
<code>E</code>	Fixed exponent (2^{\wedge}) A negative fixed exponent describes the fraction length	<code>sfix32_En31</code> is a 32-bit signed fixed-point data type with a fraction length of 31
<code>F</code>	Slope adjustment factor	<code>ufix16_F1p5_En50</code> is a 16-bit unsigned fixed-point data type with a <code>SlopeAdjustmentFactor</code> of 1.5 and a <code>FixedExponent</code> of -50

Symbol	Description	Example
C,c,D, or d	Compressed encoding for Bias	No example available. For backwards compatibility only.
	Note: If you pass this string to the <code>slDataTypeAndScale</code> function, it returns a valid <code>fixdt</code> data type.	To identify and replace calls to <code>slDataTypeAndScale</code> , use the “Check for calls to <code>slDataTypeAndScale</code> ” Model Advisor check.
T or t	Compressed encoding for Slope	No example available. For backwards compatibility only.
	Note: If you pass this string to the <code>slDataTypeAndScale</code> , it returns a valid <code>fixdt</code> data type.	To identify and replace calls to <code>slDataTypeAndScale</code> , use the “Check for calls to <code>slDataTypeAndScale</code> ” Model Advisor check.


Display Port Data Types

To display the data types for the ports in your model.

- 1 From the Simulink **Display** menu, select **Signals and Ports**, and then select **Port Data Types**.

The port display for fixed-point signals consists of three parts: the data type, the number of bits, and the scaling. These three parts reflect the block **Output data type** parameter value or the data type and scaling that is inherited from the driving block or through back propagation.

The following model displays its port data types.

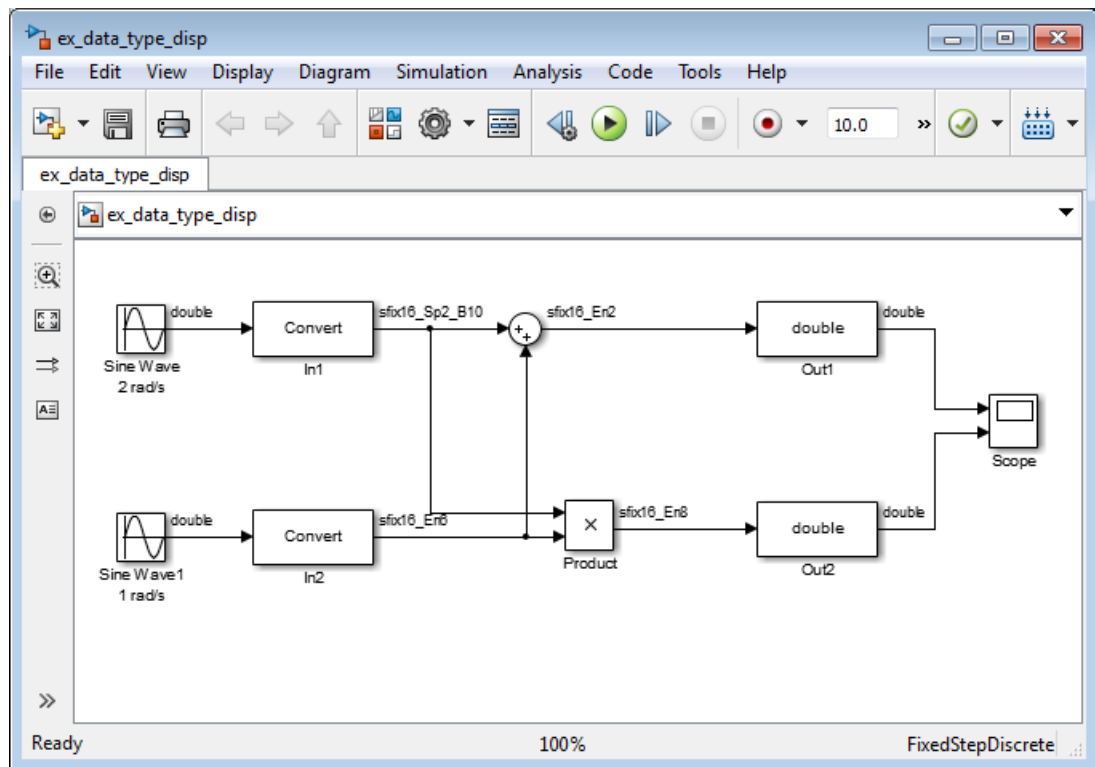

In the model, the data type displayed with the In1 block indicates that the output data type name is `sfix16_Sp2_B10`. This corresponds to `fixdt(1, 16, 0.2, 10)` which

is a signed 16 bit fixed-point number with slope 0.2 and bias 10.0. The data type displayed with the In2 block indicates that the output data type name is `sfix16_En6`. This corresponds to `fixdt(1, 16, 6)` which is a signed 16 bit fixed-point number with fraction length of 6.

Scaled Doubles

What Are Scaled Doubles?

Scaled doubles are a hybrid between floating-point and fixed-point numbers. The Fixed-Point Designer software stores them as doubles with the scaling, sign, and word length information retained. For example, the storage container for a fixed-point data type `sfixed16_En14` is `int16`. The storage container of the equivalent scaled doubles data type, `flts16_En14` is floating-point `double`. For details of the fixed-point scaling notation, see “Fixed-Point Data Type and Scaling Notation” on page 31-17. The Fixed-Point Designer software applies the scaling information to the stored floating-point double to obtain the real-world value. Storing the value in a double almost always eliminates overflow and precision issues.

What is the Difference between Scaled Double and Double Data Types?

The storage container for both the scaled double and double data types is floating-point double. Therefore both data type override settings, `Double` and `Scaled double`, provide the range and precision advantages of floating-point doubles. Scaled doubles retain the information about the specified data type and scaling, but doubles do not retain this information. Because scaled doubles retain the information about the specified scaling, they can also be used for overflow detection.

Consider an example where you are storing 0.75001 degrees Celsius in a data type `sfixed16_En13`. For this data type:

- The slope, $S = 2^{-13}$.
- The bias, $B = 0$.

Using the scaling equation $V \approx \tilde{V} = SQ + B$, where V is the real-world value and Q is the stored value.

- $B = 0$.
- $\tilde{V} = SQ = 2^{-13}Q = 0.75001$.

Because the storage container of the data type `sfixed16_En13` is 16 bits, the stored integer Q can only be represented as an integer within these 16 bits, so the ideal value of Q is quantized to 6144 causing precision loss.

If you override the data type `sfix16_En13` with `Double`, the data type changes to `Double` and you lose the information about the scaling. The stored-value equals the real-world value `0.75001`.

If you override the data type `sfix16_En13` with `Scaled Double`, the data type changes to `flts16_En13`. The scaling is still given by `_En13` and is identical to that of the original data type. The only difference is the storage container used to hold the stored value which is now `double` so the stored-value is `6144.08192`. This example shows one advantage of using scaled doubles: the virtual elimination of quantization errors.

When to Use Scaled Doubles

The Fixed-Point Tool enables you to perform various data type overrides on fixed-point signals in your simulations. Use scaled doubles to override the fixed-point data types and scaling using double-precision numbers to avoid quantization effects. Overriding the fixed-point data types provides a floating-point benchmark that represents the ideal output.

Scaled doubles are useful for:


- Testing and debugging
- Detecting overflows
- Applying data type overrides to individual subsystems

If you apply a data type override to subsystems in your model rather than to the whole model, Scaled doubles provide the information that the fixed-point portions of the model need for consistent data type propagation.

Use Scaled Doubles to Avoid Precision Loss

This example uses the `ex_scaled_double` model to show how you can avoid precision loss by overriding the data types in your model with scaled doubles. For more information about scaled doubles, see “Scaled Doubles” on page 31-22.

About the Model

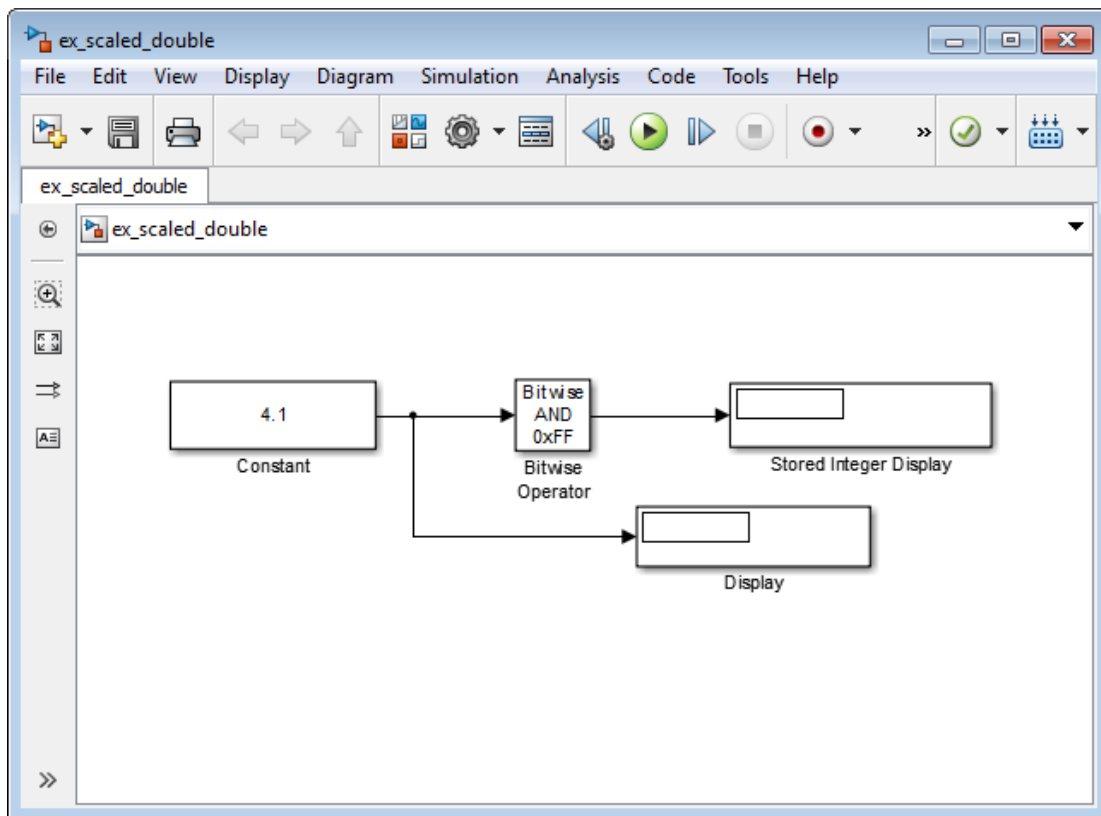

In this model:

- The Constant block output data type is `fixdt(1,8,4)`.
- The Bitwise Operator block uses the AND operator and the bit mask `0xFF` to pass the input value to the output. Because the **Treat mask as** parameter is set to **Stored**

Integer, the block outputs the stored integer value, S , of its input. The encoding scheme is $V = SQ + B$, where V is the real-world value and Q is the stored integer value. For more information, see “Scaling” on page 31-7.

Running the Example

- 1 Open the `ex_scaled_double` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
ex_scaled_double
```

- 2 From the model menu, select **Analysis > Fixed-Point Tool**.

The Fixed-Point Tool opens.

- 3 In the Fixed-Point Tool, set the **Data type override** parameter to `Use local settings` and click **Apply**.

- 4 From the model menu, select **Simulation > Run**.

The simulation runs and the **Display** block displays `4.125` as the output value of the **Constant** block. The **Stored Integer Display** block displays `0100 0010`, which is the binary equivalent of the stored integer value. Precision loss occurs because the output data type, `fixdt(1,8,4)`, cannot represent the output value `4.1` exactly.

- 5 In the Fixed-Point Tool, set the **Data type override** parameter to `Scaled double` and the **Data type override applies to** parameter to `All numeric types`. Then click **Apply** and rerun the simulation.

Note: You cannot use a **Data type override** setting of `Double` because the **Bitwise Operator** block does not support floating-point data types.

The simulation runs and this time the **Display** block correctly displays `4.1` as the output value of the **Constant** block. The **Stored Integer Display** block displays `65`, which is the binary equivalent of the stored integer value. Because the model uses scaled doubles to override the data type `fixdt(1,8,4)`, the compiled output data type changes to `flts8_En4`, which is the scaled doubles equivalent of `fixdt(1,8,4)`. No precision loss occurs because the scaled doubles retain the information about the specified data type and scaling, and they use a double to hold the stored value.

Floating-Point Numbers

In this section...

“Floating-Point Numbers” on page 31-26

“Scientific Notation” on page 31-26

“The IEEE Format” on page 31-27

“Range and Precision” on page 31-29

“Exceptional Arithmetic” on page 31-31

Floating-Point Numbers

Fixed-point numbers are limited in that they cannot simultaneously represent very large or very small numbers using a reasonable word size. This limitation can be overcome by using scientific notation. With scientific notation, you can dynamically place the binary point at a convenient location and use powers of the binary to keep track of that location. Thus, you can represent a range of very large and very small numbers with only a few digits.

You can represent any binary floating-point number in scientific notation form as $f2^e$, where f is the fraction (or mantissa), 2 is the radix or base (binary in this case), and e is the exponent of the radix. The radix is always a positive number, while f and e can be positive or negative.

When performing arithmetic operations, floating-point hardware must take into account that the sign, exponent, and fraction are all encoded within the same binary word. This results in complex logic circuits when compared with the circuits for binary fixed-point operations.

The Fixed-Point Designer software supports single-precision and double-precision floating-point numbers as defined by the IEEE Standard 754. Additionally, a nonstandard IEEE-style number is supported.

Scientific Notation

A direct analogy exists between scientific notation and radix point notation. For example, scientific notation using five decimal digits for the fraction would take the form

$$\pm d.dddd \times 10^p = \pm dddd.d \times 10^{p-4} = \pm 0.ddddd \times 10^{p+1},$$

where $d = 0, \dots, 9$ and p is an integer of unrestricted range.

Radix point notation using five bits for the fraction is the same except for the number base

$$\pm b.bbbb \times 2^q = \pm bbbbb.d \times 2^{q-4} = \pm 0.bbbbb \times 2^{q+1},$$

where $b = 0, 1$ and q is an integer of unrestricted range.

For fixed-point numbers, the exponent is fixed but there is no reason why the binary point must be contiguous with the fraction. For more information, see “Binary Point Interpretation” on page 31-5.

The IEEE Format

The IEEE Standard 754 has been widely adopted, and is used with virtually all floating-point processors and arithmetic coprocessors—with the notable exception of many DSP floating-point processors.

Among other things, this standard specifies four floating-point number formats, of which singles and doubles are the most widely used. Each format contains three components: a sign bit, a fraction field, and an exponent field. These components, as well as the specific formats for singles and doubles, are discussed in the sections that follow.

The Sign Bit

While two's complement is the preferred representation for signed fixed-point numbers, IEEE floating-point numbers use a sign/magnitude representation, where the sign bit is explicitly included in the word. Using this representation, a sign bit of 0 represents a positive number and a sign bit of 1 represents a negative number.

The Fraction Field

In general, floating-point numbers can be represented in many different ways by shifting the number to the left or right of the binary point and decreasing or increasing the exponent of the binary by a corresponding amount.

To simplify operations on these numbers, they are *normalized* in the IEEE format. A normalized binary number has a fraction of the form $1.f$ where f has a fixed size for a


given data type. Since the leftmost fraction bit is always a 1, it is unnecessary to store this bit and is therefore implicit (or hidden). Thus, an n -bit fraction stores an $n+1$ -bit number. The IEEE format also supports denormalized numbers, which have a fraction of the form $0.f$. Normalized and denormalized formats are discussed in more detail in the next section.

The Exponent Field

In the IEEE format, exponent representations are biased. This means a fixed value (the bias) is subtracted from the field to get the true exponent value. For example, if the exponent field is 8 bits, then the numbers 0 through 255 are represented, and there is a bias of 127. Note that some values of the exponent are reserved for flagging Inf (infinity), NaN (not-a-number), and denormalized numbers, so the true exponent values range from -126 to 127. See the sections “Inf” on page 31-32 and “NaN” on page 31-32.

Single-Precision Format

The IEEE single-precision floating-point format is a 32-bit word divided into a 1-bit sign indicator s , an 8-bit biased exponent e , and a 23-bit fraction f . For more information, see “The Sign Bit” on page 31-27, “The Exponent Field” on page 31-28, and “The Fraction Field” on page 31-27. A representation of this format is given below.



The relationship between this format and the representation of real numbers is given by

$$value = \begin{cases} (-1)^s (2^{e-127})(1.f) & \text{normalized, } 0 < e < 255, \\ (-1)^s (2^{e-126})(0.f) & \text{denormalized, } e = 0, f > 0, \\ \text{exceptional value} & \text{otherwise.} \end{cases}$$

“Exceptional Arithmetic” on page 31-31 discusses denormalized values.

Double-Precision Format

The IEEE double-precision floating-point format is a 64-bit word divided into a 1-bit sign indicator s , an 11-bit biased exponent e , and a 52-bit fraction f . For more information,

see “The Sign Bit” on page 31-27, “The Exponent Field” on page 31-28, and “The Fraction Field” on page 31-27. A representation of this format is shown in the following figure.



The relationship between this format and the representation of real numbers is given by

$$value = \begin{cases} (-1)^s (2^{e-1023})(1.f) & \text{normalized, } 0 < e < 2047, \\ (-1)^s (2^{e-1022})(0.f) & \text{denormalized, } e = 0, f > 0, \\ \text{exceptional value} & \text{otherwise.} \end{cases}$$

“Exceptional Arithmetic” on page 31-31 discusses denormalized values.


Range and Precision

The range of a number gives the limits of the representation while the precision gives the distance between successive numbers in the representation. The range and precision of an IEEE floating-point number depend on the specific format.

Range

The range of representable numbers for an IEEE floating-point number with f bits allocated for the fraction, e bits allocated for the exponent, and the bias of e given by

$bias = 2^{(e-1)} - 1$ is given below.



where

- Normalized positive numbers are defined within the range $2^{(1-bias)}$ to $(2-2^{-f})2^{bias}$.
- Normalized negative numbers are defined within the range $-2^{(1-bias)}$ to $-(2-2^{-f})2^{bias}$.
- Positive numbers greater than $(2-2^{-f})2^{bias}$ and negative numbers greater than $-(2-2^{-f})2^{bias}$ are overflows.
- Positive numbers less than $2^{(1-bias)}$ and negative numbers less than $-2^{(1-bias)}$ are either underflows or denormalized numbers.
- Zero is given by a special bit pattern, where $e = 0$ and $f = 0$.

Overflows and underflows result from exceptional arithmetic conditions. Floating-point numbers outside the defined range are always mapped to $\pm\text{Inf}$.

Note: You can use the MATLAB commands `realmin` and `realmax` to determine the dynamic range of double-precision floating-point values for your computer.

Precision

Because of a finite word size, a floating-point number is only an approximation of the “true” value. Therefore, it is important to have an understanding of the precision (or accuracy) of a floating-point result. In general, a value v with an accuracy q is specified by $v \pm q$. For IEEE floating-point numbers,

$$v = (-1)^s(2^{e-bias})(1.f)$$

and

$$q = 2^{-f} \times 2^{e-bias}$$

Thus, the precision is associated with the number of bits in the fraction field.

Note: In the MATLAB software, floating-point relative accuracy is given by the command `eps`, which returns the distance from 1.0 to the next larger floating-point number. For a computer that supports the IEEE Standard 754, `eps` = 2^{-52} or $2.22045 \cdot 10^{-16}$.

Floating-Point Data Type Parameters

The high and low limits, exponent bias, and precision for the supported floating-point data types are given in the following table.

Data Type	Low Limit	High Limit	Exponent Bias	Precision
Single	$2^{-126} \approx 10^{-38}$	$2^{128} \approx 3 \cdot 10^{38}$	127	$2^{-23} \approx 10^{-7}$
Double	$2^{-1022} \approx 2 \cdot 10^{-308}$	$2^{1024} \approx 2 \cdot 10^{308}$	1023	$2^{-52} \approx 10^{-16}$
Nonstandard	$2^{(1 - bias)}$	$(2 - 2^{-f}) \cdot 2^{bias}$	$2^{(e - 1)} - 1$	2^{-f}

Because of the sign/magnitude representation of floating-point numbers, there are two representations of zero, one positive and one negative. For both representations $e = 0$ and $f \cdot 0 = 0.0$.

Exceptional Arithmetic

In addition to specifying a floating-point format, the IEEE Standard 754 specifies practices and procedures so that predictable results are produced independently of the hardware platform. Specifically, denormalized numbers, `Inf`, and `NaN` are defined to deal with exceptional arithmetic (underflow and overflow).

If an underflow or overflow is handled as `Inf` or `NaN`, then significant processor overhead is required to deal with this exception. Although the IEEE Standard 754 specifies practices and procedures to deal with exceptional arithmetic conditions in a consistent manner, microprocessor manufacturers might handle these conditions in ways that depart from the standard.

Denormalized Numbers

Denormalized numbers are used to handle cases of exponent underflow. When the exponent of the result is too small (i.e., a negative exponent with too large a magnitude), the result is denormalized by right-shifting the fraction and leaving the exponent at its minimum value. The use of denormalized numbers is also referred to as gradual underflow. Without denormalized numbers, the gap between the smallest representable nonzero number and zero is much wider than the gap between the smallest representable nonzero number and the next larger number. Gradual underflow fills that gap and reduces the impact of exponent underflow to a level comparable with roundoff among the normalized numbers. Thus, denormalized numbers provide extended range for small numbers at the expense of precision.

Inf

Arithmetic involving **Inf** (infinity) is treated as the limiting case of real arithmetic, with infinite values defined as those outside the range of representable numbers, or $-\infty \leq (\text{representable numbers}) < \infty$. With the exception of the special cases discussed below (**NaN**), any arithmetic operation involving **Inf** yields **Inf**. **Inf** is represented by the largest biased exponent allowed by the format and a fraction of zero.

NaN

A **NaN** (not-a-number) is a symbolic entity encoded in floating-point format. There are two types of **NaN**: signaling and quiet. A signaling **NaN** signals an invalid operation exception. A quiet **NaN** propagates through almost every arithmetic operation without signaling an exception. The following operations result in a **NaN**: $\infty - \infty$, $-\infty + \infty$, $0 \times \infty$, $0/0$, and ∞/∞ .

Both types of **NaN** are represented by the largest biased exponent allowed by the format and a fraction that is nonzero. The bit pattern for a quiet **NaN** is given by $0.f$ where the most significant number in f must be a one, while the bit pattern for a signaling **NaN** is given by $0.f$ where the most significant number in f must be zero and at least one of the remaining numbers must be nonzero.

Arithmetic Operations

- “Fixed-Point Arithmetic Operations” on page 32-3
- “Limitations on Precision” on page 32-4
- “Rounding” on page 32-5
- “Rounding Modes for Fixed-Point Simulink Blocks” on page 32-6
- “Rounding Mode: Ceiling” on page 32-8
- “Rounding Mode: Convergent” on page 32-9
- “Rounding Mode: Floor” on page 32-11
- “Rounding Mode: Nearest” on page 32-12
- “Rounding Mode: Round” on page 32-14
- “Rounding Mode: Simplest” on page 32-16
- “Rounding Mode: Zero” on page 32-20
- “Pad with Trailing Zeros” on page 32-23
- “Limitations on Precision and Errors” on page 32-24
- “Maximize Precision” on page 32-25
- “Net Slope and Net Bias Precision” on page 32-26
- “Detect Net Slope and Bias Precision Issues” on page 32-29
- “Detect Fixed-Point Constant Precision Loss” on page 32-30
- “Limitations on Range” on page 32-31
- “Saturation and Wrapping” on page 32-33
- “Guard Bits” on page 32-36
- “Determine the Range of Fixed-Point Numbers” on page 32-37
- “Handle Overflows in Simulink Models” on page 32-38
- “Recommendations for Arithmetic and Scaling” on page 32-40
- “Parameter and Signal Conversions” on page 32-52
- “Rules for Arithmetic Operations” on page 32-56

- “The Summation Process” on page 32-66
- “The Multiplication Process” on page 32-69
- “The Division Process” on page 32-71
- “Shifts” on page 32-72
- “Conversions and Arithmetic Operations” on page 32-74

Fixed-Point Arithmetic Operations

When developing a dynamic system using floating-point arithmetic, you generally don't have to worry about numerical limitations since floating-point data types have high precision and range. Conversely, when working with fixed-point arithmetic, you must consider these factors when developing dynamic systems:

- **Overflow**

Adding two sufficiently large negative or positive values can produce a result that does not fit into the representation. This will have an adverse effect on the control system.

- **Quantization**

Fixed-point values are rounded. Therefore, the output signal to the plant and the input signal to the control system do not have the same characteristics as the ideal discrete-time signal.

- **Computational noise**

The accumulated errors that result from the rounding of individual terms within the realization introduce noise into the control signal.

- **Limit cycles**

In the ideal system, the output of a stable transfer function (digital filter) approaches some constant for a constant input. With quantization, limit cycles occur where the output oscillates between two values in steady state.

This chapter describes the limitations involved when arithmetic operations are performed using encoded fixed-point variables. It also provides recommendations for encoding fixed-point variables such that simulations and generated code are reasonably efficient.

Limitations on Precision

Computer words consist of a finite numbers of bits. This means that the binary encoding of variables is only an approximation of an arbitrarily precise real-world value. Therefore, the limitations of the binary representation automatically introduce limitations on the precision of the value. For a general discussion of range and precision, refer to “Range and Precision” on page 31-12.

The precision of a fixed-point word depends on the word size and binary point location. Extending the precision of a word can always be accomplished with more bits, but you face practical limitations with this approach. Instead, you must carefully select the data type, word size, and scaling such that numbers are accurately represented. Rounding and padding with trailing zeros are typical methods implemented on processors to deal with the precision of binary words.

Rounding

The result of any operation on a fixed-point number is typically stored in a register that is longer than the number's original format. When the result is put back into the original format, the extra bits must be disposed of. That is, the result must be *rounded*. Rounding involves going from high precision to lower precision and produces quantization errors and computational noise.

Choose a Rounding Mode

To choose the most suitable rounding mode for your application, you need to consider your system requirements and the properties of each rounding mode. The most important properties to consider are:

- Cost — Independent of the hardware being used, how much processing expense does the rounding method require?
- Bias — What is the expected value of the rounded values minus the original values?
- Possibility of overflow — Does the rounding method introduce the possibility of overflow?

For more information on when to use each rounding mode, see “Rounding Methods” in the *Fixed-Point Designer User's Guide*.

Choosing a Rounding Mode for Diagnostic Purposes


Rounding toward ceiling and rounding toward floor are sometimes useful for diagnostic purposes. For example, after a series of arithmetic operations, you may not know the exact answer because of word-size limitations, which introduce rounding. If every operation in the series is performed twice, once rounding to positive infinity and once rounding to negative infinity, you obtain an upper limit and a lower limit on the correct answer. You can then decide if the result is sufficiently accurate or if additional analysis is necessary.

More About

- “Rounding Modes for Fixed-Point Simulink Blocks” on page 32-6

Rounding Modes for Fixed-Point Simulink Blocks

Fixed-point Simulink blocks support the rounding modes shown in the expanded drop-down menu of the following dialog box.

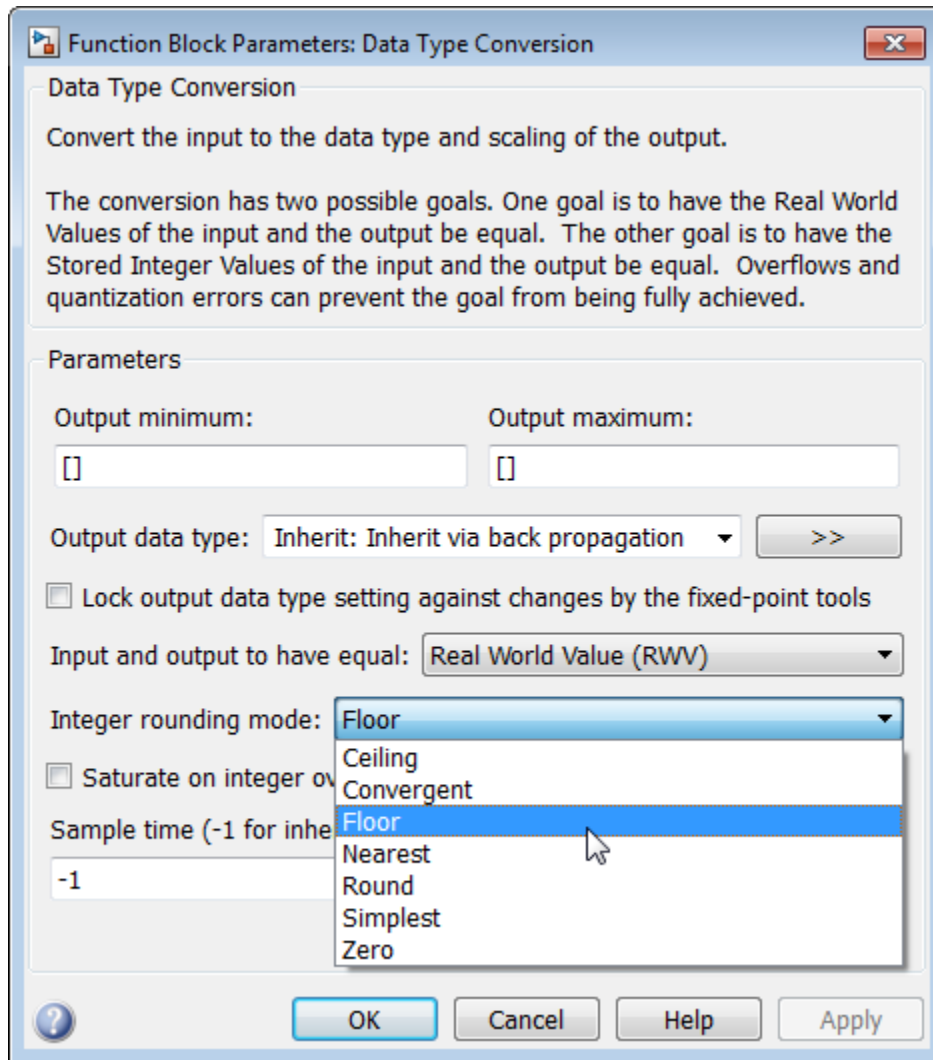

The following table illustrates the differences between these rounding modes:


Rounding Mode	Description	Tie Handling
Ceiling	Rounds to the nearest representable number in the direction of positive infinity.	N/A
Floor	Rounds to the nearest representable number in the direction of negative infinity.	N/A
Zero	Rounds to the nearest representable number in the direction of zero.	N/A
Convergent	Rounds to the nearest representable number.	Ties are rounded toward the nearest even integer.
Nearest	Rounds to the nearest representable number.	Ties are rounded to the closest representable number in the direction of positive infinity.
Round	Rounds to the nearest representable number.	<p>For positive numbers, ties are rounded toward the closest representable number in the direction of positive infinity.</p> <p>For negative numbers, ties are rounded toward the closest representable number in the direction of negative infinity.</p>
Simplest	Automatically chooses between Floor and Zero to produce generated code that is as efficient as possible.	N/A

Rounding Mode: Ceiling

When you round toward ceiling, both positive and negative numbers are rounded toward positive infinity. As a result, a positive cumulative bias is introduced in the number.

In the MATLAB software, you can round to ceiling using the `ceil` function. Rounding toward ceiling is shown in the following figure.

All numbers are rounded toward positive infinity

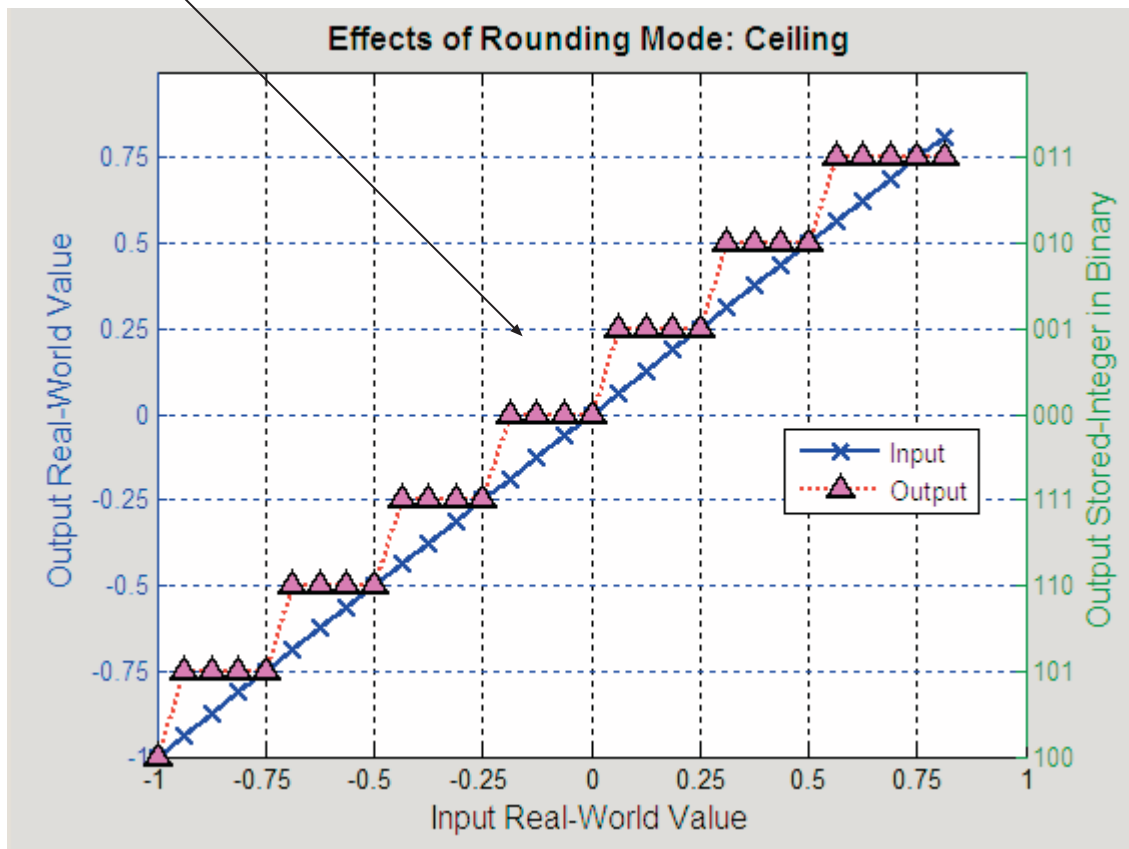


Rounding Mode: Convergent

Convergent rounds toward the nearest representable value with ties rounding toward the nearest even integer. It eliminates bias due to rounding. However, it introduces the possibility of overflow.

In the MATLAB software, you can perform convergent rounding using the `convergent` function. Convergent rounding is shown in the following figure.

All numbers are rounded to the nearest representable number

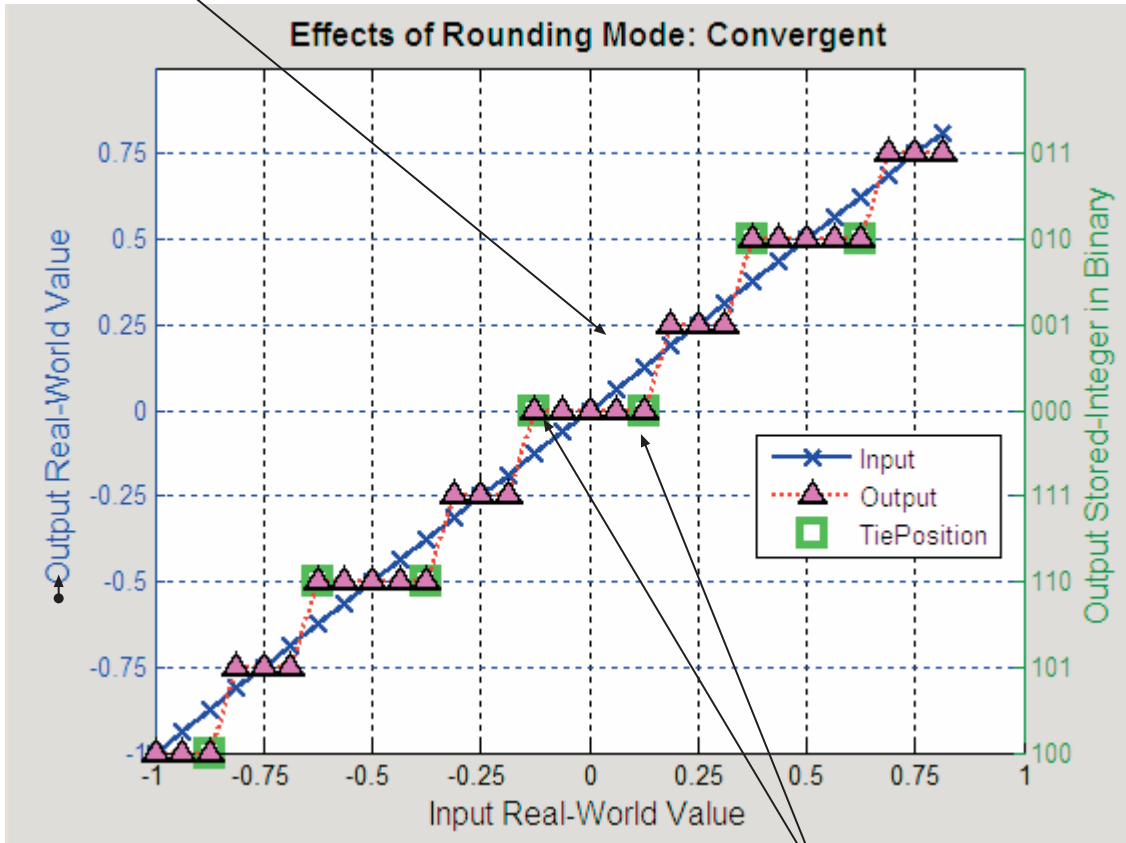


Ties are rounded to the nearest even number

Rounding Mode: Floor

When you round toward floor, both positive and negative numbers are rounded to negative infinity. As a result, a negative cumulative bias is introduced in the number.

In the MATLAB software, you can round to floor using the `floor` function. Rounding toward floor is shown in the following figure.

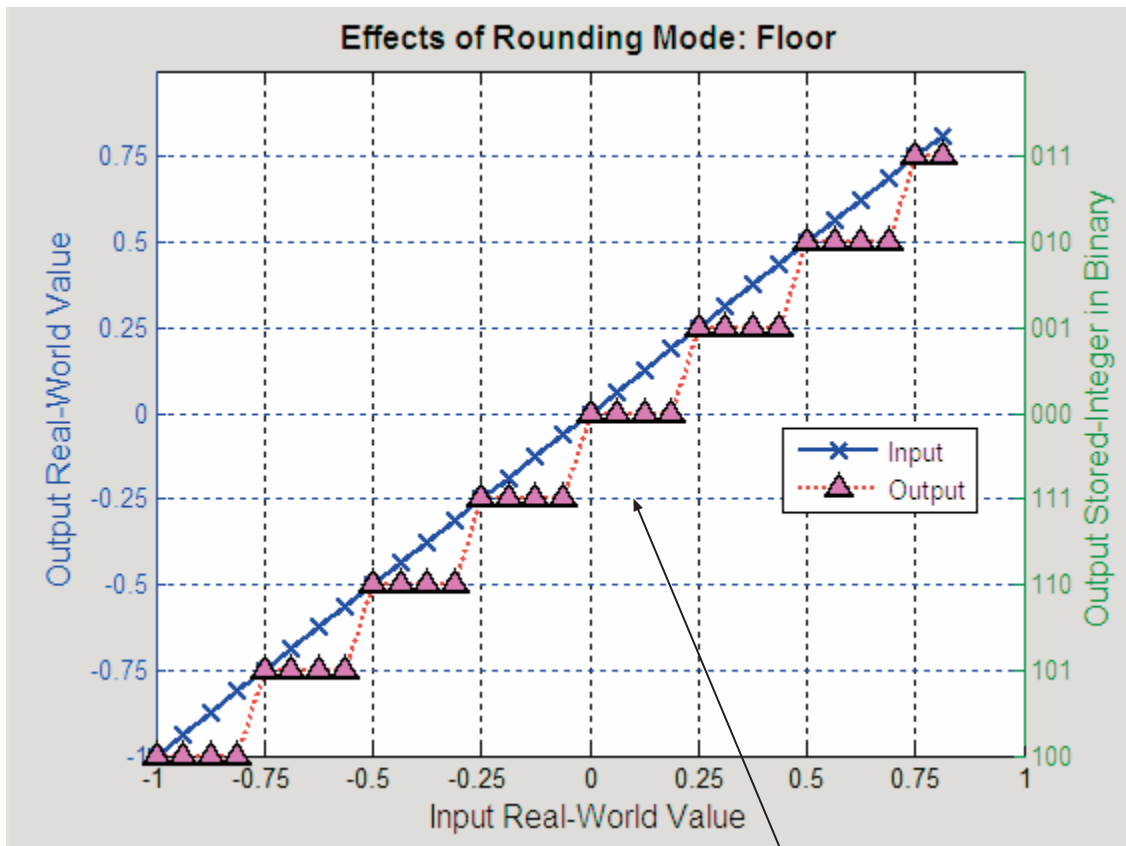

All numbers are rounded toward negative infinity


Rounding Mode: Nearest

When you round toward nearest, the number is rounded to the nearest representable value. In the case of a tie, **nearest** rounds to the closest representable number in the direction of positive infinity.

In the Fixed-Point Designer software, you can round to nearest using the **nearest** function. Rounding toward nearest is shown in the following figure.

All numbers are rounded to the nearest representable number

Ties are rounded to the closest representable number in the direction of positive infinity

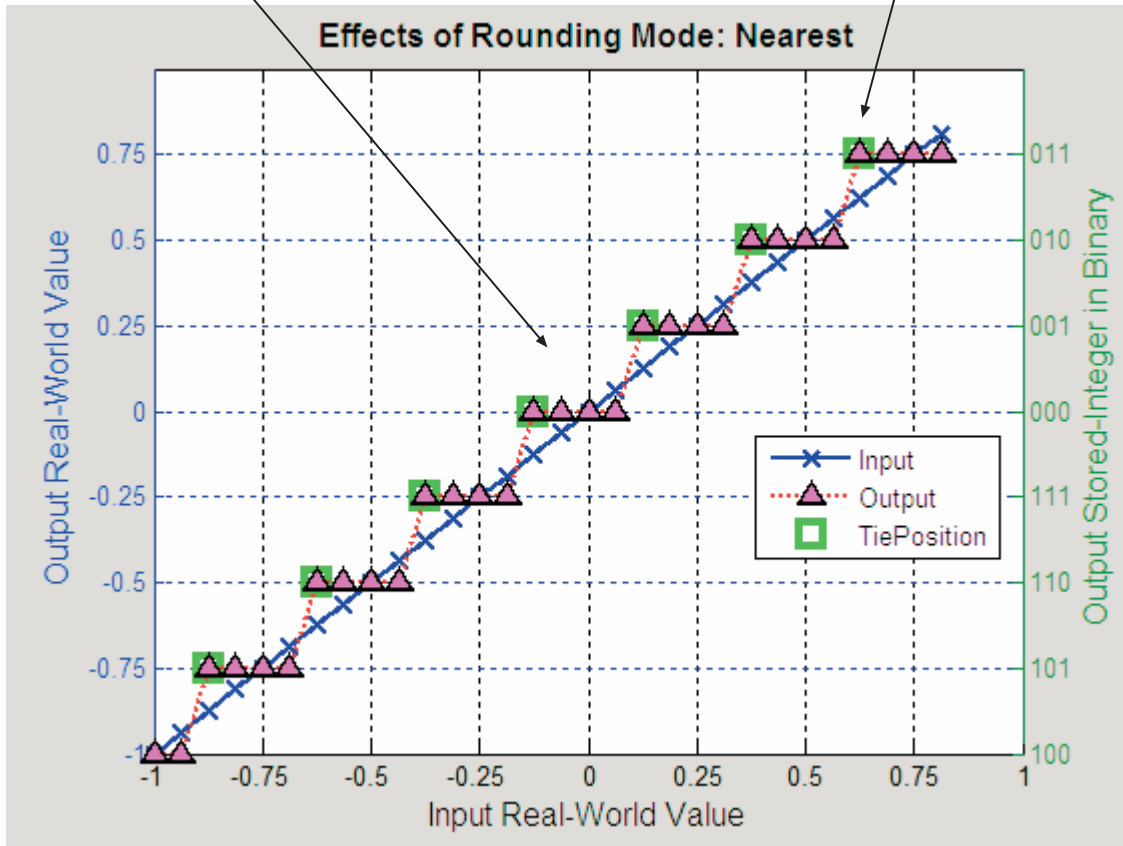

Rounding Mode: Round

Round rounds to the closest representable number. In the case of a tie, it rounds:

- Positive numbers to the closest representable number in the direction of positive infinity.
- Negative numbers to the closest representable number in the direction of negative infinity.


As a result:

- A small negative bias is introduced for negative samples.
- No bias is introduced for samples with evenly distributed positive and negative values.
- A small positive bias is introduced for positive samples.

In the MATLAB software, you can perform this type of rounding using the `round` function. The rounding mode `Round` is shown in the following figure.

All numbers are rounded to the nearest representable number

For positive numbers, ties are rounded to the closest representable number in the direction of positive infinity

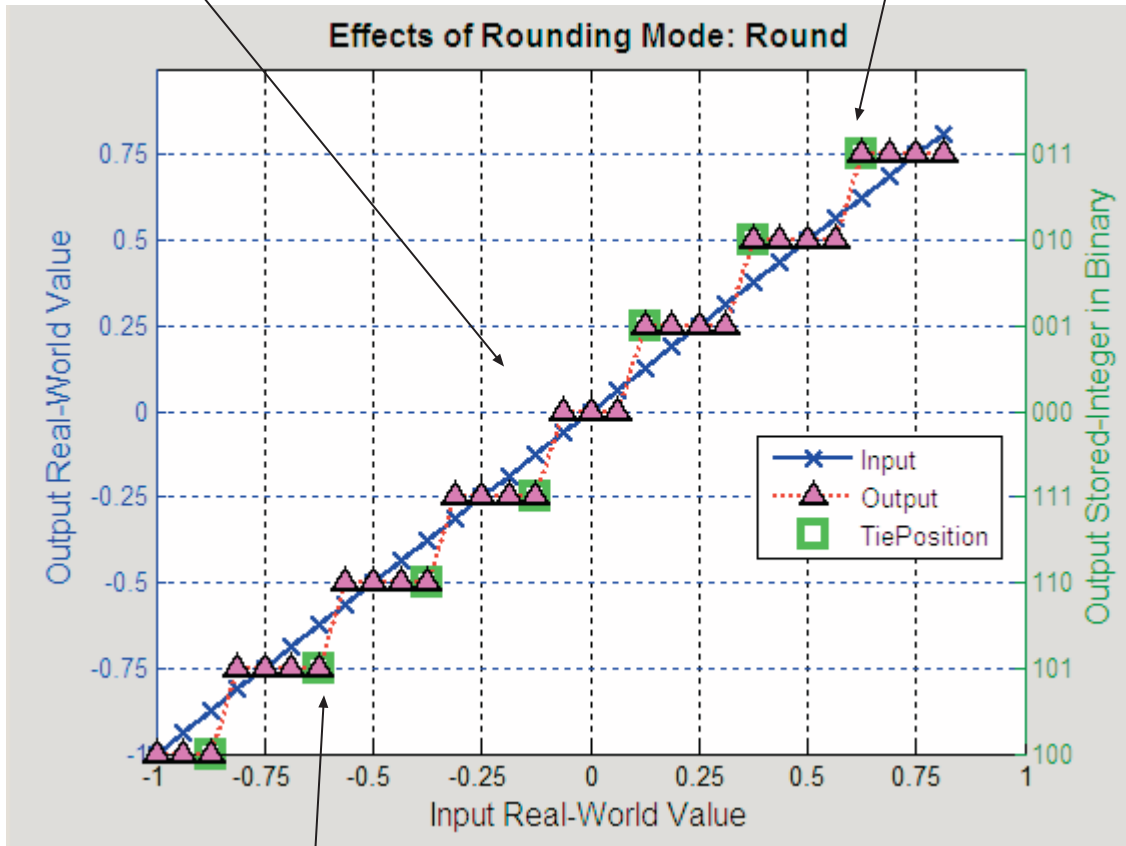

For negative numbers, ties are rounded to the closest representable number in the direction of negative infinity

Rounding Mode: Simplest

The simplest rounding mode attempts to reduce or eliminate the need for extra rounding code in your generated code using a combination of techniques, discussed in the following sections:

- “Optimize Rounding for Casts” on page 32-16
- “Optimize Rounding for High-Level Arithmetic Operations” on page 32-16
- “Optimize Rounding for Intermediate Arithmetic Operations” on page 32-18

In nearly all cases, the simplest rounding mode produces the most efficient generated code. For a very specialized case of division that meets three specific criteria, round to floor might be more efficient. These three criteria are:

- Fixed-point/integer signed division
- Denominator is an invariant constant
- Denominator is an exact power of two

For this case, set the rounding mode to floor and the **Model Configuration Parameters > Hardware Implementation > Production Hardware > Signed integer division rounds to** parameter to describe the rounding behavior of your production target.


Optimize Rounding for Casts

The Data Type Conversion block casts a signal with one data type to another data type. When the block casts the signal to a data type with a shorter word length than the original data type, precision is lost and rounding occurs. The simplest rounding mode automatically chooses the best rounding for these cases based on the following rules:

- When casting from one integer or fixed-point data type to another, the simplest mode rounds toward floor.
- When casting from a floating-point data type to an integer or fixed-point data type, the simplest mode rounds toward zero.

Optimize Rounding for High-Level Arithmetic Operations

The simplest rounding mode chooses the best rounding for each high-level arithmetic operation. For example, consider the operation $y = u_1 \times u_2 / u_3$ implemented using a Product block:

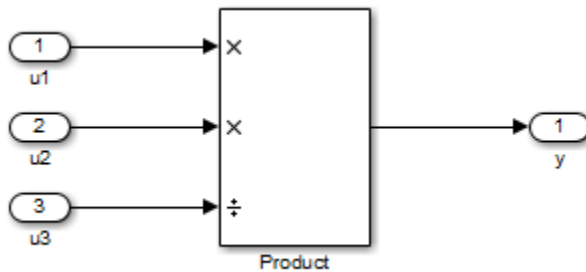

As stated in the C standard, the most efficient rounding mode for multiplication operations is always floor. However, the C standard does not specify the rounding mode for division in cases where at least one of the operands is negative. Therefore, the most efficient rounding mode for a divide operation with signed data types can be floor or zero, depending on your production target.

The simplest rounding mode:

- Rounds to floor for all nondivision operations.
- Rounds to zero or floor for division, depending on the setting of the **Model Configuration Parameters > Hardware Implementation > Production Hardware > Signed integer division rounds to** parameter.


To get the most efficient code, you must set the **Signed integer division rounds to** parameter to specify whether your production target rounds to zero or to floor for integer division. Most production targets round to zero for integer division operations. Note that **Simplest** rounding enables “mixed-mode” rounding for such cases, as it rounds to floor for multiplication and to zero for division.

If the **Signed integer division rounds to** parameter is set to **Undefined**, the simplest rounding mode might not be able to produce the most efficient code. The simplest mode rounds to zero for division for this case, but it cannot rely on your production target to perform the rounding, because the parameter is **Undefined**. Therefore, you need additional rounding code to ensure rounding to zero behavior.

Note: For signed fixed-point division where the denominator is an invariant constant power of 2, the simplest rounding mode does not generate the most efficient code. In this case, set the rounding mode to floor.

Optimize Rounding for Intermediate Arithmetic Operations

For fixed-point arithmetic with nonzero slope and bias, the simplest rounding mode also chooses the best rounding for each intermediate arithmetic operation. For example, consider the operation $y = u_1 / u_2$ implemented using a Product block, where u_1 and u_2 are fixed-point quantities:

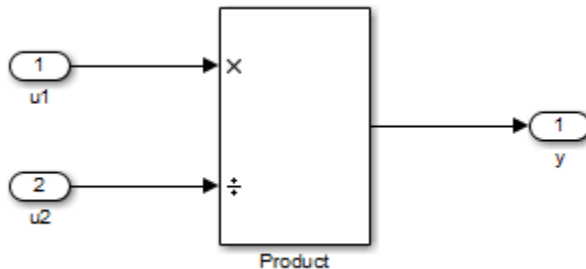

As discussed in , each fixed-point quantity is calculated using its slope, bias, and stored integer. So in this example, not only is there the high-level divide called for by the block operation, but intermediate additions and multiplies are performed:

$$y = \frac{u_1}{u_2} = \frac{S_1 Q_1 + B_1}{S_2 Q_2 + B_2}$$

The simplest rounding mode performs the best rounding for each of these operations, high-level and intermediate, to produce the most efficient code. The rules used to select the appropriate rounding for intermediate arithmetic operations are the same as those described in “Optimize Rounding for High-Level Arithmetic Operations” on page 32-16. Again, this enables mixed-mode rounding, with the most common case being round toward floor used for additions, subtractions, and multiplies, and round toward zero used for divides.


Remember that generating the most efficient code using the simplest rounding mode requires you to set the **Model Configuration Parameters > Hardware Implementation > Production Hardware > Signed integer division rounds to** parameter to describe the rounding behavior of your production target.

Note: For signed fixed-point division where the denominator is an invariant constant power of 2, the simplest rounding mode does not generate the most efficient code. In this case, set the rounding mode to floor.

Rounding Mode: Zero

Rounding towards zero is the simplest rounding mode computationally. All digits beyond the number required are dropped. Rounding towards zero results in a number whose magnitude is always less than or equal to the more precise original value. In the MATLAB software, you can round to zero using the `fix` function.

Rounding toward zero introduces a cumulative downward bias in the result for positive numbers and a cumulative upward bias in the result for negative numbers. That is, all positive numbers are rounded to smaller positive numbers, while all negative numbers are rounded to smaller negative numbers. Rounding toward zero is shown in the following figure.

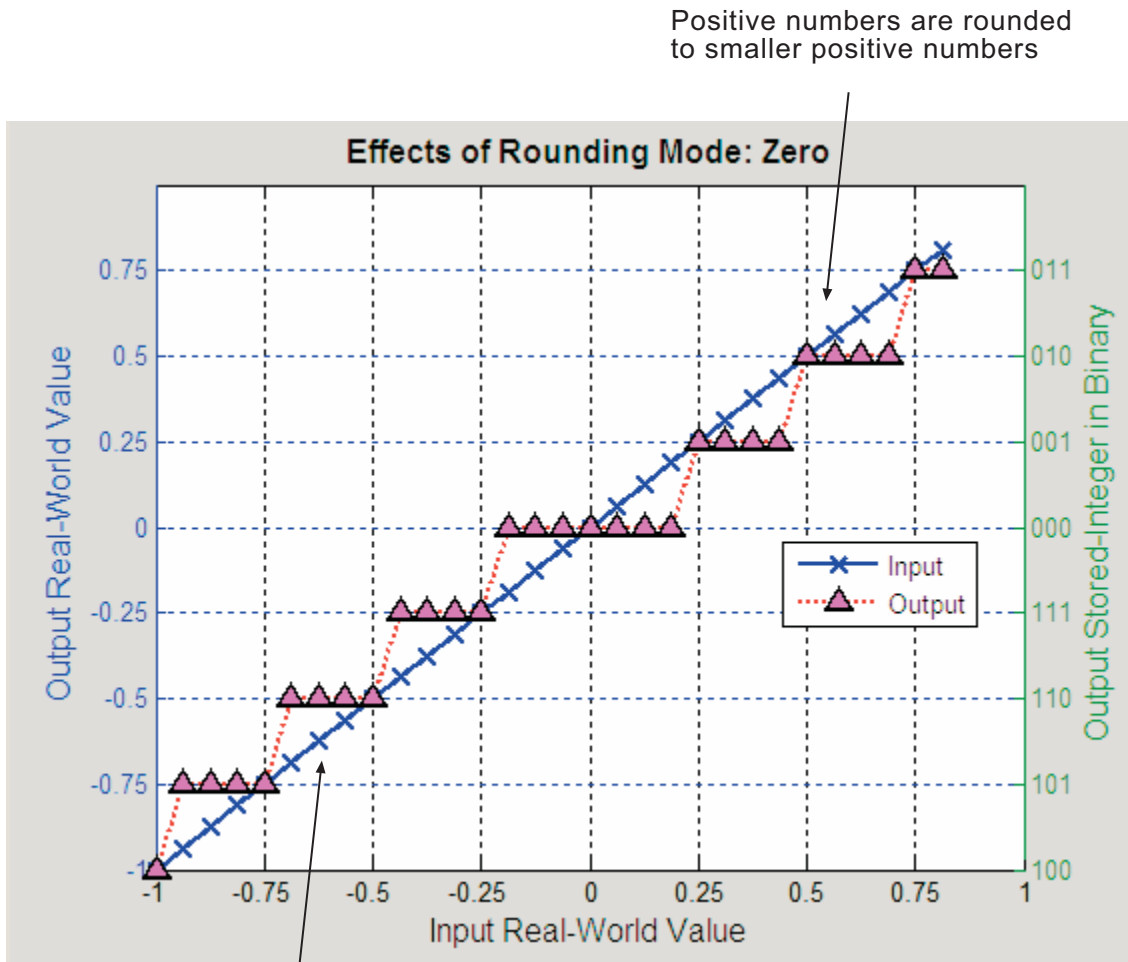

Rounding to Zero Versus Truncation

Rounding to zero and *truncation* or *chopping* are sometimes thought to mean the same thing. However, the results produced by rounding to zero and truncation are different for unsigned and two's complement numbers. For this reason, the ambiguous term “truncation” is not used in this guide, and explicit rounding modes are used instead.

To illustrate this point, consider rounding a 5-bit unsigned number to zero by dropping (truncating) the two least significant bits. For example, the unsigned number $100.01 = 4.25$ is truncated to $100 = 4$. Therefore, truncating an unsigned number is equivalent to rounding to zero *or* rounding to floor.

Now consider rounding a 5-bit two's complement number by dropping the two least significant bits. At first glance, you may think truncating a two's complement number is the same as rounding to zero. For example, dropping the last two digits of -3.75 yields -3.00 . However, digital hardware performing two's complement arithmetic yields a different result. Specifically, the number $100.01 = -3.75$ truncates to $100 = -4$, which is rounding to floor.

Pad with Trailing Zeros

Padding with trailing zeros involves extending the least significant bit (LSB) of a number with extra bits. This method involves going from low precision to higher precision.

For example, suppose two numbers are subtracted from each other. First, the exponents must be aligned, which typically involves a right shift of the number with the smaller value. In performing this shift, significant digits can “fall off” to the right. However, when the appropriate number of extra bits is appended, the precision of the result is maximized. Consider two 8-bit fixed-point numbers that are close in value and subtracted from each other:

$$1.0000000 \times 2^q - 1.1111111 \times 2^{q-1},$$

where q is an integer. To perform this operation, the exponents must be equal:

$$\frac{1.0000000 \times 2^q - 0.1111111 \times 2^q}{0.0000001 \times 2^q}.$$

If the top number is padded by two zeros and the bottom number is padded with one zero, then the above equation becomes

$$\frac{1.000000000 \times 2^q - 0.111111110 \times 2^q}{0.000000010 \times 2^q},$$

which produces a more precise result. An example of padding with trailing zeros in a Simulink model is illustrated in “Digital Controller Realization” on page 38-37.

Limitations on Precision and Errors

Fixed-point variables have a limited precision because digital systems represent numbers with a finite number of bits. For example, suppose you must represent the real-world number 35.375 with a fixed-point number. Using the encoding scheme described in “Scaling” on page 31-7, the representation is

$$V \approx \tilde{V} = SQ + B = 2^{-2}Q + 32,$$

where $V = 35.375$.

The two closest approximations to the real-world value are $Q = 13$ and $Q = 14$:

$$\tilde{V} = 2^{-2}(13) + 32 = 35.25,$$

$$\tilde{V} = 2^{-2}(14) + 32 = 35.50.$$

In either case, the absolute error is the same:

$$|\tilde{V} - V| = 0.125 = \frac{S}{2} = \frac{F2^E}{2}.$$

For fixed-point values within the limited range, this represents the worst-case error if round-to-nearest is used. If other rounding modes are used, the worst-case error can be twice as large:

$$|\tilde{V} - V| < F2^E.$$

Maximize Precision

Precision is limited by slope. To achieve maximum precision, you should make the slope as small as possible while keeping the range adequately large. The bias is adjusted in coordination with the slope.

Assume the maximum and minimum real-world values are given by $\max(V)$ and $\min(V)$, respectively. These limits might be known based on physical principles or engineering considerations. To maximize the precision, you must decide upon a rounding scheme and whether overflows saturate or wrap. To simplify matters, this example assumes the minimum real-world value corresponds to the minimum encoded value, and the maximum real-world value corresponds to the maximum encoded value. Using the encoding scheme described in “Scaling” on page 31-7, these values are given by

$$\max(V) = F 2^E (\max(Q)) + B$$

$$\min(V) = F 2^E (\min(Q)) + B.$$

Solving for the slope, you get

$$F 2^E = \frac{\max(V) - \min(V)}{\max(Q) - \min(Q)} = \frac{\max(V) - \min(V)}{2^{ws} - 1}.$$

This formula is independent of rounding and overflow issues, and depends only on the word size, ws .

Net Slope and Net Bias Precision

What are Net Slope and Net Bias?

You can represent a fixed-point number by a general slope and bias encoding scheme

$$V \approx \tilde{V} = SQ + B,$$

where:

- V is an arbitrarily precise real-world value.
- \tilde{V} is the approximate real-world value.
- Q , the stored value, is an integer that encodes V .
- $S = F2^E$ is the slope.
- B is the bias.

For a cast operation,

$$S_a Q_a + B_a = S_b Q_b + B_b$$

or

$$Q_a = \frac{S_b Q_b}{S_a} + \left(\frac{B_b - B_a}{S_a} \right),$$

where:

- $\frac{S_b}{S_a}$ is the net slope.
- $\frac{B_b - B_a}{S_a}$ is the net bias.

Detecting Net Slope and Net Bias Precision Issues

Precision issues might occur in the fixed-point constants, net slope and net bias, due to quantization errors when you convert from floating point to fixed point. These fixed-point constant precision issues can result in numerical inaccuracy in your model.

You can configure your model to alert you when fixed-point constant precision issues occur. For more information, see “Detect Net Slope and Bias Precision Issues” on page 32-29. The Fixed-Point Designer software provides the following information:

- The type of precision issue: underflow, overflow, or precision loss.
- The original value of the fixed-point constant.
- The quantized value of the fixed-point constant.
- The error in the value of the fixed-point constant.
- The block that introduced the error.

This information warns you that the outputs from this block are not accurate. If possible, change the data types in your model to fix the issue.

Fixed-Point Constant Underflow

Fixed-point constant underflow occurs when the Fixed-Point Designer software encounters a fixed-point constant whose data type does not have enough precision to represent the ideal value of the constant, because the ideal value is too close to zero. Casting the ideal value to the fixed-point data type causes the value of the fixed-point constant to become zero. Therefore the value of the fixed-point constant differs from its ideal value.

Fixed-Point Constant Overflow

Fixed-point constant overflow occurs when the Fixed-Point Designer software converts a fixed-point constant to a data type whose range is not large enough to accommodate the ideal value of the constant with reasonable precision. The data type cannot accurately represent the ideal value because the ideal value is either too large or too small. Casting the ideal value to the fixed-point data type causes overflow. For example, suppose the ideal value is 200 and the converted data type is `int8`. Overflow occurs in this case because the maximum value that `int8` can represent is 127.

The Fixed-Point Designer software reports an overflow error if the quantized value differs from the ideal value by more than the precision for the data type. The precision

for a data type is approximately equal to the default scaling (for more information, see “Fixed-Point Data Type Parameters” on page 31-13.) Therefore, for positive values, the Fixed-Point Designer software treats errors greater than the slope as overflows. For negative values, it treats errors greater than or equal to the slope as overflows.

For example, the maximum value that `int8` can represent is `127`. The precision for `int8` is `1.0`. An ideal value of `127.3` quantizes to `127` with an absolute error of `0.3`. Although the ideal value `127.3` is greater than the maximum representable value for `int8`, the quantization error is small relative to the precision of `int8`. Therefore the Fixed-Point Designer software does not report an overflow. However, an ideal value of `128.1` does cause an overflow because the quantization error is `1.1`, which is larger than the precision for `int8`.

Note: Fixed-point constant overflow differs from fixed-point constant precision loss. Precision loss occurs when the ideal fixed-point constant value is within the range of the current data type and scaling, but the software cannot represent this value exactly.

Fixed-Point Constant Precision Loss

Fixed-point constant precision loss occurs when the Fixed-Point Designer software converts a fixed-point constant to a data type without enough precision to represent the exact value of the constant. As a result, the quantized value differs from the ideal value. For an example of this behavior, see “Detect Fixed-Point Constant Precision Loss” on page 32-30.

Note: Fixed-point constant precision loss differs from fixed-point constant overflow. Overflow occurs when the range of the parameter data type, that is, the maximum value that it can represent, is smaller than the ideal value of the parameter.


Detect Net Slope and Bias Precision Issues

To receive alerts when fixed-point constant precision issues occur, use these options available in the Simulink Configuration Parameters dialog box, on the **Diagnostics** > **Type Conversion** pane. Set the parameters to warning or error so that Simulink alerts you when precision issues occur.

Configuration Parameter	Specifies	Default
“Detect underflow”	Diagnostic action when a fixed-point constant underflow occurs during simulation	Does not generate a warning or error.
“Detect overflow”	Diagnostic action when a fixed-point constant overflow occurs during simulation	Does not generate a warning or error.
“Detect precision loss”	Diagnostic action when a fixed-point constant precision loss occurs during simulation	Does not generate a warning or error.

Detect Fixed-Point Constant Precision Loss

This example shows how to detect fixed-point constant precision loss. The example uses the following model.

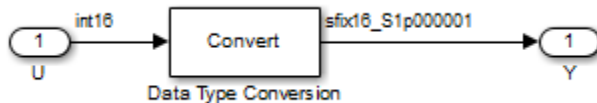

For the Data Type Conversion block in this model, the:

- Input slope, $S_U = 1$
- Output slope, $S_Y = 1.000001$
- Net slope, $S_U/S_Y = 1/1.000001$

When you simulate the model, a net slope quantization error occurs.

To set up the model and run the simulation:

- 1 For the Inport block, set the **Output data type** to `int16`.
- 2 For the Data Type Conversion block, set the **Output data type** to `fixdt(1, 16, 1.000001, 0)`.
- 3 Set the **Diagnostics > Type Conversion > Detect precision loss** configuration parameter to `error`.
- 4 In your Simulink model window, select **Simulation > Run**.

The Fixed-Point Designer software generates an error informing you that net scaling quantization caused precision loss. The message provides the following information:


- The block that introduced the error.
- The original value of the net slope.
- The quantized value of the net slope.
- The error in the value of the net slope.

Limitations on Range

Limitations on the range of a fixed-point word occur for the same reason as limitations on its precision. Namely, fixed-point words have limited size. For a general discussion of range and precision, refer to “Range and Precision” on page 31-12.

In binary arithmetic, a processor might need to take an n -bit fixed-point number and store it in m bits, where $m \neq n$. If $m < n$, the range of the number has been reduced and an operation can produce an overflow condition. Some processors identify this condition as `Inf` or `NaN`. For other processors, especially digital signal processors (DSPs), the value *saturates* or *wraps*. If $m > n$, the range of the number has been extended. Extending the range of a word requires the inclusion of *guard bits*, which act to guard against potential overflow. In both cases, the range depends on the word's size and scaling.

The Simulink software supports saturation and wrapping for all fixed-point data types, while guard bits are supported only for fractional data types. As shown in the following figure, you can select saturation or wrapping for fixed-point Simulink blocks with the **Saturate on integer overflow** check box. By setting **Output data type** to `sfrac(36,4)`, you specify a 36-bit signed fractional data type with 4 guard bits (total word size is 40 bits).

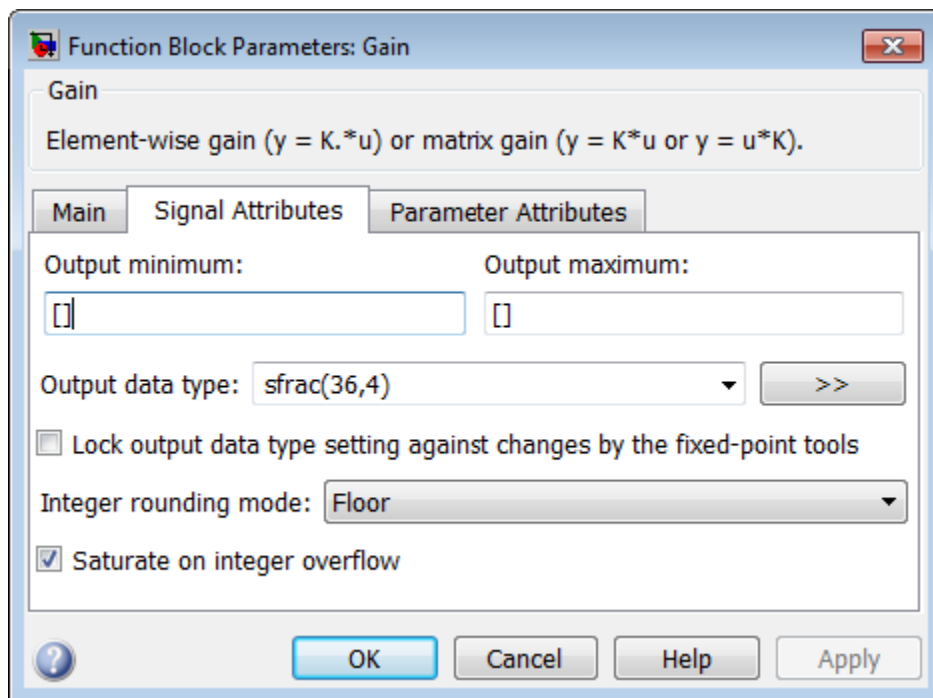


Saturation and Wrapping

What Are Saturation and Wrapping?


Saturation and wrapping describe a particular way that some processors deal with overflow conditions. For example, the ADSP-2100 family of processors from Analog Devices™ supports either of these modes. If a register has a saturation mode of operation, then an overflow condition is set to the maximum positive or negative value allowed. Conversely, if a register has a wrapping mode of operation, an overflow condition is set to the appropriate value within the range of the representation.

Saturation and Wrapping

Consider an 8-bit unsigned word with binary-point-only scaling of 2^{-5} . Suppose this data type must represent a sine wave that ranges from -4 to 4. For values between 0 and 4, the word can represent these numbers without regard to overflow. This is not the case with negative numbers. If overflows saturate, all negative values are set to zero, which is the smallest number representable by the data type. The saturation of overflows is shown in the following figure.

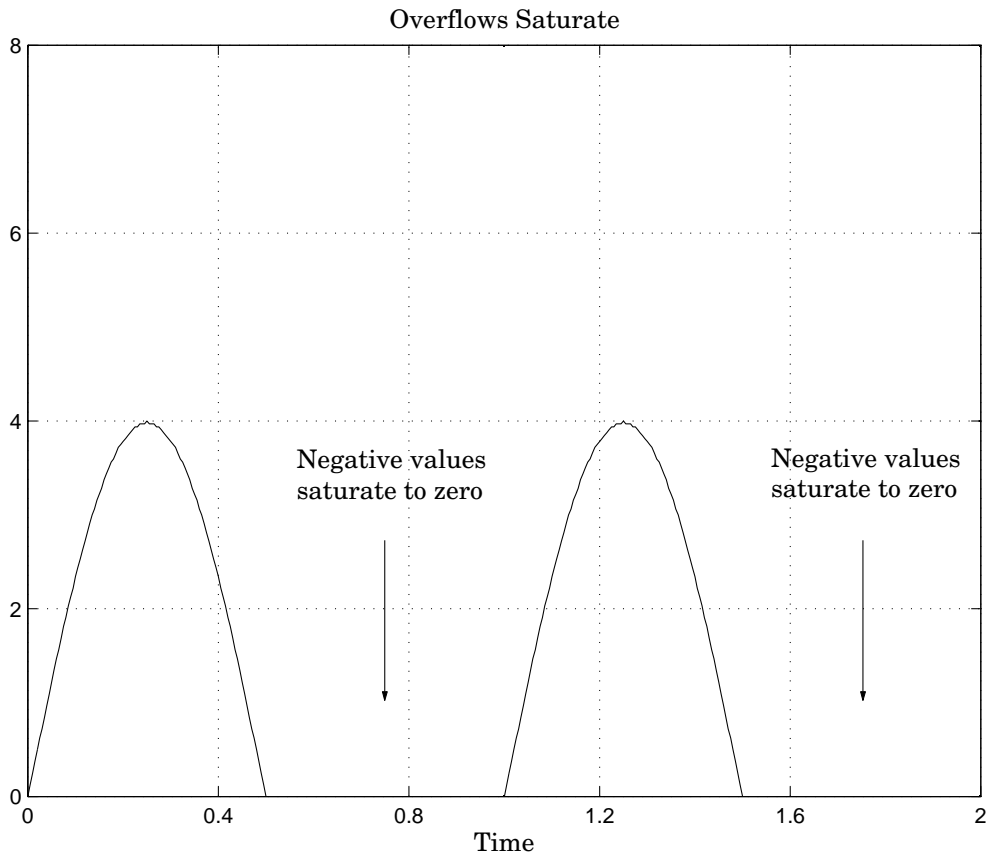

If overflows wrap, all negative values are set to the appropriate positive value. The wrapping of overflows is shown in the following figure.

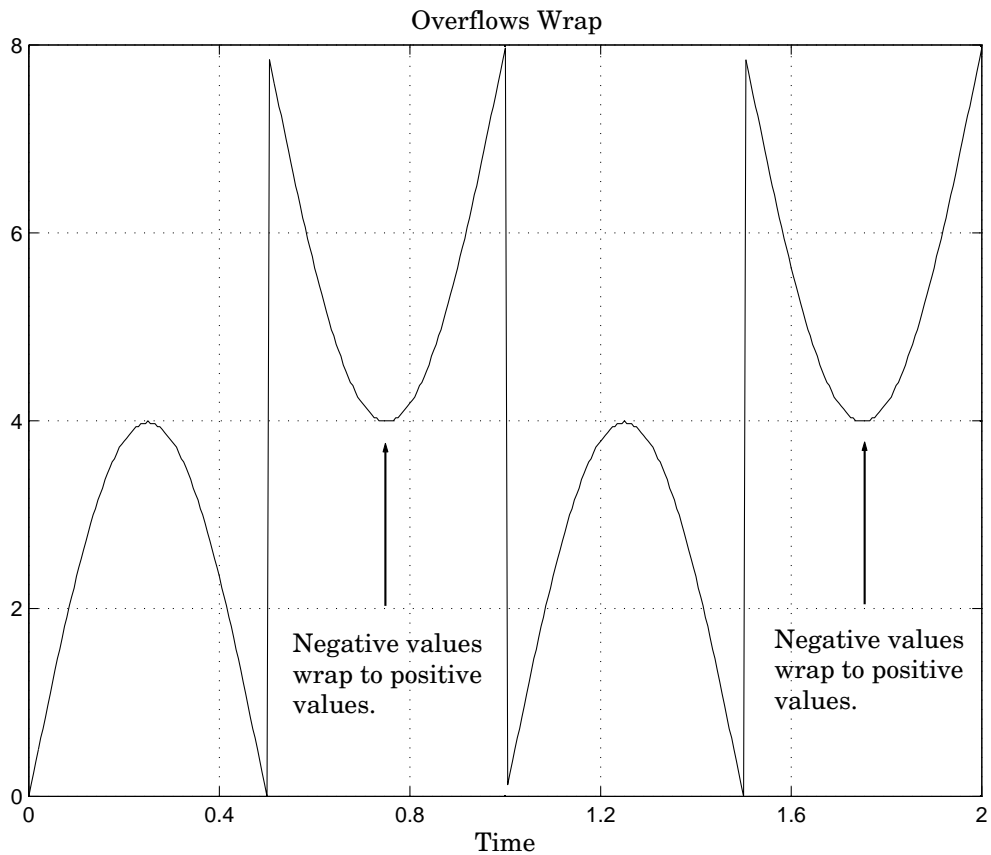

Note: For most control applications, saturation is the safer way of dealing with fixed-point overflow. However, some processor architectures allow automatic saturation by hardware. If hardware saturation is not available, then extra software is required, resulting in larger, slower programs. This cost is justified in some designs—perhaps for safety reasons. Other designs accept wrapping to obtain the smallest, fastest software.

Guard Bits

You can eliminate the possibility of overflow by appending the appropriate number of guard bits to a binary word.

For a two's complement signed value, the guard bits are filled with either 0's or 1's depending on the value of the most significant bit (MSB). This is called *sign extension*. For example, consider a 4-bit two's complement number with value 1011. If this number is extended in range to 7 bits with sign extension, then the number becomes 1111101 and the value remains the same.

Guard bits are supported only for fractional data types. For both signed and unsigned fractionals, the guard bits lie to the left of the default binary point.

Determine the Range of Fixed-Point Numbers

Fixed-point variables have a limited range for the same reason they have limited precision—because digital systems represent numbers with a finite number of bits. As a general example, consider the case where an integer is represented as a fixed-point word of size ws . The range for signed and unsigned words is given by

$$\max(Q) - \min(Q),$$

where

$$\min(Q) = \begin{cases} 0 & \text{unsigned,} \\ -2^{ws-1} & \text{signed,} \end{cases}$$

$$\max(Q) = \begin{cases} 2^{ws} - 1 & \text{unsigned,} \\ 2^{ws-1} - 1 & \text{signed.} \end{cases}$$

Using the general [Slope Bias] encoding scheme described in “Scaling” on page 31-7, the approximate real-world value has the range

$$\max(\tilde{V}) - \min(\tilde{V}),$$

where

$$\min(\tilde{V}) = \begin{cases} B & \text{unsigned,} \\ -F 2^E (2^{ws-1}) + B & \text{signed,} \end{cases}$$

$$\max(\tilde{V}) = \begin{cases} F 2^E (2^{ws} - 1) + B & \text{unsigned,} \\ F 2^E (2^{ws-1} - 1) + B & \text{signed.} \end{cases}$$


If the real-world value exceeds the limited range of the approximate value, then the accuracy of the representation can become significantly worse.

Handle Overflows in Simulink Models

This example shows how to control the warning messages you receive when a model contains an overflow. This diagnostic control can simplify debugging models in which only one type of overflow is of interest.

- 1 Open the `ex_detect_overflows` model.

```
addpath(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
ex_detect_overflows
```

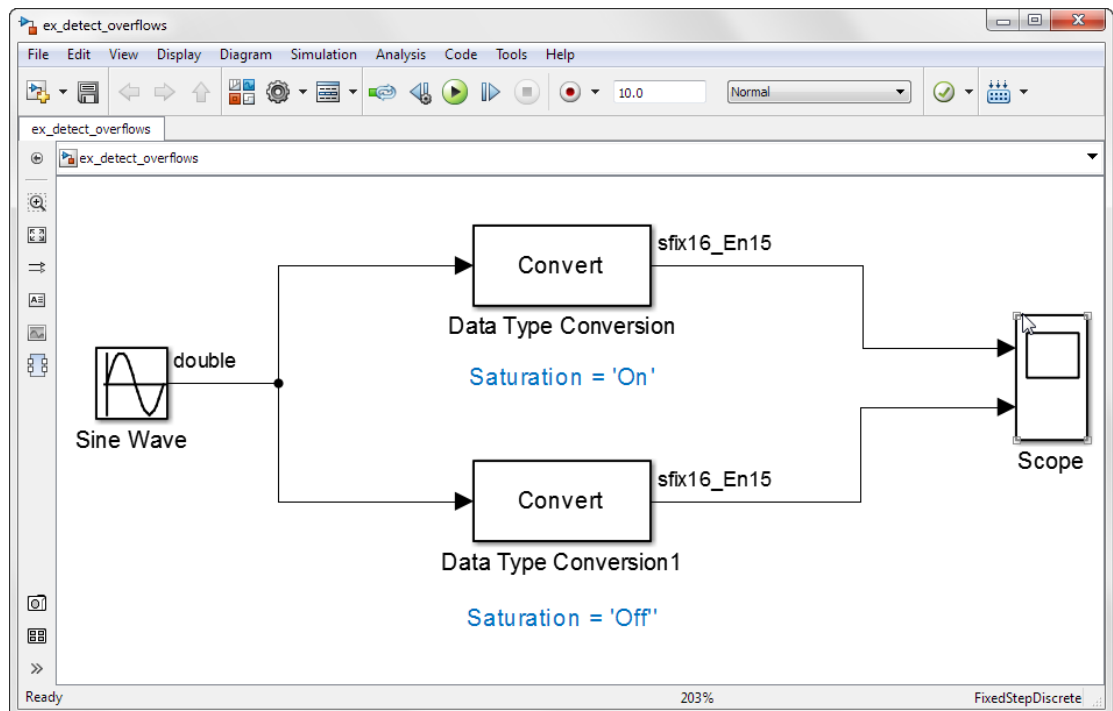

This model contains a sine wave with an amplitude of 1.5 passed through two Data Type Conversion blocks. In the Data Type Conversion block, the **Saturate on integer overflow** parameter is selected. The Data Type Conversion1 block wraps when the signal is too large to fit into the output data type.

- 2 Simulate the model.

The Diagnostic Viewer displays two overflow warnings. The first overflow saturated and the second overflow wrapped.

- 3** In the Configuration Parameters dialog box:
 - Set **Diagnostics > Data Validity > Wrap on overflow** to Error.
 - Set **Diagnostics > Data Validity > Saturate on overflow** to Warning.
- 4** Simulate the model again.

The Diagnostic Viewer displays an error message for the overflow that wrapped, and a warning message for the overflow that saturated.

For more information, see “Wrap on overflow”, and “Saturate on overflow”.

Recommendations for Arithmetic and Scaling

In this section...

“Arithmetic Operations and Fixed-Point Scaling” on page 32-40

“Addition” on page 32-41

“Accumulation” on page 32-44

“Multiplication” on page 32-44

“Gain” on page 32-47

“Division” on page 32-49

“Summary” on page 32-51

Arithmetic Operations and Fixed-Point Scaling

The sections that follow describe the relationship between arithmetic operations and fixed-point scaling, and offer some basic recommendations that may be appropriate for your fixed-point design. For each arithmetic operation,

- The general [Slope Bias] encoding scheme described in “Scaling” on page 31-7 is used.
- The scaling of the result is automatically selected based on the scaling of the two inputs. In other words, the scaling is *inherited*.
- Scaling choices are based on
 - Minimizing the number of arithmetic operations of the result
 - Maximizing the precision of the result

Additionally, binary-point-only scaling is presented as a special case of the general encoding scheme.

In embedded systems, the scaling of variables at the hardware interface (the ADC or DAC) is fixed. However for most other variables, the scaling is something you can choose to give the best design. When scaling fixed-point variables, it is important to remember that

- Your scaling choices depend on the particular design you are simulating.
- There is no best scaling approach. All choices have associated advantages and disadvantages. It is the goal of this section to expose these advantages and disadvantages to you.

Addition

Consider the addition of two real-world values:

$$V_a = V_b + V_c.$$

These values are represented by the general [Slope Bias] encoding scheme described in “Scaling” on page 31-7:

$$V_i = F_i 2^{E_i} Q_i + B_i.$$

In a fixed-point system, the addition of values results in finding the variable Q_a :

$$Q_a = \frac{F_b}{F_a} 2^{E_b-E_a} Q_b + \frac{F_c}{F_a} 2^{E_c-E_a} Q_c + \frac{B_b + B_c - B_a}{F_a} 2^{-E_a}.$$

This formula shows

- In general, Q_a is not computed through a simple addition of Q_b and Q_c .
- In general, there are two multiplications of a constant and a variable, two additions, and some additional bit shifting.

Inherited Scaling for Speed

In the process of finding the scaling of the sum, one reasonable goal is to simplify the calculations. Simplifying the calculations should reduce the number of operations, thereby increasing execution speed. The following choices can help to minimize the number of arithmetic operations:

- Set $B_a = B_b + B_c$. This eliminates one addition.
- Set $F_a = F_b$ or $F_a = F_c$. Either choice eliminates one of the two constant times variable multiplications.

The resulting formula is

$$Q_a = 2^{E_b-E_a} Q_b + \frac{F_c}{F_a} 2^{E_c-E_a} Q_c$$

or

$$Q_a = \frac{F_b}{F_a} 2^{E_b - E_a} Q_b + 2^{E_c - E_a} Q_c.$$

These equations appear to be equivalent. However, your choice of rounding and precision may make one choice stand out over the other. To further simplify matters, you could choose $E_a = E_c$ or $E_a = E_b$. This will eliminate some bit shifting.

Inherited Scaling for Maximum Precision

In the process of finding the scaling of the sum, one reasonable goal is maximum precision. You can determine the maximum-precision scaling if the range of the variable is known. “Maximize Precision” on page 32-25 shows that you can determine the range of a fixed-point operation from $\max(V_a)$ and $\min(V_a)$. For a summation, you can determine the range from

$$\begin{aligned} \min(\tilde{V}_a) &= \min(\tilde{V}_b) + \min(\tilde{V}_c), \\ \max(\tilde{V}_a) &= \max(\tilde{V}_b) + \max(\tilde{V}_c). \end{aligned}$$

You can now derive the maximum-precision slope:

$$\begin{aligned} F_a 2^{E_a} &= \frac{\max(\tilde{V}_a) - \min(\tilde{V}_a)}{2^{ws_a} - 1} \\ &= \frac{F_a 2^{E_b} (2^{ws_b} - 1) + F_c 2^{E_c} (2^{ws_c} - 1)}{2^{ws_a} - 1}. \end{aligned}$$

In most cases the input and output word sizes are much greater than one, and the slope becomes

$$F_a 2^{E_a} \approx F_b 2^{E_b + ws_b - ws_a} + F_c 2^{E_c + ws_c - ws_a},$$

which depends only on the size of the input and output words. The corresponding bias is

$$B_a = \min(\tilde{V}_a) - F_a 2^{E_a} \min(Q_a).$$

The value of the bias depends on whether the inputs and output are signed or unsigned numbers.

If the inputs and output are all unsigned, then the minimum values for these variables are all zero and the bias reduces to a particularly simple form:

$$B_a = B_b + B_c.$$

If the inputs and the output are all signed, then the bias becomes

$$B_a \approx B_b + B_c + F_b 2^{E_b} \left(-2^{ws_b-1} + 2^{ws_b-1} \right) + F_c 2^{E_c} \left(-2^{ws_c-1} + 2^{ws_c-1} \right),$$

$$B_a \approx B_b + B_c.$$

Binary-Point-Only Scaling

For binary-point-only scaling, finding Q_a results in this simple expression:

$$Q_a = 2^{E_b-E_a} Q_b + 2^{E_c-E_a} Q_c.$$

This scaling choice results in only one addition and some bit shifting. The avoidance of any multiplications is a big advantage of binary-point-only scaling.

Note: The subtraction of values produces results that are analogous to those produced by the addition of values.

Accumulation

The accumulation of values is closely associated with addition:

$$V_{a_new} = V_{a_old} + V_b.$$

Finding Q_{a_new} involves one multiplication of a constant and a variable, two additions, and some bit shifting:

$$Q_{a_new} = Q_{a_old} + \frac{F_b}{F_a} 2^{E_b - E_a} Q_b + \frac{B_b}{F_a} 2^{-E_a}.$$

The important difference for fixed-point implementations is that the scaling of the output is identical to the scaling of the first input.

Binary-Point-Only Scaling

For binary-point-only scaling, finding Q_{a_new} results in this simple expression:

$$Q_{a_new} = Q_{a_old} + 2^{E_b - E_a} Q_b.$$

This scaling option only involves one addition and some bit shifting.

Note: The negative accumulation of values produces results that are analogous to those produced by the accumulation of values.

Multiplication

Consider the multiplication of two real-world values:

$$V_a = V_b V_c.$$

These values are represented by the general [Slope Bias] encoding scheme described in “Scaling” on page 31-7:

$$V_i = F_i 2^{E_i} Q_i + B_i.$$

In a fixed-point system, the multiplication of values results in finding the variable Q_a :

$$Q_a = \frac{F_b F_c}{F_a} 2^{E_b + E_c - E_a} Q_b Q_c + \frac{F_b B_c}{F_a} 2^{E_b - E_a} Q_b \\ + \frac{F_c B_b}{F_a} 2^{E_c - E_a} Q_c + \frac{B_b B_c - B_a}{F_a} 2^{-E_a}.$$

This formula shows

- In general, Q_a is not computed through a simple multiplication of Q_b and Q_c .
- In general, there is one multiplication of a constant and two variables, two multiplications of a constant and a variable, three additions, and some additional bit shifting.

Inherited Scaling for Speed

The number of arithmetic operations can be reduced with these choices:

- Set $B_a = B_b B_c$. This eliminates one addition operation.
- Set $F_a = F_b F_c$. This simplifies the triple multiplication—certainly the most difficult part of the equation to implement.
- Set $E_a = E_b + E_c$. This eliminates some of the bit shifting.

The resulting formula is

$$Q_a = Q_b Q_c + \frac{B_c}{F_c} 2^{-E_c} Q_b + \frac{B_b}{F_b} 2^{-E_b} Q_c.$$

Inherited Scaling for Maximum Precision

You can determine the maximum-precision scaling if the range of the variable is known. “Maximize Precision” on page 32-25 shows that you can determine the range of a fixed-point operation from

$$\max(\tilde{V}_a)$$

and

$$\min(\tilde{V}_a).$$

For multiplication, you can determine the range from

$$\begin{aligned}\min(\tilde{V}_a) &= \min(V_{LL}, V_{LH}, V_{HL}, V_{HH}), \\ \max(\tilde{V}_a) &= \max(V_{LL}, V_{LH}, V_{HL}, V_{HH}),\end{aligned}$$

where

$$\begin{aligned}V_{LL} &= \min(\tilde{V}_b) \cdot \min(\tilde{V}_c), \\ V_{LH} &= \min(\tilde{V}_b) \cdot \max(\tilde{V}_c), \\ V_{HL} &= \max(\tilde{V}_b) \cdot \min(\tilde{V}_c), \\ V_{HH} &= \max(\tilde{V}_b) \cdot \max(\tilde{V}_c).\end{aligned}$$

Binary-Point-Only Scaling

For binary-point-only scaling, finding Q_a results in this simple expression:

$$Q_a = 2^{E_b + E_c - E_a} Q_b Q_c.$$

Gain

Consider the multiplication of a constant and a variable

$$V_a = K V_b,$$

where K is a constant called the gain. Since V_a results from the multiplication of a constant and a variable, finding Q_a is a simplified version of the general fixed-point multiplication formula:

$$Q_a = \left(\frac{K F_b 2^{E_b}}{F_a 2^{E_a}} \right) Q_b + \left(\frac{K B_b - B_a}{F_a 2^{E_a}} \right).$$

Note that the terms in the parentheses can be calculated offline. Therefore, there is only one multiplication of a constant and a variable and one addition.

To implement the above equation without changing it to a more complicated form, the constants need to be encoded using a binary-point-only format. For each of these constants, the range is the trivial case of only one value. Despite the trivial range, the binary point formulas for maximum precision are still valid. The maximum-precision representations are the most useful choices unless there is an overriding need to avoid any shifting. The encoding of the constants is

$$\left(\frac{KF_b 2^{E_b}}{F_a 2^{E_a}} \right) = 2^{E_x} Q_X$$

$$\left(\frac{KB_b - B_a}{F_a 2^{E_a}} \right) = 2^{E_y} Q_Y$$

resulting in the formula

$$Q_a = 2^{E_x} Q_X Q_B + 2^{E_y} Q_Y.$$

Inherited Scaling for Speed

The number of arithmetic operations can be reduced with these choices:

- Set $B_a = KB_b$. This eliminates one constant term.
- Set $F_a = KF_b$ and $E_a = E_b$. This sets the other constant term to unity.

The resulting formula is simply

$$Q_a = Q_b.$$

If the number of bits is different, then either handling potential overflows or performing sign extensions is the only possible operation involved.

Inherited Scaling for Maximum Precision

The scaling for maximum precision does not need to be different from the scaling for speed unless the output has fewer bits than the input. If this is the case, then saturation

should be avoided by dividing the slope by 2 for each lost bit. This prevents saturation but causes rounding to occur.

Division

Division of values is an operation that should be avoided in fixed-point embedded systems, but it can occur in places. Therefore, consider the division of two real-world values:

$$V_a = V_b / V_c.$$

These values are represented by the general [Slope Bias] encoding scheme described in “Scaling” on page 31-7:

$$V_i = F_i 2^{E_i} Q_i + B_i.$$

In a fixed-point system, the division of values results in finding the variable Q_a :

$$Q_a = \frac{F_b 2^{E_b} Q_b + B_b}{F_c F_a 2^{E_c + E_a} Q_c + B_c F_a 2^{E_a}} - \frac{B_a}{F_a} 2^{-E_a}.$$

This formula shows

- In general, Q_a is not computed through a simple division of Q_b by Q_c .
- In general, there are two multiplications of a constant and a variable, two additions, one division of a variable by a variable, one division of a constant by a variable, and some additional bit shifting.

Inherited Scaling for Speed

The number of arithmetic operations can be reduced with these choices:

- Set $B_a = 0$. This eliminates one addition operation.
- If $B_c = 0$, then set the fractional slope $F_a = F_b / F_c$. This eliminates one constant times variable multiplication.

The resulting formula is

$$Q_a = \frac{Q_b}{Q_c} 2^{E_b - E_c - E_a} + \frac{(B_b / F_b)}{Q_c} 2^{-E_c - E_a}.$$

If $B_c \neq 0$, then no clear recommendation can be made.

Inherited Scaling for Maximum Precision

You can determine the maximum-precision scaling if the range of the variable is known. “Maximize Precision” on page 32-25 shows that you can determine the range of a fixed-point operation from

$$\max(\tilde{V}_a)$$

and

$$\min(\tilde{V}_a).$$

For division, you can determine the range from

$$\begin{aligned} \min(\tilde{V}_a) &= \min(V_{LL}, V_{LH}, V_{HL}, V_{HH}), \\ \max(\tilde{V}_a) &= \max(V_{LL}, V_{LH}, V_{HL}, V_{HH}), \end{aligned}$$

where for nonzero denominators

$$\begin{aligned} V_{LL} &= \min(\tilde{V}_b) / \min(\tilde{V}_c), \\ V_{LH} &= \min(\tilde{V}_b) / \max(\tilde{V}_c), \\ V_{HL} &= \max(\tilde{V}_b) / \min(\tilde{V}_c), \\ V_{HH} &= \max(\tilde{V}_b) / \max(\tilde{V}_c). \end{aligned}$$

Binary-Point-Only Scaling

For binary-point-only scaling, finding Q_a results in this simple expression:

$$Q_a = \frac{Q_b}{Q_c} 2^{E_b - E_c - E_a}.$$

Note: For the last two formulas involving Q_a , a divide by zero and zero divided by zero are possible. In these cases, the hardware will give some default behavior but you must make sure that these default responses give meaningful results for the embedded system.

Summary

From the previous analysis of fixed-point variables scaled within the general [Slope Bias] encoding scheme, you can conclude

- Addition, subtraction, multiplication, and division can be very involved unless certain choices are made for the biases and slopes.
- Binary-point-only scaling guarantees simpler math, but generally sacrifices some precision.

Note that the previous formulas don't show the following:

- Constants and variables are represented with a finite number of bits.
- Variables are either signed or unsigned.
- Rounding and overflow handling schemes. You must make these decisions before an actual fixed-point realization is achieved.

Parameter and Signal Conversions

In this section...

“Introduction” on page 32-52

“Parameter Conversions” on page 32-53


“Signal Conversions” on page 32-53

Introduction

To completely understand the results generated by fixed-point Simulink blocks, you must be aware of these issues:

- When numerical block parameters are converted from doubles to Fixed-Point Designer data types
- When input signals are converted from one Fixed-Point Designer data type to another (if at all)
- When arithmetic operations on input signals and parameters are performed

For example, suppose a fixed-point Simulink block performs an arithmetic operation on its input signal and a parameter, and then generates output having characteristics that are specified by the block. The following diagram illustrates how these issues are related.

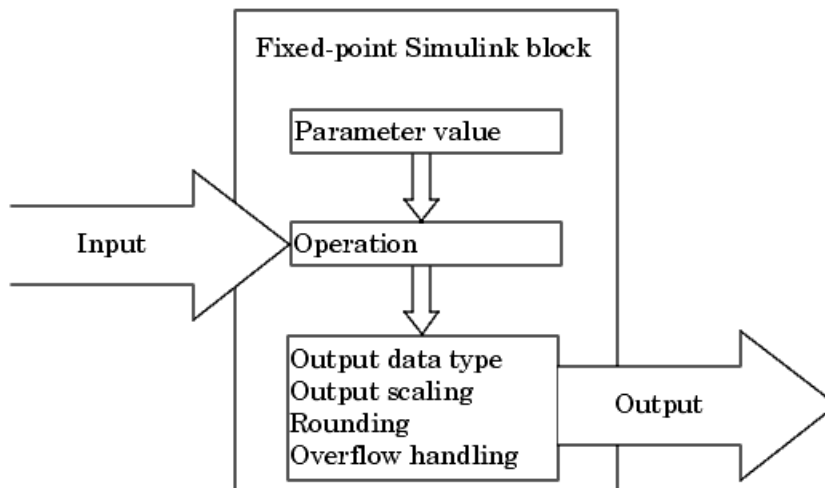

The sections that follow describe parameter and signal conversions. discusses arithmetic operations.

Parameter Conversions

Parameters of fixed-point blocks that accept numerical values are always converted from `double` to a fixed-point data type. Parameters can be converted to the input data type, the output data type, or to a data type explicitly specified by the block. For example, the Discrete FIR Filter block converts its **Initial states** parameter to the input data type, and converts its **Numerator coefficient** parameter to a data type you explicitly specify via the block dialog box.

Parameters are always converted before any arithmetic operations are performed. Additionally, parameters are always converted *offline* using round-to-nearest and saturation. Offline conversions are discussed below.

Note: Because parameters of fixed-point blocks begin as `double`, they are never precise to more than 53 bits. Therefore, if the output of your fixed-point block is longer than 53 bits, your result might be less precise than you anticipated.

Offline Conversions

An offline conversion is a conversion performed by your development platform (for example, the processor on your PC), and not by the fixed-point processor you are targeting. For example, suppose you are using a PC to develop a program to run on a fixed-point processor, and you need the fixed-point processor to compute

$$y = \left(\frac{ab}{c} \right) u = Cu$$

over and over again. If a , b , and c are constant parameters, it is inefficient for the fixed-point processor to compute ab/c every time. Instead, the PC's processor should compute ab/c offline one time, and the fixed-point processor computes only $C \cdot u$. This eliminates two costly fixed-point arithmetic operations.

Signal Conversions

Consider the conversion of a real-world value from one fixed-point data type to another. Ideally, the values before and after the conversion are equal.

$$V_a = V_b,$$

where V_b is the input value and V_a is the output value. To see how the conversion is implemented, the two ideal values are replaced by the general [Slope Bias] encoding scheme described in “Scaling” on page 31-7:

$$V_i = F_i 2^{E_i} Q_i + B_i.$$

Solving for the output data type's stored integer value, Q_a is obtained:

$$\begin{aligned} Q_a &= \frac{F_b}{F_a} 2^{E_b - E_a} Q_b + \frac{B_b - B_a}{F_a} 2^{-E_a} \\ &= F_s 2^{E_b - E_a} Q_b + B_{net}, \end{aligned}$$

where F_s is the adjusted fractional slope and B_{net} is the net bias. The offline conversions and online conversions and operations are discussed below.

Offline Conversions

Both F_s and B_{net} are computed offline using round-to-nearest and saturation. B_{net} is then stored using the output data type and F_s is stored using an automatically selected data type.

Online Conversions and Operations

The remaining conversions and operations are performed *online* by the fixed-point processor, and depend on the slopes and biases for the input and output data types. The conversions and operations are given by these steps:

- 1 The initial value for Q_a is given by the net bias, B_{net} :

$$Q_a = B_{net}.$$

- 2 The input integer value, Q_b , is multiplied by the adjusted slope, F_s :

$$Q_{RawProduct} = F_s Q_b.$$

- 3 The result of step 2 is converted to the modified output data type where the slope is one and bias is zero:

$$Q_{Temp} = \text{convert}(Q_{RawProduct}).$$

This conversion includes any necessary bit shifting, rounding, or overflow handling.

- 4 The summation operation is performed:

$$Q_a = Q_{Temp} + Q_a.$$

This summation includes any necessary overflow handling.

Streamlining Simulations and Generated Code

Note that the maximum number of conversions and operations is performed when the slopes and biases of the input signal and output signal differ (are mismatched). If the scaling of these signals is identical (matched), the number of operations is reduced from the worst (most inefficient) case. For example, when an input has the same fractional slope and bias as the output, only step 3 is required:

$$Q_a = \text{convert}(Q_b).$$

Exclusive use of binary-point-only scaling for both input signals and output signals is a common way to eliminate mismatched slopes and biases, and results in the most efficient simulations and generated code.

Rules for Arithmetic Operations

Fixed-point arithmetic refers to how signed or unsigned binary words are operated on. The simplicity of fixed-point arithmetic functions such as addition and subtraction allows for cost-effective hardware implementations.

The sections that follow describe the rules that the Simulink software follows when arithmetic operations are performed on inputs and parameters. These rules are organized into four groups based on the operations involved: addition and subtraction, multiplication, division, and shifts. For each of these four groups, the rules for performing the specified operation are presented with an example using the rules.

Computational Units

The core architecture of many processors contains several computational units including arithmetic logic units (ALUs), multiply and accumulate units (MACs), and shifters. These computational units process the binary data directly and provide support for arithmetic computations of varying precision. The ALU performs a standard set of arithmetic and logic operations as well as division. The MAC performs multiply, multiply/add, and multiply/subtract operations. The shifter performs logical and arithmetic shifts, normalization, denormalization, and other operations.

Addition and Subtraction

Addition is the most common arithmetic operation a processor performs. When two n -bit numbers are added together, it is always possible to produce a result with $n + 1$ nonzero digits due to a carry from the leftmost digit. For two's complement addition of two numbers, there are three cases to consider:

- If both numbers are positive and the result of their addition has a sign bit of 1, then overflow has occurred; otherwise the result is correct.
- If both numbers are negative and the sign of the result is 0, then overflow has occurred; otherwise the result is correct.
- If the numbers are of unlike sign, overflow cannot occur and the result is always correct.

Fixed-Point Simulink Blocks Summation Process

Consider the summation of two numbers. Ideally, the real-world values obey the equation

$$V_a = \pm V_b \pm V_c,$$

where V_b and V_c are the input values and V_a is the output value. To see how the summation is actually implemented, the three ideal values should be replaced by the general [Slope Bias] encoding scheme described in “Scaling” on page 31-7:

$$V_i = F_i 2^{E_i} Q_i + B_i.$$

The equation in “Addition” on page 32-41 gives the solution of the resulting equation for the stored integer, Q_a . Using shorthand notation, that equation becomes

$$Q_a = \pm F_{sb} 2^{E_b - E_a} Q_b \pm F_{sc} 2^{E_c - E_a} Q_c + B_{net},$$

where F_{sb} and F_{sc} are the adjusted fractional slopes and B_{net} is the net bias. The offline conversions and online conversions and operations are discussed below.

Offline Conversions

F_{sb} , F_{sc} , and B_{net} are computed offline using round-to-nearest and saturation. Furthermore, B_{net} is stored using the output data type.

Online Conversions and Operations

The remaining operations are performed online by the fixed-point processor, and depend on the slopes and biases for the input and output data types. The worst (most inefficient) case occurs when the slopes and biases are mismatched. The worst-case conversions and operations are given by these steps:

- 1 The initial value for Q_a is given by the net bias, B_{net} :

$$Q_a = B_{net}.$$

- 2 The first input integer value, Q_b , is multiplied by the adjusted slope, F_{sb} :

$$Q_{RawProduct} = F_{sb} Q_b.$$

- 3 The previous product is converted to the modified output data type where the slope is one and the bias is zero:

$$Q_{Temp} = \text{convert}(Q_{RawProduct}).$$

This conversion includes any necessary bit shifting, rounding, or overflow handling.

- 4 The summation operation is performed:

$$Q_a = Q_a \pm Q_{Temp}.$$

This summation includes any necessary overflow handling.

- 5 Steps 2 to 4 are repeated for every number to be summed.

It is important to note that bit shifting, rounding, and overflow handling are applied to the intermediate steps (3 and 4) and not to the overall sum.

For more information, see “The Summation Process” on page 32-66.

Streamlining Simulations and Generated Code

If the scaling of the input and output signals is matched, the number of summation operations is reduced from the worst (most inefficient) case. For example, when an input has the same fractional slope as the output, step 2 reduces to multiplication by one and can be eliminated. Trivial steps in the summation process are eliminated for both simulation and code generation. Exclusive use of binary-point-only scaling for both input signals and output signals is a common way to eliminate mismatched slopes and biases, and results in the most efficient simulations and generated code.

Multiplication

The multiplication of an n-bit binary number with an m-bit binary number results in a product that is up to m + n bits in length for both signed and unsigned words. Most processors perform n-bit by n-bit multiplication and produce a 2n-bit result (double bits) assuming there is no overflow condition.

Fixed-Point Simulink Blocks Multiplication Process

Consider the multiplication of two numbers. Ideally, the real-world values obey the equation

$$V_a = V_b V_c.$$

where V_b and V_c are the input values and V_a is the output value. To see how the multiplication is actually implemented, the three ideal values should be replaced by the general [Slope Bias] encoding scheme described in “Scaling” on page 31-7:

$$V_i = F_i 2^{E_i} Q_i + B_i.$$

The solution of the resulting equation for the output stored integer, Q_a , is given below:

$$\begin{aligned} Q_a = & \frac{F_b F_c}{F_a} 2^{E_b + E_c - E_a} Q_b Q_c + \frac{F_b B_c}{F_a} 2^{E_b - E_a} Q_b \\ & + \frac{F_c B_b}{F_a} 2^{E_c - E_a} Q_c + \frac{B_b B_c - B_a}{F_a} 2^{-E_a}. \end{aligned}$$

Multiplication with Nonzero Biases and Mismatched Fractional Slopes

The worst-case implementation of the above equation occurs when the slopes and biases of the input and output signals are mismatched. In such cases, several low-level integer operations are required to carry out the high-level multiplication (or division). Implementation choices made about these low-level computations can affect the computational efficiency, rounding errors, and overflow.

In Simulink blocks, the actual multiplication or division operation is always performed on fixed-point variables that have zero biases. If an input has nonzero bias, it is converted to a representation that has binary-point-only scaling before the operation. If the result is to have nonzero bias, the operation is first performed with temporary variables that have binary-point-only scaling. The result is then converted to the data type and scaling of the final output.

If both the inputs and the output have nonzero biases, then the operation is broken down as follows:

$$\begin{aligned} V_{1Temp} &= V_1, \\ V_{2Temp} &= V_2, \\ V_{3Temp} &= V_{1Temp} V_{2Temp}, \\ V_3 &= V_{3Temp}, \end{aligned}$$

where

$$V_{1Temp} = 2^{E_{1Temp}} Q_{1Temp},$$

$$V_{2Temp} = 2^{E_{2Temp}} Q_{2Temp},$$

$$V_{3Temp} = 2^{E_{3Temp}} Q_{3Temp}.$$

These equations show that the temporary variables have binary-point-only scaling. However, the equations do not indicate the signedness, word lengths, or values of the fixed exponent of these variables. The Simulink software assigns these properties to the temporary variables based on the following goals:

- Represent the original value without overflow.

The data type and scaling of the original value define a maximum and minimum real-world value:

$$V_{Max} = F 2^E Q_{MaxInteger} + B,$$

$$V_{Min} = F 2^E Q_{MinInteger} + B.$$

The data type and scaling of the temporary value must be able to represent this range without overflow. Precision loss is possible, but overflow is never allowed.

- Use a data type that leads to efficient operations.

This goal is relative to the target that you will use for production deployment of your design. For example, suppose that you will implement the design on a 16-bit fixed-point processor that provides a 32-bit `long`, 16-bit `int`, and 8-bit `short` or `char`. For such a target, preserving efficiency means that no more than 32 bits are used, and the smaller sizes of 8 or 16 bits are used if they are sufficient to maintain precision.

- Maintain precision.

Ideally, every possible value defined by the original data type and scaling is represented perfectly by the temporary variable. However, this can require more bits than is efficient. Bits are discarded, resulting in a loss of precision, to the extent required to preserve efficiency.

For example, consider the following, assuming a 16-bit microprocessor target:

$$V_{Original} = Q_{Original} + -43.25,$$

where $Q_{Original}$ is an 8-bit, unsigned data type. For this data type,

$$Q_{MaxInteger} = 225,$$

$$Q_{MinInteger} = 0,$$

so

$$V_{Max} = 211.75,$$

$$V_{Min} = -43.25.$$

The minimum possible value is negative, so the temporary variable must be a signed integer data type. The original variable has a slope of 1, but the bias is expressed with greater precision with two digits after the binary point. To get full precision, the fixed exponent of the temporary variable has to be -2 or less. The Simulink software selects the least possible precision, which is generally the most efficient, unless overflow issues arise. For a scaling of 2^{-2} , selecting signed 16-bit or signed 32-bit avoids overflow. For efficiency, the Simulink software selects the smaller choice of 16 bits. If the original variable is an input, then the equations to convert to the temporary variable are

$$\text{uint8_T} \quad Q_{Original},$$

$$\text{uint16_T} \quad Q_{Temp},$$

$$Q_{Temp} = ((\text{uint16_T})Q_{Original} \ll 2) - 173.$$

Multiplication with Zero Biases and Mismatched Fractional Slopes

When the biases are zero and the fractional slopes are mismatched, the implementation reduces to

$$Q_a = \frac{F_b F_c}{F_a} 2^{E_b + E_c - E_a} Q_b Q_c.$$

Offline Conversions

The quantity

$$F_{Net} = \frac{F_b F_c}{F_a}$$

is calculated offline using round-to-nearest and saturation. F_{Net} is stored using a fixed-point data type of the form

$$2^{E_{Net}} Q_{Net},$$

where E_{Net} and Q_{Net} are selected automatically to best represent F_{Net} .

Online Conversions and Operations

- 1 The integer values Q_b and Q_c are multiplied:

$$Q_{RawProduct} = Q_b Q_c.$$

To maintain the full precision of the product, the binary point of $Q_{RawProduct}$ is given by the sum of the binary points of Q_b and Q_c .

- 2 The previous product is converted to the output data type:

$$Q_{Temp} = \text{convert}(Q_{RawProduct}).$$

This conversion includes any necessary bit shifting, rounding, or overflow handling. “Signal Conversions” on page 32-53 discusses conversions.

- 3 The multiplication

$$Q_{2RawProduct} = Q_{Temp} Q_{Net}$$

is performed.

- 4 The previous product is converted to the output data type:

$$Q_a = \text{convert}(Q_{2RawProduct}).$$

This conversion includes any necessary bit shifting, rounding, or overflow handling. “Signal Conversions” on page 32-53 discusses conversions.

- 5 Steps 1 through 4 are repeated for each additional number to be multiplied.

Multiplication with Zero Biases and Matching Fractional Slopes

When the biases are zero and the fractional slopes match, the implementation reduces to

$$Q_a = 2^{E_b + E_c - E_a} Q_b Q_c.$$

Offline Conversions

No offline conversions are performed.

Online Conversions and Operations

- 1 The integer values Q_b and Q_c are multiplied:

$$Q_{RawProduct} = Q_b Q_c.$$

To maintain the full precision of the product, the binary point of $Q_{RawProduct}$ is given by the sum of the binary points of Q_b and Q_c .

- 2 The previous product is converted to the output data type:

$$Q_a = \text{convert}(Q_{RawProduct}).$$

This conversion includes any necessary bit shifting, rounding, or overflow handling. “Signal Conversions” on page 32-53 discusses conversions.

- 3 Steps 1 and 2 are repeated for each additional number to be multiplied.

For more information, see “The Multiplication Process” on page 32-69.

Division

This section discusses the division of quantities with zero bias.

Note: When any input to a division calculation has nonzero bias, the operations performed exactly match those for multiplication described in .

Fixed-Point Simulink Blocks Division Process

Consider the division of two numbers. Ideally, the real-world values obey the equation

$$V_a = V_b / V_c,$$

where V_b and V_c are the input values and V_a is the output value. To see how the division is actually implemented, the three ideal values should be replaced by the general [Slope Bias] encoding scheme described in “Scaling” on page 31-7:

$$V_i = F_i 2^{E_i} Q_i + B_i.$$

For the case where the slope adjustment factors are one and the biases are zero for all signals, the solution of the resulting equation for the output stored integer, Q_a , is given by the following equation:

$$Q_a = 2^{E_b - E_c - E_a} (Q_b / Q_c).$$

This equation involves an integer division and some bit shifts. If $E_a > E_b - E_c$, then any bit shifts are to the right and the implementation is simple. However, if $E_a < E_b - E_c$, then the bit shifts are to the left and the implementation can be more complicated. The essential issue is that the output has more precision than the integer division provides. To get full precision, a *fractional* division is needed. The C programming language provides access to integer division only for fixed-point data types. Depending on the size of the numerator, you can obtain some of the fractional bits by performing a shift prior to the integer division. In the worst case, it might be necessary to resort to repeated subtractions in software.

In general, division of values is an operation that should be avoided in fixed-point embedded systems. Division where the output has more precision than the integer division (i.e., $E_a < E_b - E_c$) should be used with even greater reluctance.

For more information, see “The Division Process” on page 32-71.

Shifts

Nearly all microprocessors and digital signal processors support well-defined *bit-shift* (or simply *shift*) operations for integers. For example, consider the 8-bit unsigned integer 00110101. The results of a 2-bit shift to the left and a 2-bit shift to the right are shown in the following table.

Shift Operation	Binary Value	Decimal Value
No shift (original number)	00110101	53


Shift Operation	Binary Value	Decimal Value
Shift left by 2 bits	11010100	212
Shift right by 2 bits	00001101	13

You can perform a shift using the Simulink Shift Arithmetic block. Use this block to perform a bit shift, a binary point shift, or both


Shifting Bits to the Right

The special case of shifting bits to the right requires consideration of the treatment of the leftmost bit, which can contain sign information. A shift to the right can be classified either as a *logical* shift right or an *arithmetic* shift right. For a logical shift right, a 0 is incorporated into the most significant bit for each bit shift. For an arithmetic shift right, the most significant bit is recycled for each bit shift.

The Shift Arithmetic block performs an arithmetic shift right and, therefore, recycles the most significant bit for each bit shift right. For example, given the fixed-point number 11001.011 (-6.625), a bit shift two places to the right with the binary point unmoved yields the number 11110.010 (-1.75), as shown in the model below:

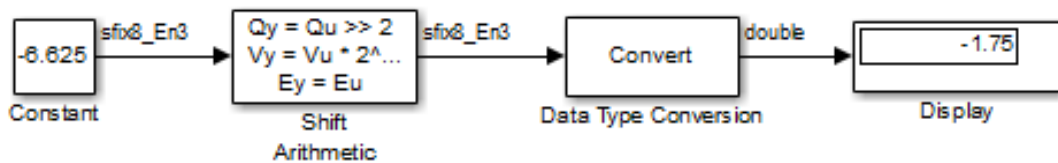


To perform a logical shift right on a signed number using the Shift Arithmetic block, use the Data Type Conversion block to cast the number as an unsigned number of equivalent length and scaling, as shown in the following model. The model shows that the fixed-point signed number 11001.001 (-6.625) becomes 00110.010 (6.25).

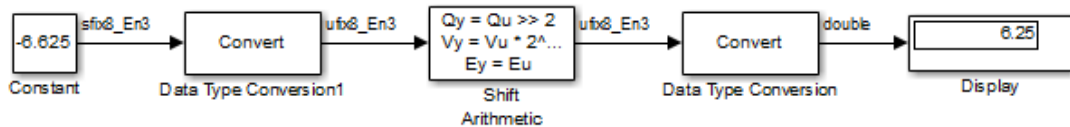

The Summation Process

Suppose you want to sum three numbers. Each of these numbers is represented by an 8-bit word, and each has a different binary-point-only scaling. Additionally, the output is restricted to an 8-bit word with binary-point-only scaling of 2^{-3} .

The summation is shown in the following model for the input values 19.875, 5.4375, and 4.84375.

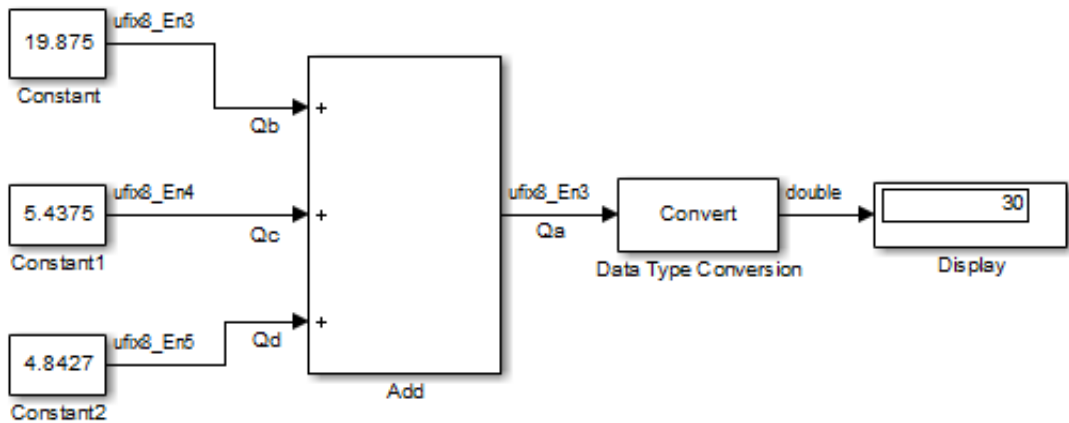

Applying the rules from the previous section, the sum follows these steps:

- 1 Because the biases are matched, the initial value of Q_a is trivial:

$$Q_a = 00000.000.$$

- 2 The first number to be summed (19.875) has a fractional slope that matches the output fractional slope. Furthermore, the binary points and storage types are identical, so the conversion is trivial:

$$Q_b = 10011.111,$$

$$Q_{\text{Temp}} = Q_b.$$

- 3 The summation operation is performed:

$$Q_a = Q_a + Q_{Temp} = 10011.111.$$

- 4** The second number to be summed (5.4375) has a fractional slope that matches the output fractional slope, so a slope adjustment is not needed. The storage data types also match, but the difference in binary points requires that both the bits and the binary point be shifted one place to the right:

$$Q_c = 0101.0111,$$

$$Q_{Temp} = \text{convert}(Q_c)$$

$$Q_{Temp} = 00101.011.$$

Note that a loss in precision of one bit occurs, with the resulting value of Q_{Temp} determined by the rounding mode. For this example, round-to-floor is used. Overflow cannot occur in this case because the bits and binary point are both shifted to the right.

- 5** The summation operation is performed:

$$\begin{aligned} Q_a &= Q_a + Q_{Temp} \\ &\quad 10011.111 \\ &= \frac{+00101.011}{11001.010} = 25.250. \end{aligned}$$

Note that overflow did not occur, but it is possible for this operation.

- 6** The third number to be summed (4.84375) has a fractional slope that matches the output fractional slope, so a slope adjustment is not needed. The storage data types also match, but the difference in binary points requires that both the bits and the binary point be shifted two places to the right:

$$Q_d = 100.11011,$$

$$Q_{Temp} = \text{convert}(Q_d)$$

$$Q_{Temp} = 00100.110.$$

Note that a loss in precision of two bit occurs, with the resulting value of Q_{Temp} determined by the rounding mode. For this example, round-to-floor is used. Overflow

cannot occur in this case because the bits and binary point are both shifted to the right.

- 7** The summation operation is performed:

$$\begin{aligned}
 Q_a &= Q_a + Q_{Temp} \\
 &\quad 11001.010 \\
 &= \frac{+00100.110}{11110.000} = 30.000.
 \end{aligned}$$

Note that overflow did not occur, but it is possible for this operation.


As shown here, the result of step 7 differs from the ideal sum:

$$\begin{aligned}
 &10011.111 \\
 &\quad 0101.0111 \\
 &= \frac{+100.11011}{11110.001} = 30.125.
 \end{aligned}$$

Blocks that perform addition and subtraction include the Sum, Gain, and Discrete FIR Filter blocks.

The Multiplication Process

Suppose you want to multiply three numbers. Each of these numbers is represented by a 5-bit word, and each has a different binary-point-only scaling. Additionally, the output is restricted to a 10-bit word with binary-point-only scaling of 2^{-4} . The multiplication is shown in the following model for the input values 5.75, 2.375, and 1.8125.

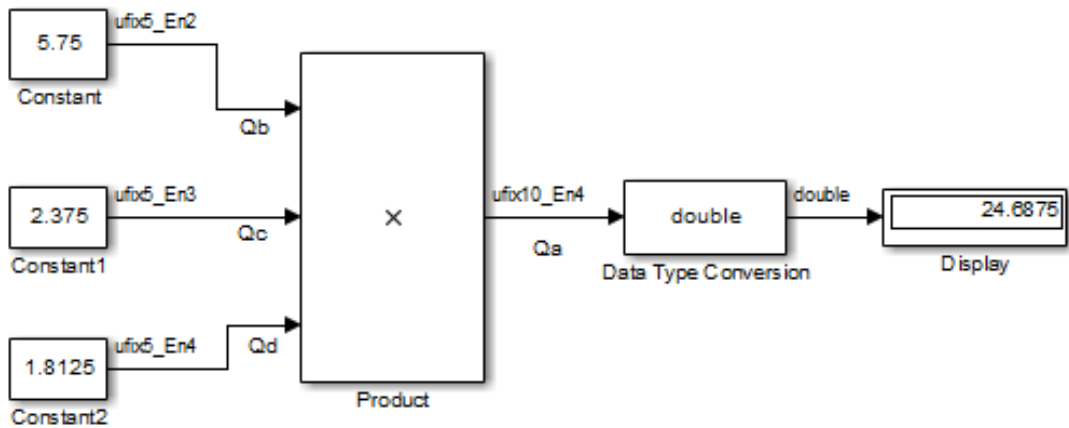

Applying the rules from the previous section, the multiplication follows these steps:

- 1 The first two numbers (5.75 and 2.375) are multiplied:

$$\begin{array}{r}
 Q_{RawProduct} = \quad 101.11 \\
 \quad \times 10.011 \\
 \hline
 101.11 \cdot 2^{-3} \\
 101.11 \cdot 2^{-2} \\
 + 101.11 \cdot 2^1 \\
 \hline
 01101.10101 = 13.65625.
 \end{array}$$

Note that the binary point of the product is given by the sum of the binary points of the multiplied numbers.

- 2 The result of step 1 is converted to the output data type:

$$\begin{aligned}
 Q_{Temp} &= \text{convert}(Q_{RawProduct}) \\
 &= 001101.1010 = 13.6250.
 \end{aligned}$$

“Signal Conversions” on page 32-53 discusses conversions. Note that a loss in precision of one bit occurs, with the resulting value of Q_{Temp} determined by the rounding mode. For this example, round-to-floor is used. Furthermore, overflow did not occur but is possible for this operation.

- 3** The result of step 2 and the third number (1.8125) are multiplied:

$$\begin{array}{r}
 Q_{RawProduct} = \quad 01101.1010 \\
 \qquad \qquad \qquad \times 1.1101 \\
 \hline
 \qquad \qquad \qquad 1101.1010 \cdot 2^{-4} \\
 \qquad \qquad \qquad 1101.1010 \cdot 2^{-2} \\
 \qquad \qquad \qquad 1101.1010 \cdot 2^{-1} \\
 \qquad \qquad \qquad + 1101.1010 \cdot 2^0 \\
 \hline
 \qquad \qquad \qquad 0011000.10110010 = 24.6953125.
 \end{array}$$

Note that the binary point of the product is given by the sum of the binary points of the multiplied numbers.

- 4** The product is converted to the output data type:

$$\begin{aligned}
 Q_a &= \text{convert}(Q_{RawProduct}) \\
 &= 011000.1011 = 24.6875.
 \end{aligned}$$


“Signal Conversions” on page 32-53 discusses conversions. Note that a loss in precision of 4 bits occurred, with the resulting value of Q_{Temp} determined by the rounding mode. For this example, round-to-floor is used. Furthermore, overflow did not occur but is possible for this operation.

Blocks that perform multiplication include the Product, Discrete FIR Filter, and Gain blocks.

The Division Process

Suppose you want to divide two numbers. Each of these numbers is represented by an 8-bit word, and each has a binary-point-only scaling of 2^{-4} . Additionally, the output is restricted to an 8-bit word with binary-point-only scaling of 2^{-4} .

The division of 9.1875 by 1.5000 is shown in the following model.

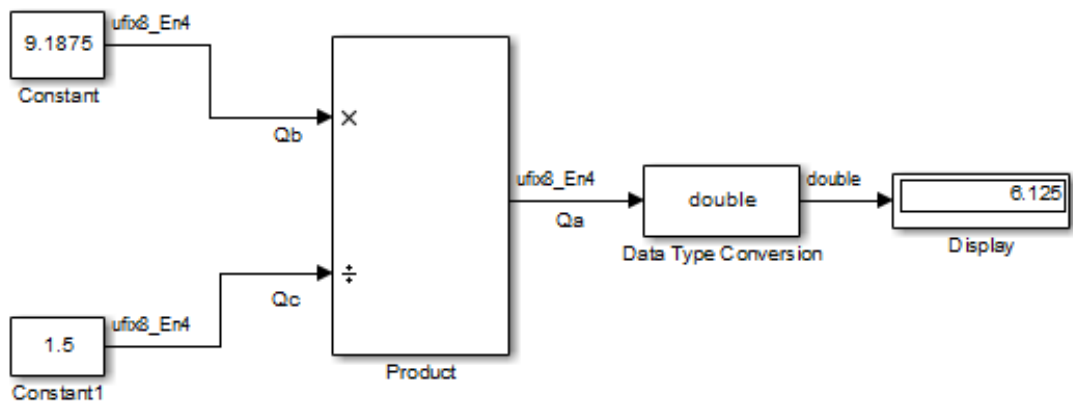

For this example,

$$\begin{aligned} Q_a &= 2^{-4-(-4)-(-4)}(Q_b/Q_c) \\ &= 2^4(Q_b/Q_c). \end{aligned}$$

Assuming a large data type was available, this could be implemented as

$$Q_a = \frac{(2^4 Q_b)}{Q_c},$$

where the numerator uses the larger data type. If a larger data type was not available, integer division combined with four repeated subtractions would be used. Both approaches produce the same result, with the former being more efficient.

Shifts

Nearly all microprocessors and digital signal processors support well-defined *bit-shift* (or simply *shift*) operations for integers. For example, consider the 8-bit unsigned integer 00110101. The results of a 2-bit shift to the left and a 2-bit shift to the right are shown in the following table.


Shift Operation	Binary Value	Decimal Value
No shift (original number)	00110101	53
Shift left by 2 bits	11010100	212
Shift right by 2 bits	00001101	13

You can perform a shift using the Simulink Shift Arithmetic block. Use this block to perform a bit shift, a binary point shift, or both

Shifting Bits to the Right


The special case of shifting bits to the right requires consideration of the treatment of the leftmost bit, which can contain sign information. A shift to the right can be classified either as a *logical* shift right or an *arithmetic* shift right. For a logical shift right, a 0 is incorporated into the most significant bit for each bit shift. For an arithmetic shift right, the most significant bit is recycled for each bit shift.

The Shift Arithmetic block performs an arithmetic shift right and, therefore, recycles the most significant bit for each bit shift right. For example, given the fixed-point number 11001.011 (-6.625), a bit shift two places to the right with the binary point unmoved yields the number 11110.010 (-1.75), as shown in the model below:

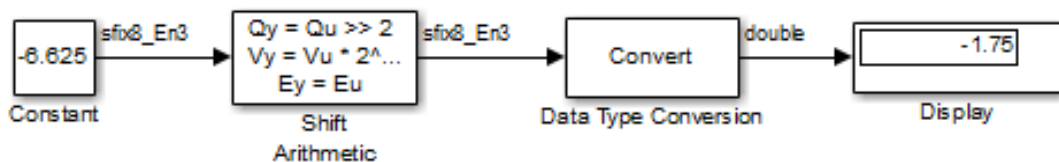

To perform a logical shift right on a signed number using the Shift Arithmetic block, use the Data Type Conversion block to cast the number as an unsigned number of equivalent

length and scaling, as shown in the following model. The model shows that the fixed-point signed number 11001.001 (-6.625) becomes 00110.010 (6.25).

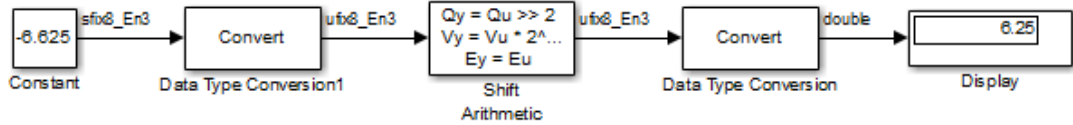

Conversions and Arithmetic Operations

This example uses the Discrete FIR Filter block to illustrate when parameters are converted from a double to a fixed-point number, when the input data type is converted to the output data type, and when the rules for addition, subtraction, and multiplication are applied. For details about conversions and operations, refer to “Parameter and Signal Conversions” on page 32-52 and .

Note: If a block can perform all four arithmetic operations, then the rules for multiplication and division are applied first. The Discrete FIR Filter block is an example of this.

Suppose you configure the Discrete FIR Filter block for two outputs, where the first output is given by


$$y_1(k) = 13 \cdot u(k) + 11 \cdot u(k-1) - 7 \cdot u(k-2),$$

and the second output is given by


$$y_2(k) = 6 \cdot u(k) - 5 \cdot u(k-1).$$

Additionally, the initial values of $u(k-1)$ and $u(k-2)$ are given by 0.8 and 1.1, respectively, and all inputs, parameters, and outputs have binary-point-only scaling.

To configure the Discrete FIR Filter block for this situation, on the **Main** pane of its dialog box, you must specify the **Coefficients** parameter as [13 11 -7; 6 -5 0] and the **Initial states** parameter as [0.8 1.1], as shown here.

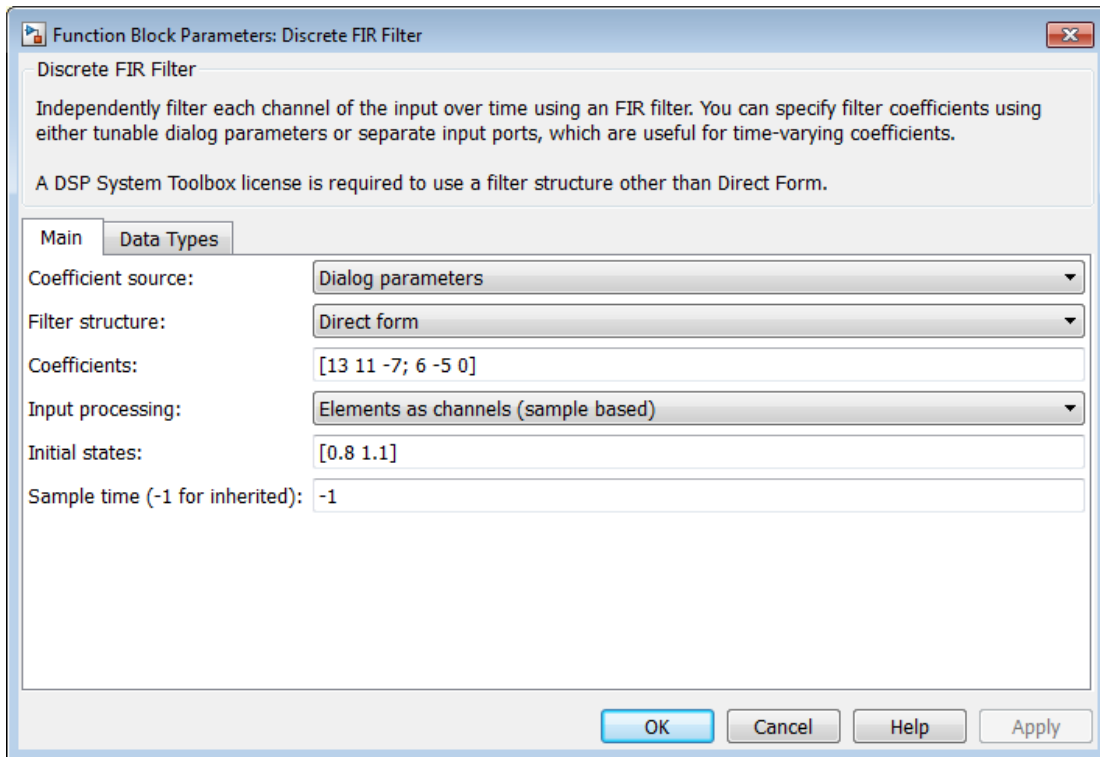

Similarly, configure the options on the **Data Types** pane of the block dialog box to appear as follows:

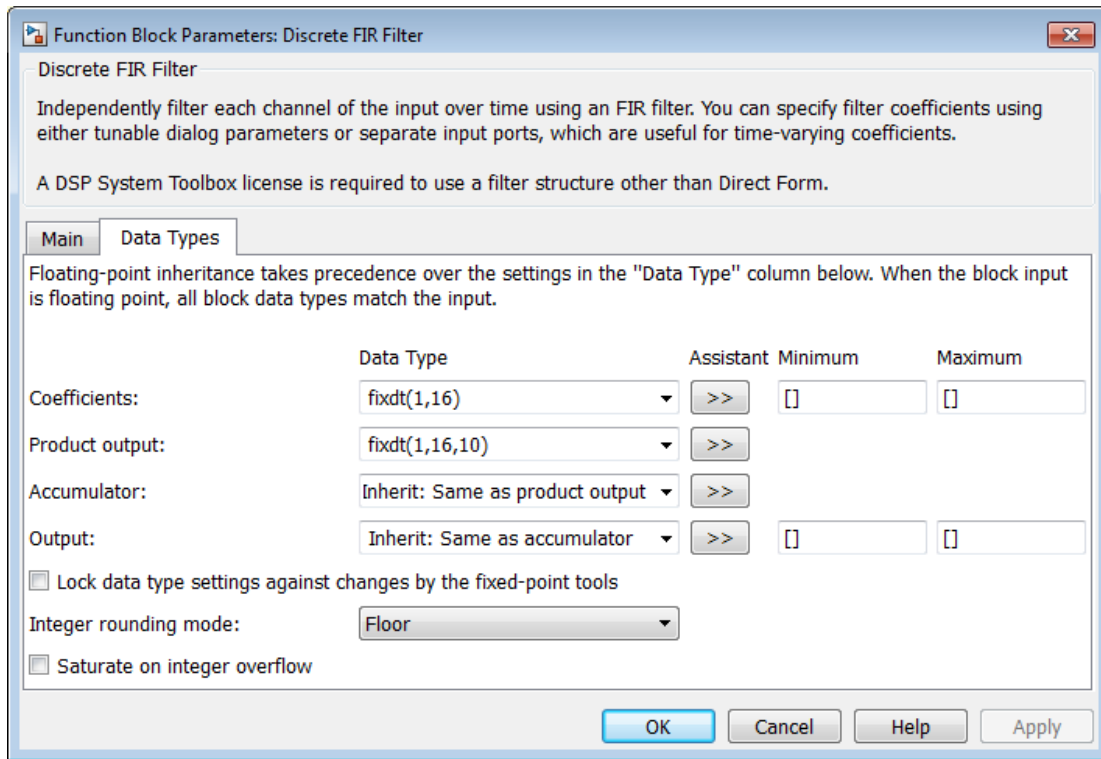

The Discrete FIR Filter block performs parameter conversions and block operations in the following order:

- 1 The **Coefficients** parameter is converted offline from doubles to the **Coefficients** data type using round-to-nearest and saturation.

The **Initial states** parameter is converted offline from doubles to the input data type using round-to-nearest and saturation.

- 2 The coefficients and inputs are multiplied together for the initial time step for both outputs. For $y_1(0)$, the operations $13 \cdot u(0)$, $11 \cdot 0.8$, and $-7 \cdot 1.1$ are performed, while for $y_2(0)$, the operations $6 \cdot u(0)$ and $-5 \cdot 0.8$ are performed.

The results of these operations are stored as **Product output**.

- 3 The sum is carried out in **Accumulator**. The final summation result is then converted to **Output**.

4 Steps 2 and 3 repeat for subsequent time steps.

Realization Structures

- “Realizing Fixed-Point Digital Filters” on page 33-2
- “Targeting an Embedded Processor” on page 33-4
- “Canonical Forms” on page 33-7
- “Direct Form II” on page 33-9
- “Series Cascade Form” on page 33-13
- “Parallel Form” on page 33-16

Realizing Fixed-Point Digital Filters

In this section...
“Introduction” on page 33-2
“Realizations and Data Types” on page 33-2

Introduction

This chapter investigates how you can realize fixed-point digital filters using Simulink blocks and the Fixed-Point Designer software.

The Fixed-Point Designer software addresses the needs of the control system, signal processing, and other fields where algorithms are implemented on fixed-point hardware. In signal processing, a digital filter is a computational algorithm that converts a sequence of input numbers to a sequence of output numbers. The algorithm is designed such that the output signal meets frequency-domain or time-domain constraints (desirable frequency components are passed, undesirable components are rejected).

In general terms, a discrete transfer function controller is a form of a digital filter. However, a digital controller can contain nonlinear functions such as lookup tables in addition to a discrete transfer function. This guide uses the term *digital filter* when referring to discrete transfer functions.

Note: To design and implement a wide variety of floating-point and fixed-point filters suitable for use in signal processing applications and for deployment on DSP chips, use the DSP System Toolbox software.

Realizations and Data Types

In an ideal world, where numbers, calculations, and storage of states have infinite precision and range, there are virtually an infinite number of realizations for the same system. In theory, these realizations are all identical.

In the more realistic world of double-precision numbers, calculations, and storage of states, small nonlinearities are introduced by the finite precision and range of floating-point data types. Therefore, each realization of a given system produces different results. In most cases however, these differences are small.

In the world of fixed-point numbers, where precision and range are limited, the differences in the realization results can be very large. Therefore, you must carefully select the data type, word size, and scaling for each realization element such that results are accurately represented. To assist you with this selection, design rules for modeling dynamic systems with fixed-point math are provided in “Targeting an Embedded Processor” on page 33-4.

Targeting an Embedded Processor

In this section...

“Introduction” on page 33-4

“Size Assumptions” on page 33-4

“Operation Assumptions” on page 33-4

“Design Rules” on page 33-5

Introduction

The sections that follow describe issues that often arise when targeting a fixed-point design for use on an embedded processor, such as some general assumptions about integer sizes and operations available on embedded processors. These assumptions lead to design issues and design rules that might be useful for your specific fixed-point design.

Size Assumptions

Embedded processors are typically characterized by a particular bit size. For example, the terms “8-bit micro,” “32-bit micro,” or “16-bit DSP” are common. It is generally safe to assume that the processor is predominantly geared to processing integers of the specified bit size. Integers of the specified bit size are referred to as the *base data type*. Additionally, the processor typically provides some support for integers that are twice as wide as the base data type. Integers consisting of double bits are referred to as the *accumulator data type*. For example a 16-bit micro has a 16-bit base data type and a 32-bit accumulator data type.

Although other data types may be supported by the embedded processor, this section describes only the base and accumulator data types.

Operation Assumptions

The embedded processor operations discussed in this section are limited to the needs of a basic simulation diagram. Basic simulations use multiplication, addition, subtraction, and delays. Fixed-point models also need shifts to do scaling conversions. For all these operations, the embedded processor should have native instructions that allow the

base data type as inputs. For accumulator-type inputs, the processor typically supports addition, subtraction, and delay (storage/retrieval from memory), but not multiplication.

Multiplication is typically not supported for accumulator-type inputs because of complexity and size issues. A difficulty with multiplication is that the output needs to be twice as big as the inputs for full precision. For example, multiplying two 16-bit numbers requires a 32-bit output for full precision. The need to handle the outputs from a multiplication operation is one of the reasons embedded processors include accumulator-type support. However, if multiplication of accumulator-type inputs is also supported, then there is a need to support a data type that is twice as big as the accumulator type. To restrict this additional complexity, multiplication is typically not supported for inputs of the accumulator type.

Design Rules

The important design rules that you should be aware of when modeling dynamic systems with fixed-point math follow.

Design Rule 1: Only Multiply Base Data Types

It is best to multiply only inputs of the base data type. Embedded processors typically provide an instruction for the multiplication of base-type inputs, but not for the multiplication of accumulator-type inputs. If necessary, you can combine several instructions to handle multiplication of accumulator-type inputs. However, this can lead to large, slow embedded code.

You can insert blocks to convert inputs from the accumulator type to the base type prior to Product or Gain blocks, if necessary.

Design Rule 2: Delays Should Use the Base Data Type

There are two general reasons why a Unit Delay should use only base-type numbers:

- The Unit Delay essentially stores a variable's value to RAM and, one time step later, retrieves that value from RAM. Because the value must be in memory from one time step to the next, the RAM must be exclusively dedicated to the variable and can't be shared or used for another purpose. Using accumulator-type numbers instead of the base data type doubles the RAM requirements, which can significantly increase the cost of the embedded system.
- The Unit Delay typically feeds into a Gain block. The multiplication design rule requires that the input (the unit delay signal) use the base data type.

Design Rule 3: Temporary Variables Can Use the Accumulator Data Type

Except for unit delay signals, most signals are not needed from one time step to the next. This means that the signal values can be temporarily stored in shared and reused memory. This shared and reused memory can be RAM or it can simply be registers in the CPU. In either case, storing the value as an accumulator data type is not much more costly than storing it as a base data type.

Design Rule 4: Summation Can Use the Accumulator Data Type

Addition and subtraction can use the accumulator data type if there is justification. The typical justification is reducing the buildup of errors due to roundoff or overflow.

For example, a common filter operation is a weighted sum of several variables. Multiplying a variable by a weight naturally produces a product of the accumulator type. Before summing, each product can be converted back to the base data type. This approach introduces round-off error into each part of the sum.

Alternatively, the products can be summed using the accumulator data type, and the final sum can be converted to the base data type. Round-off error is introduced in just one point and the precision is generally better. The cost of doing an addition or subtraction using accumulator-type numbers is slightly more expensive, but if there is justification, it is usually worth the cost.

Canonical Forms

The Fixed-Point Designer software does not attempt to standardize on one particular fixed-point digital filter design method. For example, you can produce a design in continuous time and then obtain an “equivalent” discrete-time digital filter using one of many transformation methods. Alternatively, you can design digital filters directly in discrete time. After you obtain a digital filter, it can be realized for fixed-point hardware using any number of canonical forms. Typical canonical forms are the direct form, series form, and parallel form, each of which is outlined in the sections that follow.

For a given digital filter, the canonical forms describe a set of fundamental operations for the processor. Because there are an infinite number of ways to realize a given digital filter, you must make the best realization on a per-system basis. The canonical forms presented in this chapter optimize the implementation with respect to some factor, such as minimum number of delay elements.

In general, when choosing a realization method, you must take these factors into consideration:

- **Cost**

The cost of the realization might rely on minimal code and data size.

- **Timing constraints**

Real-time systems must complete their compute cycle within a fixed amount of time. Some realizations might yield faster execution speed on different processors.

- **Output signal quality**

The limited range and precision of the binary words used to represent real-world numbers will introduce errors. Some realizations are more sensitive to these errors than others.

The Fixed-Point Designer software allows you to evaluate various digital filter realization methods in a simulation environment. Following the development cycle outlined in “Developing and Testing Fixed-Point Systems” on page 30-15, you can fine-tune the realizations with the goal of reducing the cost (code and data size) or increasing signal quality. After you have achieved the desired performance, you can use the Simulink Coder product to generate rapid prototyping C code and evaluate its performance with respect to your system's real-time timing constraints. You can then modify the model based upon feedback from the rapid prototyping system.

The presentation of the various realization structures takes into account that a summing junction is a fundamental operator, thus you may find that the structures presented here look different from those in the fixed-point filter design literature. For each realization form, an example is provided using the transfer function shown here:

$$\begin{aligned} H_{ex}(z) &= \frac{1 + 2.2z^{-1} + 1.85z^{-2} + 0.5z^{-3}}{1 - 0.5z^{-1} + 0.84z^{-2} + 0.09z^{-3}} \\ &= \frac{(1 + 0.5z^{-1})(1 + 1.7z^{-1} + z^{-2})}{(1 + 0.1z^{-1})(1 - 0.6z^{-1} + 0.9z^{-2})} \\ &= 5.5556 - \frac{3.4639}{1 + 0.1z^{-1}} + \frac{-1.0916 + 3.0086z^{-1}}{1 - 0.6z^{-1} + 0.9z^{-2}}. \end{aligned}$$

Direct Form II

In general, a direct form realization refers to a structure where the coefficients of the transfer function appear directly as Gain blocks. The direct form II realization method is presented as using the minimal number of delay elements, which is equal to n , the order of the transfer function denominator.


The canonical direct form II is presented as “Standard Programming” in *Discrete-Time Control Systems* by Ogata. It is known as the “Control Canonical Form” in *Digital Control of Dynamic Systems* by Franklin, Powell, and Workman.

You can derive the canonical direct form II realization by writing the discrete-time transfer function with input $e(z)$ and output $u(z)$ as

$$\frac{u(z)}{e(z)} = \frac{u(z)}{h(z)} \cdot \frac{h(z)}{e(z)}$$


$$= \underbrace{(b_0 + b_1 z^{-1} + \dots + b_m z^{-m})}_{\frac{u(z)}{h(z)}} \cdot \underbrace{\frac{1}{1 + a_1 z^{-1} + a_2 z^{-2} + \dots + a_n z^{-n}}}_{\frac{h(z)}{e(z)}}$$

The block diagram for $u(z)/h(z)$ follows.

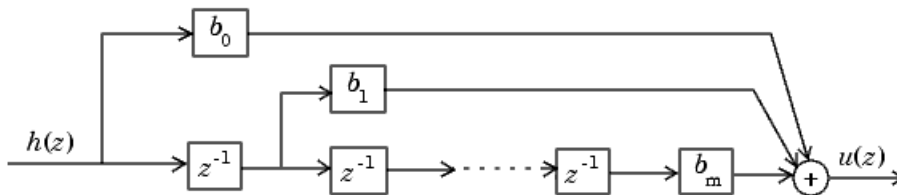


$$\frac{u(z)}{h(z)} = b_0 + b_1 z^{-1} + \dots + b_m z^{-m}$$

The block diagrams for $h(z)/e(z)$ follow.

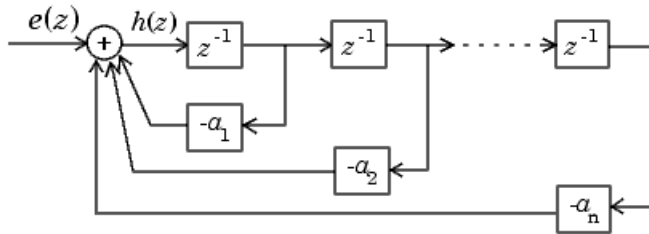

$$\frac{h(z)}{e(z)} = \frac{1}{1 + a_1 z^{-1} + a_2 z^{-2} + \dots + a_n z^{-n}}$$

Combining these two block diagrams yields the direct form II diagram shown in the following figure. Notice that the feedforward part (top of block diagram) contains the numerator coefficients and the feedback part (bottom of block diagram) contains the denominator coefficients.

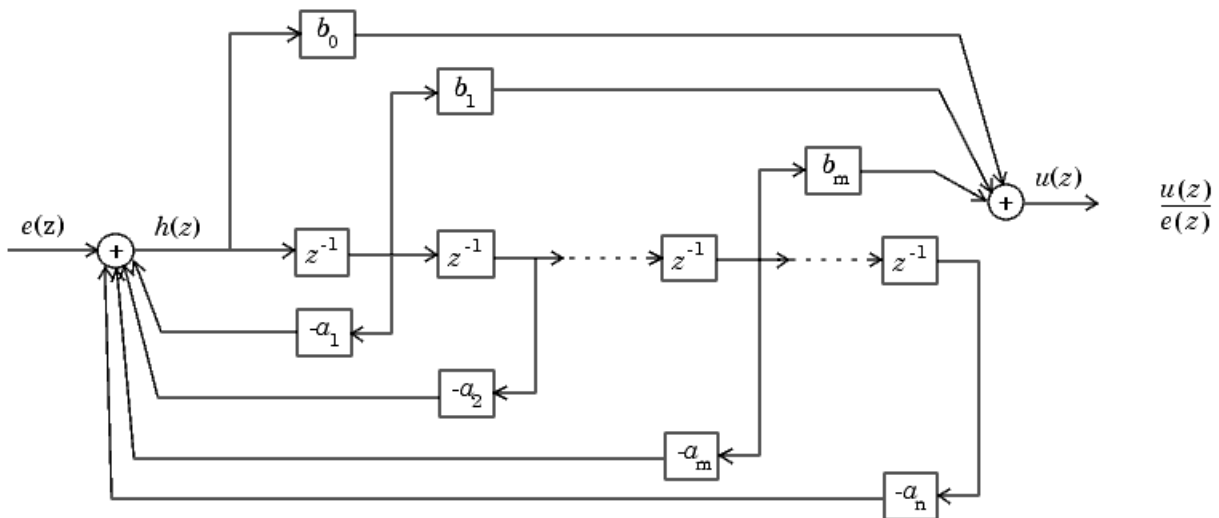


The direct form II example transfer function is given by

$$H_{ex}(z) = \frac{1 + 2.2z^{-1} + 1.85z^{-2} + 0.5z^{-3}}{1 - 0.5z^{-1} + 0.84z^{-2} + 0.09z^{-3}}.$$

The realization of $H_{ex}(z)$ using fixed-point Simulink blocks is shown in the following figure. You can display this model by typing

```
fxpdemo_direct_form2
```

at the MATLAB command line.

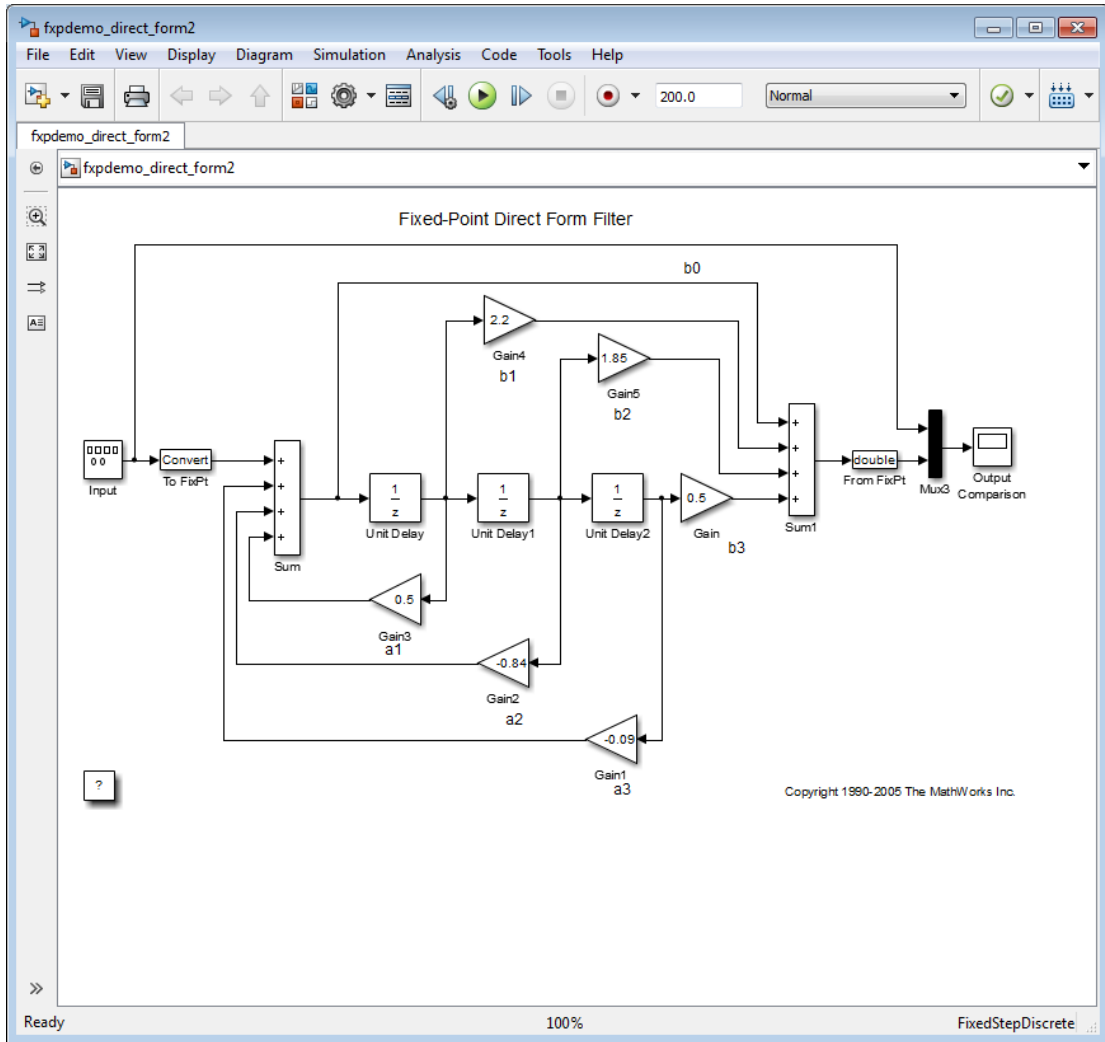


Series Cascade Form

In the canonical series cascade form, the transfer function $H(z)$ is written as a product of first-order and second-order transfer functions:

$$H_i(z) = \frac{u(z)}{e(z)} = H_1(z) \cdot H_2(z) \cdot H_3(z) \dots H_p(z).$$

This equation yields the canonical series cascade form.




Factoring $H(z)$ into $H_i(z)$ where $i = 1, 2, 3, \dots, p$ can be done in a number of ways. Using the poles and zeros of $H(z)$, you can obtain $H_i(z)$ by grouping pairs of conjugate complex poles and pairs of conjugate complex zeros to produce second-order transfer functions, or by grouping real poles and real zeros to produce either first-order or second-order transfer functions. You could also group two real zeros with a pair of conjugate complex poles or vice versa. Since there are many ways to obtain $H_i(z)$, you should compare the various groupings to see which produces the best results for the transfer function under consideration.

For example, one factorization of $H(z)$ might be

$$\begin{aligned} H(z) &= H_1(z) H_2(z) \dots H_p(z) \\ &= \prod_{i=1}^j \frac{1 + b_i z^{-1}}{1 + a_i z^{-1}} \prod_{i=j+1}^p \frac{1 + e_i z^{-1} + f_i z^{-2}}{1 + c_i z^{-1} + d_i z^{-2}}. \end{aligned}$$


You must also take into consideration that the ordering of the individual $H_i(z)$'s will lead to systems with different numerical characteristics. You might want to try various orderings for a given set of $H_i(z)$'s to determine which gives the best numerical characteristics.

The first-order diagram for $H(z)$ follows.

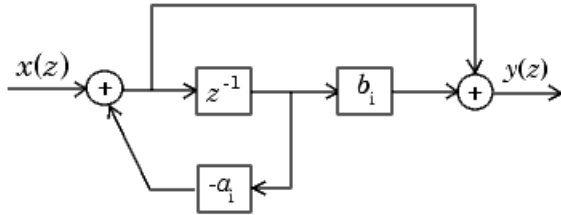

$$\frac{y(z)}{x(z)} = \frac{1 + b_i z^{-1}}{1 + a_i z^{-1}}$$

The second-order diagram for $H(z)$ follows.

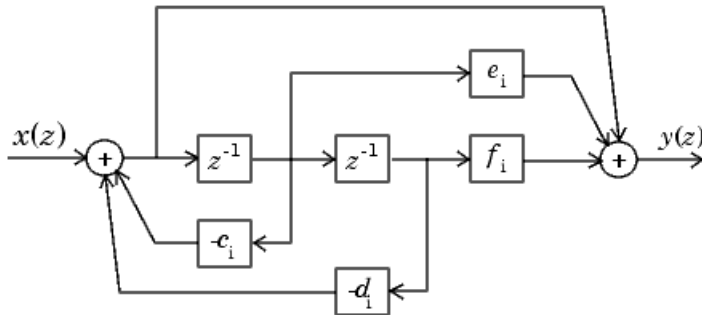

$$\frac{y(z)}{x(z)} = \frac{1 + e_i z^{-1} + f_i z^{-2}}{1 + c_i z^{-1} + d_i z^{-2}}$$


The series cascade form example transfer function is given by

$$H_{ex}(z) = \frac{(1 + 0.5z^{-1})(1 + 1.7z^{-1} + z^{-2})}{(1 + 0.1z^{-1})(1 - 0.6z^{-1} + 0.9z^{-2})}$$

The realization of $H_{ex}(z)$ using fixed-point Simulink blocks is shown in the following figure. You can display this model by typing

`fxpdemo_series_cascade_form`

at the MATLAB command line.

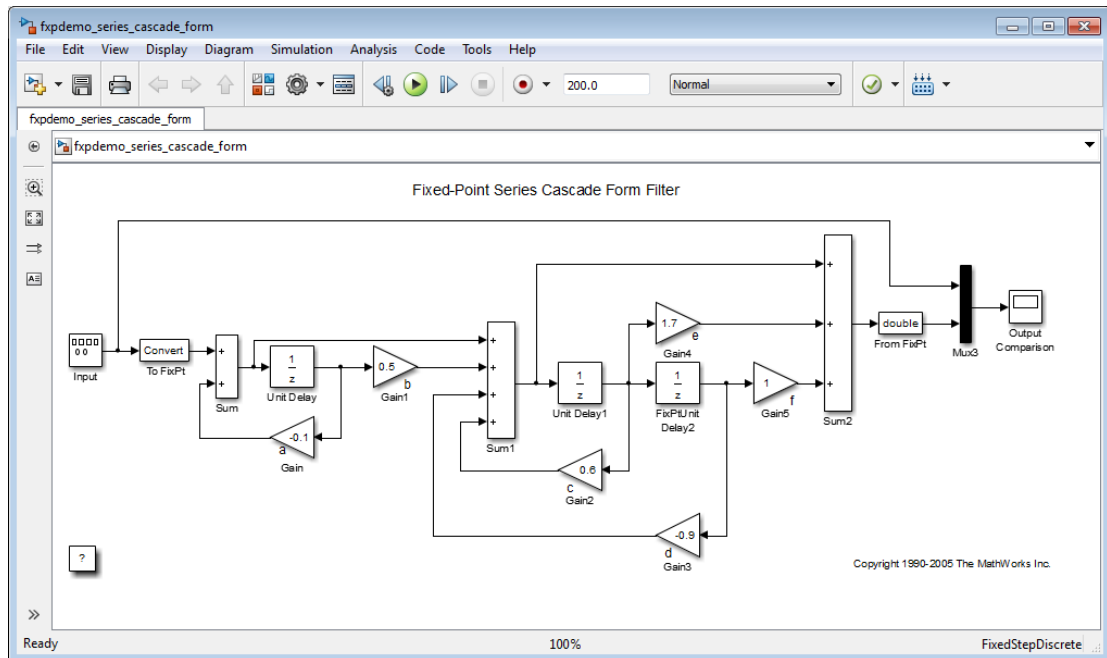


Parallel Form

In the canonical parallel form, the transfer function $H(z)$ is expanded into partial fractions. $H(z)$ is then realized as a sum of a constant, first-order, and second-order transfer functions, as shown:

$$H_i(z) = \frac{u(z)}{e(z)} = K + H_1(z) + H_2(z) + \dots + H_p(z).$$


This expansion, where K is a constant and the $H_i(z)$ are the first- and second-order transfer functions, follows.

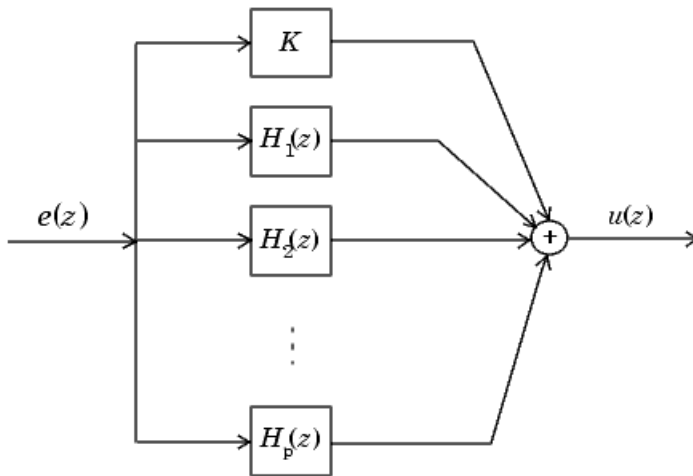

As in the series canonical form, there is no unique description for the first-order and second-order transfer function. Because of the nature of the Sum block, the ordering of the individual filters doesn't matter. However, because of the constant K , you can choose the first-order and second-order transfer functions such that their forms are simpler than those for the series cascade form described in the preceding section. This is done by expanding $H(z)$ as


$$\begin{aligned}
 H(z) &= K + \sum_{i=1}^j H_i(z) + \sum_{i=j+1}^p H_i(z) \\
 &= K + \sum_{i=1}^j \frac{b_i}{1 + a_i z^{-1}} + \sum_{i=j+1}^p \frac{e_i + f_i z^{-1}}{1 + c_i z^{-1} + d_i z^{-2}}.
 \end{aligned}$$

The first-order diagram for $H(z)$ follows.

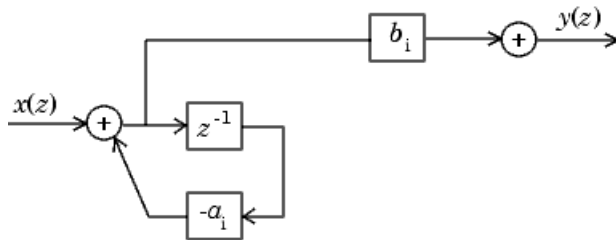

$$\frac{y(z)}{x(z)} = \frac{b_i}{1 + a_i z^{-1}}$$

The second-order diagram for $H(z)$ follows.

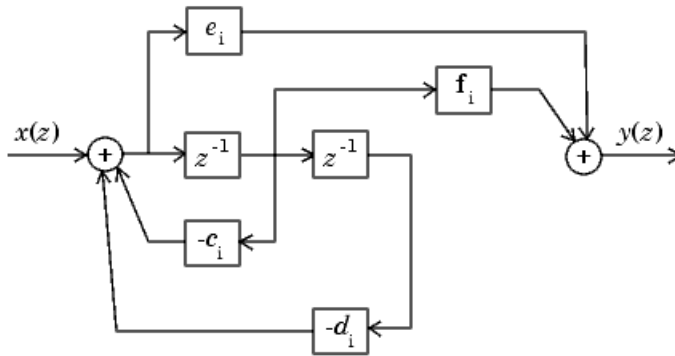

$$\frac{y(z)}{x(z)} = \frac{e_i + f_i z^{-1}}{1 + c_i z^{-1} + d_i z^{-2}}$$


The parallel form example transfer function is given by

$$H_{ex}(z) = 5.5556 - \frac{3.4639}{1 + 0.1z^{-1}} + \frac{-1.0916 + 3.0086z^{-1}}{1 - 0.6z^{-1} + 0.9z^{-2}}$$

The realization of $H_{ex}(z)$ using fixed-point Simulink blocks is shown in the following figure. You can display this model by typing

`fxpdemo_parallel_form`

at the MATLAB command line.

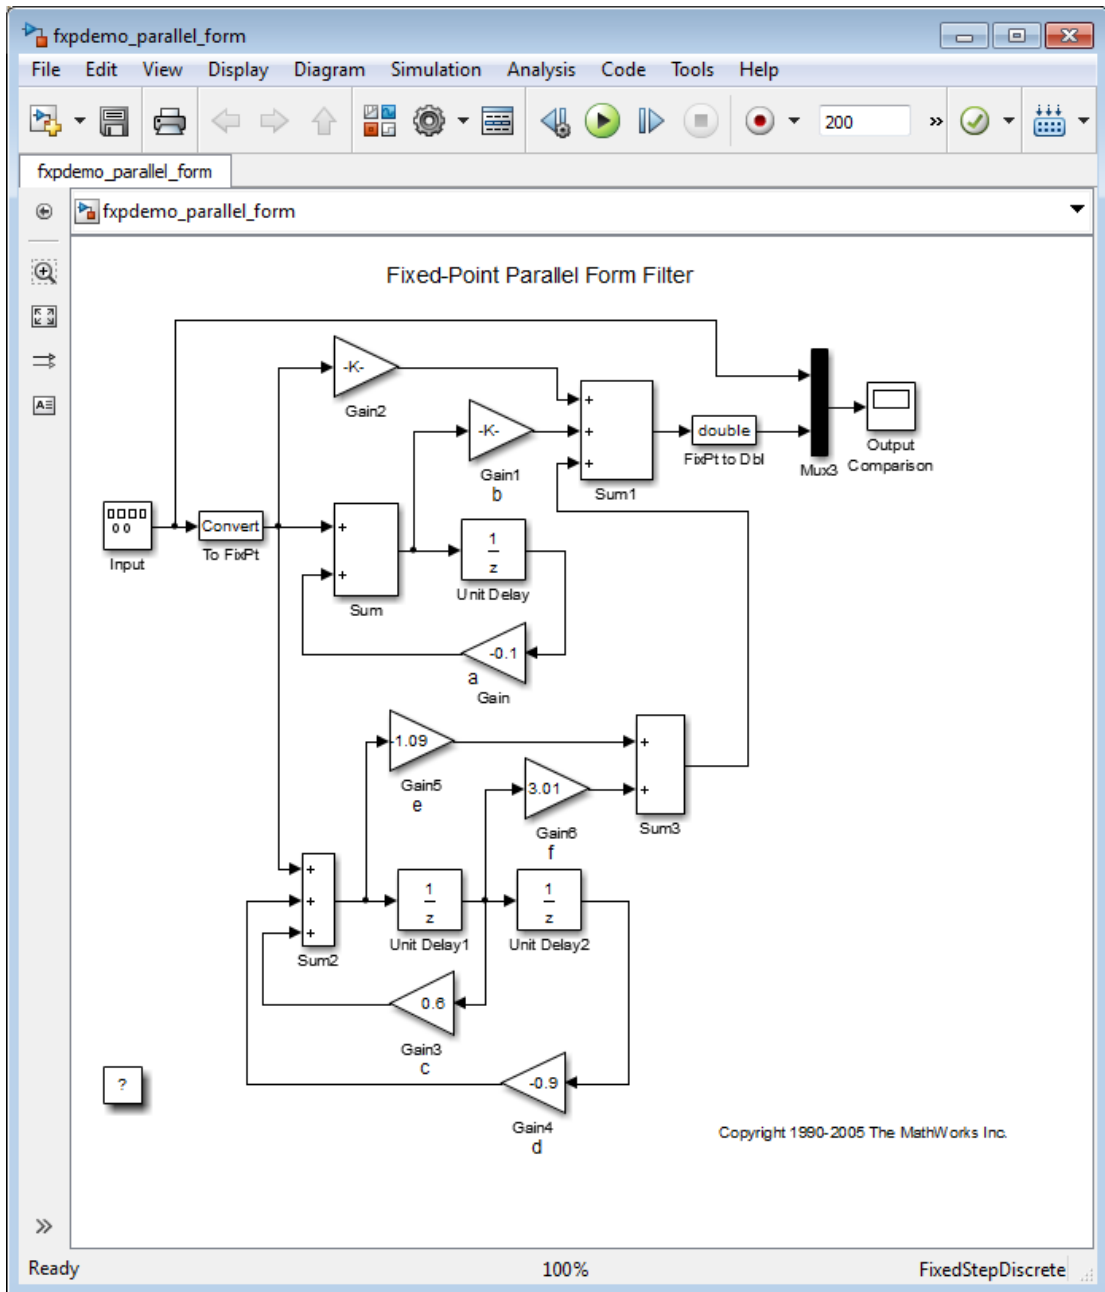

Fixed-Point Advisor

Preparation for Fixed-Point Conversion

In this section...

“Introduction” on page 34-2
“Best Practices” on page 34-2
“Run the Fixed-Point Advisor” on page 34-4
“Fix a Task Failure” on page 34-5
“Manually Fixing Failures” on page 34-5
“Automatically Fixing Failures” on page 34-6
“Batch Fixing Failures” on page 34-6
“Restore Points” on page 34-7
“Save a Restore Point” on page 34-7
“Load a Restore Point” on page 34-8

Introduction

Using the Fixed-Point Advisor, you can prepare a model for conversion from a floating-point model or subsystem to an equivalent fixed-point representation. After preparing the model for conversion, use the Fixed-Point Tool to obtain initial fixed-point data types and then refine these data types.

Best Practices

Use a Known Working Model

Before using the Fixed-Point Advisor, verify that **update diagram** succeeds for your model. To update diagram, press **Ctrl+D**. If **update diagram** fails, before you start converting your model, fix the failure in your model.

Back Up Your Model

Back up your Simulink model first.

This practice provides you with a back up in case of error and a baseline for testing and validation.

Convert Small Models

The Fixed-Point Advisor is intended to assist in converting small models. Using larger models can result in long processing times.

Convert Subsystems

Convert subsystems within your model, rather than the entire model. This practice saves time and unnecessary conversions.

Specify Short Simulation Run Times

Specifying small simulation run times reduces task processing times. You can change the simulation run time in the Configuration Parameters dialog box. For more information, see “Start time” and “Stop time” in the *Simulink Reference*.

Make Small Changes to Your Model

Make small changes to your model so that you can identify where errors are accidentally introduced.

Isolate the System Under Conversion

If you encounter data type propagation issues with a particular subsystem, isolate this subsystem by placing Data Type Conversion blocks on the inputs and outputs of the system. The Data Type Conversion block converts an input signal of any Simulink software data type to the data type and scaling you specify for its **Output data type** parameter. This practice enables you to continue converting the rest of your model.

The ultimate goal is to replace all blocks that do not support fixed-point data types. You must eventually replace blocks that you isolate with Data Type Conversion blocks with blocks that do support fixed-point data types.

Use Lock Output Data Type Setting

You can prevent the Fixed-Point Advisor from replacing the current data type. Use the **Lock output data type setting against changes by the fixed-point tools** parameter available on many blocks. The default setting allows replacement. Use this setting when:

- You already know the fixed-point data types that you want to use for a particular block.

For example, the block is modeling a real-world component. Set up the block to allow for known hardware limitations, such as restricting outputs to integer values.

Specify the output data type of the block explicitly and select **Lock output data type setting against changes by the fixed-point tools**.

- You are debugging a model and know that a particular block accepts only certain data types.

Specify the output data type of upstream blocks explicitly and select **Lock output data type setting against changes by the fixed-point tools**.

Save Simulink Signal Objects

The Fixed-Point Advisor proposes data types for Simulink signal objects in your model. However, it does not automatically save Simulink signal objects. To preserve changes, before closing the model, save the Simulink signal objects in your workspace and model before closing the model.

Save Restore Point

Before making changes to your model that might cause subsequent update diagram failure, consider saving a restore point. For example, before applying proposed data types in task 3.1. For more information, see “Save a Restore Point” on page 34-7.

Run the Fixed-Point Advisor

- 1 Open a model.
- 2 Start the Fixed-Point Advisor by:
 - Typing `fpcadvisor('model_name/subsystem_name')` at the MATLAB command line
 - Selecting a subsystem and, from the menu, selecting **Analysis > Fixed-Point Tool** to open the Fixed-Point Tool. On the Fixed-Point Tool **Fixed-point preparation for selected system** pane, click **Fixed-Point Advisor**.
 - Right-clicking a subsystem block and, from the subsystem context menu, selecting **Fixed-Point Tool** to open the Fixed-Point Tool. On the Fixed-Point Tool **Fixed-point preparation for selected system** pane, click **Fixed-Point Advisor**.
- 3 In the Fixed-Point Advisor window, on the left pane, select the Fixed-Point Advisor folder.
- 4 Run the advisor by:

- Selecting **Run All** from the Run menu.
- Right-clicking the Fixed-Point Advisor folder and selecting **Run All** from the folder context menu.

The Fixed-Point Advisor runs the tasks in order until a task fails. A waitbar is displayed while each task runs.

- 5 Review the results. If a task fails because input parameters are not specified, select an **Input Parameter**. Then continue running to failure by right-clicking the task and selecting **Continue** from the context menu. If the task fails for a different reason, fix the task as described in “Fix a Task Failure” on page 34-5.

If your model contains referenced models, the Fixed-Point Advisor provides results for each referenced model instance.

Fix a Task Failure

Tasks fail when there is a step for you to take to convert your model from floating-point to fixed-point. The Fixed-Point Advisor provides guidance on how to fix the issues.

You can fix a failure using three different methods:

- Follow the instructions in the Analysis Result box. Use this method to fix failures individually. See “Manually Fixing Failures” on page 34-5.
- Use the Action box. Use this method to automatically fix all failures. See “Automatically Fixing Failures” on page 34-6.
- Use the Model Advisor Results Explorer. Use this method to batch fix failures. See “Batch Fixing Failures” on page 34-6

Note: A warning result is meant for your information. You can choose to fix the reported issue or move on to the next task.

Manually Fixing Failures

All checks have an **Analysis Result** box that describes the recommended actions to manually fix failures.

To manually fix warnings or failures within a task:

- 1 Optionally, save a restore point so you can undo the changes that you make. For more information, see “Save a Restore Point” on page 34-7.
- 2 In the **Analysis Result** box, review the recommended actions. Use the information to make changes to your model.
- 3 To verify that the task now passes, in the **Analysis** box, click **Run This Task**.

Automatically Fixing Failures

You can automatically fix failures using the **Action** box. The **Action** box applies all of the recommended actions listed in the **Analysis Result** box.

Caution Prior to automatically fixing failures, review the **Analysis Result** box to ensure that you want to apply all of the recommended actions.

Automatically fix all failures within a task using the following steps:

- 1 Optionally, save a restore point so you can undo the changes that you make. For more information, see “Save a Restore Point” on page 34-7.
- 2 In the **Action** box, click **Modify All**.

The **Action Result** box displays a table of changes.

- 3 To verify that the task now passes, in the **Analysis** box, click **Run This Task**.

Batch Fixing Failures

If a task fails and you want to explore the results and make batch changes, use the following steps.

- 1 Optionally, save a restore point so you can undo the changes that you make. For more information, see “Save a Restore Point” on page 34-7.
- 2 In the **Analysis** box, click **Explore Result**.
- 3 Use the Model Advisor Result Explorer to modify block parameters.
- 4 When you finish making changes, in the Fixed-Point Advisor window, click **Run This Task** to see if the changes you made result in the task passing. Continue fixing failures and rerunning the task until the task passes.

Restore Points

The Fixed-Point Advisor provides a model and data restore point capability for reverting changes that you made in response to advice from the Fixed-Point Advisor. A restore point is a snapshot in time of the model, base workspace, and Fixed-Point Advisor.

Caution A restore point saves only the current working model, base workspace variables, and Fixed-Point Advisor tree. It does not save other items, such as libraries and referenced submodels.

To learn how to save a restore point, see “Save a Restore Point” on page 34-7.

To learn how to load a restore point, see “Load a Restore Point” on page 34-8.

Save a Restore Point

When to Save a Restore Point

Consider saving a restore point:


- Before applying changes to your model that might cause update diagram failure. For example, before applying proposed data types in task 3.1.
- Before attempting to fix failures.

How to Save a Restore Point

You can save a restore point and give it a name and optional description, or allow the Fixed Point Advisor to automatically name the restore point for you.

To save a restore point with a name and optional description:

- 1 From the main menu, select **File > Save Restore Point As**.

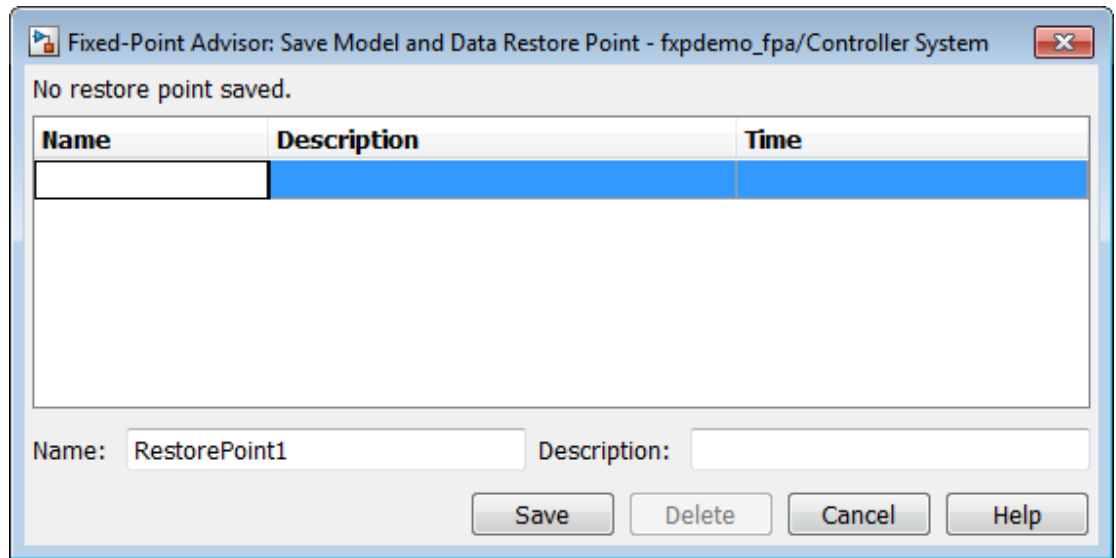

- 2 In the **Save Model and Data Restore Point** dialog box, in the **Name** field, enter a name for the restore point.
- 3 In the **Description** field, you can optionally add a description to help you identify the restore point.
- 4 Click **Save**.

The Fixed Point Advisor saves a restore point of the current model, base workspace, and Fixed Point Advisor status.

Note: To quickly save a restore point, go to **File > Save Restore Point**. The Fixed Advisor saves a restore point with the name `autosaven.n` where `n` is the sequential number of the restore point. If you use this method, you cannot change the name of, or add a description to, the restore point.

Load a Restore Point

When to Load a Restore Point


Load a restore point when:

- A task fails and you cannot continue the conversion. In this case, load a restore point saved earlier in the run to avoid rerunning all the previous tasks.
- You want to revert changes you made in response to advice from the Fixed-Point Advisor.

How to Load a Restore Point

To load a restore point:

- 1 Go to **File > Load Restore Point**.

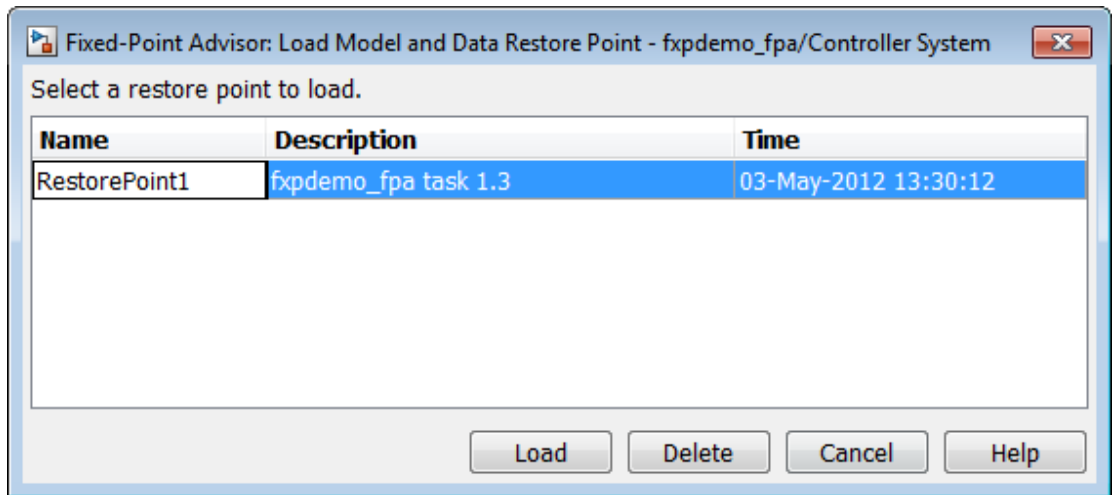

- 2 In the **Load Model and Data Restore Point** dialog box, select the restore point that you want.
- 3 Click **Load**.

The Model Advisor issues a warning that the restoration will overwrite the current model and workspace.

- 4 Click **Load** to load the restore point that you selected.

The Fixed Point Advisor reverts the model, base workspace, and Fixed Point Advisor status.

Fixed-Point Tool

- “Fixed-Point Tool” on page 35-2
- “Run Management” on page 35-5
- “Use Shortcuts to Manage Runs” on page 35-7
- “Debug a Fixed-Point Model” on page 35-11
- “Logging Simulation Ranges for Referenced Models” on page 35-18
- “Log Simulation Ranges for Referenced Models” on page 35-22
- “Propose Data Types for a Referenced Model” on page 35-28
- “Logging Simulation Ranges for MATLAB Function Block” on page 35-31
- “Log Simulation Ranges for MATLAB Function Block” on page 35-32
- “View Signal Names in Fixed-Point Tool” on page 35-35
- “Model Multiple Data Type Behaviors Using a Data Dictionary” on page 35-37

Fixed-Point Tool

In this section...

“Introduction to the Fixed-Point Tool” on page 35-2

“Using the Fixed-Point Tool” on page 35-2

Introduction to the Fixed-Point Tool

The Fixed-Point Tool is a graphical user interface that automates specifying fixed-point data types in a model. The tool collects range data for model objects. The range data comes from either design minimum and maximum values that objects specify explicitly, from logged minimum and maximum values that occur during simulation, or from minimum and maximum values derived using range analysis. Based on these values, the tool proposes fixed-point data types that maximize precision and cover the range. With this tool, you can review the data type proposals and then apply them selectively to objects in your model.

Fixed-Point Tool Capability	More Information
Deriving range information based on specified design range	“Derive Ranges”
Proposing data types based on simulation data	“Conversion Using Simulation Data”
Proposing data types based on derived ranges	“Conversion Using Range Analysis”
Proposing data types based on simulation data from multiple runs	“Propose Data Types Using Multiple Simulations”
Debugging fixed-point models	“Debug a Fixed-Point Model” on page 35-11

Using the Fixed-Point Tool

To open the Fixed-Point Tool, use any of the following methods:

- From the Simulink **Analysis** menu, select **Fixed-Point Tool**.


- From the model context menu, select **Fixed-Point Tool**.
- From a subsystem context menu, select **Fixed-Point Tool**.

If you want to open the tool programmatically, use the `fxptdlg` function. For more information, see `fxptdlg`.

The Fixed-Point Tool contains the following components:

- **Model Hierarchy** pane — Displays a tree-structured view of the Simulink model hierarchy.
- **Contents** pane — Displays a tabular view of objects that log fixed-point data in a system or subsystem.
- **Workflow** pane — Displays parameters for specifying particular attributes of a system or subsystem, such as its data type override and fixed-point instrumentation mode.
- **Toolbar** — Provides buttons for commonly used Fixed-Point Tool commands.
- **Shortcut Editor** — To open the **Shortcut Editor**, on the far right-hand pane, click the **Add/Edit shortcuts** link. This editor provides the ability to configure shortcuts that set up the run name as well as model-wide data type override and instrumentation settings prior to simulation or range derivation. For more information, see “Run Management with the Shortcut Editor” on page 35-5.

For more information about each of these components, see `fxptdlg`.

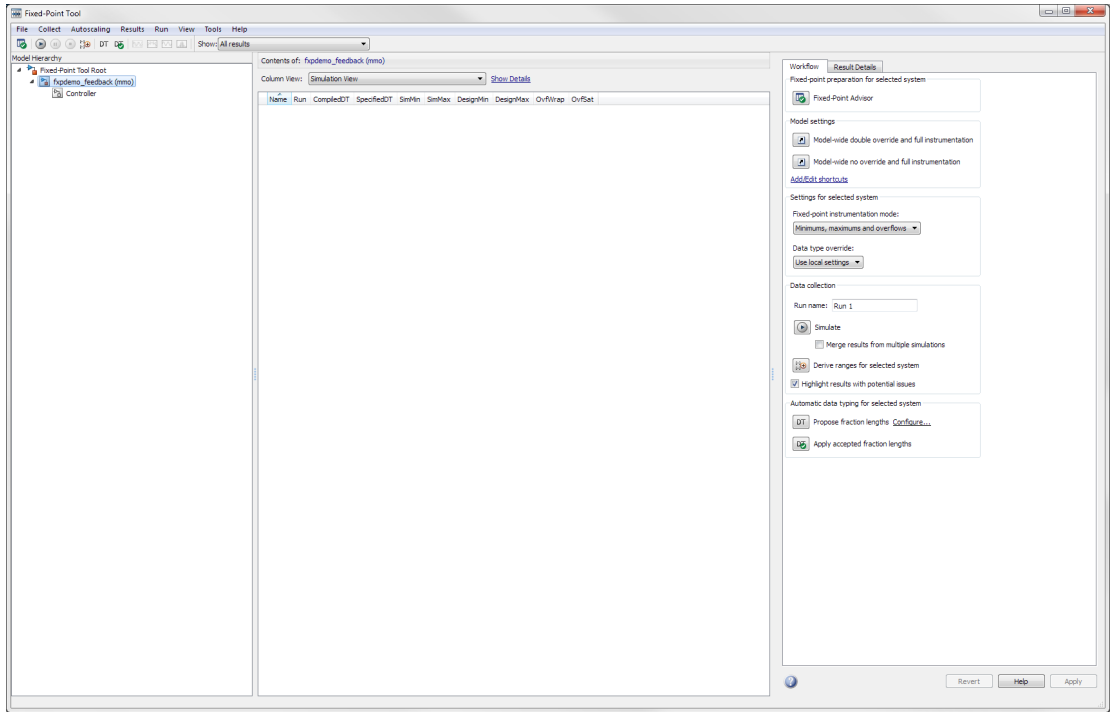

Run Management

In this section...

“Run Management” on page 35-5

“Run Management with the Shortcut Editor” on page 35-5

“Manual Run Management” on page 35-6

Run Management

The Fixed-Point Tool supports multiple runs. Each run uses one set of model settings to simulate the model or to derive or propose data types. You can:

- Store multiple runs.
- Specify custom run names.
- Propose data types based on the results in any run.
- Apply data type proposals based on any run.
- Compare the results of any two runs.
- Rename runs directly in the Fixed-Point Tool **Contents** pane.

You can easily switch between different run setups using shortcuts. Alternatively, you can manually manage runs.

Run Management with the Shortcut Editor

You can use shortcuts prior to simulation to configure the run name as well as to configure model-wide data type override and instrumentation settings. The Fixed-Point Tool provides:

- Frequently used factory default shortcuts, such as **Model-wide double override and full instrumentation**, which sets up your model so that you can override all fixed-point data types with double-precision numbers and logs the simulation minimum and maximum values and overflows.

Note: You can set up user-defined shortcuts across referenced model boundaries. The factory default shortcuts apply only to the top-level model and so do not affect the settings of any referenced model.

- The ability to add and edit custom shortcuts. The shortcuts are saved with the model so that you define them once and then reuse them multiple times. Use the Shortcut Editor to create or edit shortcuts and to add and organize shortcut buttons in the Fixed-Point Tool **Model settings** pane.

Note: You can use user-defined shortcuts across referenced model boundaries.

Manual Run Management

You can also manually manage runs using the following settings:

- In the **Data collection** pane, **Run name**.

Provide a new run name before a simulation or collecting derived minimum and maximum values so that you do not overwrite existing runs.

- In the **Settings for selected system** pane:
 - **Fixed-point instrumentation mode**
 - **Data type override**
 - **Data type override applies to**

More About

- “Use Shortcuts to Manage Runs” on page 35-7

Use Shortcuts to Manage Runs

In this section...

“Why Use Shortcuts to Manage Runs” on page 35-7

“When to Use Shortcuts to Manage Runs” on page 35-7

“Add Shortcuts” on page 35-8

“Edit Shortcuts” on page 35-8

“Delete Shortcuts” on page 35-9

“Capture Model Settings Using the Shortcut Editor” on page 35-10

Why Use Shortcuts to Manage Runs

Shortcuts provide a quick and easy way to set up data type override and fixed-point instrumentation settings run prior to simulation or range derivation. You can associate a run name with each shortcut. When you apply a shortcut, you change the data type override and fixed-point instrumentation settings of multiple systems in your hierarchy simultaneously.

Shortcuts:

- Simplify the workflow. For example, you can collect a floating-point baseline in a clearly named run.
- Provide the ability to configure data type override and instrumentation settings on multiple subsystems in the model hierarchy at the same time. This capability is useful for models that have a complicated hierarchy.
- Are a convenient way to store frequently used settings and reuse them. This capability is useful when switching between different settings during debugging.
- Provide a way to store the original fixed-point instrumentation and data type override settings for the model. Preserving these settings in a shortcut provides a backup in case of failure and a baseline for testing and validation.

When to Use Shortcuts to Manage Runs

To ...	Use...
Autoscale your entire model	The factory default shortcuts. These defaults provide an efficient way to override the model with floating-point data types or

To ...	Use...
	remove existing data type overrides. For more information, see “Propose Fraction Lengths Using Simulation Range Data” on page 38-40.
Debug a model	Shortcuts to switch between different data type override and fixed-point instrumentation modes. For more information, see “Debug a Fixed-Point Model” on page 35-11.
Manage the settings on multiple systems in a model. For example, if you are converting your model to fixed point one subsystem at a time.	The Shortcut Editor to define your own shortcuts so that you can switch between different settings without manually changing individual settings each time.
Capture the initial settings of the model before making any changes to it.	The Shortcut Editor to capture the model settings and save them in a named run. For more information, see “Capture Model Settings Using the Shortcut Editor” on page 35-10.

Add Shortcuts

- 1 On the Fixed-Point Tool **Model settings** pane, click **Add/Edit shortcuts**.
- 2 For each subsystem that you want to specify a shortcut for, on the Shortcut Editor **Model Hierarchy** pane, select the subsystem:
 - a In the **Name of shortcut** field, enter the shortcut name.

By default, if **Allow modification of run name** is selected, the software sets the **Run name** to the shortcut name. You can manually override the name.
 - b Edit the shortcut properties. See “Edit Shortcuts” on page 35-8.

Edit Shortcuts

- 1 On the Fixed-Point Tool **Model settings** pane, click **Add/Edit shortcuts**.
- 2 In the Shortcut Editor, from the **Name of shortcut** list, select the shortcut that you want to edit.


The editor displays the run name, fixed-point instrumentation settings, and data type override settings defined by the shortcut.

Note: You cannot modify the factory default shortcuts.

- 3 If you do not want this shortcut to modify the existing fixed-point instrumentation settings on the model, clear **Allow modification of fixed-point instrumentation settings**.
- 4 If you do not want this shortcut to modify the existing data type override settings on the model, clear **Allow modification of data type override settings**.
- 5 If you do not want this shortcut to modify the run name on the model, clear **Allow modification of run name**.
- 6 If you want to modify the shortcut for a subsystem:
 - a Select the subsystem.
 - b If applicable, set the **Fixed-point instrumentation mode** to use when you apply this shortcut.
 - c If applicable, set the **Data type override** mode to use when you apply this shortcut.
 - d If applicable, set the **Run name** to use when you apply this shortcut.
 - e Click **Apply**.
- 7 Repeat step 6 to modify any subsystem shortcuts that you want.
- 8 Optionally, if you want the Fixed-Point Tool to display a button for this new shortcut, use the right arrow to move the shortcut to the list of shortcuts to display. Use the up and down arrows to change the order of the shortcut buttons.
- 9 Save the model to store the shortcut with the model.

Delete Shortcuts

To delete a shortcut from a model:

- 1 On the Fixed-Point Tool **Model settings** pane, click **Add/Edit shortcuts**.
- 2 On the Shortcut Editor **Manage shortcuts** pane, in the **Shortcuts** table, select the shortcut that you want to delete.
- 3 Click the **Delete selected shortcut** button, .

Capture Model Settings Using the Shortcut Editor

- 1 On the Fixed-Point Tool **Model settings** pane, click **Add/Edit shortcuts**.
- 2 In the Shortcut Editor, create a new shortcut, for example, **Initial subsystem settings**.

By default, if **Allow modification of run name** is selected, the software sets the **Run name** to the shortcut name. You can manually override the name.

- 3 Verify that **Allow modification of fixed-point instrumentation settings** and **Allow modification of data type override settings** are selected.
- 4 Click **Capture system settings**.

The software sets the **Fixed-point instrumentation mode**, **Data type override**, and, if appropriate, **Data type override applies to** for the systems in the model hierarchy.

- 5 Click **Apply**.
- 6 Save the model to store the shortcut with the model.

Debug a Fixed-Point Model

In this section...

“Simulating the Model to See the Initial Behavior” on page 35-11

“Debugging the Model” on page 35-13

“Simulating the Model Using a Different Input Stimulus” on page 35-15

“Debugging the Model with the New Input” on page 35-15

“Proposing Fraction Lengths for Math2 Based on Simulation Results” on page 35-16

“Verifying the New Settings” on page 35-17

This example shows how to:

- Identify which parts of a model cause numeric problems.

The current fixed-point settings on this model cause overflows. You debug the model by overriding the fixed-point settings on one subsystem at a time and simulating the model to determine how these fixed-point settings affect the model behavior.

- Create and use shortcuts to set up fixed-point instrumentation and data type override settings for different runs.

To optimize the model for two different inputs, you switch several times between different data type override and fixed-point instrumentation settings. Using shortcuts facilitates changing these settings.


- Autoscale the model over the complete simulation range for both inputs.

Simulating the Model to See the Initial Behavior

Initially, the input to the Gain block is a sine wave of amplitude 7. Simulate the model using local system settings with logging enabled to see if any overflows or saturations occur.

- 1 Open the `ex_fixedpoint_debug` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot,'toolbox','fixpoint','examples'))
ex_fixedpoint_debug
```

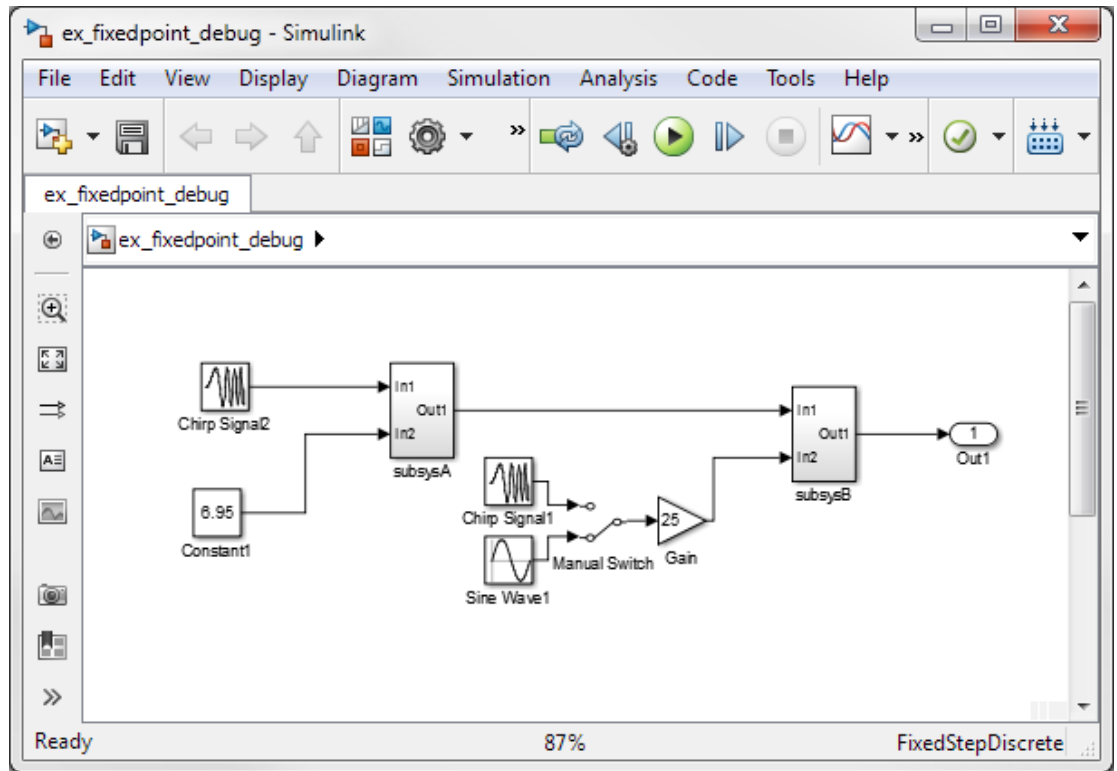


- 2 From the model **Analysis** menu, select **Fixed-Point Tool**.
- 3 In the Fixed-Point Tool, set up a shortcut for the initial system settings:

On the **Model settings** pane, click **Add/Edit shortcuts**.

- 4 In the Shortcut Editor:
 - a On the **Model Hierarchy** pane, select **subsysA>Math1**.
 - b In the **Name of shortcut** field, enter **Setting A**.

The editor sets the **Run name** for this shortcut to **Setting A**.

- c Set **Fixed-point instrumentation mode** to **Minimums, maximums and overflows**.
- d Set **Data type override** to **Use local settings**.

- e Click **Apply**.
 - f On the **Model Hierarchy** pane, select `subsysA>Math2` and repeat steps (c) to (f).
 - g On the **Manage shortcuts** pane, under **Shortcuts**, select **Setting A** then click the right arrow to move this shortcut to the list of shortcuts displayed in the Fixed-Point Tool.
- 5 Use this shortcut to set up a run. Use the settings to simulate the model.
- a On the Fixed-Point Tool **Model Hierarchy** pane, select `ex_fixedpoint_debug`.
 - b On the **Model settings** pane, click **Setting A**.
 - c Click the **Simulate** button, 

The Simulink software simulates the model using the fixed-point instrumentation and data type settings specified in **Setting A**. Afterward, on the **Contents** pane, the Fixed-Point Tool displays the simulation results for each block that logged fixed-point data. The tool stores the results in the run named **Setting A**. The Fixed-Point tool highlights `subsysB/Math2/Add1:Output` in red to indicate that there is an issue with this result. The **OvfWrap** column for this result shows that the block overflowed 51 times, which indicates a poor estimate for its scaling.

Debugging the Model

To debug the model, first simulate the model using local settings on the subsystem `Math1` while overriding the fixed-point settings on `Math2` with doubles. Simulating subsystem `Math2` with doubles override avoids quantization effects for this subsystem. If overflows occur, you can deduce that there are issues with the fixed-point settings in subsystem `Math1`.

Next, simulate the model using local settings on `Math2` and doubles override on `Math1`. If overflows occur for this simulation, there are problems with the fixed-point settings for subsystem `Math2`.

Setting Up Shortcuts

- 1 Use the Shortcut Editor to create the following new shortcuts.

Shortcut Name	Subsystem	Fixed-point instrumentation mode	Data type override	Data type override applies to
Setting B	Math1	MinMaxAndOverflow	Use local settings	N/A
	Math2	MinMaxAndOverflow	Double	All numeric types
Setting C	Math1	MinMaxAndOverflow	Double	All numeric types
	Math2	MinMaxAndOverflow	Use local settings	N/A

- 2 On the **Manage shortcuts** pane, add **Setting B** and **Setting C** to the list of buttons to display in the Fixed-Point Tool.

Testing Subsystem Math1 Settings

Simulate the model with original fixed-point settings on **Math1** while overriding the fixed-point settings with doubles on **Math2**.

- 1 On the Fixed-Point Tool **Model Hierarchy** pane, select `ex_fixedpoint_debug`.
- 2 On the **Model settings** pane, click **Setting B** to override fixed-point settings on **Math2**.
- 3 Click the **Simulate** button.

The Simulink software simulates the model using the fixed-point instrumentation and data type settings specified in **Setting B**, using fixed-point settings for **Math1** and overriding the fixed-point settings for **Math2**. No overflows occur, which indicates that the settings on **Math1** are not causing the overflows.

Testing Subsystem Math2 Settings

Simulate with original fixed-point settings on **Math2** while overriding the fixed-point settings with doubles on **Math1**.

- 1 On the Fixed-Point Tool **Model Hierarchy** pane, select `ex_fixedpoint_debug`.
- 2 On the **Shortcuts to set up runs** pane, click **Setting C** to override the fixed-point settings on **Math1**.
- 3 Click the **Simulate** button.

The Simulink software simulates the model using the fixed-point instrumentation and data type settings specified in **Setting C**, using fixed-point settings for **Math2**

and overriding the fixed-point settings for `Math1`. Overflows occur in run **Setting C**, indicating that the settings on `Math2` are causing the overflows.

Simulating the Model Using a Different Input Stimulus

Simulate the model with a different input using the original fixed-point settings on subsystems `Math1` and `Math2`. Because you set up a shortcut for this initial set up, before rerunning the simulation, you can easily configure the model. Before simulating, select to merge the simulation results so that the tool gathers the simulation range for both inputs.

- 1** On the **Data collection** pane, select **Merge results from multiple simulations**.
- 2** In the `ex_fixedpoint_debug` model, double-click the Manual Switch block to select `Chirp Signal1` as the input to the Gain block.
- 3** On the Fixed-Point Tool **Model Hierarchy** pane, select `ex_fixedpoint_debug` and simulate using the original fixed-point settings for `Math1` and `Math2`.
 - a** On the **Model settings** pane, click **Setting A**.
 - b** Click the **Simulate** button.

The Simulink software simulates the model using the fixed-point instrumentation and data type settings specified in **Setting A**. Afterward, in the **Contents** pane, the Fixed-Point Tool displays the simulation results for each block that logged fixed-point data. The tool stores the results in the run named **Setting A**.

Tip In the Fixed-Point Tool **Contents** pane, click **Run** to sort the results in this column.

Debugging the Model with the New Input

- 1** Simulate the model with original fixed-point settings on `Math1` while overriding the fixed-point settings with doubles on `Math2`.
 - a** On the Fixed-Point Tool **Model Hierarchy** pane, select `ex_fixedpoint_debug`.
 - b** On the **Model settings** pane, click **Setting B**.
 - c** Click the **Start** button.

No overflows occur, which indicates that the settings on **Math1** are not causing the overflows.

- 2 Simulate with original fixed-point settings on **Math2** while overriding the fixed-point settings with doubles on **Math1**.
 - a On the Fixed-Point Tool **Model Hierarchy** pane, select `ex_fixedpoint_debug`.
 - b On the **Model settings** pane, click **Setting C**.
 - c Click the **Start** button.

Overflows occur, which indicates that the fixed-point settings on **Math2** are causing the overflows. Next, use the Fixed-Point Tool to propose new data types for this subsystem.

Proposing Fraction Lengths for **Math2** Based on Simulation Results

- 1 On the Fixed-Point Tool **Model Hierarchy** pane, select **Math2**.
- 2 On the **Automatic data typing for selected system** pane, click the **Propose fraction lengths** button.
- 3 In the Propose Data Types dialog box, select **Setting B** as the run to use for proposing data types and click **OK**. This run simulated **Math2** with double override to obtain the 'ideal' behavior of the subsystem based on the simulation results for both input stimuli.

The Fixed-Point Tool proposes new fixed-point data types for the objects in subsystem **Math2** to avoid numerical issues such as overflows.

- 4 On the **Contents** pane **ProposedDT** column, examine the proposed data types for the objects in **Math2**. The tool proposed new fixed-point data types with reduced precision for the **Add1** block Output and Accumulator.
- 5 Because the Fixed-Point Tool marked all the proposed results with a green icon to indicate that the proposed data types pose no issues for these objects, accept the proposals.

In the **Automatic data typing for selected system** pane, click the **Apply accepted fraction lengths** button.

Verifying the New Settings

Verify that the new settings do not cause any numerical problems by simulating the model using local settings for subsystems `Math1` and `Math2` and logging the results. Use shortcut `Setting A` that you set up for these settings.

- 1 On the Fixed-Point Tool **Model Hierarchy** pane, select `ex_fixedpoint_debug`.
- 2 On the **Model settings** pane, click **Setting A**.
- 3 On the **Data collection** pane, set **Store results in run** to `Setting A2` and click **Apply** so that the Fixed-Point Tool does not overwrite the previous results for this shortcut.
- 4 Click the **Simulate** button.

The Simulink software simulates the model using the new fixed-point settings. Afterward, the Fixed-Point Tool displays the simulation results in run `Setting A2`. No overflows or saturations occur indicating that the model can now handle the full input range.


Logging Simulation Ranges for Referenced Models

In this section...
“Viewing Simulation Ranges for Referenced Models” on page 35-18
“Fixed-Point Instrumentation and Data Type Override Settings” on page 35-20
“See Also” on page 35-21


Viewing Simulation Ranges for Referenced Models

The Fixed-Point Tool logs simulation minimum and maximum values (ranges) for referenced models. The tool logs these values only for instances of the referenced model that are in Normal mode. It does not log simulation minimum and maximum values for instances of the referenced model that are in non-Normal modes. If your model contains multiple instances of a referenced model and some are instances are in Normal mode and some are not, the tool logs and displays data for those that are in Normal mode.

If a model contains a referenced model, the Fixed-Point Tool **Model Hierarchy** pane displays a subnode for the instance of the referenced model as well as a node for the referenced model. For example, the `ex_mdhref_controller` model contains a Model block that references the `ex_controller` model. The Fixed-Point Tool shows both models in the model hierarchy.

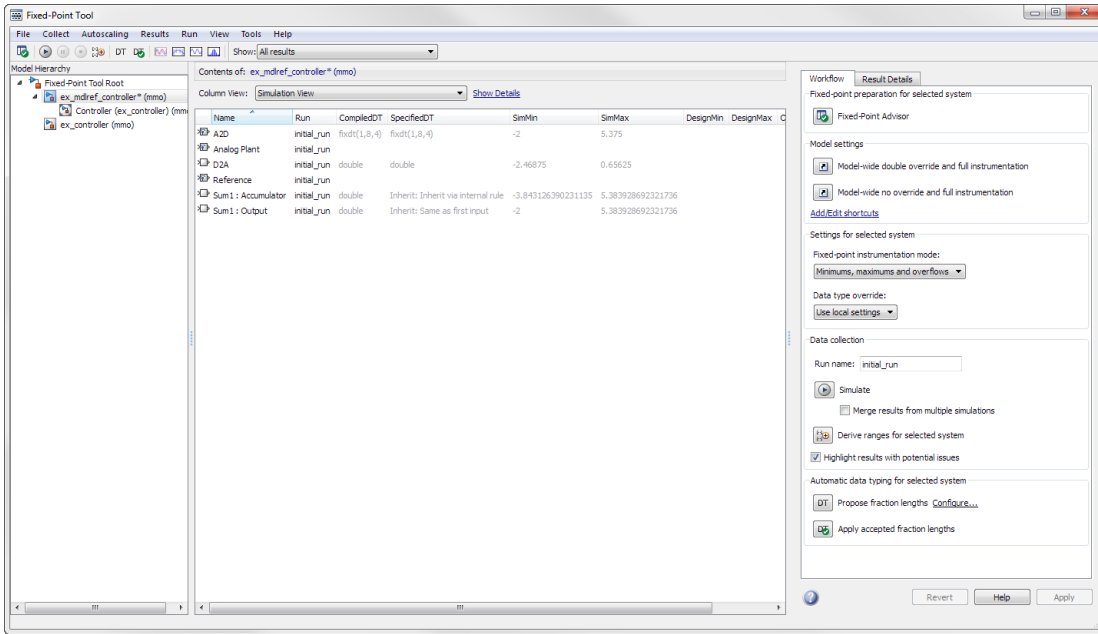

If a model contains multiple instances of a referenced model, the tool displays each instance of the referenced model in this model as well as a node for the referenced model. For example, the `ex_multi_instance` model contains two instances of the referenced model `ex_sum`. The Fixed-Point Tool displays both models and both instances of the referenced model in the model hierarchy.

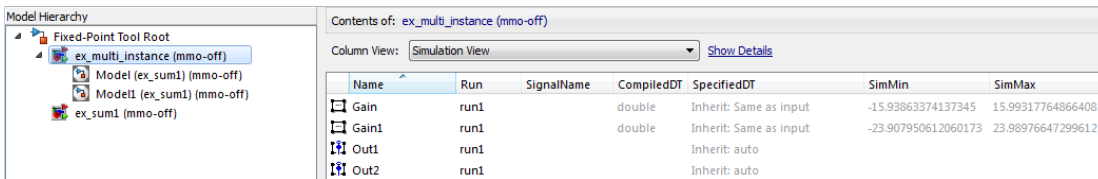

The tool logs and displays the results for each instance of the referenced model. For example, here are the results for the first instance of the referenced model `ex_sum1` in `ex_multi_instance`.

The screenshot shows the 'Model Hierarchy' on the left with 'Model (ex_sum1) (mmo-off)' selected. The main window displays 'Contents of: Model (ex_sum1) (mmo-off)' with a 'Simulation View' column view. The table below shows simulation results for two signals: 'Sum : Accumulator run1' and 'Sum : Output run1'.

Name	Run	SignalName	CompiledDT	SpecifiedDT	SimMin	SimMax
Sum : Accumulator	run1		double	Inherit: Inherit via internal rule	-23.907950612060173	23.98976647299612
Sum : Output	run1		double	Inherit: Inherit via internal rule	-7.996588824332038	7.969316870686724

Here are the results for the second instance of `ex_sum1`.

The screenshot shows the 'Model Hierarchy' on the left with 'Model1 (ex_sum1) (mmo-off)' selected. The main window displays 'Contents of: Model1 (ex_sum1) (mmo-off)' with a 'Simulation View' column view. The table below shows simulation results for two signals: 'Sum : Accumulator run1' and 'Sum : Output run1'.

Name	Run	SignalName	CompiledDT	SpecifiedDT	SimMin	SimMax
Sum : Accumulator	run1		double	Inherit: Inherit via internal rule	-19.92329217671681	19.9914720608301
Sum : Output	run1		double	Inherit: Inherit via internal rule	0	0

In the referenced model node, the tool displays the union of the results for each instance of the referenced model.

The screenshot shows the 'Model Hierarchy' on the left with 'ex_sum1 (mmo-off)' selected. The main window displays 'Contents of: ex_sum1 (mmo-off)' with a 'Simulation View' column view. The table below shows simulation results for two signals: 'Sum : Accumulator run1' and 'Sum : Output run1'.

Name	Run	SignalName	CompiledDT	SpecifiedDT	SimMin	SimMax
Sum : Accumulator	run1		double	Inherit: Inherit via internal rule	-23.907950612060173	23.98976647299612
Sum : Output	run1		double	Inherit: Inherit via internal rule	-7.996588824332038	7.969316870686724

Fixed-Point Instrumentation and Data Type Override Settings

When you simulate a model that contains referenced models, the data type override and fixed-point instrumentation settings for the top-level model do not control the settings for the referenced models. You must specify these settings separately for the referenced model. If the settings are inconsistent, for example, if you set the top-level model data type override setting to double and the referenced model to use local settings and the referenced model uses fixed-point data types, data type propagation issues might occur.

You can set up user-defined shortcuts across referenced model boundaries. The factory default shortcuts apply only to the top-level model and so do not affect the settings of any referenced model.

When you change the fixed-point instrumentation and data type override settings for any instance of a referenced model, the settings change on all instances of the model and on the referenced model itself.

See Also

- “Log Simulation Ranges for Referenced Models” on page 35-22


Log Simulation Ranges for Referenced Models

This example shows how to log simulation minimum and maximum values for a model that contains multiple instances of the same referenced model.


Simulate the Model Using Local Settings

- 1 Open the `ex_md1ref_controller` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot,'toolbox','fixpoint','examples'))
ex_md1ref_controller
```

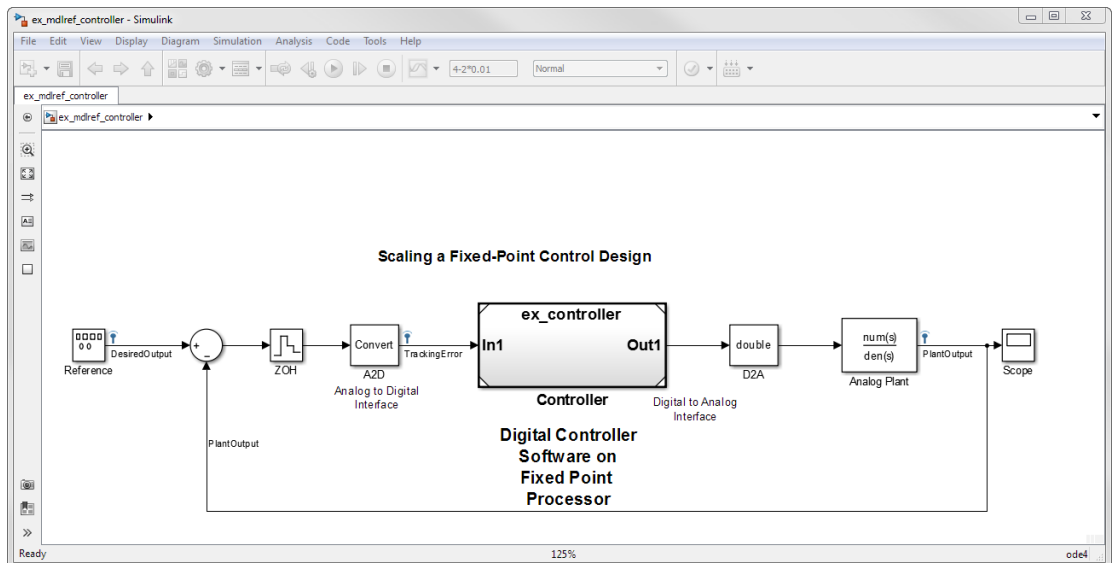


The model contains a Model block that references the `ex_controller` model. Using a referenced model isolates the controller from the rest of the system. This method is useful to help you configure a model to determine the effect of fixed-point data types on a system. Using this approach, you convert only the referenced model because this is the system of interest.

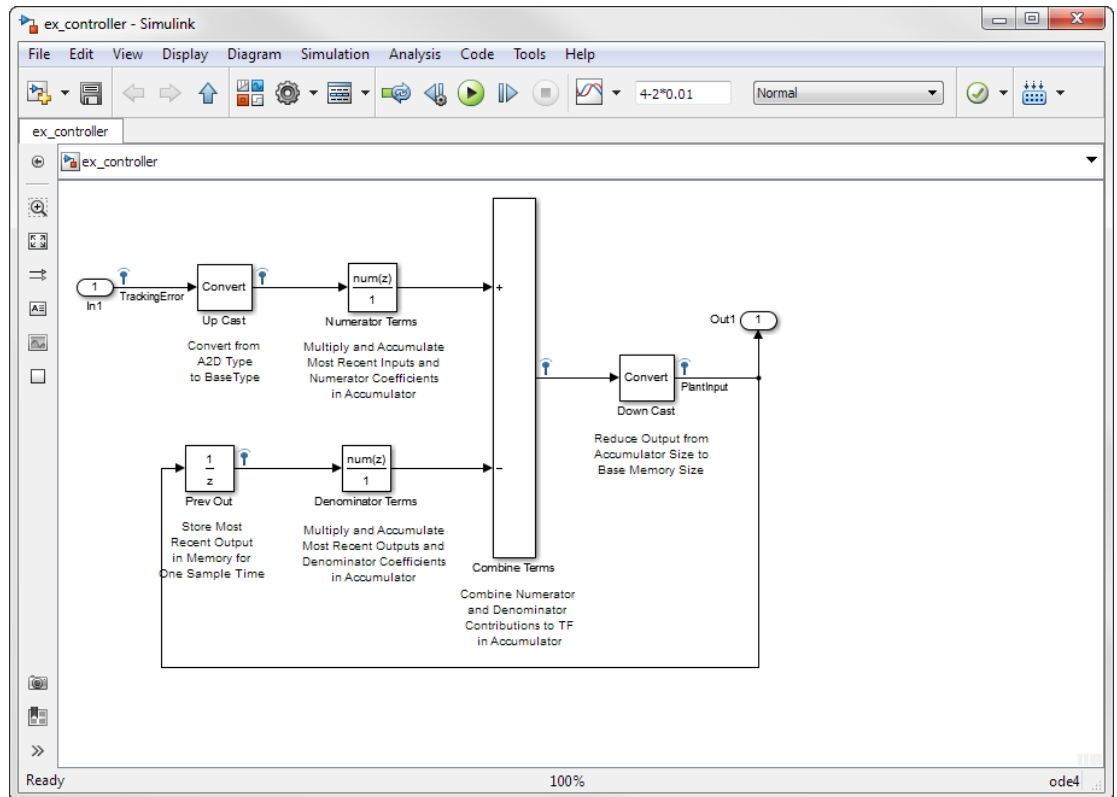

- 2 In the `ex_mdhref_controller` model menu, select **Analysis > Fixed-Point Tool**.

The Fixed-Point Tool opens. In its **Model Hierarchy** pane, the tool displays two model nodes, one for the `ex_mdhref_controller` model showing that this model contains a Model block that refers to the `ex_controller` model, and another for the `ex_controller` model itself.

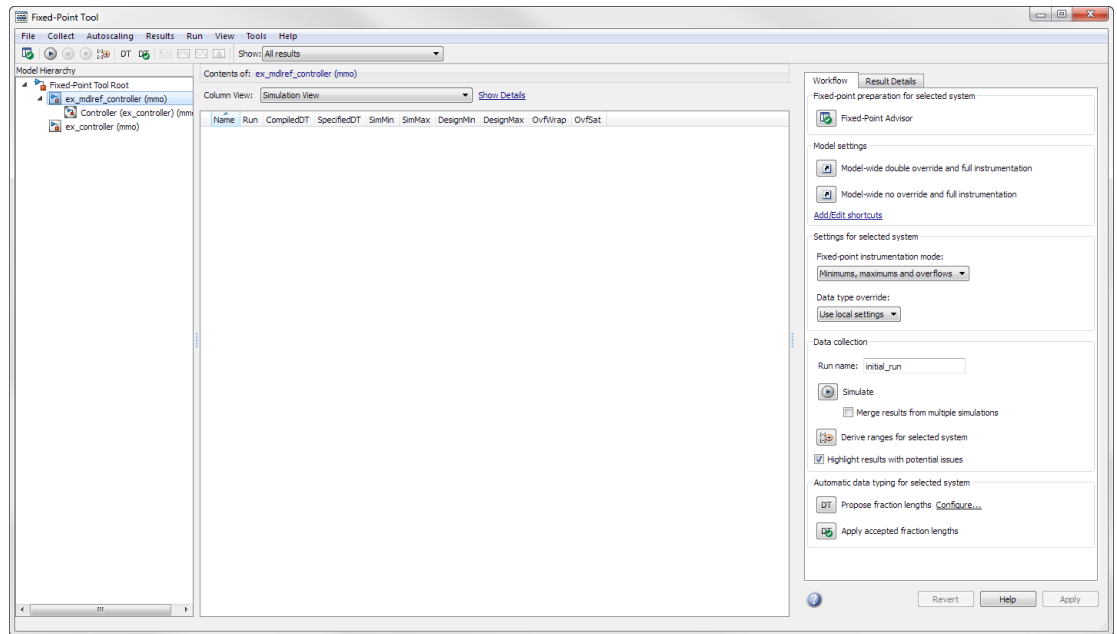

- 3 In the Fixed-Point Tool **Model Hierarchy** pane, select the `ex_mdiref_controller` model.
- 4 On the **Settings for selected system** pane, verify that:
 - **Fixed-point instrumentation mode** is set to `Minimums, maximums and overflows`.
 - **Data type override** is set to `Use local settings` so the model will log simulation data using the data types set up on the model.
- 5 In the Fixed-Point Tool Data collection pane, set **Run name** to `initial_run` and then click **Apply**.

Providing a unique name for the run avoids accidentally overwriting results from previous runs and enables you to identify the run more easily.

- 6 The fixed-point instrumentation and data type override settings for the top-level model do not affect the settings in the referenced model. In the Fixed-Point Tool **Model Hierarchy** pane, select the `ex_controller` model and verify that:

- **Fixed-point instrumentation mode** is set to Minimums, maximums and overflows
- **Data type override** is set to Use local settings

7 In the Fixed-Point Tool, click **Simulate**.

The Simulink software simulates the model. Afterward, the Fixed-Point Tool displays in its **Contents** pane the simulation results for each block that logged fixed-point data. By default, it displays the Simulation View of these results.

The Simulation Data Inspector tool opens. You can use this tool to inspect and compare signals in your model.

8 In the Fixed-Point Tool **Model Hierarchy** pane, select the `ex_controller` model.

The Fixed-Point tool displays the results for the referenced model and highlights the **Up Cast** block in red to indicate that there is an issue with this result. The **Saturations** column for this result shows that the block saturated 23 times, which indicates poor scaling.

The screenshot shows the Fixed-Point Tool interface. The 'Contents' pane displays the following table of results for the `ex_controller` model:

Name	Run	CompletedDT	SpecifiedDT	SimMin	SimMax	DesignMin	DesignMax	Overflow	Sat
Combine Terms : Accumulator	initial_run	fixed(1,32,12)	Inherit: Inherit via internal rule	-2.439208984375	3.505893375				
Combine Terms : Output	initial_run	fixed(1,32,12)	fixed(1,32,12)	-2.439208984375	6.661376951325				
Denominator Terms : Accumulator	initial_run	fixed(1,32,12)	fixed(1,32,12)	-3.0791015625	4.859130859375				
Denominator Terms : Output	initial_run	fixed(1,32,12)	fixed(1,32,12)	-0.709927734375	3.505893375				
Denominator Terms : Product output	initial_run	fixed(1,32,12)	fixed(1,32,12)	-3.0791015625	4.859130859375				
Down Cast	initial_run	fixed(1,16,5)	fixed(1,16,5)	-2.46875	0.65625				
Numerator Terms : Accumulator	initial_run	fixed(1,32,12)	fixed(1,32,12)	-2.850341796875	2.85009765625				
Numerator Terms : Output	initial_run	fixed(1,32,12)	fixed(1,32,12)	-1.77197265625	1.693603515625				
Numerator Terms : Product output	initial_run	fixed(1,32,12)	fixed(1,32,12)	-2.850341796875	2.85009765625				
Up Cast	initial_run	fixed(1,16,14)	fixed(1,16,14)	-2	1.999386484375				23

The 'Up Cast' block is highlighted in red, indicating a saturation issue. The 'Saturations' column for this block shows a value of 23.

Next, use data type override mode to perform a global override of the fixed-point data types and scaling using double-precision numbers to avoid quantization effects. Later, you use these simulation results when performing automatic data typing.

Gather a Floating-Point Benchmark


- 1 In the **Settings for selected system** pane, set **Data type override** to Double.
- 2 In the **Data collection** pane, set **Run name** to `double_run` and then click **Apply**.
- 3 In the **Model Hierarchy** pane, select the `ex_md1ref_controller` model, set **Data type override** to Double and then click **Apply**.

Setting data type override for the top-level model avoids data type propagation issues when you simulate the model.

- 4 In the Fixed-Point Tool, click **Simulate**.

The Simulink software simulates the `ex_md1ref_controller` model in data type override mode and stores the results in the run named `double_run`. Afterward, the Fixed-Point Tool displays in its **Contents** pane the results along with those of the run that you generated previously.


- 5 Use the Simulation Data Inspector to view the `initial_run` and `double_run` versions of the signal associated with the Analog Plant output (upper axes), and the difference between the signals (lower axes).

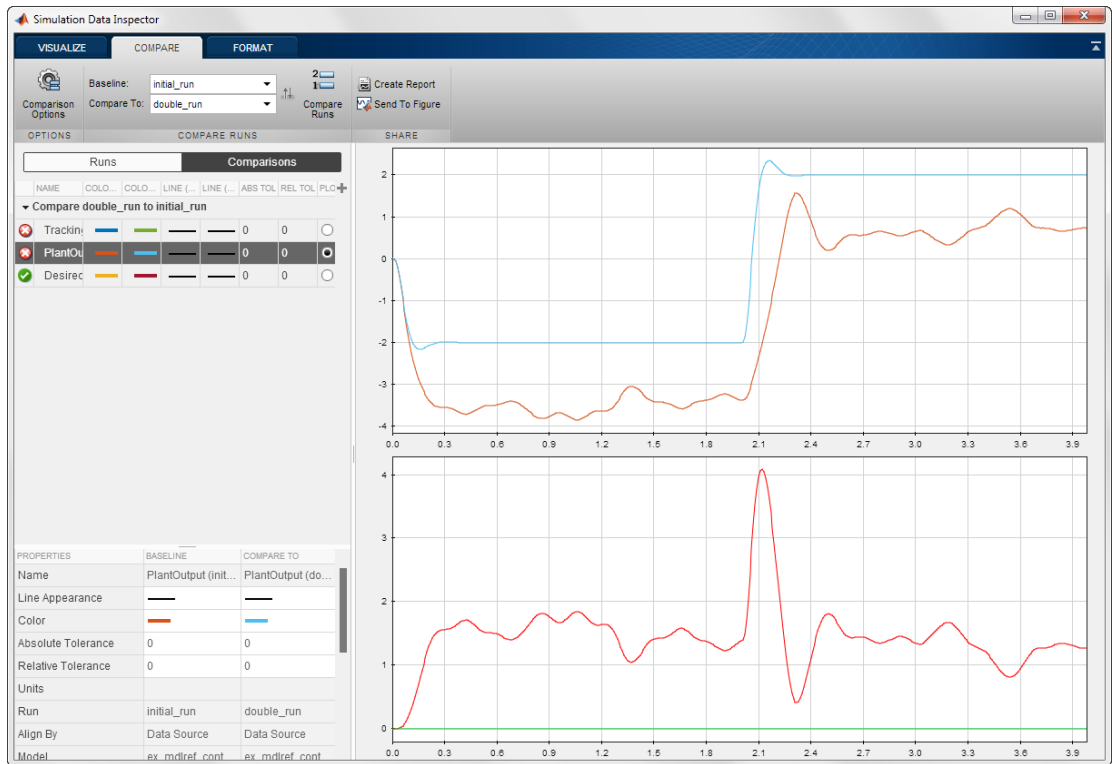

Now you are ready to propose data types based on the simulation results from the doubles override run.

Propose Data Types for a Referenced Model

This example shows how to propose data types for a referenced model. To run this example, you must first run the “Log Simulation Minimum and Maximum Values for Referenced Models” example.

- 1 In the **Model Hierarchy** pane of the Fixed-Point Tool, select the `ex_controller` model.
- 2 In the **Automatic data typing for selected system** pane, click the **Configure** link and verify that **Propose fraction lengths for specified word lengths** is selected.
- 3 In the same pane, specify the **Safety margin for simulation min/max (%)** parameter as **20** and click **Apply**.
- 4 In the Fixed-Point Tool, click **Propose fraction lengths**, .

Because no design minimum and maximum information is supplied, the simulation minimum and maximum data that was collected during the simulation run is used to propose data types. The **Percent safety margin for simulation min/max** parameter value multiplies the “raw” simulation values by a factor of 1.2. Setting this parameter to a value greater than 1 decreases the likelihood that an overflow will occur when fixed-point data types are being used.

Because of the nonlinear effects of quantization, a fixed-point simulation will produce results that are different from an idealized, doubles-based simulation. Signals in a fixed-point simulation can cover a larger or smaller range than in a doubles-based simulation. If the range increases enough, overflows or saturations could occur. A safety margin decreases the likelihood of this happening, but it might also decrease the precision of the simulation.

- 5 In the Propose Data Types dialog box, select `double_run` and click **OK**.

The Fixed-Point Tool analyzes the scaling of all fixed-point blocks whose:

- **Lock output data type setting against changes by the fixed-point tools** parameter is not selected.
- **Output data type** parameter specifies a generalized fixed-point number.

The Fixed-Point Tool uses the minimum and maximum values stored in the selected run to propose each block's scaling such that the precision is maximized while the

full range of simulation values is spanned. The tool displays the proposed scaling in its **Contents** pane. Now, it displays the Automatic Data Typing View to provide information, such as **ProposedDT**, **ProposedMin**, **ProposedMax**, which are relevant at this stage of the fixed-point conversion.

Contents of: ex_controller* (mmo-dbl)

Column View: Automatic Data Typing View [Show Details](#)

Name	Run	Accept	ProposedDT	SpecifiedDT	CompledDT	SimMin	SimMax	ProposedMin	ProposedMax
Up Cast	double_run	<input checked="" type="checkbox"/>	fixdt(1,16,12)	fixdt(1,16,14)	double	-2	3.9999999999711746	-8	7.999755859
Numerator Terms : Accumulator	double_run	<input checked="" type="checkbox"/>	fixdt(1,32,28)	fixdt(1,32,12)	double	-5.677304459288715	5.700524518426912	-8	7.999999996
Numerator Terms : Output	double_run	<input checked="" type="checkbox"/>	fixdt(1,32,28)	fixdt(1,32,12)	double	-3.367372640959928	3.5439615259925983	-8	7.999999996
Numerator Terms : Product output	double_run	<input checked="" type="checkbox"/>	fixdt(1,32,28)	fixdt(1,32,12)	double	-5.677304459288715	5.700524518426912	-8	7.999999996
Denominator Terms : Accumulator	double_run	<input checked="" type="checkbox"/>	fixdt(1,32,27)	fixdt(1,32,12)	double	-8.516638478410028	5.39648751512156	-16	15.99999999
Denominator Terms : Output	double_run	<input checked="" type="checkbox"/>	fixdt(1,32,28)	fixdt(1,32,12)	double	-6.475416336873576	3.4877081684371363	-8	7.999999996
Denominator Terms : Product output	double_run	<input checked="" type="checkbox"/>	fixdt(1,32,27)	fixdt(1,32,12)	double	-8.516638478410028	5.39648751512156	-16	15.99999999
Combine Terms : Output	double_run	<input checked="" type="checkbox"/>	fixdt(1,32,28)	fixdt(1,32,12)	double	-2.4135009037899806	4.32700180757929	-8	7.999999996
Combine Terms : Accumulator	double_run	<input type="checkbox"/>	n/a	Inherit: Inherit via internal rule	double	-6.475416336873576	4.32700180757929		
Down Cast	double_run	<input checked="" type="checkbox"/>	fixdt(1,16,12)	fixdt(1,16,5)	double	-2.4135009037899806	4.32700180757929	-8	7.999755859
In1	double_run	<input type="checkbox"/>	n/a	fixdt(1,8,4)					
Out1	double_run	<input checked="" type="checkbox"/>	fixdt(1,16,12)	fixdt(1,16,5)				-8	7.999755859

- Review the scaling that the Fixed-Point Tool proposes. You can choose to accept the scaling proposal for each block by selecting the corresponding **Accept** check box in the **Contents** pane. By default, the Fixed-Point Tool accepts all scaling proposals that differ from the current scaling. For this example, verify that the **Accept** check box associated with the active run is selected for each of the Controller subsystem's blocks.

The Fixed-Point Tool does not propose a data type for **Combine Terms:Accumulator** and displays n/a in the **ProposedDT** column. The tool does not propose a data type because the **SpecifiedDT** is **Inherit: Inherit via internal rule**. To view more information about a proposal, select the result and click the **Result Details** tab.

- In the Fixed-Point Tool, click the **Apply accepted fraction lengths** button .

The Fixed-Point Tool applies to the scaling proposals that you accepted in the previous step.


- In the **Model Hierarchy** pane of the Fixed-Point Tool, select the `ex_md1ref_controller` model.
 - In the **Settings for selected system** pane, set **Data type override** to **Use local settings**. This option enables each of the model's subsystems to use its locally specified data type settings, however, it does not apply to the referenced model.

- b** In the **Data collection** pane, set **Run name** to `scaled_fixed_run` and then click **Apply**.
- 9** In the **Model Hierarchy** pane, select the `ex_controller` model and set its **Data type override** parameter as `Use local settings` and click **Apply**.
- 10** In the Fixed-Point Tool, click **Simulate**.

The Simulink software simulates the `ex_md1ref_controller` model using the new scaling that you applied. Afterward, the Fixed-Point Tool displays in its **Contents** pane information about blocks that logged fixed-point data.

- 11** Use the Simulation Data Inspector to plot the Analog Plant output for the floating-point and fixed-point runs and the difference between them.

The difference plot shows that the difference between the floating-point signal and the fixed-point signal is within the specified tolerance of `0.04`.

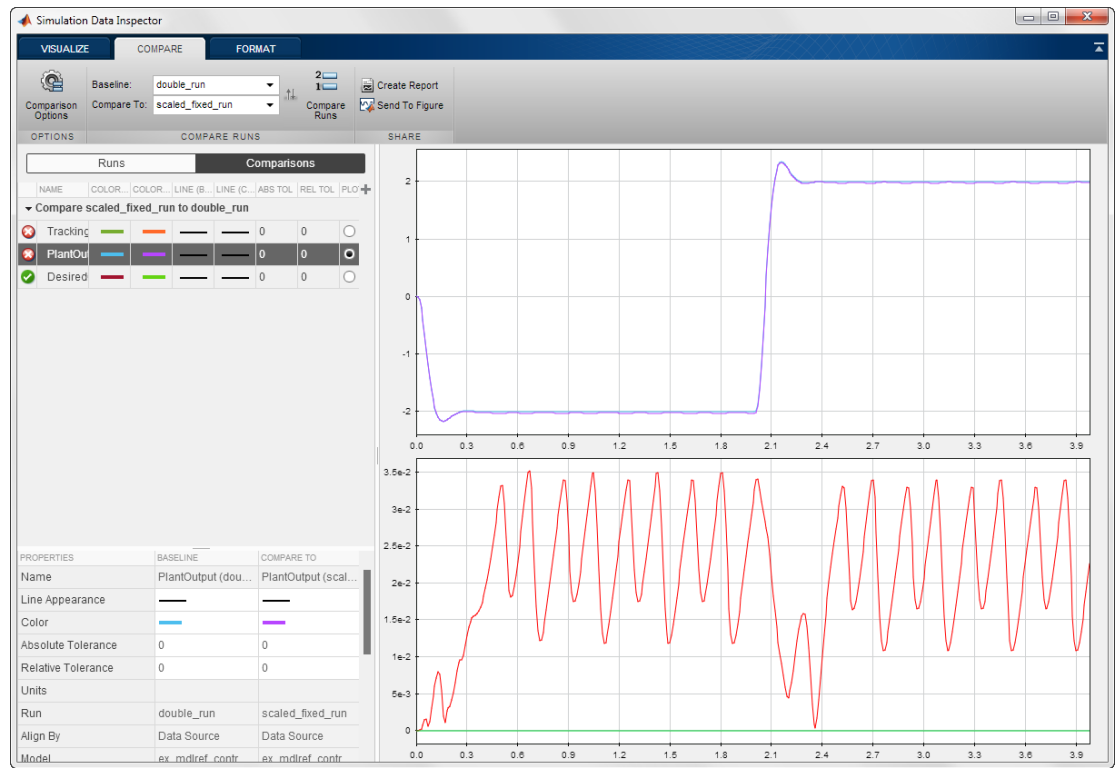

Logging Simulation Ranges for MATLAB Function Block

You can log simulation minimum and maximum values for MATLAB Function blocks using the `Mininums`, `maximumx` and `overflows` logging control in the Fixed-Point Tool. The logged minimum and maximum values are displayed in the MATLAB Function Report. For fixed-point data types, the report also displays the percent of current range. You can use the simulation minimum/maximum data to help you determine the optimal word length and fraction length of fixed-point data types for signals in your model. After modifying your model to use fixed-point data types, simulate again to verify that the data types cover the full intended operating range.

Note: The software does not log simulation minimum and maximum values for MATLAB Function blocks used as a reference (library) block or in a referenced model.

See Also


- “Log Simulation Ranges for MATLAB Function Block” on page 35-32

Log Simulation Ranges for MATLAB Function Block


This example shows how to log simulation minimum and maximum values for a MATLAB Function block and view these values in the MATLAB Function Report.

- 1 Open the `ex_matlab_function_block_logging` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot,'toolbox','fixpoint','examples'))
ex_matlab_function_block_logging
```

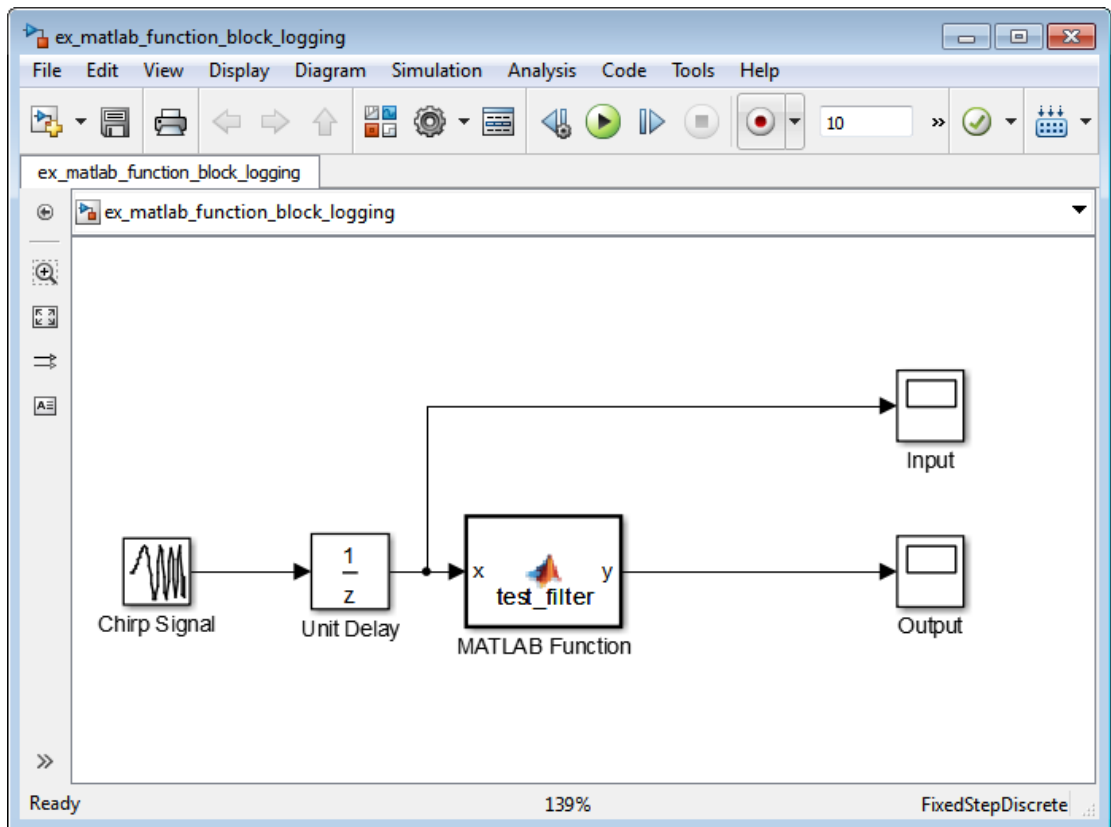

- 2 From the model **Analysis** menu, select **Fixed-Point Tool**.

- 3 In the Fixed-Point Tool, under **Settings for selected system, Fixed-point instrumentation mode** is set to **Minimums, maximums and overflows** so that the Fixed-Point Tool logs the simulation minimum and maximum values. **Data type override** is set to **Use local settings** so that the Fixed-Point Tool logs data using the data types specified in the model.
- 4 On the Fixed-Point Tool **Model Hierarchy** pane, select `ex_matlab_function_block_logging`.
- 5 Click the **Simulate** button, .

The Simulink software simulates the model using the specified fixed-point instrumentation and local data type settings.

- 6 In the `ex_matlab_function_block_logging` model, double-click the MATLAB Function block.

The MATLAB Function block code is displayed in the MATLAB editor window.

- 7 In MATLAB, on the **Editor** tab, click **View Report**.
- 8 In the **MATLAB Function Report**, click the **Variables** tab.

The **Variables** tab displays the simulation minimum and maximum values for the MATLAB Function block input, output, and variables.

The image shows a MATLAB Function Report window. The title bar reads 'MATLAB Function Report'. Below the title bar, the function name is 'MATLAB Function'. There are two tabs: 'MATLAB code' and 'Call stack'. The 'MATLAB code' tab is active, showing the source code for a function named 'test_filter'. The code is as follows:

```

1 function y = test_filter(x)
2     persistent z
3     if isempty(z)
4         z = zeros(2,1);
5     end
6     y = coder.nullcopy(zeros(size(x)));
7     b = [0.0299545822080925  0.0599091644161849  0.0299545822080925];
8     a = [1                    -1.4542435862515900  0.5740619150839550];
9     for i=1:length(x)
10        y(i) = b(1)*x(i) + z(1);
11        z(1) = b(2)*x(i) + z(2) - a(2) * y(i);
12        z(2) = b(3)*x(i)          - a(3) * y(i);
13    end
14 end
    
```


Below the code, there is a 'Variables' tab. It contains a table with the following data:

Order	Variable	Type	Size	Class	Complex	Always Whole Number	SimMin	SimMax
1	y	Output	1 x 1	double	No	No	-0.9953042106664765	0.9982037870598791
2	x	Input	1 x 1	double	No	No	-0.9999998058235401	0.9999352241729103
3	z	Persistent	2 x 1	double	No	No	-0.9674129881375739	0.9690706423526149
4	b	Local	1 x 3	double	No	No	0.0299545822080925	0.0599091644161849
5	a	Local	1 x 3	double	No	No	-1.45424358625159	1
6	i	Local	1 x 1	double	No	Yes	1	1

View Signal Names in Fixed-Point Tool

To view signal names in the Fixed-Point Tool:

- 1 In the Fixed-Point Tool **Contents** pane, click **Show Details**.
- 2 In the list box of available columns, select **SignalName**.

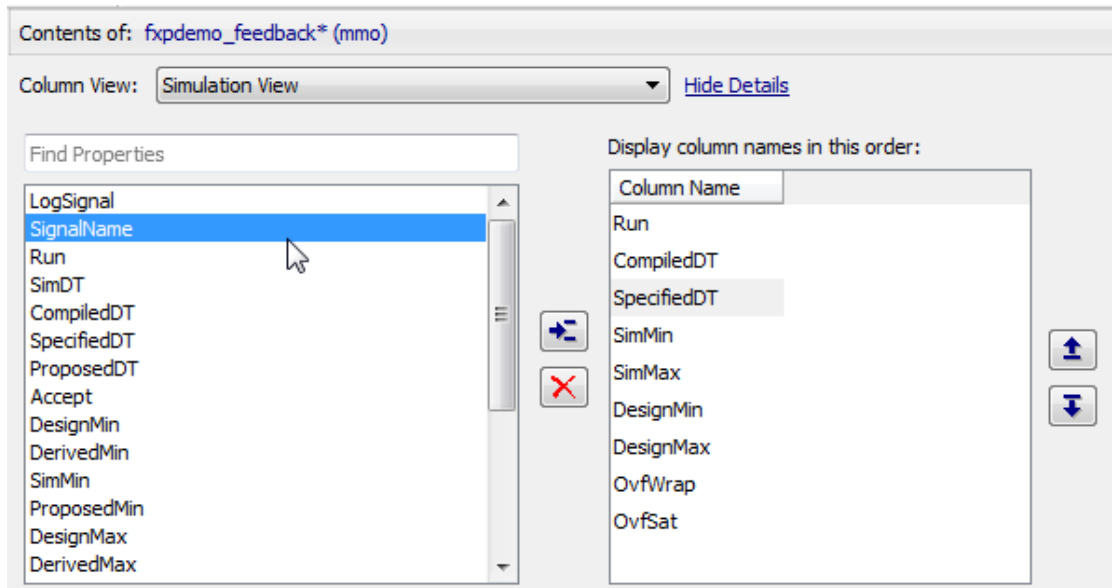

- 3 Click .

The Fixed-Point Tool includes **SignalName** in the list box of columns to display.

- 4 Optionally, use the up and down arrow buttons to change the display order for the columns.
- 5 Click **Hide Details**.
- 6 If a signal has a name, the Fixed-Point Tool displays the name in the **Contents** pane.

Column View: [St](#)

	Name	Run	SignalName	CompiledDT
✱	A2D	initial_run	TrackingError	fixdt(1,8,4)
✱	A2D	double_run	TrackingError	double
✱	A2D	scaled_fixed_run	TrackingError	fixdt(1,8,4)
✱	Analog Plant	initial_run	PlantOutput	
✱	Analog Plant	double_run	PlantOutput	
✱	Analog Plant	scaled_fixed_run	PlantOutput	

Model Multiple Data Type Behaviors Using a Data Dictionary

This example shows how to use referenced data dictionaries to store multiple sets of data types for a model. This example also shows how to change the data types by switching the referenced data dictionary.

- 1 Open the folder containing the example. At the MATLAB command line, enter:


```
cd(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
```

- 2 Copy these files to a local writable folder:

- `ex_data_dictionary.slx` — Simulink model using a data dictionary to store its data types
- `mdl_dd.sldd` — Main data dictionary
- `flt_dd.sldd` — Referenced data dictionary using floating-point data types
- `fix_dd.sldd` — Referenced data dictionary using fixed-point data types

- 3 In the folder you copied the files to, open the `ex_data_dictionary` model.

```
ex_data_dictionary
```

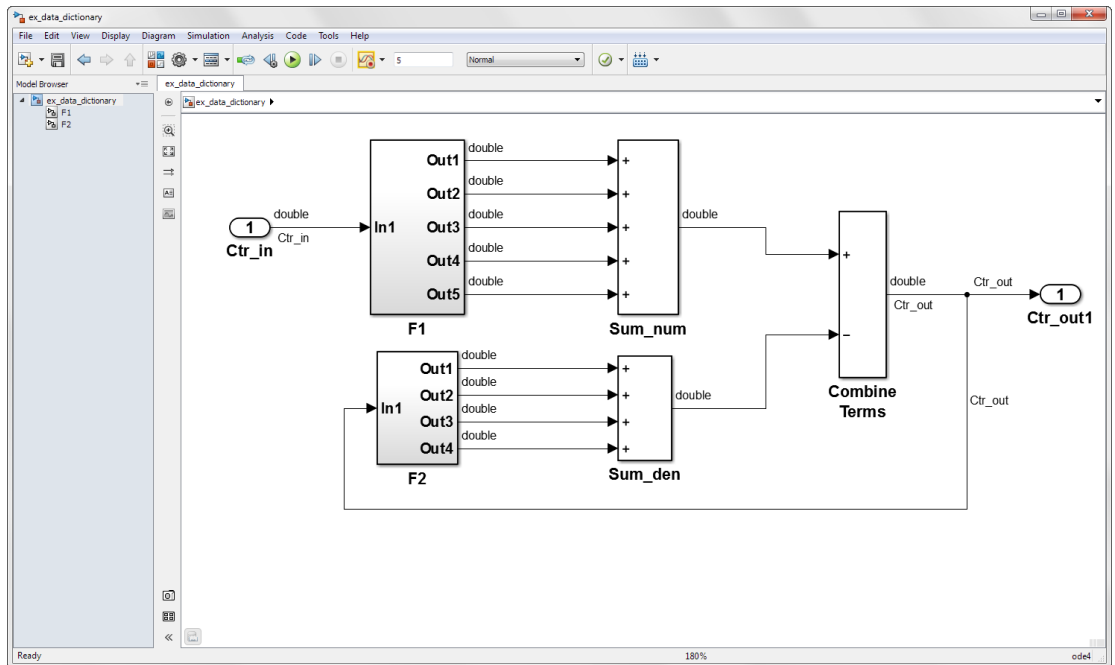


4


In the lower left corner of the Simulink Editor, click  to open the dictionary.

The data dictionary defines the parameters of the Gain blocks in the F1 and F2 subsystems. `mdl_dd` is associated with a referenced data dictionary, `fl_t_dd`, which defines the output data types of the gain blocks in the model's subsystems.


In the Model Explorer, in the **Contents** pane, the **Data Source** column shows the source data dictionary for each Gain block parameter.

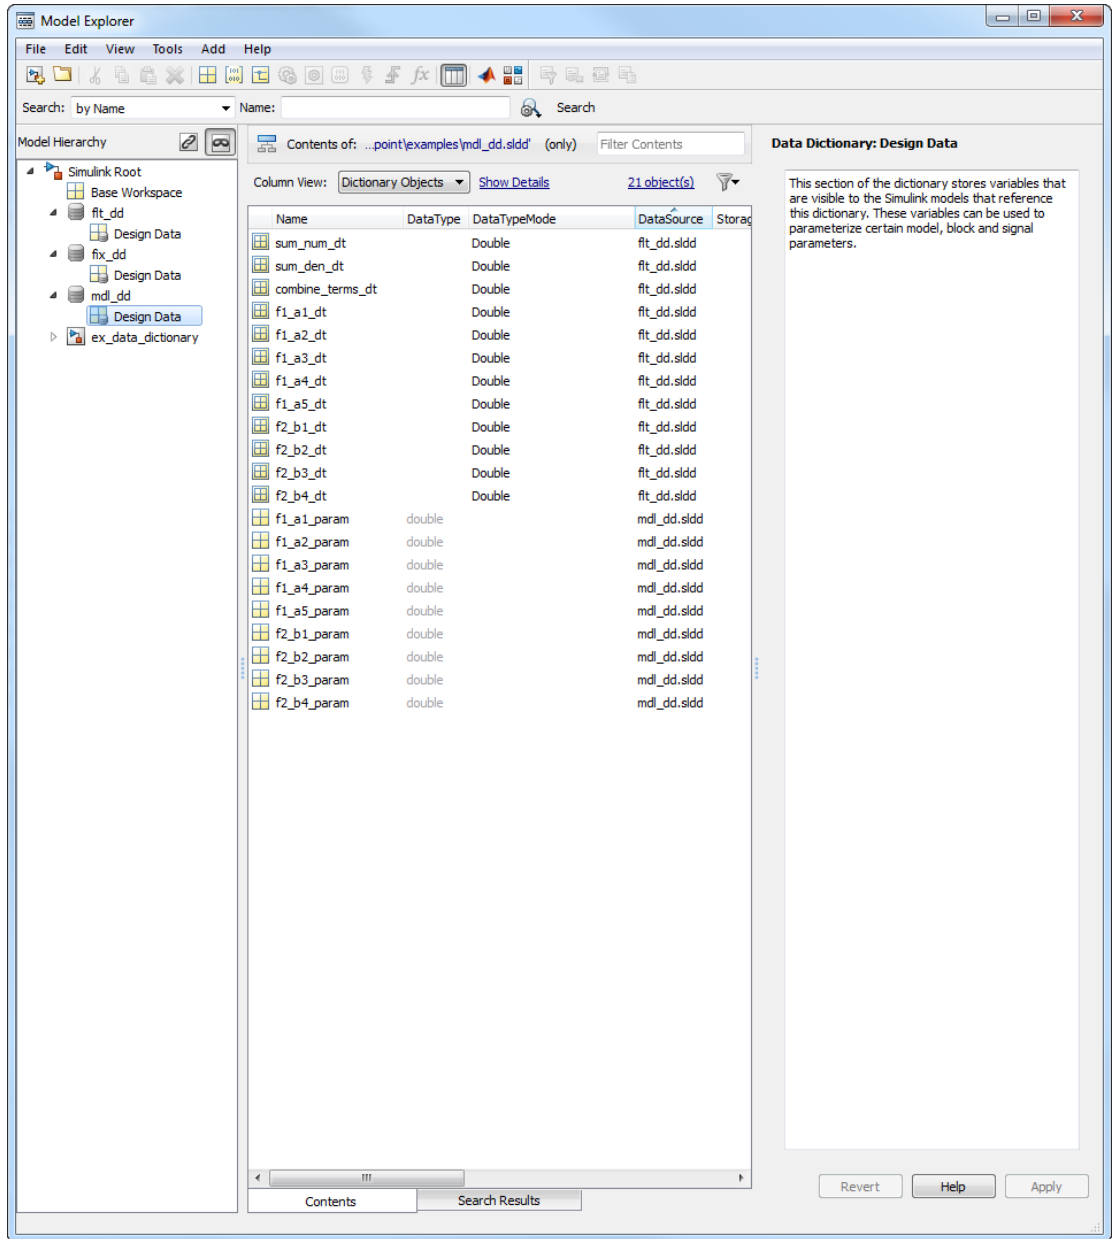

- Return to the model. Open the F1 subsystem and double-click the a1 block. The block gain is specified as f1_a1_param, which is defined in the data dictionary.

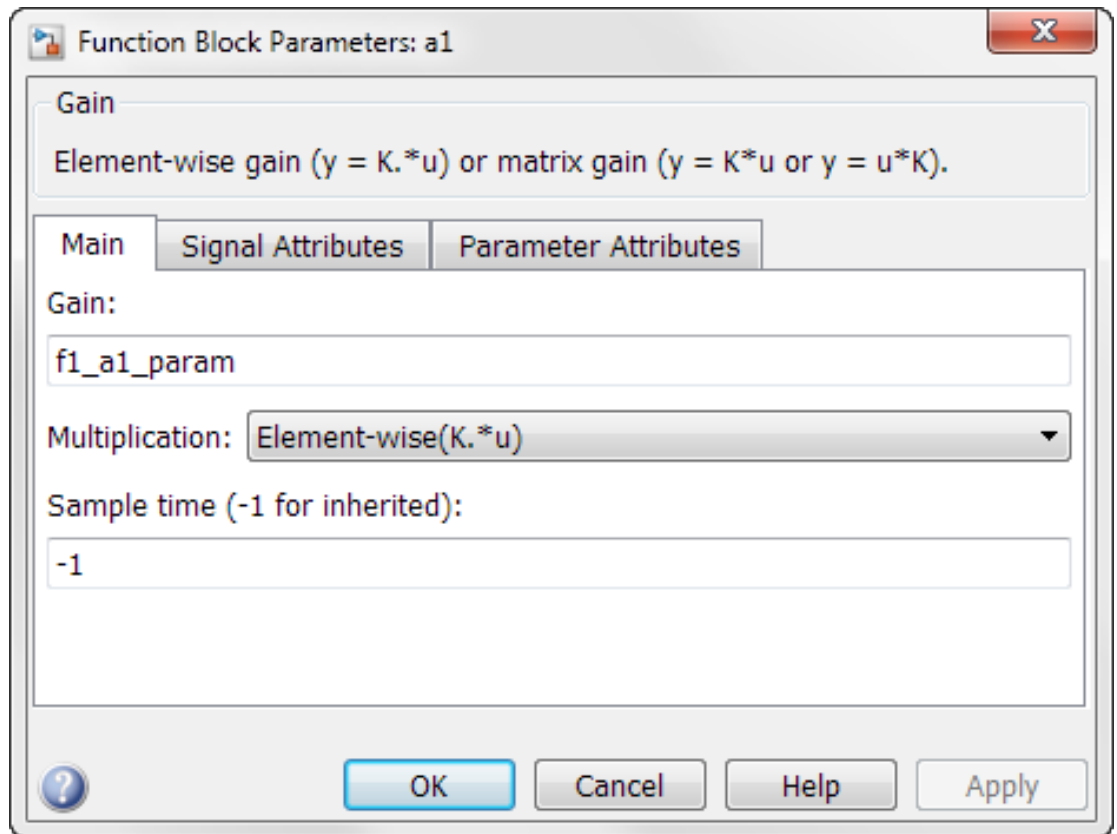

In the **Signal Attributes** tab, the block output data type is specified as f1_a1_dt. The data type of f1_a1_dt is defined in the referenced data dictionary, flt_dd.

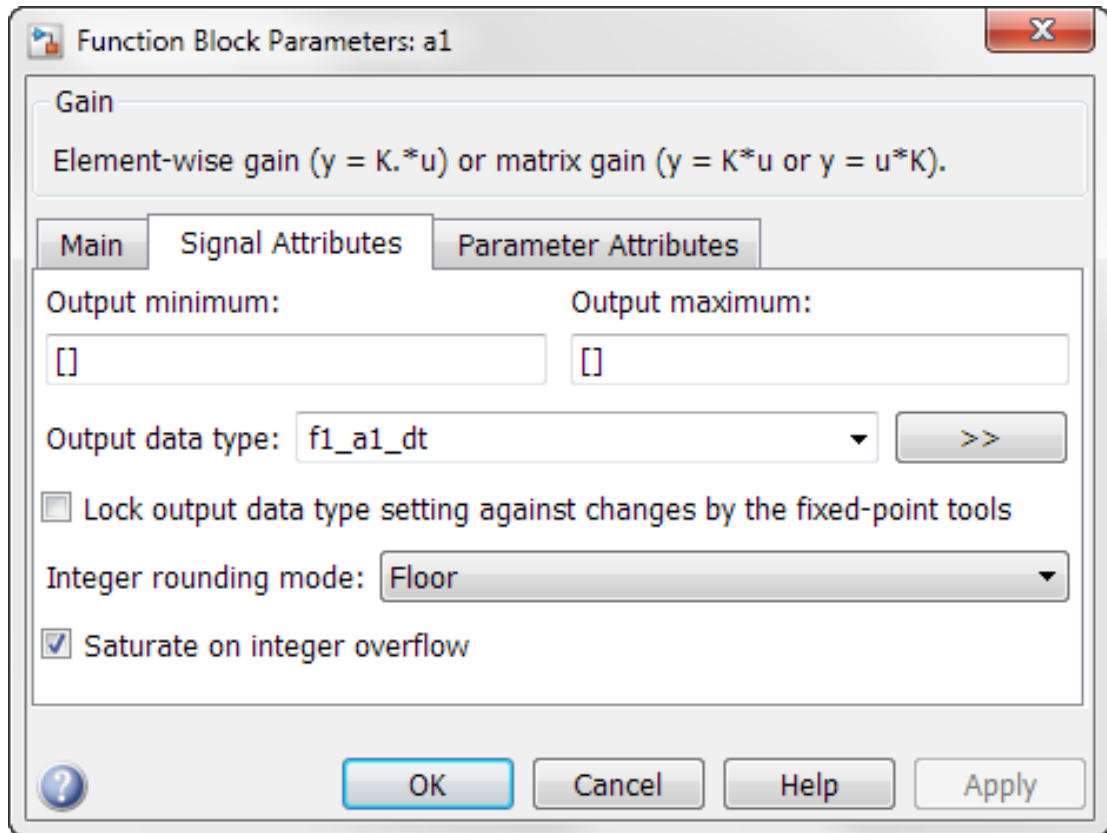


Change Data Types of Model Parameters

The `fix_dd` data dictionary contains the same entries as `flt_dd`, but defines fixed-point data types instead of floating-point data types. To use the fixed-point data types without changing the model, replace `flt_dd` with `fix_dd` as the referenced data dictionary of `mdl_dd`.

- 1 In the Model Explorer, in the **Model Hierarchy** pane, right-click `mdl_dd` and select **Properties**.
- 2 Remove the referenced floating-point data dictionary. In the Data Dictionary dialog box, in the **Referenced Dictionaries** pane, select `flt_dd` and click **Remove**.
- 3 Add a reference to the fixed-point data dictionary. Click **Add Reference** and select `fix_dd`. Click **OK** to close the dialog box.

- 4 In the Model Explorer, right-click mdl_dd and select **Save Changes**.
- 5 Return to the Simulink editor and update the model.

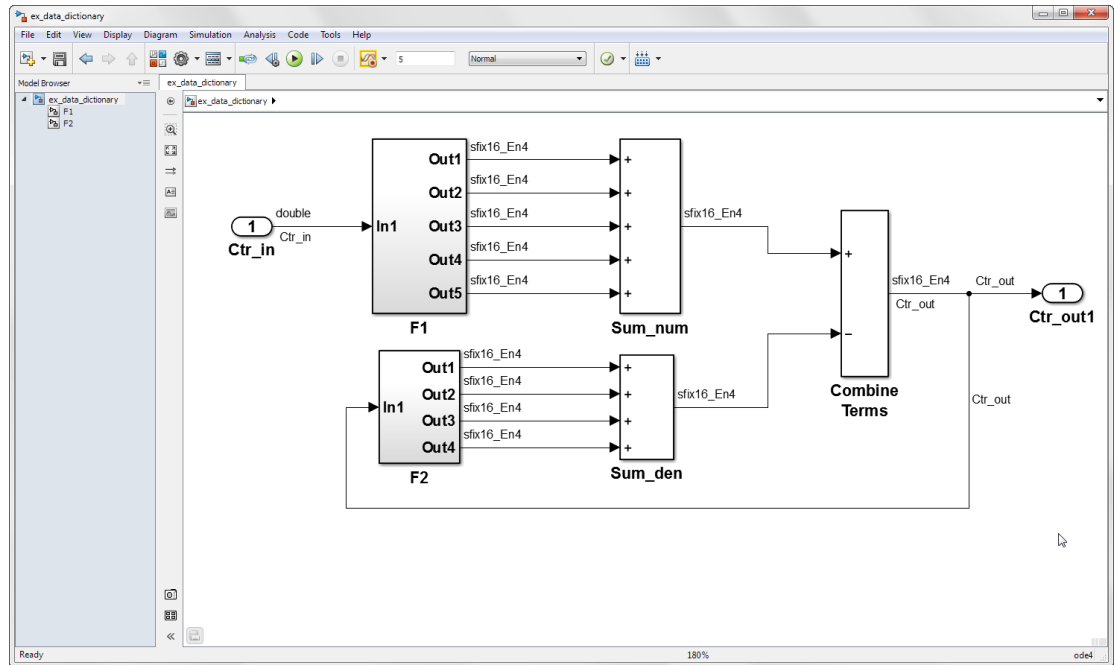

The model now uses fixed-point data types.

Related Examples

- “Migrate Single Model to Use Dictionary”

More About

- “What Is a Data Dictionary?”

Convert Floating-Point Model to Fixed Point

- “Learning Objectives” on page 36-2
- “Model Description” on page 36-4
- “Before You Begin” on page 36-7
- “Convert Floating-Point Model to Fixed Point” on page 36-8
- “Key Points to Remember” on page 36-24
- “Where to Learn More” on page 36-25

Learning Objectives

In this example, you learn how to:

- Convert a floating-point system to an equivalent fixed-point representation.

This example shows the recommended workflow for conversion when using proposing fraction lengths based on simulation data.

- Use the Fixed-Point Advisor to prepare your model for conversion.

The Fixed-Point Advisor provides a set of tasks to help you convert a floating-point system to fixed point.

You use the Fixed-Point Advisor to:

- Set model-wide configuration options
- Set block-specific dialog parameters
- Check the model against fixed-point guidelines.
- Identify unsupported blocks.
- Remove output data type inheritance from blocks that use floating-point inheritance.
- Promote simulation minimum and maximum values to design minimum and maximum values. This capability is useful if you want to derive ranges for objects in the model and you have not specified design ranges but you have simulated the model with inputs that cover the full intended operating range. For more information, see “Specify block minimum and maximum values”.
- Use the Fixed-Point Tool to propose fixed-point data types.

The Fixed-Point Tool automates the task of specifying fixed-point data types in a system. In this example, the tool collects range data for model objects, either from design minimum and maximum values that you specify explicitly for signals and parameters, or from logged minimum and maximum values that occur during simulation. Based on these values, the tool proposes fixed-point data types that maximize precision and covers the range. The tool allows you to review the data type proposals and then apply them selectively to objects in your model.

- Handle floating-point inheritance blocks during conversion.

For floating-point inheritance blocks when inputs are floating point, all internal and output data types are floating point. The model in this example uses a Discrete Filter block, which is a floating-point inheritance block.

Model Description


In this section...

“Model Overview” on page 36-4

“Model Set Up” on page 36-5

Model Overview

This example uses the `ex_fixed_point_workflow` model.

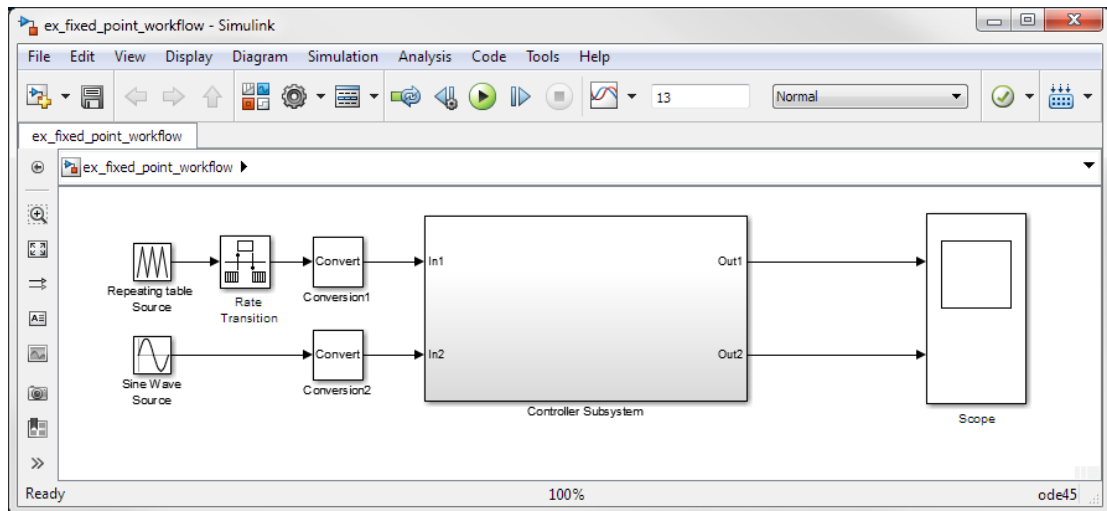

The model consists of a Source, a Controller Subsystem that you want to convert to fixed point, and a Scope to visualize the subsystem outputs. This method is how you configure a model to determine the effect of fixed-point data types on a system. Using this approach, you convert only the subsystem because this is the system of interest. There is no need to convert the Source or Scope to fixed point.

This configuration allows you to modify the inputs and collect simulation data for multiple stimuli. You can then examine the behavior of the subsystem with different input ranges and scale your fixed-point data types to provide maximum precision while accommodating the full simulation range.

Model Set Up

The model consists of the following blocks and subsystem.

Source

- **Repeating table Source**

A Repeating Sequence (Repeating Table) block provides the first input to the Controller Subsystem and periodically repeats the sequence of data specified in the mask.

- **Rate Transition**

A Rate Transition block outputs data from the Repeating table Source block at a different rate to the input.

- **Sine Wave Source**

A Sine Wave block provides the second input to the Controller Subsystem.

Initially, the amplitude of the Sine Wave block is 1. Later, you modify the amplitude to change the input range of the system.

- **Conversion1 and Conversion2**

These two Conversion blocks are set up so that the real-world values of their input and output are equal.

Controller Subsystem

The Controller Subsystem consists of:

- **Discrete Filter**

The Discrete Filter block filters the Repeating table Source signal. The Discrete Filter is a floating-point inheritance block. For floating-point inheritance blocks, when inputs are floating-point, all internal and output data types are floating point.

- **Chart**

The Chart consists of aStateflow Chart block which converts the Sine Wave input to a positive output and multiplies it by 3.

- **Lookup Table for Chart**

The Lookup Table for Chart block is the first of two identical n-D Lookup Table blocks. This block receives the output from the Chart and, at each breakpoint, outputs the input multiplied by 10.

- **Gain**

The Gain block multiplies the Sine Wave input by -3.

- **Lookup Table for Gain**

The Lookup Table for Gain block is a n-D Lookup Table block. It receives the output from the Gain block and, at each breakpoint, outputs its input multiplied by 10.

- **Sum for Chart**

This Sum block adds the outputs from the Discrete Filter and Lookup Table for Chart blocks and outputs the result to the Scope block.

- **Sum for Gain**

This Sum block adds the outputs from the Discrete Filter and Lookup Table for Gain blocks and outputs the result to the Scope block.

Scope

- **Scope**

The model includes a Scope block that displays the Controller Subsystem output signals.

Before You Begin

This example shows the recommended workflow for converting a floating-point system to fixed point using design and simulation data. It shows you how to use the Fixed-Point Advisor to prepare a floating-point subsystem for conversion to an equivalent fixed-point representation, and then how to use the Fixed-Point Tool to propose the fixed-point data types in the subsystem.

The example uses the following recommended workflow:

- 1 “Prepare Floating-Point Model for Conversion to Fixed Point” on page 36-8.

Step through the Fixed-Point Advisor tasks that prepare the floating-point subsystem for conversion to an equivalent fixed-point representation.

Note: If your model contains referenced models, you must run the Fixed-Point Advisor on each instance of the referenced model as well as the parent model.

- 2 “Propose Data Types” on page 36-15.

Propose data types based on the simulation results. Examine the results to resolve any conflicts and to verify that you want to accept the proposed data type for each result.

- 3 “Apply Fixed-Point Data Types” on page 36-16.

Write the proposed data types to the model. Perform the automatic data typing procedure, which uses the double-precision simulation results to propose fixed-point data types for appropriately configured blocks. The Fixed-Point Tool allows you to accept and apply the proposals selectively.

- 4 “Verify Fixed-Point Settings” on page 36-17.

Simulate the model again using the fixed-point settings. Compare the ideal results for the double-precision run with the fixed-point results.

- 5 Test the fixed-point settings with a different input stimulus and, if necessary, propose new data types to accommodate the simulation range for this input.

Convert Floating-Point Model to Fixed Point

In this section...

“Open the Model” on page 36-8

“Prepare Floating-Point Model for Conversion to Fixed Point” on page 36-8

“Propose Data Types” on page 36-15

“Apply Fixed-Point Data Types” on page 36-16

“Verify Fixed-Point Settings” on page 36-17

“Test Fixed-Point Settings With New Input Data” on page 36-18

“Gather a Floating-Point Benchmark” on page 36-20

“Propose Data Types for the New Input” on page 36-20

“Apply the New Fixed-Point Data Types” on page 36-21

“Verify New Fixed-Point Settings” on page 36-21

“Prepare for Code Generation” on page 36-22

Open the Model

Open the `ex_fixed_point_workflow` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot,'toolbox','fixpoint','examples'))
ex_fixed_point_workflow
```

Prepare Floating-Point Model for Conversion to Fixed Point

The Fixed-Point Advisor provides a set of tasks that help you prepare a floating-point model or subsystem for conversion to an equivalent fixed-point representation. After preparing your model, you use the Fixed-Point Tool to perform the fixed-point conversion.

In this part of the example, you use the Fixed-Point Advisor to prepare the Controller Subsystem in the `ex_fixed_point_workflow` model for conversion.

Open the Fixed-Point Advisor

- 1 In the `ex_fixed_point_workflow` model menu, select **Analysis > Fixed-Point Tool**.
- 2 In the Fixed-Point Tool:

- a In the **Model Hierarchy** pane, select the Controller Subsystem.
- b In the **Fixed-point preparation for selected system** pane, click the **Fixed-Point Advisor** button.

You run the Fixed-Point Advisor on the `ex_fixed_point_workflow` Controller Subsystem because this is the system of interest. There is no need to convert the system inputs or the display to fixed point.

Prepare Model for Conversion

- 1 In the Fixed-Point Advisor left pane, expand the **Prepare Model for Conversion** folder to view the tasks. For the purpose of this example, run the tasks in the this folder one at a time. Select **Verify model simulation settings** and, in the right pane, select **Run this task**.

This task validates that model simulation settings allow signal logging and disables data type override in the model and for `fi` objects or embedded numeric data types in your model or workspace. These settings facilitate conversion to fixed point in later tasks.

A waitbar appears while the task runs. When the run is complete, the result shows that the task passed.

- 2 Select and run **Verify update diagram status**.

Verify update diagram status runs. Your model must be able to successfully update diagram to run the checks in the Fixed-Point Advisor.

The task passes.

- 3 Select and run **Address unsupported blocks**. This task identifies blocks that do not support fixed-point data types.

The task passes because the subsystem contains no blocks that do not support fixed-point data.

- 4 Select and run **Set up signal logging**. Prior to simulation, you must specify at least one signal for the Fixed-Point Advisor to use for analysis and comparison in downstream checks. You should log, at minimum, the unique input and output signals.

The task generates a warning because signal logging is not specified for any signals.

5 Fix the warning using the Model Advisor Result Explorer:

- a Click the **Explore Result** button.

The Model Advisor Result Explorer opens.

- b In the middle pane, select each signal you want to log and, next to the signal, select the corresponding **EnableLogging** check box.

For this example, log these signals:

- Lookup Table for Gain
- Lookup Table for Chart
- Chart
- Discrete Filter

- c Close the Model Advisor Result Explorer.

- d In the Fixed-Point Advisor window, click **Run This Task**.

The task passes because signal logging is now enabled for at least one signal.

6 Select and run **Create simulation reference data**.

The Fixed-Point Advisor simulates the model using the current solver settings, and creates and archives reference signal data in a run named `FPA_Reference` to use for analysis and comparison in later conversion tasks. This task also validates that model simulation settings allow signal logging and that the **Fixed-point instrumentation mode** is set to `Minimums, maximums and overflows`.

The Fixed-Point Advisor issues a warning and provides information in the Analysis Result box that logging simulation minimum and maximum values failed.

Logging failed because the **Fixed-point instrumentation mode** is `Use local settings`, but the recommended setting is `Minimums, maximums and overflows`.

7 To fix the failure, in the **Action** pane, click **Modify All**.

The Fixed-Point Advisor configures the model to the settings recommended in the Analysis **Result** pane. The **Action** pane displays a table of changes showing that the **Fixed-point instrumentation mode** is now `Minimums, maximums and overflows`

8 Click Run This Task.

Running the task after using the Modify All action verifies that you made the necessary changes. The Analysis **Result** pane updates to display a passed result and information about why the task passed.

Tip You can view the reference run data in the Fixed-Point Tool **Contents** pane in the run named **FPA_Reference** or in the Simulation Data Inspector. Because you ran the simulation twice, the Simulation Data Inspector displays data for both runs using the same name (FPA_Reference).

9 In the Verify Fixed-Point Conversion Guidelines folder, select and run Check model configuration data validity diagnostic parameters settings. This task verifies that the **Model Configuration Parameters > Diagnostics > Data Validity > Parameters** options are all set to warning. If these options are set to error, the model update diagram action fails in downstream checks.

The task passes because none of these options are set to error.

10 Select and run Implement logic signals as Boolean data. This task verifies that **Model Configuration Parameters > Optimization > Implement logic signals as Boolean data** is selected. If it is cleared, the code generated in downstream checks is not optimized.

The task passes.

11 Select and run Check bus usage. This task identifies:

- Mux blocks that are bus creators
- Bus signals that the top-level model treats as vectors

Note: This is a Simulink check. For more information, see “Check bus usage”.

The task runs and generates a warning because this check works only from top-level models and you are running from the subsystem. Because this model uses no buses, ignore this warning. For models containing buses, you must run the Fixed-Point Advisor from the top-level model to perform this check.

12 Select and run Simulation range checking. This task verifies that the **Model Configuration Parameters > Diagnostics > Data Validity > Simulation range checking** option is not set to none.

The task generates a warning because the Simulation range checking option is `none`.

- 13** To fix the warning, in the **Action** box, click **Modify All**.

The Fixed-Point Advisor sets the Simulation range checking option to `warning`.

- 14** Rerun the task.

The task now passes because the **Simulation range checking** option is correct.

- 15** Select and run **Check for implicit signal resolution**. This task checks for models that use implicit signal resolution.

The task fails because implicit signal resolution is enabled.

- 16** To fix the failure, in the **Action** box, click **Modify All**.

The Fixed-Point Advisor sets the **Signal resolution** option to `Explicit only`.

- 17** Rerun the task.

The task now passes.

You have completed all the tasks for the **Prepare Model for Conversion** folder. At this point, you can review the results report found at the folder level, or continue to the next folder.

Prepare for Data Typing and Scaling

This folder contains tasks that set the block configuration options and set output minimum and maximum values for blocks. The block settings from this task simplify the initial data typing and scaling. Later tasks set optimal block configuration. The tasks in this folder prepare the model for automatic data typing in the Fixed-Point Tool.

- 1** For the purpose of this example, run the tasks in the **Prepare for Data Typing and Scaling** folder one at a time.

Open the **Prepare for Data Typing and Scaling** folder then select and run **Review locked data type settings**. This task identifies blocks that have their data type settings locked down which excludes them for automatic data typing.

This task passes because the model contains no blocks with locked data types.

- 2** Select and run **Remove output data type inheritance**. This task identifies blocks that have an inherited output signal data type that might lead to data type propagation errors.

This task fails because there are floating-point inheritance blocks in the model. For floating-point inheritance blocks, when inputs are floating-point, all internal and output data types are floating point. Therefore, you must specify an input parameter data type for these blocks.

- 3 In the Fixed-Point Advisor **Input Parameters** pane, set **Data type for blocks with floating-point inheritance** to `int16`, and rerun the task.

The task fails and the Fixed-Point Advisor provides information about the failure in the Analysis Result box. The Fixed-Point Advisor recommends that you set:

- The input data type of the Discrete Filter block, which is a floating-point inheritance block, to a fixed-point data type. This avoids inheritance issues when the system is converted to fixed-point types.
- The output data type of all the other blocks that currently have their output data type set by inheritance rules to the compiled (current propagated) data type.

Tip Review the recommended data types prior to accepting them.

- 4 Fix the failure using the **Modify All** button to configure the output data types to the recommended values.

The Action Result box displays:

- A table showing the previous and current data types for all the floating-point inheritance blocks.
- A table showing the previous and current data types for blocks that use other types of inheritance.

- 5 Rerun the task.

The task passes.

- 6 Select and run **Relax input data type settings**. This task identifies blocks with input data type constraints that might cause data type propagation issues.

The task passes because the model contains no blocks that have inherited input data types.

- 7 Select and run **Verify Stateflow charts have strong data typing with Simulink**. This task verifies that the configuration of all Stateflow charts ensures strong data typing with Simulink I/O.

The task passes because the configuration of the Stateflow chart in the subsystem is correct.

- 8 Select and run **Remove redundant specification between signal objects and blocks**. This task identifies and removes redundant data type specification originating from blocks and Simulink signal objects.

The task passes because the model contains no resolved Simulink signal objects.

- 9 Select and run **Verify hardware selection**. This task identifies the hardware device information in the **Hardware Implementation** pane of the Configuration Parameters dialog box. It also checks the default data type selected for floating-point signals in the model.

The task fails because the default data type for all floating-point signals is set to **Remain floating-point**. Because the target hardware is an embedded processor, the Fixed-Point Advisor recommends that you set this value to the hardware integer used by the embedded hardware.

- 10 To fix the failure, in the **Input Parameters** pane, set **Default data type of all floating-point signals** to **Same as embedded hardware integer**.
- 11 Rerun the task.

The task passes.

- 12 Select and run **Specify block minimum and maximum values**. Ideally, you should specify block output and parameter minimum and maximum values for, at minimum, the Inport blocks in the system. You can specify the minimum and maximum values for any block in this step. Typically, you determine these values during the design process based on the system you are creating.

The Fixed-Point Advisor warns you that you have not specified any minimum and maximum values.

- 13 Fix the warning by specifying minimum and maximum values for Inport blocks:
 - a Click the **Explore Result** button.

The Model Advisor Result Explorer opens, showing that the Inport blocks, In1 and In2, do not have output minimum and maximum values specified.

- b In the center pane, select In1. This block receives the output from Repeating table Source, which has a minimum value of 10 and a maximum value of 20. Therefore, set **OutMin** to 10 and set **OutMax** to 20 as follows:

- i In the **OutMin** column for In1, select [] and replace with 10.
- ii In the **OutMax** column for In1, select [] and replace with 20.
- c Select In2. This block receives the output from Sine Wave block, which has a minimum value of -1 and a maximum value of 1. Therefore, set **OutMin** to -1 and set **OutMax** to 1.
- d Close the Model Advisor Result Explorer.
- e In the Fixed-Point Advisor, rerun the task.

The task passes because you specified minimum and maximum values for all Inport blocks.

The tool advises you to specify minimum and maximum values for all blocks if possible. For the purpose of this example, do not specify other minimum and maximum values for other blocks.

You have completed all tasks in the **Prepare for Data Typing and Scaling** folder. At this point, you can review the results report found at the folder level, or continue to the next folder.

Return to Fixed-Point Tool to Perform Data Typing and Scaling

Select and run this task to close the Fixed-Point Advisor and return to the Fixed-Point Tool.

Propose Data Types

Use the Fixed-Point Tool to propose fixed-point data types for appropriately configured blocks based on the double-precision simulation results stored in the simulation reference run that the Fixed-Point Advisor created. These results are stored in the run named **FPA_Reference**. You can view the results in the Fixed-Point Tool **Contents** pane.

The tool proposes fixed-point data types and scaling based on the ranges of the Repeating table Source and Sine Wave inputs. You can then use the tool to accept and apply the proposed data types selectively. In this example, you propose fraction lengths for the specified word lengths.

- 1 In the Fixed-Point Tool, click the **Propose fraction lengths** button .

The Fixed-Point Tool analyzes the scaling of all fixed-point blocks whose:

- **Lock output data type setting against changes by the fixed-point tools** parameter is not selected.
- **Output data type** parameter specifies a generalized fixed-point number.
- Data types are not inherited.

The Fixed-Point Tool updates the results in the **Contents** pane.

- 2 In the Fixed-Point Tool, set the **Column View** to **Automatic Data Typing with Simulation Min/Max View** to display information relevant to the proposal. The tool displays the proposed data types in the **ProposedDT** column in the **Contents** pane. The tool does not propose data types for objects with inherited data types.

To accommodate the full simulation range, the Fixed-Point Tool proposes data types for blocks that do not have inherited data types. By default, it selects the **Accept** check box for these signals because the proposed data type differs from the object's current data type. If you apply data types, the tool will apply the proposed data types to these signals. For more information, see “Apply Proposed Data Types” on page 38-18.

- 3 Examine the results to resolve any conflicts and to ensure that you want to accept the proposed data type for each result.


In the Fixed-Point Tool toolbar, select **Show > Conflicts with proposed data types**.

The Fixed-Point Tool detected no conflicts.

Tip If the tool does detect conflicts, you must resolve these before applying data types. For more information, see “Examine Results to Resolve Conflicts” on page 38-15.

Now that you have reviewed the results and ensured that there are no issues, you are ready to apply the proposed data types to the model, as described in “Apply Fixed-Point Data Types” on page 36-16.

Apply Fixed-Point Data Types

- 1 Click the **Apply accepted fraction lengths** button to write the proposed data types to the model. 

The Fixed-Point Tool applies the data type proposals to the subsystem blocks.


- 2 In the Fixed-Point Tool toolbar, select **Show > All results**.

The tool has set all the specified data types to the proposed types.

You are now ready to check that the new data types are acceptable, as described in “Verify Fixed-Point Settings” on page 36-17.

Verify Fixed-Point Settings

Next, you simulate again using the new fixed-point settings. You then use the Fixed-Point Tool plotting capabilities to compare the results from the floating-point **FPA_Reference** run with the fixed-point results.

- 1 In the Fixed-Point Tool **Model Hierarchy** pane, select the Controller Subsystem.
- 2 In the **Data collection** pane, set **Store results in run** to **Initial_fixed_point**. You specify a new run name to prevent the tool from overwriting the results that you want to retain in the **FPA_Reference** run.
- 3 Click the Fixed-Point Tool **Simulate** button  to run the simulation.

The Simulink software simulates using the new data types that you applied in the previous step. Afterward, the Fixed-Point Tool displays in its **Contents** pane information about blocks that logged fixed-point data. The **CompiledDT** (compiled data type) column for the run shows that the Controller Subsystem blocks use fixed-point data types with the new data types.


Tip In the **Contents** pane, click the **Run** column heading to sort the runs.

- 4 Examine the results to verify that there are no overflows or saturations.
- 5 In the Fixed-Point Tool **Model Hierarchy** pane, select the Controller Subsystem. In the **Contents** pane, select the **Discrete Filter: Output** that corresponds to the **FPA_Reference** run, and then click the **Compare Signals** button.



The Fixed-Point Tool plots the signal for the **FPA_Reference** and **Initial_fixed_point** runs, as well as their difference. The difference plot shows

that the floating-point signal and the fixed-point signal are almost identical, the difference is on the order of 10^{-6} .

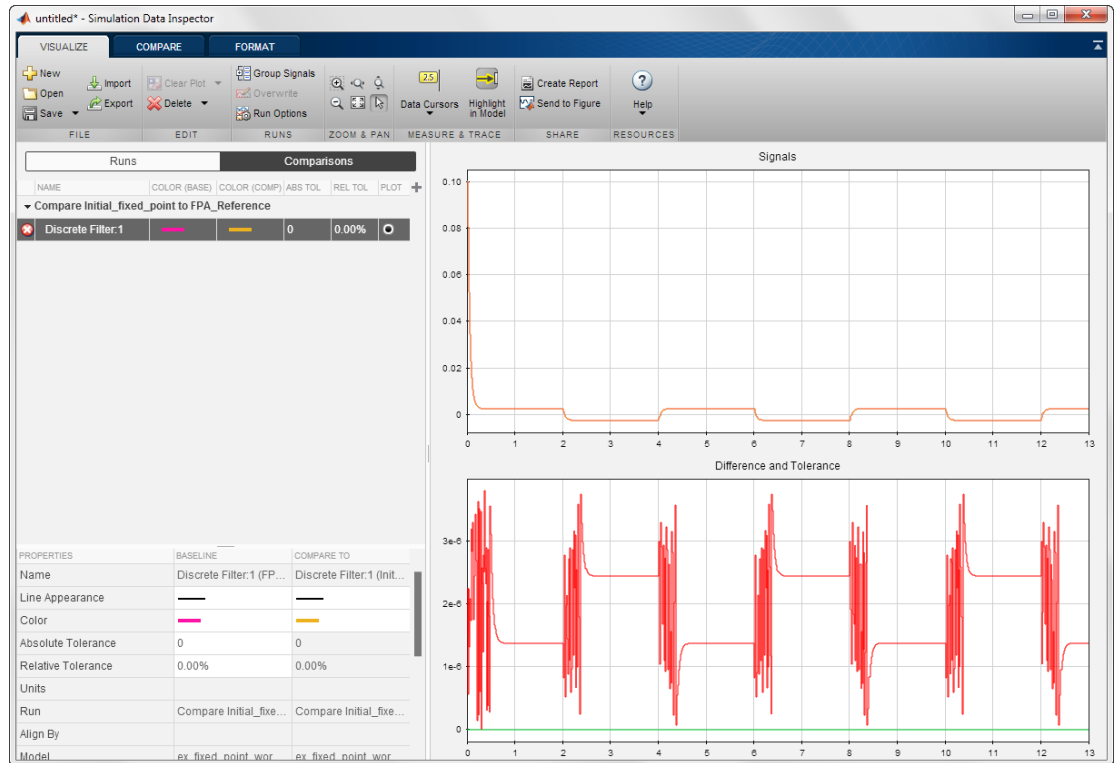


Now you are ready to test the fixed-point settings with new the input data, as described in “Test Fixed-Point Settings With New Input Data” on page 36-18.

Test Fixed-Point Settings With New Input Data

You have successfully used the Fixed-Point Tool to propose fixed-point data types for your model. In the previous step, you saw that the numerical results for the double-precision system and the fixed-point system are very close. These results indicate that the fixed-point data types are suitable for the range of input data that you used. In practice, you might need to run multiple simulations to cover the entire design range of your system and use the results of these simulations to refine the fixed-point data types in your model.

In this part of the example, you continue working on the model. First, you modify the range of the Sine Wave input and obtain simulation data based on this new range. Then, you use the Fixed-Point Tool to refine the model fixed-point settings based on the new simulation data. The Fixed-Point Tool proposes new data types that can accommodate the new input range.

To change the range of the input data and test the fixed-point settings:

- 1 In the `ex_fixed_point_workflow` model, double-click the Sine Wave Source block. The **Source Block Parameters** dialog box opens.
- 2 In this dialog box, change the **Amplitude** to 2 and click **OK**.
- 3 In the Fixed-Point Tool **Model Hierarchy** pane, select the Controller Subsystem.
- 4 In the **Data collection** pane, set **Store results in run** to Input2.
- 5 Click the Fixed-Point Tool **Simulate** button  to run the simulation.

The Simulink software simulates the `ex_fixed_point_workflow` model. The Stateflow debugger reports a data overflow error in the Stateflow chart.

- 6 In the **Stateflow Debugging** window, under **Error checking options**, clear the **Data Range** option and close the debugger and the Chart.

This action disables data range error detection and allows the simulation to run to completion.

- 7 In the Fixed-Point Tool **Model Hierarchy** pane, select the Controller Subsystem.

The Fixed-Point Tool **Contents** pane displays the simulation results for each block in the subsystem that logged fixed-point data. The tool stores the results in the `Input2` run.

In the `Input2` run, the tool highlights in red the result for the Gain block, indicating that there are issues.

- 8 Examine the result for the Gain block.

The result shows that the Gain block output saturated, which indicates that the fixed-point data settings for this block are not suitable for the new input range.


Next, override the fixed-point data types with doubles and simulate the model again to obtain the ideal behavior of the subsystem, as described in “Gather a Floating-Point Benchmark” on page 36-20.

Gather a Floating-Point Benchmark

Run the model with a global override of the fixed-point data types using double-precision numbers to avoid quantization effects. This provides a floating-point benchmark that represents the ideal output. The Simulink software logs the signal logging results to the MATLAB workspace. The Fixed-Point Tool displays the simulation results including minimum and maximum values that occur during the run.

- 1 In the Fixed-Point Tool **Model Hierarchy** pane, select the Controller Subsystem.
- 2 In the **Settings for selected system** pane, set **Data type override** to Double.

Using this setting, the Fixed-Point Tool performs a global override of the fixed-point data types and scaling using double-precision numbers, thus avoiding quantization effects.


- 3 In the **Data collection** pane, set **Store results in run** to `DTO_Input2`.
- 4 Click the Fixed-Point Tool **Simulate** button  to run the simulation.

The Fixed-Point Tool highlights any simulation results that have issues, such as overflows or saturations.

- 5 In the Contents pane, click the Run column to sort the runs. Verify that there were no overflows or saturations in the **DTO_Input2** run.

Propose Data Types for the New Input

Now, use the Fixed-Point Tool to propose fixed-point data types based on the double-precision simulation results for the new input stored in the **DTO_Input2** run.

- 1 In the Fixed-Point Tool, click the **Propose fraction lengths** button .
- 2 In the **Propose Data Types** dialog box, select `DTO_Input2` as the run to use for proposing data types, and then click **OK**.

The Fixed-Point Tool proposes new data types for all objects in the model and updates the results in the **Contents** pane.

- 3 In the Fixed-Point Tool, set the **Column View** to **Automatic Data Typing with Simulation Min/Max View** to display information relevant to the proposal. The tool displays the proposed data types in the **ProposedDT** column in the **Contents** pane. The tool does not propose data types for objects with inherited data types.


To accommodate the full simulation range, the Fixed-Point Tool proposes new data types with reduced precision for the Chart/output and Gain block output.

- 4 Examine the results to resolve any conflicts and to ensure that you want to accept the proposed data type for each result.

In the Fixed-Point Tool toolbar, select **Show > Conflicts with proposed data types**.

The Fixed-Point Tool detected no conflicts, so you are ready to apply the new data types as described in “Apply the New Fixed-Point Data Types” on page 36-21.

Apply the New Fixed-Point Data Types

- 1 Click **Apply accepted fraction lengths**  to write the proposed data types to the model.
- 2 In the **Apply Data Types** dialog box, select `DT0_Input2` as the run to use for applying proposed data types and then click **OK**.
- 3 In the Fixed-Point Tool toolbar, select **Show > All results**.

The tool has set all the specified data types to the proposed types.

Verify New Fixed-Point Settings

Finally, you simulate again using the new fixed-point settings. You then use the Fixed-Point Tool plotting capabilities to compare the results for the initial and final fixed-point settings.

- 1 In the Fixed-Point Tool **Model Hierarchy** pane, select the Controller Subsystem.
- 2 In the **Settings for selected system** pane, set **Data type override** to `Use local settings`.
- 3 In the **Data collection** pane, set **Store results in run** to `Final_fixed_point`.
- 4 Click **Simulate** to run the simulation.

The Simulink software simulates using the new data types that you applied in the previous step and stores the results in the `Final_fixed_point` run.

- 5 Examine the results to verify that there are no overflows or saturations.

- 6 In the Fixed-Point Tool **Model Hierarchy** pane, select the Controller Subsystem. In the **Contents** pane, select the **Discrete Filter: Output** that corresponds to the `Initial_fixed_point` run, and then click the **Compare Signals** button.



- 7 In the **Compare Runs Selector** dialog box, select `Final_fixed_point`, and then click **OK**.

The Fixed-Point Tool plots the signal for both runs, as well as their difference. The difference plot shows that the floating-point signal and the fixed-point signal are identical.

- 8 Optionally, you can zoom in to view the steady-state region with greater detail. From the **Tools** menu of the figure window, select **Zoom In** and then drag the pointer to draw a box around the area you want to view more closely.

Prepare for Code Generation

Optionally, use the Simulink Model Advisor to identify model settings that might lead to nonoptimal results in code generation.

- 1 From the Simulink **Analysis** menu, select **Model Advisor>Model Advisor**.
- 2 In the **System Selector** dialog box, select **Controller Subsystem**, and then click **OK**.
- 3 In the Model Advisor left pane, expand the **By Task** node.
- 4 Expand the **Code Generation Efficiency** node.
- 5 Select and run **Identify blocks that generate expensive rounding code**. This task optimizes the code to eliminate unnecessary rounding code.

The Model Advisor warns that your model contains expensive rounding code.

- 6 Change the **Integer rounding mode** of the Look-Up Table1, Conversion1, and Conversion2 blocks from `Floor` to `Simplest`, and rerun the check.

The task passes.

- 7 Select and run **Identify questionable fixed-point operations**. This task identifies fixed-point operations that can lead to nonoptimal results.

The Model Advisor warns that your model generates cumbersome multiplication code, and contains inefficient lookup blocks.

- 8 The Discrete Filter and Gain blocks contain expensive multiplication code.

Under **Configuration Parameters>Hardware Implementation** change the **Device Type** to 64-bit Embedded Processor (LLP64), and select **Enable long long**.

- 9 The Model Advisor recommends that you change the breakpoints data of your lookup tables to have even power of 2 spacing, and use **Evenly-spaced points** index search method.

Using the function `fixpt_look1_func_approx`, and following the steps outlined in “Fixed-Point Function Approximation”, adjust the breakpoints data of the lookup table blocks.

- 10 Rerun the task.

The task passes.

- 11 Select and run **Identify blocks that generate expensive fixed-point and saturation code**. This task identifies blocks that can lead to unnecessary saturation code.

The Model Advisor warns that the model contains expensive saturation code.

- 12 Clear the Gain block’s **Function Block Parameters > Signal Attributes > Saturate on integer overflow** parameter. Click apply, and close the window.

- 13 Rerun the task.

The task passes.

Your model is now optimized for code generation.

Key Points to Remember

- Convert subsystems within your model, rather than the entire model. This practice saves time and avoids unnecessary conversions.
- Use the Fixed-Point Advisor to prepare your model for conversion to fixed point.
- Use the Fixed-Point Tool to propose fixed-point data types for your model or subsystem.
- When using the Fixed-Point Advisor, consider saving a restore point before applying recommendations.

A restore point provides a fallback in case the recommended data types causes subsequent update diagram failure. If you do not save a restore point and you encounter an update diagram failure, you must start the conversion from the beginning.

- Provide as much design minimum and maximum information as possible before starting the conversion to fixed point.

Providing this information enables the fixed-point tools to choose fixed-point data types that maximize precision and cover the range.

Specify minimum and maximum values for signals and parameters in the model for:

- Inport and Outport blocks
- Block outputs
- The interface between MATLAB Function and C Chart blocks and the Simulink model to ensure strong data typing
- Simulink.Signal objects
- Ensure that you simulate the system using the full range of inputs.

If you use simulation minimum and maximum values to scale fixed-point data types, the tools provide meaningful results when exercising the full range of values over which your design is meant to run.

Where to Learn More

To learn more about...	See...
Fixed-Point Advisor capabilities	“Preparation for Fixed-Point Conversion”
Best practices for using the Fixed-Point Advisor	“Best Practices” on page 34-2
Using restore points in the Fixed-Point Advisor	“Restore Points” on page 34-7
Fixed-Point Tool capabilities	“Fixed-Point Tool” on page 35-2 fxptdlg
Best practices for using the Fixed-Point Tool	“Best Practices for Fixed-Point Workflow” on page 38-5
Using the Fixed-Point Tool to merge multiple simulation results	“Propose Data Types Using Multiple Simulations” on page 38-58

Producing Lookup Table Data

- “Producing Lookup Table Data” on page 37-2
- “What Is the Worst-Case Error for a Lookup Table?” on page 37-3
- “Approximate the Square Root Function” on page 37-4
- “Create Lookup Tables for a Sine Function” on page 37-6
- “Use Lookup Table Approximation Functions” on page 37-21
- “Effects of Spacing on Speed, Error, and Memory Usage” on page 37-22

Producing Lookup Table Data

A function lookup table is a method by which you can approximate a function by a table with a finite number of points (X,Y). Function lookup tables are essential to many fixed-point applications. The function you want to approximate is called the *ideal function*. The X values of the lookup table are called the *breakpoints*. You approximate the value of the ideal function at a point by linearly interpolating between the two breakpoints closest to the point.

In creating the points for a function lookup table, you generally want to achieve one or both of the following goals:

- Minimize the worst-case error for a specified maximum number of breakpoints
- Minimize the number of breakpoints for a specified maximum allowed error

“Create Lookup Tables for a Sine Function” on page 37-6 shows you how to create function lookup tables using the function `fixpt_look1_func_approx`. You can optimize the lookup table to minimize the number of data points, the error, or both. You can also restrict the spacing of the breakpoints to be even or even powers of two to speed up computations using the table.

explains how to use the function `fixpt_look1_func_plot` to find the worst-case error of a lookup table and plot the errors at all points.

What Is the Worst-Case Error for a Lookup Table?

The error at any point of a function lookup table is the absolute value of the difference between the ideal function at the point and the corresponding Y value found by linearly interpolating between the adjacent breakpoints. The *worst-case error*, or *maximum absolute error*, of a lookup table is the maximum absolute value of all errors in the interval containing the breakpoints.

For example, if the ideal function is the square root, and the breakpoints of the lookup table are 0, 0.25, and 1, then in a perfect implementation of the lookup table, the worst-case error is $1/8 = 0.125$, which occurs at the point $1/16 = 0.0625$. In practice, the error could be greater, depending on the fixed-point quantization and other factors.

The section that follows shows how to use the function `fixpt_look1_func_plot` to find the worst-case error of a lookup table for the square root function.

Approximate the Square Root Function

This example shows how to use the function `fixpt_look1_func_plot` to find the maximum absolute error for the simple lookup whose breakpoints are 0, 0.25, and 1. The corresponding Y data points of the lookup table, which you find by taking the square roots of the breakpoints, are 0, 0.5, and 1.

To use the function `fixpt_look1_func_plot`, you need to define its parameters first. To do so, type the following at the MATLAB prompt:

```
funcstr = 'sqrt(x)'; % Define the square root function
xdata = [0;.25;1]; % Set the breakpoints
ydata = sqrt(xdata); % Find the square root of the breakpoints
xmin = 0; % Set the minimum breakpoint
xmax = 1; % Set the maximum breakpoint
xdt = ufix(16); % Set the x data type
xscale = 2^-16; % Set the x data scaling
ydt = sfix(16); % Set the y data type
yscale = 2^-14; % Set the y data scaling
rndmeth = 'Floor'; % Set the rounding method
```

To get the worst-case error of the lookup table and a plot of the error, type:

```
errworst = fixpt_look1_func_plot(xdata,ydata,funcstr, ...
xmin,xmax,xdt,xscale,ydt,yscale,rndmeth)
```

```
errworst =
    0.1250
```

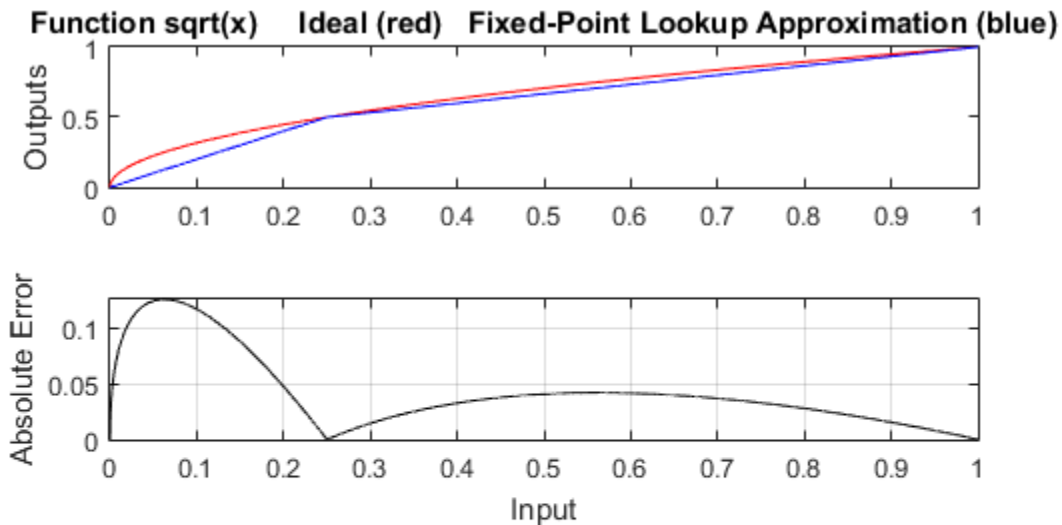



Table uses 3 unevenly spaced data points.

The input is Unsigned 16 Bit with 16 bits right of binary point

The output is Signed 16 Bit with 14 bits right of binary point

Maximum Absolute Error 0.12503 $\log_2(\text{MAE}) = -2.9996$ MAE/yBit = 2048.5

The least significant 12 bits of the output can be inaccurate.

The most significant nonsign bit of the output is used.

The remaining 3 nonsign bits of the output are used and always accurate.

The sign bit of the output is not used.

The rounding mode is to Floor

The upper box (Outputs) displays a plot of the square root function with a plot of the fixed-point lookup approximation underneath. The approximation is found by linear interpolation between the breakpoints. The lower box (Absolute Error) displays the errors at all points in the interval from 0 to 1. Notice that the maximum absolute error occurs at 0.0625. The error at the breakpoints is 0.

Create Lookup Tables for a Sine Function

In this section...

“Introduction” on page 37-6

“Parameters for `fixpt_look1_func_approx`” on page 37-6

“Setting Function Parameters for the Lookup Table” on page 37-8

“Using `errmax` with Unrestricted Spacing” on page 37-8

“Using `nptsmax` with Unrestricted Spacing” on page 37-11

“Using `errmax` with Even Spacing” on page 37-13

“Using `nptsmax` with Even Spacing” on page 37-14

“Using `errmax` with Power of Two Spacing” on page 37-15

“Using `nptsmax` with Power of Two Spacing” on page 37-17

“Specifying Both `errmax` and `nptsmax`” on page 37-18

“Comparison of Example Results” on page 37-19

Introduction

The sections that follow explain how to use the function `fixpt_look1_func_approx` to create lookup tables. It gives examples that show how to create lookup tables for the function $\sin(2\pi x)$ on the interval from 0 to 0.25.

Parameters for `fixpt_look1_func_approx`

To use the function `fixpt_look1_func_approx`, you must first define its parameters. The required parameters for the function are

- `funcstr` — Ideal function
- `xmin` — Minimum input of interest
- `xmax` — Maximum input of interest
- `xdt` — x data type
- `xscale` — x data scaling
- `ydt` — y data type

- `yscale` — y data scaling
- `rndmeth` — Rounding method

In addition there are three optional parameters:

- `errmax` — Maximum allowed error of the lookup table
- `nptsmax` — Maximum number of points of the lookup table
- `spacing` — Spacing allowed between breakpoints

You must use at least one of the parameters `errmax` and `nptsmax`. The next section, “Setting Function Parameters for the Lookup Table” on page 37-8, gives typical settings for these parameters.

Using Only `errmax`

If you use only the `errmax` parameter, without `nptsmax`, the function creates a lookup table with the fewest points, for which the worst-case error is at most `errmax`. See “Using `errmax` with Unrestricted Spacing” on page 37-8.

Using Only `nptsmax`

If you use only the `nptsmax` parameter without `errmax`, the function creates a lookup table with at most `nptsmax` points, which has the smallest worst case error. See “Using `nptsmax` with Unrestricted Spacing” on page 37-11.

The section “Specifying Both `errmax` and `nptsmax`” on page 37-18 describes how the function behaves when you specify both `errmax` and `nptsmax`.

Spacing

You can use the optional `spacing` parameter to restrict the spacing between breakpoints of the lookup table. The options are

- `'unrestricted'` — Default.
- `'even'` — Distance between any two adjacent breakpoints is the same.
- `'pow2'` — Distance between any two adjacent breakpoints is the same and the distance is a power of two.

The section “Restricting the Spacing” on page 37-12 and the examples that follow it explain how to use the `spacing` parameter.

Setting Function Parameters for the Lookup Table

To do the examples in this section, you must first set parameter values for the `fixpt_look1_func_approx` function. To do so, type the following at the MATLAB prompt:

```
funcstr = 'sin(2*pi*x)'; % Define the sine function
xmin = 0; % Set the minimum input of interest
xmax = 0.25; % Set the maximum input of interest
xdt = ufix(16); % Set the x data type
xscale = 2^-16; % Set the x data scaling
ydt = sfix(16); % Set the y data type
yscale = 2^-14; % Set the y data scaling
rndmeth = 'Floor'; % Set the rounding method
errmax = 2^-10; % Set the maximum allowed error
nptsmax = 21; % Specify the maximum number of points
```

If you exit the MATLAB software after typing these commands, you must retype them before trying any of the other examples in this section.

Using `errmax` with Unrestricted Spacing

The first example shows how to create a lookup table that has the fewest data points for a specified worst-case error, with unrestricted spacing. Before trying the example, enter the same parameter values given in the section “Setting Function Parameters for the Lookup Table” on page 37-8, if you have not already done so in this MATLAB session.

You specify the maximum allowed error by typing

```
errmax = 2^-10;
```

Creating the Lookup Table

To create the lookup table, type

```
[xdata, ydata, errworst] = fixpt_look1_func_approx(funcstr, ...
xmin, xmax, xdt, xscale, ydt, yscale, rndmeth, errmax, []);
```

Note that the `nptsmax` and `spacing` parameters are not specified.

The function returns three variables:

- `xdata`, the vector of breakpoints of the lookup table
- `ydata`, the vector found by applying ideal function $\sin(2\pi x)$ to `xdata`
- `errworst`, which specifies the maximum possible error in the lookup table

The value of `errworst` is less than or equal to the value of `errmax`.

You can find the number of X data points by typing

```
length(xdata)
```

```
ans =
```

```
16
```

This means that 16 points are required to approximate $\sin(2\pi x)$ to within the tolerance specified by `errmax`.

You can display the maximum error by typing `errworst`. This returns

```
errworst
```

```
errworst =
```

```
9.7656e-04
```

Plotting the Results

You can plot the output of the function `fixpt_look1_func_plot` by typing

```
fixpt_look1_func_plot(xdata,ydata,funcstr,xmin,xmax,xdt, ...  
xscale,ydt,yscale,rndmeth);
```

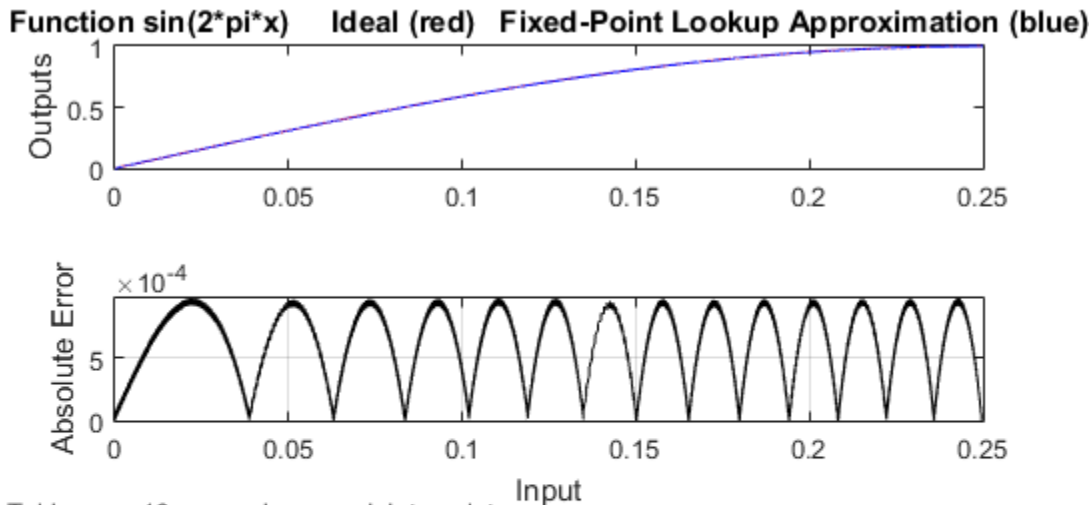


Table uses 16 unevenly spaced data points.

The input is Unsigned 16 Bit with 16 bits right of binary point

The output is Signed 16 Bit with 14 bits right of binary point

Maximum Absolute Error 0.00097656 $\log_2(\text{MAE}) = -10$ MAE/yBit = 16

The least significant 4 bits of the output can be inaccurate.

The most significant nonsign bit of the output is used.

The remaining 11 nonsign bits of the output are used and always accurate.

The sign bit of the output is not used.

The rounding mode is to Floor

The upper plot shows the ideal function $\sin(2\pi x)$ and the fixed-point lookup approximation between the breakpoints. In this example, the ideal function and the approximation are so close together that the two graphs appear to coincide. The lower plot displays the errors.

In this example, the Y data points, returned by the function `fixpt_look1_func_approx` as `ydata`, are equal to the ideal function applied to the points in `xdata`. However, you can define a different set of values for `ydata` after running `fixpt_look1_func_plot`. This can sometimes reduce the maximum error.

You can also change the values of `xmin` and `xmax` in order to evaluate the lookup table on a subset of the original interval.

To find the new maximum error after changing `ydata`, `xmin` or `xmax`, type

```
errworst = fixpt_look1_func_plot(xdata,ydata,funcstr,xmin,xmax, ...
xdt,xscale,ydt,yscale,rndmeth)
```

Using `nptsmax` with Unrestricted Spacing

The next example shows how to create a lookup table that minimizes the worst-case error for a specified maximum number of data points, with unrestricted spacing. Before starting the example, enter the same parameter values given in the section “Setting Function Parameters for the Lookup Table” on page 37-8, if you have not already done so in this MATLAB session.

Setting the Number of Breakpoints

You specify the number of breakpoints in the lookup table by typing

```
nptsmax = 21;
```

Creating the Lookup Table

Next, type

```
[xdata, ydata, errworst] = fixpt_look1_func_approx(funcstr, ...
xmin,xmax,xdt,xscale,ydt,yscale,rndmeth,[],nptsmax);
```

The empty brackets, `[]`, tell the function to ignore the parameter `errmax`, which is not used in this example. Omitting `errmax` causes the function `fixpt_look1_func_approx` to return a lookup table of size specified by `nptsmax`, with the smallest worst-case error.

The function returns a vector `xdata` with 21 points. You can find the maximum error for this set of points by typing `errworst` at the MATLAB prompt.

```
errworst
```

```
errworst =
    5.1139e-04
```

Plotting the Results

To plot the lookup table along with the errors, type

```
fixpt_look1_func_plot(xdata,ydata,funcstr,xmin,xmax,xdt, ...
xscale,ydt,yscale,rndmeth);
```

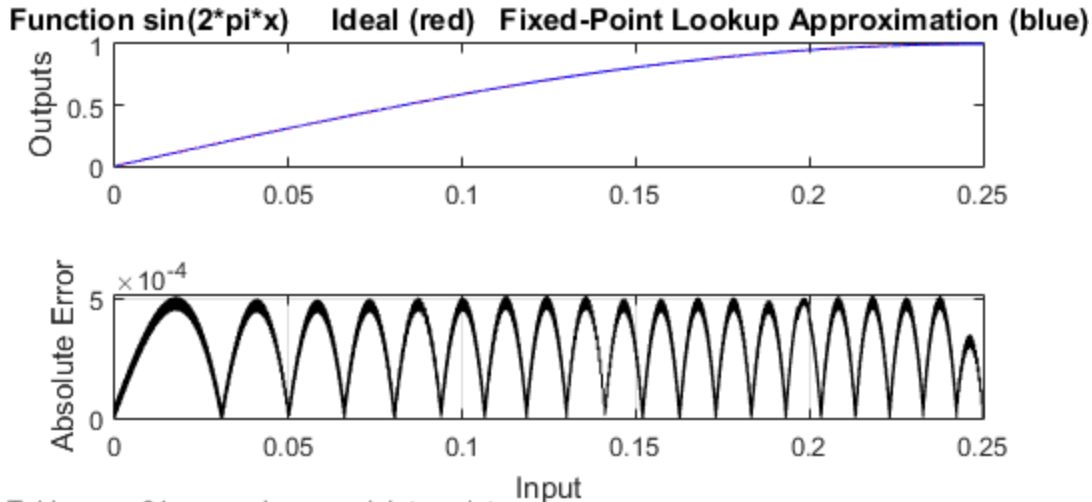


Table uses 21 unevenly spaced data points.

The input is Unsigned 16 Bit with 16 bits right of binary point

The output is Signed 16 Bit with 14 bits right of binary point

Maximum Absolute Error 0.00051139 $\log_2(\text{MAE}) = -10.9333$ MAE/yBit = 8.3785

The least significant 4 bits of the output can be inaccurate.

The most significant nonsign bit of the output is used.

The remaining 11 nonsign bits of the output are used and always accurate.

The sign bit of the output is not used.

The rounding mode is to Floor

Restricting the Spacing

In the previous two examples, the function `fixpt_look1_func_approx` creates lookup tables with unrestricted spacing between the breakpoints. You can restrict the spacing to improve the computational efficiency of the lookup table, using the spacing parameter.

The options for spacing are

- 'unrestricted' — Default.
- 'even' — Distance between any two adjacent breakpoints is the same.

- 'pow2' — Distance between any two adjacent breakpoints is the same and is a power of two.

Both power of two and even spacing increase the computational speed of the lookup table and use less command read-only memory (ROM). However, specifying either of the spacing restrictions along with `errmax` usually requires more data points in the lookup table than does unrestricted spacing to achieve the same degree of accuracy. The section “Effects of Spacing on Speed, Error, and Memory Usage” on page 37-22 discusses the tradeoffs between different spacing options.

Using `errmax` with Even Spacing

The next example shows how to create a lookup table that has evenly spaced breakpoints and a specified worst-case error. To try the example, you must first enter the parameter values given in the section “Setting Function Parameters for the Lookup Table” on page 37-8, if you have not already done so in this MATLAB session.

Next, at the MATLAB prompt type

```
spacing = 'even';  
[xdata, ydata, errworst] = fixpt_look1_func_approx(funcstr, ...  
xmin, xmax, xdt, xscale, ydt, yscale, rndmeth, errmax, [], spacing);
```

You can find the number of points in the lookup table by typing:

```
length(xdata)
```

```
ans =
```

```
20
```

To plot the lookup table along with the errors, type

```
fixpt_look1_func_plot(xdata, ydata, funcstr, xmin, xmax, xdt, ...  
xscale, ydt, yscale, rndmeth);
```

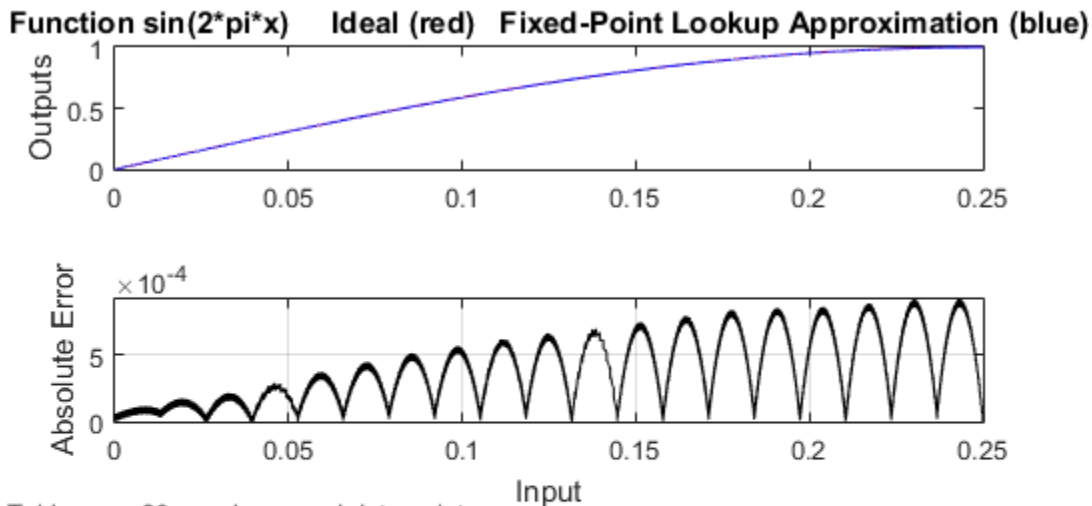


Table uses 20 evenly spaced data points.

The input is Unsigned 16 Bit with 16 bits right of binary point

The output is Signed 16 Bit with 14 bits right of binary point

Maximum Absolute Error 0.00092109 $\log_2(\text{MAE}) = -10.0844$ MAE/yBit = 15.0912

The least significant 4 bits of the output can be inaccurate.

The most significant nonsign bit of the output is not used.

The remaining 10 nonsign bits of the output are used and always accurate.

The sign bit of the output is not used.

The rounding mode is to Floor

Using nptsmax with Even Spacing

The next example shows how to create a lookup table that has evenly spaced breakpoints and minimizes the worst-case error for a specified maximum number of points. To try the example, you must first enter the parameter values given in the section “Setting Function Parameters for the Lookup Table” on page 37-8, if you have not already done so in this MATLAB session.

Next, at the MATLAB prompt type

```
spacing = 'even';
[xdata, ydata, errworst] = fixpt_look1_func_approx(funcstr, ...
xmin, xmax, xdt, xscale, ydt, yscale, rndmeth, [], nptsmax, spacing);
```

The result requires 21 evenly spaced points to achieve a maximum absolute error of $2^{-10.2209}$.

To plot the lookup table along with the errors, type

```
fixpt_look1_func_plot(xdata,ydata,funcstr,xmin,xmax,xdt, ...
xscale,ydt,yscale,rndmeth);
```

Function $\sin(2\pi x)$ Ideal (red) Fixed-Point Lookup Approximation (blue)

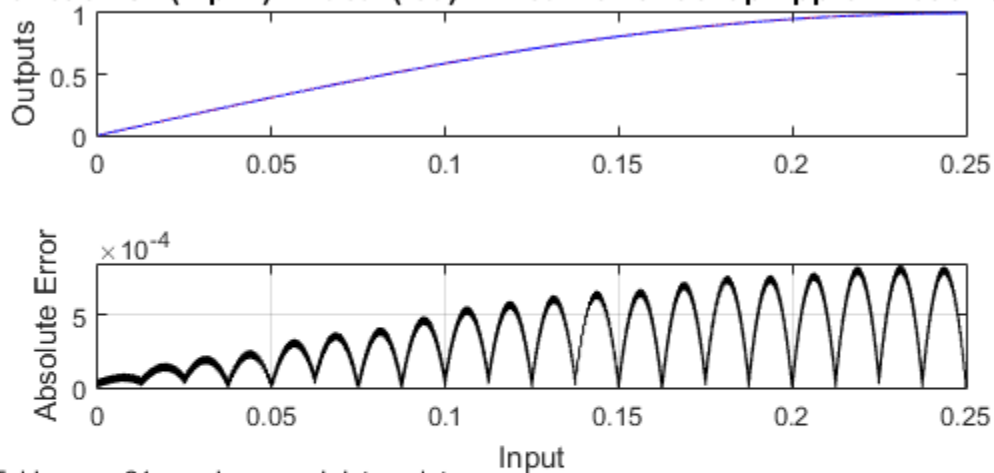


Table uses 21 evenly spaced data points.

The input is Unsigned 16 Bit with 16 bits right of binary point

The output is Signed 16 Bit with 14 bits right of binary point

Maximum Absolute Error 0.00083793 $\log_2(\text{MAE}) = -10.2209$ MAE/yBit = 13.7287

The least significant 4 bits of the output can be inaccurate.

The most significant nonsign bit of the output is not used.

The remaining 10 nonsign bits of the output are used and always accurate.

The sign bit of the output is not used.

The rounding mode is to Floor

Using `errmax` with Power of Two Spacing

The next example shows how to construct a lookup table that has power of two spacing and a specified worst-case error. To try the example, you must first enter the parameter

values given in the section “Setting Function Parameters for the Lookup Table” on page 37-8, if you have not already done so in this MATLAB session.

Next, at the MATLAB prompt type

```
spacing = 'pow2';  
[xdata, ydata, errworst] = ...  
fixpt_look1_func_approx(funcstr, xmin, ...  
xmax, xdt, xscale, ydt, yscale, rndmeth, errmax, [], spacing);
```

To find out how many points are in the lookup table, type

```
length(xdata)
```

```
ans =
```

```
33
```

This means that 33 points are required to achieve the worst-case error specified by `errmax`. To verify that these points are evenly spaced, type

```
widths = diff(xdata)
```

This generates a vector whose entries are the differences between consecutive points in `xdata`. Every entry of `widths` is 2^{-7} .

To find the maximum error for the lookup table, type

```
errworst
```

```
errworst =
```

```
3.7209e-04
```

This is less than the value of `errmax`.

To plot the lookup table data along with the errors, type

```
fixpt_look1_func_plot(xdata, ydata, funcstr, xmin, xmax, xdt, ...
```

```
xscale,ydt,yscale,rndmeth);
```

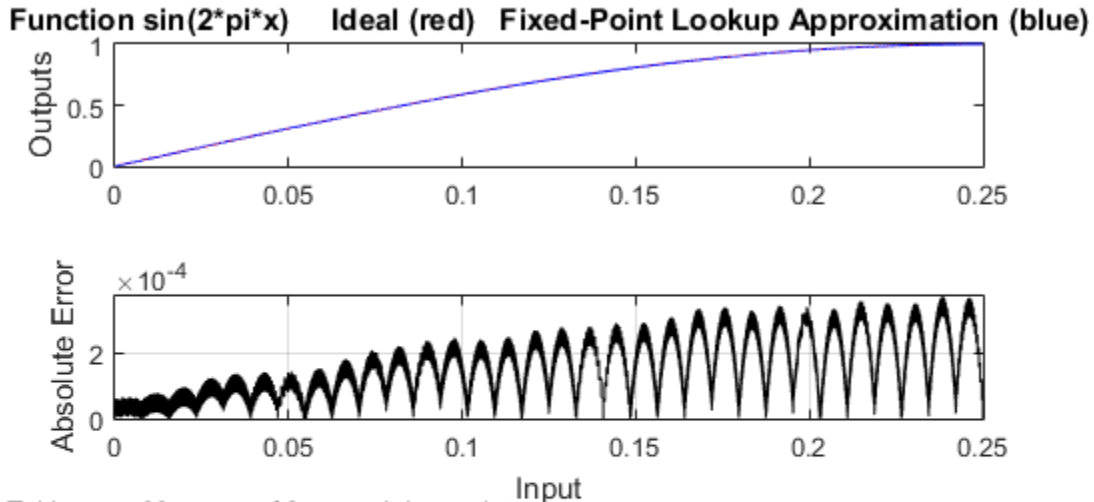


Table uses 33 power of 2 spaced data points.

The input is Unsigned 16 Bit with 16 bits right of binary point

The output is Signed 16 Bit with 14 bits right of binary point

Maximum Absolute Error 0.00037209 $\log_2(\text{MAE}) = -11.3921$ MAE/yBit = 6.0964

The least significant 3 bits of the output can be inaccurate.

The most significant nonsign bit of the output is used.

The remaining 12 nonsign bits of the output are used and always accurate.

The sign bit of the output is not used.

The rounding mode is to Floor

Using nptsmx with Power of Two Spacing

The next example shows how to create a lookup table that has power of two spacing and minimizes the worst-case error for a specified maximum number of points. To try the example, you must first enter the parameter values given in the section “Setting Function Parameters for the Lookup Table” on page 37-8, if you have not already done so in this MATLAB session:

```
spacing = 'pow2';
[xdata, ydata, errworst] = ...
fixpt_look1_func_approx(funcstr,xmin, ...
```

```
xmax,xdt,xscale,ydt,yscale,rndmeth,errmax,[],spacing);
```

The result requires 17 points to achieve a maximum absolute error of $2^{-9.6267}$.

To plot the lookup table along with the errors, type

```
fixpt_look1_func_plot(xdata,ydata,funcstr,xmin,xmax,xdt, ...
xscale,ydt,yscale,rndmeth);
```

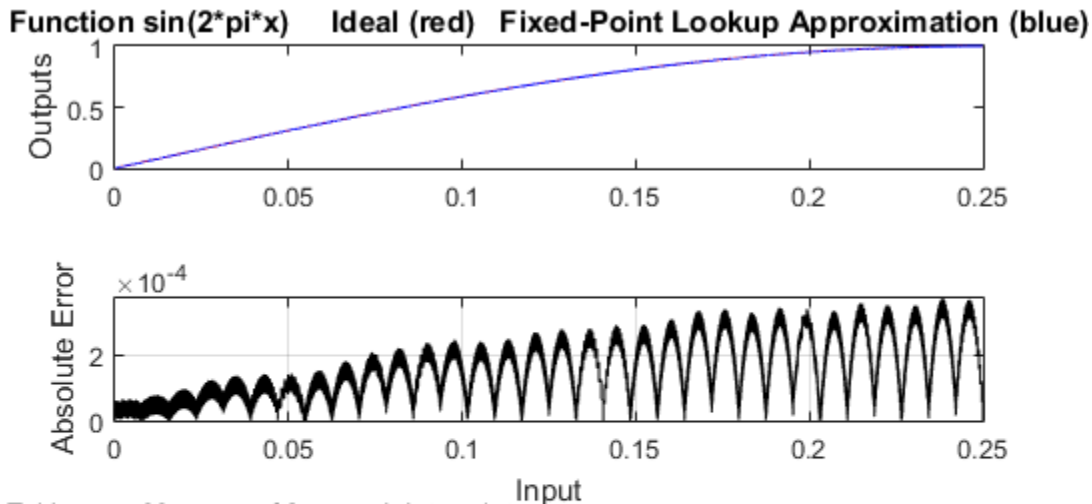


Table uses 33 power of 2 spaced data points.

The input is Unsigned 16 Bit with 16 bits right of binary point

The output is Signed 16 Bit with 14 bits right of binary point

Maximum Absolute Error 0.00037209 $\log_2(\text{MAE}) = -11.3921$ MAE/yBit = 6.0964

The least significant 3 bits of the output can be inaccurate.

The most significant nonsign bit of the output is used.

The remaining 12 nonsign bits of the output are used and always accurate.

The sign bit of the output is not used.

The rounding mode is to Floor

Specifying Both errmax and nptsmax

If you include both the `errmax` and the `nptsmax` parameters, the function `fixpt_look1_func_approx` tries to find a lookup table with at most `nptsmax` data

points, whose worst-case error is at most `errmax`. If it can find a lookup table meeting both conditions, it uses the following order of priority for spacing:

- 1 Power of two
- 2 Even
- 3 Unrestricted

If the function cannot find any lookup table satisfying both conditions, it ignores `nptsmax` and returns a lookup table with unrestricted spacing, whose worst-case error is at most `errmax`. In this case, the function behaves the same as if the `nptsmax` parameter were omitted.

Using the parameters described in the section “Setting Function Parameters for the Lookup Table” on page 37-8, the following examples illustrate the results of using different values for `nptsmax` when you enter

```
[xdata ydata errworst] = fixpt_look1_func_approx(funcstr, ...
xmin,xmax,xdt,xscale,ydt,yscale,rndmeth,errmax,nptsmax);
```

The results for three different settings for `nptsmax` are as follows:

- `nptsmax = 33`; — The function creates the lookup table with 33 points having power of two spacing, as in Example 3.
- `nptsmax = 21`; — Because the `errmax` and `nptsmax` conditions cannot be met with power of two spacing, the function creates the lookup table with 20 points having even spacing, as in Example 5.
- `nptsmax = 16`; — Because the `errmax` and `nptsmax` conditions cannot be met with either power of two or even spacing, the function creates the lookup table with 16 points having unrestricted spacing, as in Example 1.

Comparison of Example Results

The following table summarizes the results for the examples. Note that when you specify `errmax`, even spacing requires more data points than unrestricted, and power of two spacing requires more points than even spacing.

Example	Options	Spacing	Worst-Case Error	Number of Points in Table
1	<code>errmax=2⁻¹⁰</code>	'unrestricted'	2 ⁻¹⁰	16

Example	Options	Spacing	Worst-Case Error	Number of Points in Table
2	nptsmax=21	'unrestricted'	$2^{-10.933}$	21
3	errmax= 2^{-10}	'even'	$2^{-10.0844}$	20
4	nptsmax=21	'even'	$2^{-10.2209}$	21
5	errmax= 2^{-10}	'pow2'	$2^{-11.3921}$	33
6	nptsmax=21	'pow2'	$2^{-9.627}$	17

Use Lookup Table Approximation Functions

The following steps summarize how to use the lookup table approximation functions:

- 1** Define:
 - a** The ideal function to approximate
 - b** The range, `xmin` to `xmax`, over which to find X and Y data
 - c** The fixed-point implementation: data type, scaling, and rounding method
 - d** The maximum acceptable error, the maximum number of points, and the spacing
- 2** Run the `fixpt_look1_func_approx` function to generate X and Y data.
- 3** Use the `fixpt_look1_func_plot` function to plot the function and error between the ideal and approximated functions using the selected X and Y data, and to calculate the error and the number of points used.
- 4** Vary input criteria, such as `errmax`, `nptsmax`, and `spacing`, to produce sets of X and Y data that generate functions with varying worst-case error, number of points required, and spacing.
- 5** Compare results of the number of points required and maximum absolute error from various runs to choose the best set of X and Y data.

Effects of Spacing on Speed, Error, and Memory Usage

In this section...

“Criteria for Comparing Types of Breakpoint Spacing” on page 37-22

“Model That Illustrates Effects of Breakpoint Spacing” on page 37-22

“Data ROM Required for Each Lookup Table” on page 37-23

“Determination of Out-of-Range Inputs” on page 37-23

“How the Lookup Tables Determine Input Location” on page 37-24

“Interpolation for Each Lookup Table” on page 37-26

“Summary of the Effects of Breakpoint Spacing” on page 37-28

Criteria for Comparing Types of Breakpoint Spacing

The sections that follow compare implementations of lookup tables that use breakpoints whose spacing is uneven, even, and power of two. The comparison focuses on:

- Execution speed of commands
- Rounding error during interpolation
- The amount of read-only memory (ROM) for data
- The amount of ROM for commands

This comparison is valid only when the breakpoints are not tunable. If the breakpoints are tunable in the generated code, all three cases generate the same code. For a summary of the effects of breakpoint spacing on execution speed, error, and memory usage, see “Summary of the Effects of Breakpoint Spacing” on page 37-28.

Model That Illustrates Effects of Breakpoint Spacing

This comparison uses the model `fxpdemo_approx_sin`. Three fixed-point lookup tables appear in this model. All three tables approximate the function $\sin(2\pi u)$ over the first quadrant and achieve a worst-case error of less than 2^{-8} . However, they have different restrictions on their breakpoint spacing.

You can use the model `fxpdemo_approx`, which `fxpdemo_approx_sin` opens, to generate Simulink Coder code (Simulink Coder software license required). The sections that follow present several segments of generated code to emphasize key differences.

To open the model, type at the MATLAB prompt:

```
fxpdemo_approx_sin
```

Data ROM Required for Each Lookup Table

This section looks at the data ROM required by each of the three spacing options.

Uneven Case

Uneven spacing requires both Y data points and breakpoints:

```
int16_T yuneven[8];  
uint16_T xuneven[8];
```

The total bytes used is 32.

Even Case

Even spacing requires only Y data points:

```
int16_T yeven[10];
```

The total bytes used is 20. The breakpoints are not explicitly required. The code uses the spacing between the breakpoints, and might use the smallest and largest breakpoints. At most, three values related to the breakpoints are necessary.

Power of Two Case

Power of two spacing requires only Y data points:

```
int16_T ypow2[17];
```

The total bytes used is 34. The breakpoints are not explicitly required. The code uses the spacing between the breakpoints, and might use the smallest and largest breakpoints. At most, three values related to the breakpoints are necessary.

Determination of Out-of-Range Inputs

In all three cases, you must guard against the chance that the input is less than the smallest breakpoint or greater than the biggest breakpoint. There can be differences in how occurrences of these possibilities are handled. However, the differences are generally minor and are normally not a key factor in deciding to use one spacing method over

another. The subsequent sections assume that out-of-range inputs are impossible or have already been handled.

How the Lookup Tables Determine Input Location

This section describes how the three fixed-point lookup tables determine where the current input is relative to the breakpoints.

Uneven Case

Unevenly-spaced breakpoints require a general-purpose algorithm such as a binary search to determine where the input lies in relation to the breakpoints. The following code provides an example:

```
iLeft = 0;
iRight = 7; /* number of breakpoints minus 1 */

while ( ( iRight - iLeft ) > 1 )
{
    i = ( iLeft + iRight ) >> 1;

    if ( uAngle < xuneven[i] )
    {
        iRight = i;
    }
    else
    {
        iLeft = i;
    }
}
```

The while loop executes up to $\log_2(N)$ times, where N is the number of breakpoints.

Even Case

Evenly-spaced breakpoints require only one step to determine where the input lies in relation to the breakpoints:

```
iLeft = uAngle / 455U;
```

The divisor `455U` represents the spacing between breakpoints. In general, the dividend would be `(uAngle - SmallestBreakPoint)`. In this example, the smallest breakpoint is zero, so the code optimizes out the subtraction.

Power of Two Case

Power of two spaced breakpoints require only one step to determine where the input lies in relation to the breakpoints:

```
iLeft = uAngle >> 8;
```

The number of shifts is 8 because the breakpoints have spacing 2^8 . The smallest breakpoint is zero, so `uAngle` replaces the general case of `(uAngle - SmallestBreakPoint)`.

Comparison

To determine where the input lies with respect to the breakpoints, the unevenly-spaced case requires much more code than the other two cases. This code requires additional command ROM. If many lookup tables share the binary search algorithm as a function, you can reduce this ROM penalty. Even if the code is shared, the number of clock cycles required to determine the location of the input is much higher for the unevenly-spaced cases than the other two cases. If the code is shared, function-call overhead decreases the speed of execution a little more.

In the evenly-spaced case and the power of two spaced case, you can determine the location of the input with a single line of code. The evenly-spaced case uses a general integer division. The power of two case uses a shift instead of general division because the divisor is an exact power of two. Without knowing the specific processor, you cannot be certain that a shift is better than division.

Many processors can implement division with a single assembly language instruction, so the code will be small. However, this instruction often takes many clock cycles to complete. Many processors do not provide a division instruction. Division on these processors occurs through repeated subtractions. This process is slow and requires a lot of machine code, but this code can be shared.

Most processors provide a way to do logical and arithmetic shifts left and right. A key difference is whether the processor can do N shifts in one instruction (barrel shift) or requires N instructions that shift one bit at a time. The barrel shift requires less code. Whether the barrel shift also increases speed depends on the hardware that supports the operation.

The compiler can also complicate the comparison. In the previous example, the command `uAngle >> 8` essentially takes the upper 8 bits in a 16-bit word. The compiler can detect

this situation and replace the bit shifts with an instruction that takes the bits directly. If the number of shifts is some other value, such as 7, this optimization would not occur.

Interpolation for Each Lookup Table

In theory, you can calculate the interpolation with the following code:

```
y = ( yData[iRight] - yData[iLeft] ) * ( u - xData[iLeft] ) ...  
    / ( xData[iRight] - xData[iLeft] ) + yData[iLeft]
```

The term $(xData[iRight] - xData[iLeft])$ is the spacing between neighboring breakpoints. If this value is constant, due to even spacing, some simplification is possible. If spacing is not just even but also a power of two, significant simplifications are possible for fixed-point implementations.

Uneven Case

For the uneven case, one possible implementation of the ideal interpolation in fixed point is as follows:

```
xNum = uAngle          - xuneven[iLeft];  
xDen = xuneven[iRight] - xuneven[iLeft];  
yDiff = yuneven[iRight] - yuneven[iLeft];  
  
MUL_S32_S16_U16( bigProd, yDiff, xNum );  
  
    DIV_NZP_S16_S32_U16_FL00R( yDiff, bigProd, xDen );  
  
yUneven = yuneven[iLeft] + yDiff;
```

The multiplication and division routines are not shown here. These routines can be complex and depend on the target processor. For example, these routines look different for a 16-bit processor than for a 32-bit processor.

Even Case

Evenly-spaced breakpoints implement interpolation using slightly different calculations than the uneven case. The key difference is that the calculations do not directly use the breakpoints. When the breakpoints are not required in ROM, you can save a lot of memory:

```
xNum = uAngle - ( iLeft * 455U );
```

```
yDiff = yeven[iLeft+1] - yeven[iLeft];  
MUL_S32_S16_U16( bigProd, yDiff, xNum );  
DIV_NZP_S16_S32_U16_FLOOR( yDiff, bigProd, 455U );  
yEven = yeven[iLeft] + yDiff;
```

Power of Two Case

Power of two spaced breakpoints implement interpolation using very different calculations than the other two cases. As in the even case, breakpoints are not used in the generated code and therefore not required in ROM:

```
lambda = uAngle & 0x00FFU;  
yPow2 = ypow2[iLeft+1] - ypow2[iLeft];  
MUL_S16_U16_S16_SR8(yPow2, lambda, yPow2);  
yPow2 += ypow2[iLeft];
```

This implementation has significant advantages over the uneven and even implementations:

- A bitwise AND combined with a shift right at the end of the multiplication replaces a subtraction and a division.
- The term $(u - xData[iLeft]) / (xData[iRight] - xData[iLeft])$ results in no loss of precision, because the spacing is a power of two.

In contrast, the uneven and even cases usually introduce rounding error in this calculation.

Summary of the Effects of Breakpoint Spacing

The following table summarizes the effects of breakpoint spacing on execution speed, error, and memory usage.

Parameter	Even Power of 2 Spaced Data	Evenly Spaced Data	Unevenly Spaced Data
Execution speed	The execution speed is the fastest. The position search and interpolation are the same as for evenly-spaced data. However, to increase the speed more, a bit shift replaces the position search, and a bit mask replaces the interpolation.	The execution speed is faster than that for unevenly-spaced data, because the position search is faster and the interpolation requires a simple division.	The execution speed is the slowest of the different spacings because the position search is slower, and the interpolation requires more operations.
Error	The error can be larger than that for unevenly-spaced data because approximating a function with nonuniform curvature requires more points to achieve the same accuracy.	The error can be larger than that for unevenly-spaced data because approximating a function with nonuniform curvature requires more points to achieve the same accuracy.	The error can be smaller because approximating a function with nonuniform curvature requires fewer points to achieve the same accuracy.
ROM usage	Uses less command ROM, but more data ROM.	Uses less command ROM, but more data ROM.	Uses more command ROM, but less data ROM.
RAM usage	Not significant.	Not significant.	Not significant.

The number of Y data points follows the expected pattern. For the same worst-case error, unrestricted spacing (uneven) requires the fewest data points, and power-of-two-spaced breakpoints require the most. However, the implementation for the evenly-spaced and the power of two cases does not need the breakpoints in the generated code. This reduces their data ROM requirements by half. As a result, the evenly-spaced case actually uses

less data ROM than the unevenly-spaced case. Also, the power of two case requires only slightly more ROM than the uneven case. Changing the worst-case error can change these rankings. Nonetheless, when you compare data ROM usage, you should always take into account the fact that the evenly-spaced and power of two spaced cases do not require their breakpoints in ROM.

The effort of determining where the current input is relative to the breakpoints strongly favors the evenly-spaced and power of two spaced cases. With uneven spacing, you use a binary search method that loops up to $\log_2(N)$ times. With even and power of two spacing, you can determine the location with the execution of one line of C code. But you cannot decide the relative advantages of power of two versus evenly spaced without detailed knowledge of the hardware and the C compiler.

The effort of calculating the interpolation favors the power of two case, which uses a bitwise AND operation and a shift to replace a subtraction and a division. The advantage of this behavior depends on the specific hardware, but you can expect an advantage in code size, speed, and also in accuracy. The evenly-spaced case calculates the interpolation with a minor improvement in efficiency over the unevenly-spaced case.

Automatic Data Typing

- “About Automatic Data Typing” on page 38-2
- “Before Proposing Data Types for Your Model” on page 38-3
- “Best Practices for Fixed-Point Workflow” on page 38-5
- “Models That Might Cause Data Type Propagation Errors” on page 38-8
- “Automatic Data Typing Using Simulation Data” on page 38-10
- “Automatic Data Typing Using Derived Ranges” on page 38-21
- “Propose Fraction Lengths” on page 38-33
- “How the Fixed-Point Tool Proposes Word Lengths” on page 38-48
- “Propose Word Lengths” on page 38-51
- “Propose Word Lengths Based on Simulation Data” on page 38-52
- “Propose Data Types Using Multiple Simulations” on page 38-58
- “View Simulation Results” on page 38-63
- “Viewing Results With the Simulation Data Inspector” on page 38-68

About Automatic Data Typing

The Fixed-Point Tool automates the task of specifying fixed-point data types in a Simulink model. This process is also known as *autoscaling*. The tool collects range data for model objects, either from design minimum and maximum values that objects specify explicitly, from logged minimum and maximum values that occur during simulation, or from minimum and maximum values derived using range analysis. Based on these values, the tool proposes fixed-point data types that maximize precision and cover the range. The tool allows you to review the data type proposals and then apply them selectively to objects in your model.

You can use the Fixed-Point Tool to select data types automatically for your model using the following methods.

Automatic Data Typing Method	Advantages	Disadvantages
Using simulation minimum and maximum values	<ul style="list-style-type: none"> • Useful if you know the inputs to use for the model. • You do not need to specify any design range information. 	<ul style="list-style-type: none"> • Not always feasible to collect full simulation range. • Simulation might take a very long time.
Using design minimum and maximum values	You can use this method if the model contains blocks that range analysis does not support. However, if possible, use simulation data to propose data types.	<ul style="list-style-type: none"> • Design range often available only on some input and output signals. • Can propose data types only for signals with specified design minimum and maximum values.
Using derived minimum and maximum values	You do not have to simulate multiple times to ensure that simulation data covers the full intended operating range.	<ul style="list-style-type: none"> • Derivation might take a very long time.

Before Proposing Data Types for Your Model


Before you use the Fixed-Point Tool to propose data types your Simulink model, consider how automatic data typing affects your model:

- The Fixed-Point Tool proposes new data types for the fixed-point data types in your model. If you choose to apply the proposed data types, the tool changes the data types in your model. Before using the Fixed-Point Tool, back up your model and workspace variables to ensure that you can recover your original data type settings and capture the fixed-point instrumentation and data type override settings using the Shortcut Editor.



For more information, see “Best Practices for Fixed-Point Workflow” on page 38-5.

- Before proposing data types, verify that you can **update diagram** successfully . Sometimes, changing the data types in your model results in subsequent **update diagram** errors. Immediately before and after applying data type proposals, it is good practice to test **update diagram** again. This practice enables you to fix any errors before making further modifications to your model.

For more information, see “Update a Block Diagram”.

- The Fixed-Point Tool alerts you to potential issues with proposed data types for each object in your model:
 - If the Fixed-Point Tool detects that the proposed data type introduces data type errors when applied to an object, the tool marks the object with an error, . You must inspect this proposal and fix the problem in the Simulink model. After fixing the problem, rerun the simulation and generate a proposal again to confirm that you have resolved the issue.

For more information, see “Examine Results to Resolve Conflicts” on page 38-15.

- If the Fixed-Point Tool detects that the proposed data type poses potential issues for an object, the tool marks the object with a yellow caution, . Review the proposal before accepting it.
- If the Fixed-Point Tool detects that the proposed data type poses no issues for an object, the tool marks the object with a green check, .

Caution The Fixed-Point Tool does not detect all potential data type issues. If the Fixed-Point Tool does not detect any issues for your model, it is still possible to experience subsequent data type propagation issues. For more information, see “Models That Might Cause Data Type Propagation Errors” on page 38-8.

Best Practices for Fixed-Point Workflow

Use a Known Working Simulink Model

Before you begin automatic data typing, verify that **update diagram** succeeds for your model. To update diagram, press **Ctrl+D**. If **update diagram** fails, before automatic data typing to propose data types, fix the failure in your model.

Back Up Your Simulink Model

Before using the Fixed-Point Tool, back up your Simulink model and associated workspace variables.

Backing up your model provides a backup of your original model in case of error and a baseline for testing and validation.

Capture the Current Data Type Override Settings

Before changing the current fixed-point instrumentation and data type override settings, use the Fixed-Point Tool Shortcut Editor to create a shortcut for these settings. Creating a shortcut allows you to revert to the original model settings. For more information, see “Capture Model Settings Using the Shortcut Editor” on page 35-10.

Convert Individual Subsystems

Convert individual subsystems in your model one at a time. This practice facilitates debugging by isolating the source of fixed-point issues. For example, see “Debug a Fixed-Point Model” on page 35-11.

Isolate the System Under Conversion

If you encounter data type propagation issues with a particular subsystem during the conversion, isolate this subsystem by placing Data Type Conversion blocks on the inputs and outputs of the system. The Data Type Conversion block converts an input signal of any Simulink data type to the data type and scaling you specify for its **Output data type** parameter. This practice enables you to continue automatic data typing for the rest of your model.

Do Not Use “Save as” on Referenced Models and MATLAB Function blocks

During the fixed-point conversion process using the Fixed-Point Tool, do not use the “Save as” option to save referenced models or MATLAB Function blocks with a different name. If you do, you might lose existing results for the original model.

Use Lock Output Data Type Setting

You can prevent the Fixed-Point Tool from replacing the current data type. Use the **Lock output data type setting against changes by the fixed-point tools** parameter that is available on many blocks. The default setting allows for replacement. Use this setting when:

- You already know the fixed-point data types that you want to use for a particular block.

For example, the block is modeling a real-world component. Set up the block to allow for known hardware limitations, such as restricting outputs to integer values.

Explicitly specify the output data type of the block and select **Lock output data type setting against changes by the fixed-point tools**.

- You are debugging a model and know that a particular block accepts only certain input signal data types.

Explicitly specify the output data type of upstream blocks and select **Lock output data type setting against changes by the fixed-point tools**.

Save Simulink Signal Objects

If your model contains Simulink signal objects and you accept proposed data types, the Fixed-Point Tool automatically applies the changes to the signal objects. However, the Fixed-Point Tool does not automatically save changes that it makes to Simulink signal objects. To preserve changes, before closing your model, save the Simulink signal objects in your workspace and model.

Test Update Diagram Failure

Immediately after applying data type proposals, test **update diagram**. If **update diagram** fails, perform one of the following actions:

- Use the failure information to fix the errors in your model. After fixing the errors, test **update diagram** again.
- If you are unable to fix the errors, restore your back-up model. After restoring the model, try to fix the errors by, for example, locking output data type settings and isolating the system, as described in the preceding sections. After addressing the errors, test **update diagram** again.

Disable Fast Restart

The Fixed-Point Tool provides limited support when the model is simulated in Fast Restart. You must disable Fast Restart to collect simulation and derived ranges, and propose data types.

Models That Might Cause Data Type Propagation Errors

When the Fixed-Point Tool proposes changes to the data types in your model, it alerts you to potential issues. If the Fixed-Point Tool alerts you to data type errors, you must diagnose the errors and fix the problems. For more information, see “Examine Results to Resolve Conflicts” on page 38-15.

The Fixed-Point Tool does not detect all potential data type issues. If the tool does not report any issues for your model, it is still possible to experience subsequent data type propagation errors. Before you use the Fixed-Point Tool, back up your model to ensure that you can recover your original data type settings. For more information, see “Best Practices for Fixed-Point Workflow” on page 38-5.

The following models are likely to cause data type propagation issues.

Model Uses...	Fixed-Point Tool Behavior	Data Type Propagation Issue
Simulink parameter objects	Does not consider any data type information for Simulink parameter objects and does not use them for automatic data typing.	Fixed-Point Tool might propose data types that are inconsistent with the data types for the parameter object or generate proposals that cause overflows.
User-defined S-functions	Cannot detect the operation of user-defined S-functions.	<ul style="list-style-type: none"> The user-defined S-function accepts only certain input data types. The Fixed-Point Tool cannot detect this requirement and proposes a different data type upstream of the S-function. Update diagram fails on the model due to data type mismatch errors. The user-defined S-function specifies certain output data types. The Fixed-Point Tool is not aware of this requirement and does not use it for automatic data typing. Therefore, the tool might propose data types that are

Model Uses...	Fixed-Point Tool Behavior	Data Type Propagation Issue
		inconsistent with the data types for the S-function or generate proposals that cause overflows.
User-defined masked subsystems	Has no knowledge of the masked subsystem workspace and cannot take this subsystem into account when proposing data types.	Fixed-Point Tool might propose data types that are inconsistent with the requirements of the masked subsystem, particularly if the subsystem uses mask initialization. The proposed data types might cause data type mismatch errors or overflows.
Linked subsystems	Does not include linked subsystems when proposing data types.	Data type mismatch errors might occur at the linked subsystem boundaries.

Automatic Data Typing Using Simulation Data

In this section...

“Workflow for Automatic Data Typing Using Simulation Data” on page 38-10

“Set Up the Model” on page 38-10

“Prepare the Model for Fixed-Point Conversion” on page 38-11

“Gather a Floating-Point Benchmark” on page 38-12

“Proposing Data Types” on page 38-13

“Propose Data Types” on page 38-15

“Examine Results to Resolve Conflicts” on page 38-15

“Apply Proposed Data Types” on page 38-18

“Verify New Settings” on page 38-19

“Automatic Data Typing of Simulink Signal Objects” on page 38-20

Workflow for Automatic Data Typing Using Simulation Data

1

- 1 Set up the model
- 2 Prepare the model for fixed-point conversion
- 3 Run the model to gather floating-point benchmark
- 4 Propose data types
- 5 Examine results to resolve conflicts
- 6 Apply proposed data types
- 7 Verify new settings

Set Up the Model

To use the Fixed-Point Tool to generate data type proposals for your model based on simulation minimum and maximum values only, you must first set up your model in Simulink.

- 1 Back up your model in case of error and as a baseline for testing and validation.

- 2 Open your model in Simulink.
- 3 From the Simulink menu, select **Simulation > Mode > Normal** so that the model runs in **Normal** mode. The Fixed-Point Tool supports only **Normal** mode.
- 4 If you are using design minimum and maximum range information, add this information to blocks.

You specify a design range for model objects using parameters typically titled **Output minimum** and **Output maximum**. For a list of blocks that permit you to specify these values, see “Blocks That Allow Signal Range Specification”.

- 5 Specify fixed-point data types for blocks and signals in your model. For blocks with the **Data Type Assistant**, use the **Calculate Best-Precision Scaling** button to calculate best-precision scaling automatically. For more information, see “Specify Fixed-Point Data Types with the Data Type Assistant” on page 30-22. Use the Fixed-Point Advisor to prepare your model for conversion to an equivalent fixed-point representation. For more information, see “Preparation for Fixed-Point Conversion”.
- 6 You can choose to lock some blocks against automatic data typing by selecting the **Lock output data type setting against changes by the fixed-point tools** parameter. If you select the **Lock output data type setting against changes by the fixed-point tools** parameter, the tool does not propose data types for that object.
- 7 From the Simulink **Simulation** menu, select **Update Diagram** to perform parameter range checking for all blocks in the model.

If **update diagram** fails, use the failure information to fix the errors in your model. After fixing the errors, test **update diagram** again. If you are unable to fix the errors, restore your back-up model.

- 8 If the model changed, back up the model again in case of error and as a baseline for testing and validation.
- 9 Create a shortcut to capture the initial fixed-point instrumentation and data type override settings. For more information, see “Capture Model Settings Using the Shortcut Editor” on page 35-10.

Prepare the Model for Fixed-Point Conversion

First use the Fixed-Point Advisor to prepare the model for conversion to fixed point. You do this preparation only once. The Fixed-Point Advisor gives advice about model and block configuration settings to prepare for automatic conversion to fixed point using the Fixed-Point Tool. The Fixed-Point Advisor:

- Checks the model against fixed-point guidelines.
- Identifies unsupported blocks.
- Removes output data type inheritance from blocks.

The Fixed-Point Advisor also makes recommendations for a model, such as model-level diagnostic settings and removal of inheritance rules. It configures the model for autoscaling by the Fixed-Point Tool. Therefore, even if your model uses only fixed-point data types, it is useful to run the Fixed-Point Advisor on the model.

To open the Fixed-Point Advisor:

- 1 From the Simulink **Analysis** menu, select **Fixed-Point Tool**.
- 2 On the Fixed-Point Tool **Model Hierarchy** pane, select the system or subsystem of interest.
- 3 On the **Fixed-point preparation for selected system** pane, click **Fixed-Point Advisor**.

Use the Fixed-Point Advisor to prepare the model for conversion. For more information, see “Preparation for Fixed-Point Conversion”.


Gather a Floating-Point Benchmark

First, run the model with a global override of the fixed-point data types using double-precision numbers to avoid quantization effects. This action provides a floating-point benchmark that represents the ideal output. The Simulink software logs the signal logging results to the MATLAB workspace. The Fixed-Point Tool displays the simulation results, including minimum and maximum values, that occur during the run.

- 1 From the Simulink **Analysis** menu, select **Fixed-Point Tool**.
- 2 Enable signal logging for the system or subsystem of interest. Using the Fixed-Point Tool you can enable signal logging for multiple signals simultaneously. For more information, see “Signal Logging Options” in the `fxptdlg` Reference.

To enable signal logging:

- a On the Fixed-Point Tool **Model Hierarchy** pane, select the system or subsystem.
- b Right-click the selected system to open the context menu.
- c Use the **Enable Signal Logging** option to enable signal logging, as necessary.

The **Contents** pane of the Fixed-Point Tool displays an antenna icon  next to items that have signal logging enabled.

Note: You can plot results only for signals that have signal logging enabled.

- 3 On the Fixed-Point Tool **Model Hierarchy** pane, select the system or subsystem for which you want a proposal.
- 4 On the **Model settings** pane, click the **Model-wide double override and full instrumentation** button to set:
 - **Data type override** to Double
 - **Data type override applies to** to All numeric types
 - **Fixed-point instrumentation mode** to Minimums, maximums and overflows
 - The run name (in the **Data collection** pane **Run name** field) to DoubleOverride

The Fixed-Point Tool performs a global override of the fixed-point data types with double-precision data types, thus avoiding quantization effects. During simulation, the tool logs minimum value, maximum value, and overflow data for all blocks in the current system or subsystem in the run DoubleOverride.

Note: Data type override does not apply to boolean or enumerated data types.

- 5 Click the Fixed-Point Tool **Simulate** button  to run the simulation.

The Fixed-Point Tool highlights any simulation results that have issues, such as overflows or saturations.

Proposing Data Types

Unless you select an object's **Lock output data type setting against changes by the fixed-point tools** parameter or the data types are using inheritance rules, the Fixed-Point Tool proposes data types for model objects that specify fixed-point data types.

When proposing data types, the Fixed-Point Tool collects the following types of range data for model objects:

- Design minimum or maximum values — You specify a design range for model objects using parameters typically titled **Output minimum** and **Output maximum**. For a list of blocks that permit you to specify these values, see “Blocks That Allow Signal Range Specification”.
- Simulation minimum or maximum values — When simulating a system whose **Fixed-point instrumentation mode** parameter specifies **Minimums**, **maximums** and **overflows**, the Fixed-Point Tool logs the minimum and maximum values generated by model objects. For more information about the **Fixed-point instrumentation mode** parameter, see `fxptdlg`.
- Derived minimum or maximum values — When deriving minimum and maximum values for a selected system, the Fixed-Point Tool uses the design minimum and maximum values that you specify for the model to derive range information for signals in your model. For more information, see “Derive Ranges”.

The Fixed-Point Tool uses available range data to calculate data type proposals according to the following rules:

- Design minimum and maximum values take precedence over the simulation and derived range.

The **Safety margin for design and derived min/max (%)** parameter specifies a range that differs from that defined by the design range. For example, a value of 20 specifies that a range of at least 20 percent larger is desired. A value of -10 specifies that a range of up to 10 percent smaller is acceptable. If this parameter is not visible in the **Automatic data typing for selected system** pane, click the **Configure** link.

- The tool observes the derived range only when the **Derived min/max** option is selected. Otherwise, the tool ignores the derived range.

The **Safety margin for design and derived min/max (%)** parameter specifies a range that differs from that defined by the derived range. For example, a value of 20 specifies that a range of at least 20 percent larger is desired. A value of -10 specifies that a range of up to 10 percent smaller is acceptable. If this parameter is not visible in the **Automatic data typing for selected system** pane, click the **Configure** link.

- The tool observes the simulation range only when the **Simulation min/max** option is selected. Otherwise, the tool ignores the simulation range.

The **Safety margin for simulation min/max (%)** parameter specifies a range that differs from that defined by the simulation range. For example, a value of 20 specifies that a range of at least 20 percent larger is desired. A value of -10 specifies that a

range of up to 10 percent smaller is acceptable. If this parameter is not visible in the **Automatic data typing for selected system** pane, click the **Configure** link.

Propose Data Types

- 1 In the **Automatic data typing for selected system Settings** pane, select either **Propose fraction lengths for specified word lengths** or **Propose word lengths for specified fraction lengths**.

If these options are not visible, use the **Configure** link to display them.

- 2 To use simulation min/max information only, clear **Derived min/max**.
- 3 If you have safety margins to apply:
 - a Enter **Safety margin for design and derived min/max (%)**, if applicable. For example, enter 10 for a 10% safety margin. If this parameter is not visible in the **Automatic data typing for selected system** pane, click the **Configure** link.
 - b Enter **Safety margin for simulation min/max (%)**, if applicable.
- 4 Click the **Propose fraction lengths** or **Propose word lengths** button to generate a proposal, **DT**.

Note: When the Fixed-Point Tool proposes data types, it does not alter your model.

Examine Results to Resolve Conflicts

You can examine each proposal using the **Result Details** tab, which displays the rationale underlying the proposed data types. Also, this tab describes potential issues or errors, and it suggests methods for resolving them. To view the details, on the **Contents** pane, select an object that has proposed data types and click the **Result Details** tab in the upper right corner of the Fixed-Point Tool.

The **Result Details** tab provides the following information about the proposed data types, as appropriate.

Proposed Data Type Summary

Describes a proposal in terms of how it differs from the object's current data type. For cases when the Fixed-Point Tool does not propose data types, this section provides a

rationale. For example, the data type might be locked against changes by the fixed-point tools.

This section of the **Result Details** tab also informs you if the selected object must share the same data type as other objects in the model because of data type propagation rules. For example, the inputs to a Merge block must have the same data type. Therefore, the outputs of blocks that connect to these inputs must share the same data type. Similarly, blocks that are connected by the same element of a virtual bus must share the same data type.

The tab provides a hyperlink that you can click to highlight the objects that share data types in the model. To clear this highlighting, from the model **View** menu, select **Remove Highlighting**.

The Fixed-Point Tool allocates an identification tag to objects that must share the same data type. The tool displays this identification tag in the **DTGroup** column for the object. To display only the objects that must share data types, from the Fixed-Point Tool main toolbar, select the **Show** option.


Some Simulink blocks accept only certain data types on some ports. This section of the **Result Details** tab also informs you when a block that connects to the selected object has data type constraints that impact the proposed data type of the selected object. The tab lists the blocks that have data type constraints, provides details of the constrained data types, and links to the blocks in the model.


The **Proposed Data Type Summary** section of the **Result Details** tab provides a table with the proposed data type information.

Item	Description
ProposedDT	Data type that the Fixed-Point Tool proposes for this object and the minimum and maximum values that the proposed data type can represent.
SpecifiedDT	Data type that an object specifies.

Needs Attention

Lists potential issues and errors associated with data type proposals. It describes the issues and suggests methods for resolving them. It uses the following icons to differentiate warnings from errors:

 Indicates a warning message.

 Indicates an error message.

Range Information

Provides a table with model object attributes that influence its data type proposal.

Item	Description
Design	Design maximum and minimum values that an object specifies, e.g., its Output maximum and Output minimum parameters.
Simulation	Maximum and minimum values that occur during simulation.

Shared Values

When proposing data types, the Fixed-Point Tool attempts to satisfy data type requirements that model objects impose on one another. For example, the Sum block provides an option that requires all of its inputs to have the same data type. Consequently, the table might also list attributes of other model objects that impact the proposal for the selected object. In such cases, the table displays the following types of shared values:

- **Initial Values**

Some model objects provide parameters that allow you to specify the initial values of their signals. For example, the Constant block includes a **Constant value** parameter that initializes the block output signal. The Fixed-Point Tool uses initial values to propose data types for model objects whose design and simulation ranges are unavailable. When data type dependencies exist, the tool considers how initial values impact the proposals for neighboring objects.




- **Model-Required Parameters**



Some model objects require the specification of numeric parameters to compute the value of their outputs. For example, the **Table data** parameter of an n-D Lookup Table block specifies values that the block requires to perform a lookup operation and generate output. When proposing data types, the Fixed-Point Tool considers how this “model-required” parameter value impacts the proposals for neighboring objects.


To Examine the Results and Resolve Conflicts

- 1 On the Fixed-Point Tool toolbar, use the **Show** option to filter the results to show **Conflicts with proposed data types**.


The Fixed-Point Tool lists its data type proposals on the **Contents** pane under the **ProposedDT** column. The tool alerts you to potential issues for each object in the list by displaying a green, yellow, or red icon.

-  The proposed data type poses no issues for this object.
-  The proposed data type poses potential issues for this object.
-  The proposed data type will introduce data type errors if applied to this object.

- 2 Review and fix each  error.
 - a Select the error, right-click and select **Highlight in Editor** from the context menu to identify which block has a conflict.
 - b Click the **Result Details** tab.
 - c Use the information provided in the **Needs Attention** section of the **Result Details** tab to resolve the conflict by fixing the problem in the Simulink model.
- 3 Review the **Result Details** for the  warnings and correct the problem if necessary.
- 4 You have changed the Simulink model, so the benchmark data is not up to date.

Click the Fixed-Point Tool **Start** button  to rerun the simulation.

The Fixed-Point Tool warns you that you have not applied proposals. Click the **Ignore and Simulate** button to continue.

- 5 Click the **Propose fraction lengths** or **Propose word lengths** button to generate a proposal, .
- 6 On the Fixed-Point Tool toolbar, use the **Show** option to filter the results to show **All results**.

Apply Proposed Data Types


After reviewing the data type proposals, apply the proposed data types to your model. The Fixed-Point Tool allows you to apply its data type proposals selectively to objects in

your model. On the **Contents** pane, use the **Accept** check box to specify the proposals that you want to assign to model objects. The check box indicates the status of a proposal:

- The Fixed-Point Tool will apply the proposed data type to this object. By default, the tool selects the **Accept** check box when a proposal differs from the object's current data type.
- The Fixed-Point Tool will ignore the proposed data type and leave the current data type intact for this object.
- No proposal exists for this object, for example, when the object specifies a data type inheritance rule or is locked against automatic data typing.

- 1 Examine each result. For more information about a particular result, select the result and then click the **Result Details** tab.
- 2 If you do **not** want to accept the proposal for a result, on the Fixed-Point Tool **Contents** pane, clear the **Accept** check box for that result.

Before applying proposals to your model, you can customize them with the Fixed-Point Tool. On the **Contents** pane, click a **ProposedDT** cell and edit the data type expression. For information about specifying fixed-point data types, see `fixdt`.

- 3 Click the **Apply accepted fraction lengths** or **Apply accepted word lengths** button  to write the proposed data types to the model.

If you have not fixed all the warnings in the model, the Fixed-Point Tool displays a warning dialog box.

Verify New Settings

After applying proposed data types to your model, you simulate the model using the applied fixed-point data types.




- 1 On the Fixed-Point Tool **Model Hierarchy** pane, select the system or subsystem for which you want a proposal.
- 2 On the **Model settings** pane, click the **Model-wide no override and full instrumentation** button to use the locally specified data type settings.

This sets:

- **Data type override** to Use local settings.

- **Fixed-point instrumentation mode** to Minimums, maximums and overflows.
- The run name (in the **Data collection** pane **Run name** field) to NoOverride.

Using these settings, the Fixed-Point Tool simulates the model using the new fixed-point settings and logs minimum value, maximum value, and overflow data for all blocks in the current system or subsystem in the run NoOverride.

- 3 Click the Fixed-Point Tool **Start** button  to run the simulation.
- 4 Compare the ideal results stored in the **DoubleOverride** run with the fixed-point results in the **NoOverride** run:
 - a On the **Contents** pane, select a result that has logged signal data. These results are annotated with the  icon.
 - b Click the **Compare Signals**  to view the difference between the fixed-point and double override runs for the selected result.

If you have more than two runs, in the **Compare Runs Selector** dialog box, select the two runs that you want to compare.

Automatic Data Typing of Simulink Signal Objects

The Fixed-Point Tool can propose new data types for Simulink signal objects in the base or model workspace. If you accept the proposed data types, the Fixed-Point Tool automatically applies them to the Simulink signal objects.

Caution The Fixed-Point Tool does not save the changes to the signal object. Before closing the model, you must save the changes.

After automatic data typing, if you delete or manipulate a signal object in the base workspace, you must rerun the automatic data typing.

Automatic Data Typing Using Derived Ranges

In this section...

“Prerequisites for Autoscaling Using Derived Ranges” on page 38-21

“Workflow for Autoscaling Using Derived Data” on page 38-21

“Set Up the Model” on page 38-22

“Prepare Model for Autoscaling Using Derived Data” on page 38-23

“Derive Minimum and Maximum Values” on page 38-24

“Resolve Range Analysis Issues” on page 38-25

“Proposing Data Types” on page 38-25

“Propose Data Types” on page 38-27

“Examine Results to Resolve Conflicts” on page 38-27

“Apply Proposed Data Types” on page 38-31

“Update Diagram” on page 38-32

Prerequisites for Autoscaling Using Derived Ranges

The Fixed-Point Tool uses range analysis to derive minimum and maximum values for objects in your model.

Range analysis:

- Requires a Fixed-Point Designer license.
- Works only for compatible models. For more information, see “Model Compatibility with Range Analysis”.

Workflow for Autoscaling Using Derived Data

- 1 Verify that your model is compatible with range analysis. See “Model Compatibility with Range Analysis”.
- 2 Set up model.
- 3 Prepare model prior to automatic data typing using derived data.
- 4 Derive minimum and maximum values.

- 5 Resolve any issues.
- 6 Derive minimum and maximum values.
- 7 Propose data types.
- 8 Examine results to resolve conflicts.
- 9 Apply proposed data types.
- 10 Update diagram.

Set Up the Model

To use the Fixed-Point Tool to generate data type proposals for your model based on derived minimum and maximum values only, you must first set up your model in Simulink.

- 1 Back up your model in case of error and as a baseline for testing and validation.
- 2 Open your model in Simulink.
- 3 Select **Simulation > Normal** in the Simulink menu so that the model runs in **Normal** mode. The Fixed-Point Tool supports only **Normal** mode.
- 4 To autoscale using derived data, you **must** specify design minimum and maximum values on at least the model inputs. The range analysis tries to narrow the derived range by using all the specified design ranges in the model. The more design range information you specify, the more likely the range analysis is to succeed. As the analysis is performed, it derives new range information for the model and then attempts to use this new information together with the specified ranges to derive ranges for the remaining objects in the model. For this reason, the analysis results might depend on block priorities because these priorities determine the order in which the software analyzes the blocks.

You specify a design range for model objects using parameters typically titled **Output minimum** and **Output maximum**. For a list of blocks that permit you to specify these values, see “Blocks That Allow Signal Range Specification”.

- 5 Specify fixed-point data types for blocks and signals in your model. For blocks with the **Data Type Assistant**, use the **Calculate Best-Precision Scaling** button to calculate best-precision scaling automatically. For more information, see “Specify Fixed-Point Data Types with the Data Type Assistant” on page 30-22.
- 6 You can choose to lock some blocks against automatic data typing by selecting the **Lock output data type setting against changes by the fixed-point tools** parameter. If you select the **Lock output data type setting against changes**

by the **fixed-point tools** parameter, the tool does not propose data types for that object.

- 7 From the Simulink **Simulation** menu, select **Update Diagram** to perform parameter range checking for all blocks in the model.

If **update diagram** fails, use the failure information to fix the errors in your model. After fixing the errors, test **update diagram** again. If you are unable to fix the errors, restore your back-up model.

- 8 If the model changed, back up the model in case of error and as a baseline for testing and validation.
- 9 Create a shortcut to capture the initial fixed-point instrumentation and data type override settings. For more information, see “Capture Model Settings Using the Shortcut Editor” on page 35-10.

Prepare Model for Autoscaling Using Derived Data

First use the Fixed-Point Advisor to prepare the model for conversion to fixed point. You do this preparation only once. The Fixed-Point Advisor gives advice about model and block configuration settings to prepare for automatic conversion to fixed point using the Fixed-Point Tool. The Fixed-Point Advisor:

- Checks the model against fixed-point guidelines.
- Identifies unsupported blocks.
- Removes output data type inheritance from blocks.
- Allows you to promote simulation minimum and maximum values to design minimum and maximum values. This capability is useful if you have not specified design ranges and you have simulated the model with inputs that cover the full intended operating range. For more information, see “Specify block minimum and maximum values”.
- Runs simulation range detection diagnostics. When preparing the model for automatic data typing using derived data, you can complete the preparation without setting up signal logging and creating a simulation reference run. However, creating at least one simulation run is useful for early error detection. Simulating the model helps to verify that the design minimum and maximum values specified on the model are correct and that the model conforms to modeling guidelines.

To open the Fixed-Point Advisor:

- 1 From the Simulink **Analysis** menu, select **Fixed-Point Tool**.

- 2 On the Fixed-Point Tool **Model Hierarchy** pane, select the system or subsystem of interest.
- 3 On the **Fixed-point preparation for selected system** pane, click **Fixed-Point Advisor**.

Use the Fixed-Point Advisor to prepare the model for conversion. For more information, see “Preparation for Fixed-Point Conversion”.

Derive Minimum and Maximum Values

- 1 On the Fixed-Point Tool **Model Hierarchy** pane, select the system or subsystem of interest.
- 2 On the **Settings for selected system** pane, set **Data type override** to **Double**.
- 3 Optionally, in the **Data collection** pane **Run name** field, specify a run name. Specifying a unique run name avoids overwriting results from previous runs.
- 4 In the Fixed-Point Tool, click **Derive ranges for selected system**.

The analysis runs and tries to derive range information for objects in the selected system.

If the analysis successfully derives range data for the model, the Fixed-Point Tool displays the derived minimum and maximum values for the blocks in the selected system. (See “View Derived Ranges in the Fixed-Point Tool” on page 39-11.) Before proposing data types, review the results.

If the analysis fails, examine the error messages and resolve the issues. See “Resolve Range Analysis Issues” on page 38-25.

Resolve Range Analysis Issues

The following table shows the different types of range analysis issues and the steps to resolve them.

Analysis Results	Next Steps	For More Information
The analysis fails because the model contains blocks that it does not support. The Fixed-Point Tool generates an error.	Review the error message information and replace the unsupported blocks.	“Model Compatibility with Range Analysis” on page 39-6
The analysis cannot derive range data because the model contains conflicting design range information. The Fixed-Point Tool generates an error.	Examine the design ranges specified in the model to identify inconsistent design specifications and modify them to make them consistent.	“Fixing Design Range Conflicts” on page 39-26
The analysis cannot derive range data for an object because there is insufficient design range information specified on the model. The Fixed-Point Tool highlights the results for the object.	Examine the model to determine which design range information is missing.	“Providing More Design Range Information” on page 39-23

Proposing Data Types

Unless you select an object’s **Lock output data type setting against changes by the fixed-point tools** parameter or the data types are using inheritance rules, the Fixed-Point Tool proposes data types for model objects that specify fixed-point data types. You set up the tool to either propose fraction lengths for specified word lengths or to propose word lengths for specified fraction lengths. For more information, see “Propose Fraction Lengths” on page 38-33 and .

When generating data type proposals, the Fixed-Point Tool collects the following types of range data for model objects:

- Design minimum or maximum values — You specify a design range for model objects using parameters typically titled **Output minimum** and **Output maximum**. For a

list of blocks that permit you to specify these values, see “Blocks That Allow Signal Range Specification”.

- Simulation minimum or maximum values — When simulating a system whose **Fixed-point instrumentation mode** parameter specifies `Minimums`, `maximums` and `overflows`, the Fixed-Point Tool logs the minimum and maximum values generated by model objects. For more information about the **Fixed-point instrumentation mode** parameter, see `fxptdlg`.
- Derived minimum or maximum values — When deriving minimum and maximum values for a selected system, the Fixed-Point Tool uses the design minimum and maximum values that you specify for the model to derive range information for signals in your model. For more information, see “Derive Ranges”.

For models that contain floating-point operations, range analysis might report a range that is slightly larger than expected due to rounding errors in the analysis. Automatic data typing bases its proposal on this slightly larger derived range. To avoid this issue, use the safety margin for design and derived min/max.

The Fixed-Point Tool uses available range data to calculate data type proposals according to the following rules:

- Design minimum and maximum values take precedence over the simulation and derived range.

The **Safety margin for design and derived min/max (%)** parameter specifies a range that differs from that defined by the design range. For example, a value of 20 specifies that a range of at least 20 percent larger is desired. A value of -10 specifies that a range of up to 10 percent smaller is acceptable. If this parameter is not visible in the **Automatic data typing for selected system** pane, click the **Configure** link.

For more information, see “Safety margin for design and derived min/max (%)” in the `fxptdlg` reference.

- The tool observes the derived range only when the **Derived min/max** option is selected. Otherwise, the tool ignores the derived range.

The **Safety margin for design and derived min/max (%)** parameter specifies a range that differs from that defined by the derived range. For more information, see Percent safety margin for design and derived min/max in the `fxptdlg` reference.


- The tool observes the simulation range only when the **Simulation min/max** option is selected. Otherwise, the tool ignores the simulation range.

The **Safety margin for simulation min/max (%)** parameter specifies a range that differs from that defined by the simulation range. For more information, see “Safety margin for simulation min/max (%)” in the `fxptdlg` reference.

Propose Data Types

- 1 On the **Automatic data typing for selected system Settings** pane, select either **Propose fraction lengths for specified word lengths** or **Propose word lengths for specified fraction lengths**, as applicable.

If these options are not visible, use the **Configure** link to display them.

- 2 If you have a safety margin to apply, set **Safety margin for design and derived min/max (%)**. For example, enter 10 for a 10% safety margin.
- 3 Click the **Propose fraction lengths** or **Propose word lengths** button to generate a proposal, .

Note: When the Fixed-Point Tool proposes data types, it does not alter your model.

Examine Results to Resolve Conflicts

You can examine each data type proposal using the **Result Details** tab, which displays the rationale underlying the proposal. Also, this tab describes potential issues or errors, and provides methods for resolving them. To view the details, on the **Contents** pane, select an object that has proposed data types and click the **Result Details** tab in the upper right corner of the Fixed-Point Tool.

Workflow Result Details

untitled/Product

Proposed Data Type Summary

- There is a requirement for the data type of this result to match the data type of other results.
 - [Highlight Elements Sharing Same Data Type](#)

Property	Data Type	Minimum	Maximum	Precision
ProposedDT	fixdt(1,16,-5)	-1048576	1048544	32
SpecifiedDT	double	-1.7976e+308	1.79769e+308	4.94065e-324

Range Information

Property	Minimum	Maximum
Shared derived	0	1.0000000000
Derived	0	1.0000000000
Intermediate	0	1000000

The **Result Details** tab provides the following information about the proposed data type, as appropriate.

Proposed Data Type Summary

Describes a proposal in terms of how it differs from the object's current data type. For cases when the Fixed-Point Tool does not propose data types, this section provides a rationale. For example, the data type might be locked against changes by the fixed-point tools.

This section of the **Result Details** tab also informs you if the selected object must share the same data type as other objects in the model because of data type propagation rules. For example, the inputs to a Merge block must have the same data type. Therefore, the outputs of blocks that connect to these inputs must share the same data type. Similarly, blocks that are connected by the same element of a virtual bus must share the same data type.

The tab provides a hyperlink that you can click to highlight the objects that share data types in the model. To clear this highlighting, from the model **View** menu, select **Remove Highlighting**.

The Fixed-Point Tool allocates an identification tag to objects that must share the same data type. The tool displays this identification tag in the **DTGroup** column for the object. To display only the objects that must share data types, from the Fixed-Point Tool main toolbar, select the **Show** option.

Some Simulink blocks accept only certain data types on some ports. This section of the **Result Details** tab also informs you when a block that connects to the selected object has data type constraints that impact the proposed data type of the selected object. The tab lists the blocks that have data type constraints, provides details of the constrained data types, and links to the blocks in the model.

The **Proposed Data Type Summary** section of the **Result Details** tab provides a table with the proposed data type information.


Item	Description
ProposedDT	Data type that the Fixed-Point Tool proposes for this object and the minimum and maximum values that the proposed data type can represent.
SpecifiedDT	Data type that an object specifies.

Needs Attention

Lists potential issues and errors associated with data type proposals. Describes the issues and suggests methods for resolving them. The tab uses the following icons to differentiate warnings from errors.



Indicates a warning message.

 Indicates an error message.

Range Information

Provides a table that lists a model object attributes that influence its data type proposal.

Item	Description
Design	Design maximum and minimum values that an object specifies, e.g., its Output maximum and Output minimum parameters.
Simulation	Maximum and minimum values that occur during simulation.

Shared Values

When proposing data types, the Fixed-Point Tool attempts to satisfy data type requirements that model objects impose on one another. For example, the Sum block provides an option that requires all of its inputs to have the same data type. Consequently, the table might also list attributes of other model objects that impact the data type proposal for the selected object. In such cases, the table displays the following types of shared values:

- **Initial Values**

Some model objects provide parameters that allow you to specify the initial values of their signals. For example, the Constant block includes a **Constant value** parameter that initializes the block output signal. The Fixed-Point Tool uses initial values to propose data types for model objects whose design and simulation ranges are unavailable. When data type dependencies exist, the tool considers how initial values impact the proposals for neighboring objects.




- **Model-Required Parameters**




Some model objects require the specification of numeric parameters to compute the value of their outputs. For example, the **Table data** parameter of an n-D Lookup Table block specifies values that the block requires to perform a lookup operation and generate output. When proposing data types, the Fixed-Point Tool considers how this “model-required” parameter value impacts the proposals for neighboring objects.

To Examine the Results and Resolve Conflicts


- 1 On the Fixed-Point Tool toolbar, use the **Show** option to filter the results to show **Conflicts with proposed data types**.

The Fixed-Point Tool lists its data type proposals on the **Contents** pane under the **ProposedDT** column. The tool alerts you to potential issues for each object in the list by displaying a green, yellow, or red icon.

-  The proposed data type poses no issues for this object.
-  The proposed data type poses potential issues for this object.
-  The proposed data type will introduce data type errors if applied to this object.

- 2 Review and fix each  error.
 - a Select the error, right-click, and from the context menu, select **Highlight Block In Model** to identify which block has a conflict.
 - b Click the **Result Details** tab.
 - c Use the information provided in the **Needs Attention** section of the **Result Details** tab to resolve the conflict by fixing the problem in the Simulink model.
- 3 Review the **Result Details** for the  warnings and correct the problem if necessary.
- 4 You have changed the Simulink model, so the benchmark data is not up to date. Click the Fixed-Point Tool **Start** button  to rerun the simulation.

The Fixed-Point Tool warns you that you have not applied proposals. Click the **Ignore and Simulate** button to continue.


- 5 Click the **Propose fraction lengths** or **Propose word lengths** button to generate a data type proposal, .
- 6 On the Fixed-Point Tool toolbar, use the **Show** option to filter the results to show **All results**.

Apply Proposed Data Types

After reviewing the data type proposals, apply the proposed data types to your model. The Fixed-Point Tool allows you to apply its data type proposals selectively to objects in your model. On the **Contents** pane, use the **Accept** check box to specify the proposals that you want to assign to model objects. The check box indicates the status of a proposal:

- The Fixed-Point Tool will apply the proposed data type to this object. By default, the tool selects the **Accept** check box when a proposal differs from the object's current data type.
 - The Fixed-Point Tool will ignore the proposed data type and leave the current data type intact for this object.
 - No proposal exists for this object, for example, when the object specifies a data type inheritance rule or is locked against automatic data typing.
- 1 Examine each result. For more information about a particular result, select the result and then click the **Result Details** tab.
 - 2 If you do **not** want to accept the proposal for a result, on the Fixed-Point Tool **Contents** pane, clear the **Accept** check box for that result.

Before applying proposals to your model, the Fixed-Point Tool enables you to customize them. On the **Contents** pane, click a **ProposedDT** cell and edit the data type expression. For information about specifying fixed-point data types, see `fixdt`.

- 3 Click the **Apply accepted fraction lengths** or **Apply accepted word lengths** button  to write the proposed data types to the model.

If you have not fixed all the warnings in the model, the Fixed-Point Tool displays a warning dialog box.

Update Diagram

From the model's **Simulation** menu, select **Update Diagram**.

After applying the data types to the model, **update diagram** to check for data type propagation issues.

If **update diagram** fails, use the failure information to fix the errors in your model. After fixing the errors, test **update diagram** again. If you are unable to fix the errors, restore your backed up model.

Propose Fraction Lengths


In this section...

“Propose Fraction Lengths” on page 38-33

“About the Feedback Controller Example Model” on page 38-33

“Propose Fraction Lengths Using Simulation Range Data” on page 38-40

Propose Fraction Lengths

- 1 On the Fixed-Point Tool **Automatic data typing for selected system** pane, select **Propose fraction lengths for specified word lengths**. If you cannot see this option, click **Configure** to display more options.
- 2 On the same pane:
 - For simulation min/max information only, clear **Derived min/max**.
 - For derived min/max information only, clear **Simulation min/max**.
- 3 If you have safety margins to apply, set **Safety margin for design and derived min/max (%)** and **Safety margin for design and derived min/max (%)**, as applicable.
- 4 Click the **Propose fraction lengths** button, .


Note: When the Fixed-Point Tool proposes data types, it does not alter your model.

About the Feedback Controller Example Model

- “Opening the Feedback Controller Model” on page 38-33
- “Simulation Setup” on page 38-35
- “Idealized Feedback Design” on page 38-36
- “Digital Controller Realization” on page 38-37

Opening the Feedback Controller Model

To open the Simulink feedback design model for this tutorial, at the MATLAB command line, type `fxpdemo_feedback`.

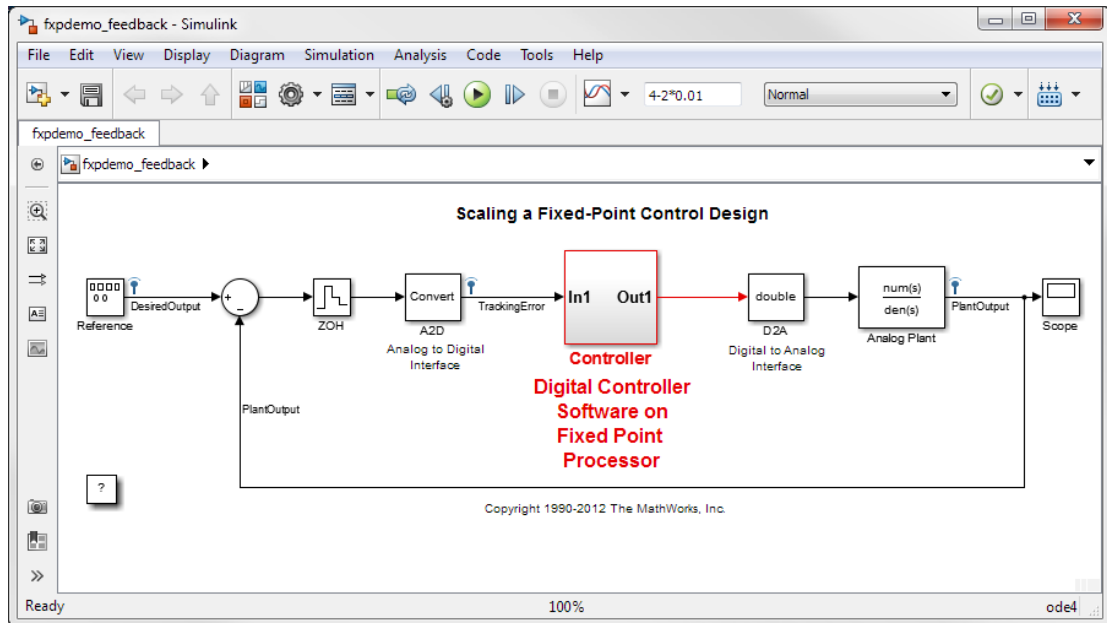

The Simulink model of the feedback design consists of the following blocks and subsystems:

- **Reference**

This Signal Generator block generates a continuous-time reference signal. It is configured to output a square wave.

- **Sum**

This Sum block subtracts the plant output from the reference signal.

- **ZOH**

The Zero-Order Hold block samples and holds the continuous signal. This block is configured so that it quantizes the signal in time by 0.01 seconds.

- **Analog to Digital Interface**

The analog to digital (A/D) interface consists of a Data Type Conversion block that converts a `double` to a fixed-point data type. It represents any hardware that

digitizes the amplitude of the analog input signal. In the real world, its characteristics are fixed.

- **Controller**

The digital controller is a subsystem that represents the software running on the hardware target. Refer to “Digital Controller Realization” on page 38-37.

- **Digital to Analog Interface**

The digital to analog (D/A) interface consists of a Data Type Conversion block that converts a fixed-point data type into a **double**. It represents any hardware that converts a digitized signal into an analog signal. In the real world, its characteristics are fixed.

- **Analog Plant**

The analog plant is described by a transfer function, and is controlled by the digital controller. In the real world, its characteristics are fixed.

- **Scope**

The model includes a Scope block that displays the plant output signal.

Simulation Setup

To set up this kind of fixed-point feedback controller simulation:

- 1 Identify all design components.

In the real world, there are design components with fixed characteristics (the hardware) and design components with characteristics that you can change (the software). In this feedback design, the main hardware components are the A/D hardware, the D/A hardware, and the analog plant. The main software component is the digital controller.

- 2 Develop a theoretical model of the plant and controller.

For the feedback design in this tutorial, the plant is characterized by a transfer function.

The digital controller model in this tutorial is described by a z-domain transfer function and is implemented using a direct-form realization.

- 3 Evaluate the behavior of the plant and controller.


You evaluate the behavior of the plant and the controller with a Bode plot. This evaluation is idealized, because all numbers, operations, and states are double-precision.

4 Simulate the system.

You simulate the feedback controller design using Simulink and Fixed-Point Designer software. In a simulation environment, you can treat all components (software *and* hardware) as though their characteristics are not fixed.

Idealized Feedback Design


Open loop (controller and plant) and plant-only Bode plots for the “Scaling a Fixed-Point Control Design” model are shown in the following figure. The open loop Bode plot results from a digital controller described in the idealized world of continuous time, double-precision coefficients, storage of states, and math operations.

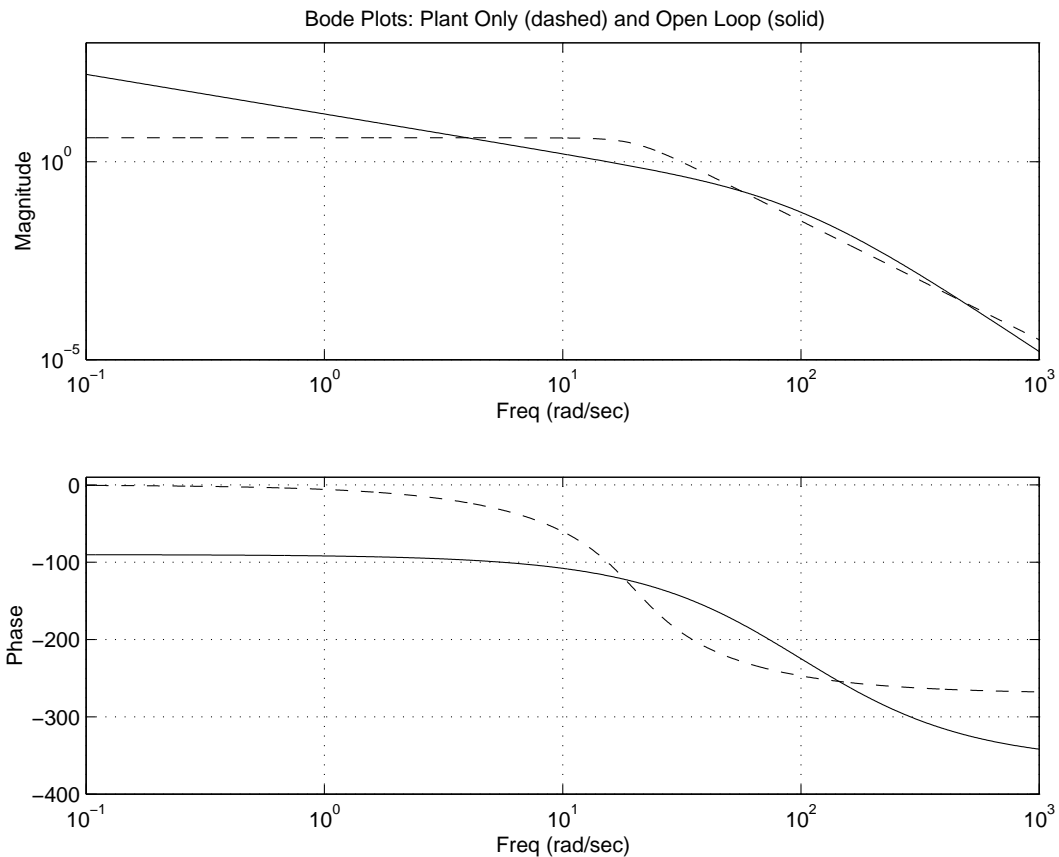

The Bode plots were created using workspace variables produced by a script named `preload_feedback.m`.

Digital Controller Realization

In this simulation, the digital controller is implemented using the fixed-point direct form realization shown in the following diagram. The hardware target is a 16-bit processor. Variables and coefficients are generally represented using 16 bits, especially if these quantities are stored in ROM or global RAM. Use of 32-bit numbers is limited to temporary variables that exist briefly in CPU registers or in a stack.

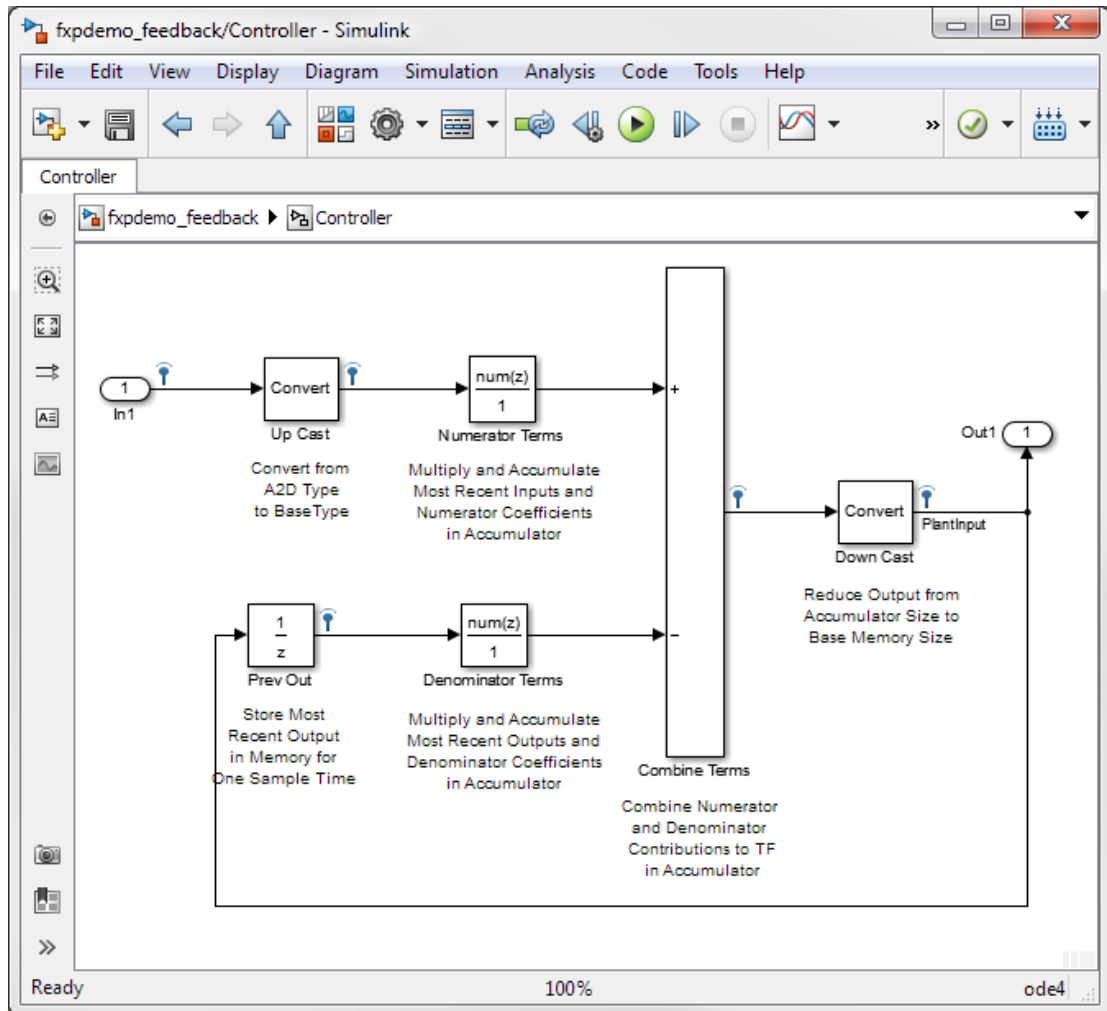

The realization consists of these blocks:

- **Up Cast**

Up Cast is a Data Type Conversion block that connects the A/D hardware with the digital controller. It pads the output word size of the A/D hardware with trailing zeros to a 16-bit number (the base data type).

- **Numerator Terms and Denominator Terms**

Each of these Discrete FIR Filter blocks represents a weighted sum carried out in the CPU target. The word size and precision in the calculations reflect those of the accumulator. Numerator Terms multiplies and accumulates the most recent inputs with the FIR numerator coefficients. Denominator Terms multiples and accumulates the most recent delayed outputs with the FIR denominator coefficients. The coefficients are stored in ROM using the base data type. The most recent inputs are stored in global RAM using the base data type.

- **Combine Terms**

Combine Terms is a Sum block that represents the accumulator in the CPU. Its word size and precision are twice that of the RAM (double bits).

- **Down Cast**

Down Cast is a Data Type Conversion block that represents taking the number from the CPU and storing it in RAM. The word size and precision are reduced to half that of the accumulator when converted back to the base data type.

- **Prev Out**

Prev Out is a Unit Delay block that delays the feedback signal in memory by one sample period. The signals are stored in global RAM using the base data type.

Direct Form Realization

The controller directly implements this equation:

$$y(k) = \sum_{i=0}^N b_i u(k-1) - \sum_{i=1}^N a_i y(k-1),$$

- $u(k-1)$ represents the *input* from the previous time step.
- $y(k)$ represents the current output, and $y(k-1)$ represents the output from the previous time step.
- b_i represents the FIR numerator coefficients.
- a_i represents the FIR denominator coefficients.

The first summation in $y(k)$ represents multiplication and accumulation of the most recent inputs and numerator coefficients in the accumulator. The second summation

in $y(k)$ represents multiplication and accumulation of the most recent outputs and denominator coefficients in the accumulator. Because the FIR coefficients, inputs, and outputs are all represented by 16-bit numbers (the base data type), any multiplication involving these numbers produces a 32-bit output (the accumulator data type).

Propose Fraction Lengths Using Simulation Range Data

- “Initial Guess at Scaling” on page 38-40
- “Data Type Override” on page 38-43
- “Automatic Data Typing” on page 38-44

This example shows you how to use the Fixed-Point Tool to refine the scaling of fixed-point data types associated with a feedback controller model (see “About the Feedback Controller Example Model” on page 38-33). Although the tool enables multiple workflows for converting a digital controller described in ideal double-precision numbers to one realized in fixed-point numbers, this example uses the following approach:


- “Initial Guess at Scaling” on page 38-40. Run an initial “proof of concept” simulation using a reasonable guess at the fixed-point word size and scaling. This task illustrates how difficult it is to guess the best scaling.
- “Data Type Override” on page 38-43. Perform a global override of the fixed-point data types using double-precision numbers. The Simulink software logs the simulation results to the MATLAB workspace, and the Fixed-Point Tool displays them.
- “Automatic Data Typing” on page 38-44. Perform the automatic data typing procedure, which uses the double-precision simulation results to propose fixed-point scaling for appropriately configured blocks. The Fixed-Point Tool allows you to accept and apply the scaling proposals selectively. Afterward, you determine the quality of the results by examining the input and output of the model's analog plant.

Initial Guess at Scaling

Initial guesses for the scaling of each block are already specified in each block mask in the model. This task illustrates the difficulty of guessing the best scaling.

- 1 Open both the `fxpdemo_feedback` model and the Fixed-Point Tool.
- 2 On the Fixed-Point Tool **Model settings** pane, click the **Model-wide no override and full instrumentation** button to set:

- **Data type override** to Use local settings. This option enables each of the model's subsystems to use its locally specified data type settings.
- **Fixed-point instrumentation mode** to Minimums, maximums and overflows.
- The run name to NoOverride.

3 In the Fixed-Point Tool, click the **Simulate** button .


The Simulink software simulates the `fxpdemo_feedback` model. Afterward, on its **Contents** pane, the Fixed-Point Tool displays the simulation results for each block that logged fixed-point data. By default, it displays the Simulation View of these results. You can customize this view by clicking **Show Details**. For more information about the standard views provided by the Fixed-Point Tool, see “Customizing the Contents Pane View” in the `fxptdlg` function reference. For more information about customizing views, see “Control Model Explorer Contents Using Views”.

The tool stores the results in the `NoOverride` run, denoted by the **NoOverride** label in the **Run** column. The Fixed-Point tool highlights the **Up Cast** block to indicate that there is an issue with this result. The **OvfSat** column for this result shows that the block saturated 23 times, which indicates a poor guess for its scaling.

Tip In the main toolbar, use the **Show** option to view only blocks that have Overflows.

4 On the **Contents** pane of the Fixed-Point Tool, select the Transfer Fcn block named `Analog Plant` and then click the **Inspect Signal** button .

The Fixed-Point Tool plots the signal associated with the plant output.

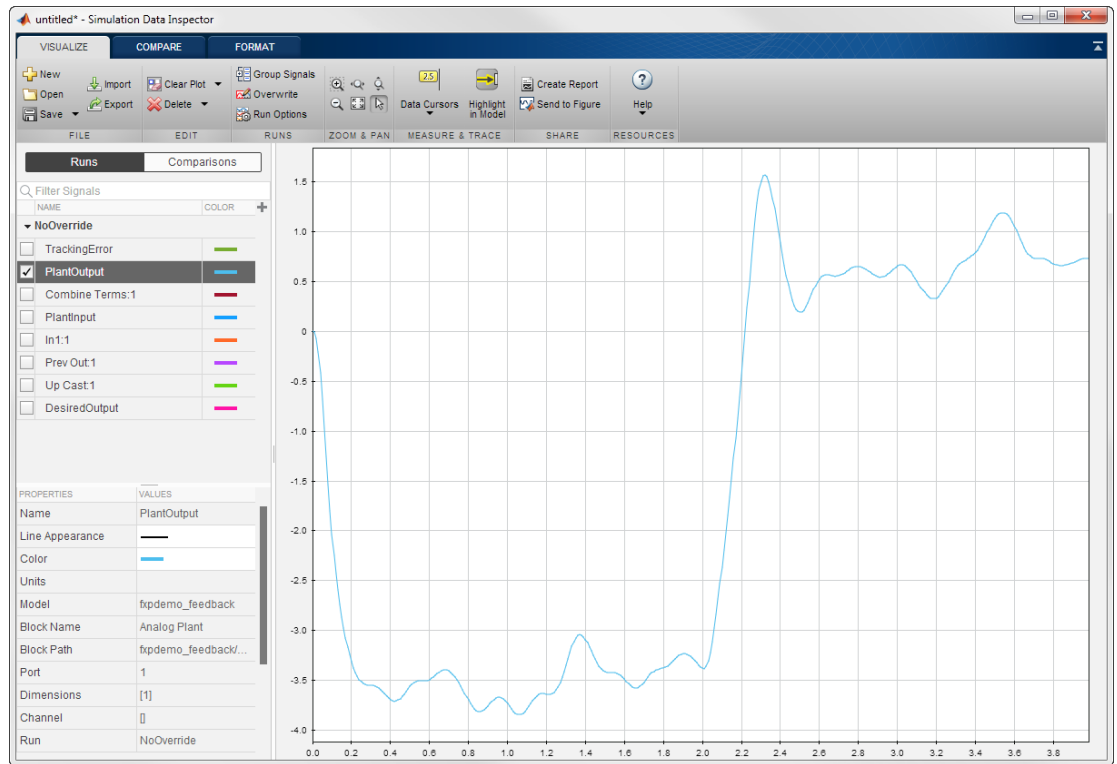

The preceding plot of the plant output signal reflects the initial guess at scaling. The Bode plot design sought to produce a well-behaved linear response for the closed-loop system. Clearly, the response is nonlinear. Significant quantization effects cause the nonlinear features. An important part of fixed-point design is finding a scaling that reduces quantization effects to acceptable levels.

Tip Use the Fixed-Point Tool plotting tools to plot simulation results associated with logged signal data. To view a list of all logged signals, in the main toolbar, use the **Show** option and select **Signal logging results**.

Data Type Override


Data type override mode enables you to perform a global override of the fixed-point data types with double-precision data types, thereby avoiding quantization effects. When performing automatic scaling to propose higher fidelity fixed-point scaling, the Fixed-Point Tool uses these simulation results.

- 1 On the Fixed-Point Tool **Model settings** pane, click the **Model-wide double override and full instrumentation** button to set:

- **Data type override** to Double
- **Data type override applies to** to All numeric types
- **Fixed-point instrumentation mode** to Minimums, maximums and overflows
- The run name (on the **Data collection** pane **Run name** field) to DoubleOverride


- 2 In the Fixed-Point Tool, click the **Simulate** button .

The Simulink software simulates the `fxpdemo_feedback` model in data type override mode and stores the results as the `DoubleOverride` run. Afterward, on its **Contents** pane, the Fixed-Point Tool displays the **DoubleOverride** run results along with those of the **NoOverride** run that you generated previously (see “Initial Guess at Scaling” on page 38-40). The compiled data type (**CompiledDT**) column for the `DoubleOverride` run shows that the model's blocks used a `double` data type during simulation.

- 3 On the **Contents** pane of the Fixed-Point Tool, select the Transfer Fcn block named `Analog Plant` in the `NoOverride` run, and then click the **Compare Signals** button .

The Fixed-Point Tool plots both the `DoubleOverride` and `NoOverride` versions of the signal associated with the plant output (upper axes), and plots the difference between the active and reference versions of that signal (lower axes). Compare the ideal (`double` data type) plant output signal with its fixed-point version.

Tip From the Simulation Data Inspector menu bar, use the zoom tools to zoom in on an area.

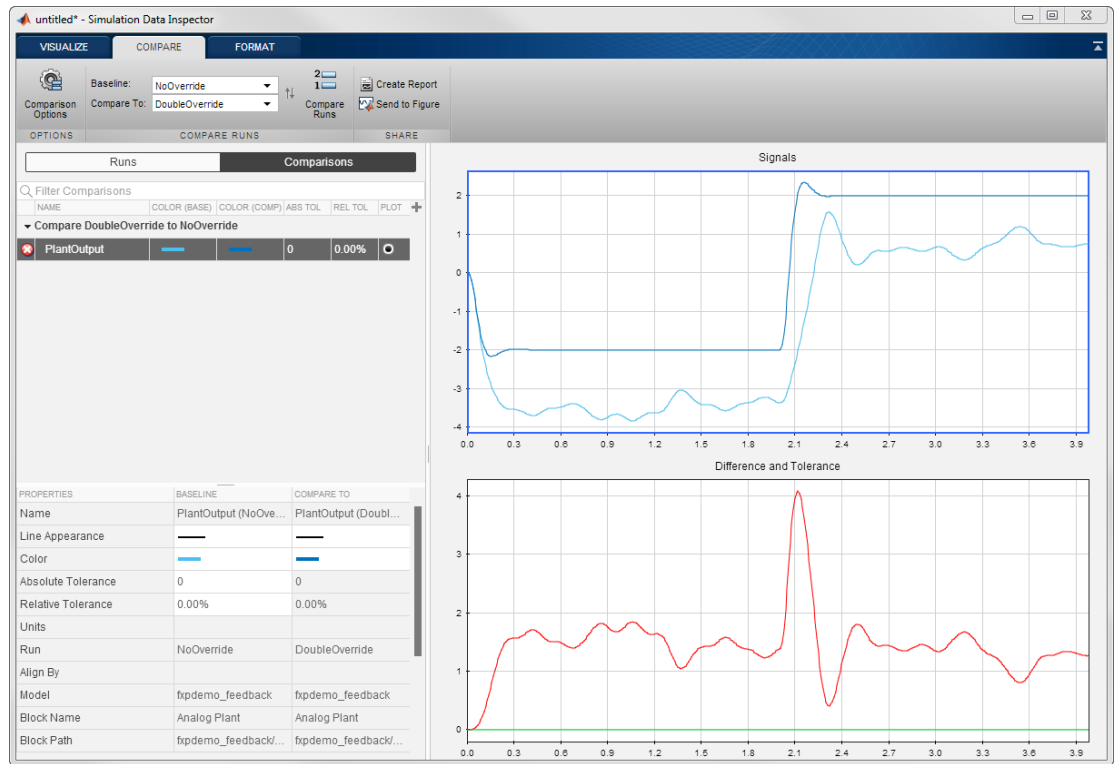

Automatic Data Typing


Using the automatic data typing procedure, you can easily maximize the precision of the output data type while spanning the full simulation range.

Because no design min/max information is supplied, the simulation min/max data that was collected during the simulation run is used for proposing data types. The **Safety margin for simulation min/max (%)** parameter value multiplies the “raw” simulation values. Setting this parameter to a value greater than 1 decreases the likelihood that an overflow will occur when fixed-point data types are being used. For more information about how the Fixed-Point Tool calculates data type proposals, see “Proposing Data Types” on page 38-13.

Because of the nonlinear effects of quantization, a fixed-point simulation produces results that are different from an idealized, doubles-based simulation. Signals in a fixed-point simulation can cover a larger or smaller range than in a doubles-based simulation. If the range increases enough, overflows or saturations could occur. A safety margin decreases this likelihood, but it might also decrease the precision of the simulation.

Note: When the maximum and minimum simulation values cover the full, intended operating range of your design, the Fixed-Point Tool yields meaningful automatic data typing results.

Perform automatic data typing for the **Controller** block. This block is a subsystem that represents software running on the target, and it requires optimization.

- 1 On the **Model Hierarchy** pane of the Fixed-Point Tool, select the **Controller** subsystem. On the **Automatic data typing for selected system** pane, click the **Configure** link. Select **Simulation min/max** for **Propose using information from design min/max and**, then specify the **Safety margin for simulation min/max** parameter as 20. Click **Apply**.
- 2 In the Fixed-Point Tool:
 - a Click the **Propose fraction lengths** button .
 - b In the **Propose Data Types** dialog box, select **DoubleOverride**, and then click **OK**.

The Fixed-Point Tool analyzes the scaling of all fixed-point blocks whose:

- **Lock output data type setting against changes by the fixed-point tools** parameter is not selected.
- **Output data type** parameter specifies a generalized fixed-point number.
- Data types are not inherited types.

The Fixed-Point Tool uses the minimum and maximum values stored in the **DoubleOverride** run to propose each block's data types such that the precision is maximized while the full range of simulation values is spanned. The tool displays the proposed data types on its **Contents** pane. Now, it displays the **Automatic Data Typing with Simulation Min/Max View** to provide

information, such as **ProposedDT**, **ProposedMin**, **ProposedMax**, which are relevant at this stage of the fixed-point conversion.

Tip In the main toolbar, use the **Show** option to view the groups that must share data types. For more information, see `fxptdlg` in the Simulink Reference.


- 3 Review the scaling that the Fixed-Point Tool proposes. You can choose to accept the scaling proposal for each block. On the **Contents** pane, select the corresponding Accept check box. By default, the Fixed-Point Tool accepts all scaling proposals that differ from the current scaling. For this example, ensure that the **Accept** check box associated with the `DoubleOverride` run is selected for each of the Controller subsystem's blocks.

- 4 In the Fixed-Point Tool, click the **Apply accepted fraction lengths** button .

The Fixed-Point Tool applies the scaling proposals that you accepted in the previous step to the `Controller` subsystem's blocks.


- 5 On the **Model Hierarchy** pane of the Fixed-Point Tool, select the `fxpdemo_feedback` system.
 - a On the **Model settings** pane, click the **Model-wide no override and full instrumentation** button to use the locally specified data type settings.
 - b On the **Data collection** pane, set **Run name** to `FixedPoint` so that the Fixed-Point Tool stores the results with a new run name and does not overwrite the results for the initial fixed-point set up. Storing the results in different runs allows you to compare the initial system behavior with the behavior of the autoscaled model.
- 6 In the Fixed-Point Tool, click **Simulate**.

The Simulink software simulates the `fxpdemo_feedback` model using the new scaling that you applied. Afterward, in its **Contents** pane, the Fixed-Point Tool displays information about blocks that logged fixed-point data. The compiled data type (**CompiledDT**) column for the `FixedPoint` run shows that the Controller subsystem's blocks used fixed-point data types with the new scaling.

- 7 On the **Model Hierarchy** pane of the Fixed-Point Tool, select the `fxpdemo_feedback` system.
 - a On the **Contents** pane, select the Transfer Fcn block named `Analog Plant` for the `FixedPoint` run, and then click the **Compare Signals** button .

- b** In the **Compare Runs Selector** dialog box, select **DoubleOverride**, and then click **OK**.

The Fixed-Point Tool plots the fixed-point and double override versions of the plant output signal, as well as their difference.

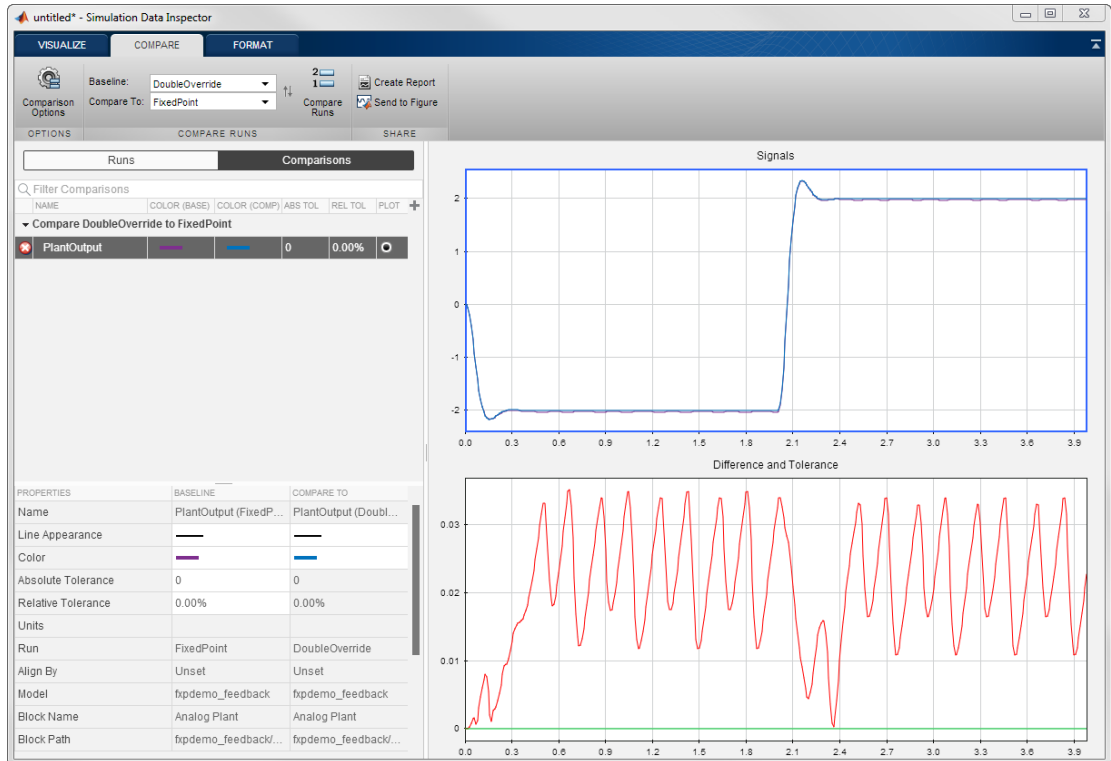

Tip Optionally, you can zoom in to view the steady-state region with greater detail. From the **Tools** menu of the figure window, select **Zoom In** and then drag the pointer to draw a box around the area that you want to view more closely.

The plant output signal represented by the fixed-point run achieves a steady state, but a small limit cycle is present because of poor A/D design.

How the Fixed-Point Tool Proposes Word Lengths

To use the Fixed-Point Tool to propose word lengths, you must specify the target hardware and the fraction length requirements for data types in the model. Select the fraction lengths based on the precision required for the system that you are modeling. If you do not specify fraction lengths, the Fixed-Point Tool sets the fraction length to zero. The Fixed-Point Tool uses these specified fraction lengths to recommend the minimum word length for fixed-point data types in the selected model or subsystem to avoid overflow for the collected range information.

The proposed word length is based on:

- Design range information and range information that the Fixed-Point Tool or Fixed-Point Advisor collects. This collected range information can be either simulation or derived range data.
- The signedness and fraction lengths of data types that you specify for blocks, signal objects.
- The signedness and fraction lengths of the default data types that you specify in the Fixed-Point Tool or Fixed-Point Advisor.
- The production hardware implementation settings specified in the Configuration Parameters dialog box.

How the Fixed-Point Tool Uses Range Information

The Fixed-Point Tool determines whether to use different types of range information based on its availability and on the Fixed-Point Tool **Derived min/max** and **Simulation min/max** settings.

Design range information always takes precedence over both simulation and derived range data. When there is no design range information, the Fixed-Point Tool uses the union of available simulation and derived range data. If you specify safety margins, the Fixed-Point Tool takes these margins into account.

For example, if a signal has a design range of $[-10, 10]$, the Fixed-Point Tool uses this range for the proposal and ignores all simulation and derived range information. If you specify a safety margin of 10% for design range, the Fixed-Point Tool uses a range of $[-11, 11]$ for the proposal.

If the signal has no specified design information, but does have a simulation range of $[-8, 8]$ and a derived range of $[-2, 2]$, the proposal uses the union of the ranges, $[-8, 8]$. If you specify a safety margin of 50%, the proposal uses a range of $[-12, 12]$.


How the Fixed-Point Tool Uses Target Hardware Information

The Fixed-Point Tool calculates the ideal word length and then checks this length against the production hardware implementation settings for the target hardware. The tool uses the following rules.

Target Hardware	Ideal Word Length	Proposed Word Length	Restrictions
FPGA/ASIC	Ideal word length ≤ 128	Ideal word length	None
	Ideal word length > 128	128	Maximum word length is 128
Embedded Processor	Ideal word length \leq character bit length for the embedded processor (<code>char</code>)	<code>char</code>	Rounds up word length
	<code>char</code> $<$ Ideal word length \leq short bit length for the embedded processor (<code>short</code>)	<code>short</code>	Rounds up word length
	<code>short</code> $<$ Ideal word length \leq integer bit length for the embedded processor (<code>int</code>)	<code>int</code>	Rounds up word length
	<code>int</code> $<$ Ideal word length \leq long bit length for the embedded processor (<code>long</code>)	<code>long</code>	Rounds up word length

Target Hardware	Ideal Word Length	Proposed Word Length	Restrictions
	Ideal word length > long bit length for the embedded processor	long	Maximum word length is the target hardware long

Propose Word Lengths

- 1 Specify the target hardware.
 - a In the model, select **Simulation > Model Configuration Parameters**.
 - b In the Configuration Parameters dialog box, select **Hardware Implementation**.
 - c On the **Hardware Implementation** pane, specify the **Device vendor** and **Device type**, and then click **Apply**.
- 2 On the Fixed-Point Tool **Automatic data typing for selected system** pane, select **Propose word lengths for specified fraction lengths**. If you cannot see this option, click **Configure** to display more options.
- 3 On the same pane:
 - For simulation min/max information only, clear **Derived min/max**.
 - For derived min/max information only, clear **Simulation min/max**.
- 4 If you have safety margins to apply, set **Safety margin for design and derived min/max (%)** and **Safety margin for design and derived min/max (%)**, as applicable.
- 5 Click the **Propose word lengths** button, .


Note: When the Fixed-Point Tool proposes data types, it does not alter your model.

Propose Word Lengths Based on Simulation Data

This example shows how to use the Fixed-Point Tool to propose word lengths for a model that implements a simple moving average algorithm. The model already uses fixed-point data types, but they are not optimal. Simulate the model and propose data types based on simulation data. To see how the target hardware affects the word length proposals, first set the target hardware to an embedded processor and propose word lengths. Then, set the target hardware to an FPGA and propose word lengths.

- 1 Open the `ex_moving_average` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot,'toolbox','fixpoint','examples'))
ex_moving_average
```

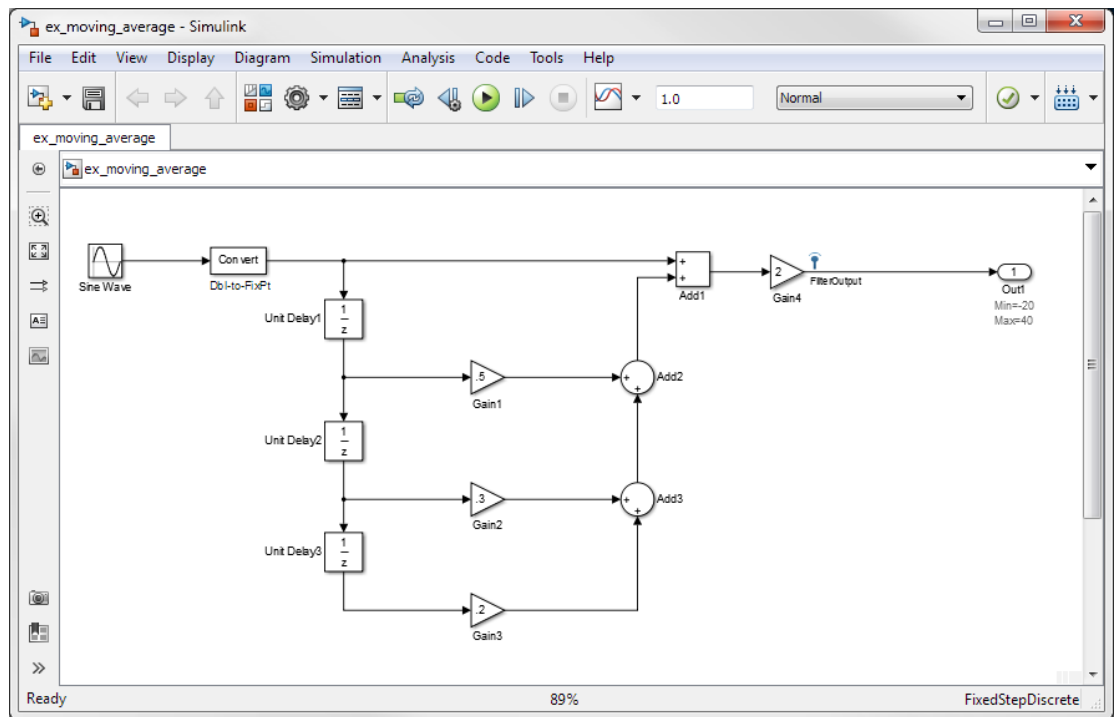

Some blocks in the model already have specified fixed-point data types.

Block	Data Type Specified on Block
Db12Fixpt	fixdt(1,16,10)
Gain1	fixdt(1,32,17)
Gain2	fixdt(1,32,17)
Gain3	fixdt(1,32,17)
Gain4	fixdt(1,16,1)
Add1	fixdt(1,32,17)
Add2	fixdt(1,32,17)
Add3	fixdt(1,32,17)

- 2 Verify that the target hardware is an embedded processor.
 - a In the model, select **Simulation > Model Configuration Parameters**.
 - b In the Configuration Parameters dialog box, select **Hardware Implementation**.

On the **Hardware Implementation** pane, the **Device vendor** is Generic and the **Device type** is 16-bit embedded processor.
 - c Close the Configuration Parameters dialog box.
- 3 From the model **Analysis** menu, select **Fixed-Point Tool**.
- 4 On the **Model settings** pane, click the **Model-wide double override and full instrumentation** button to set:
 - **Data type override** to Double
 - **Data type override applies to** to All numeric types
 - **Fixed-point instrumentation mode** to Minimums, maximums and overflows
 - The run name (in the **Data collection** pane **Run name** field) to DoubleOverride

Using these settings, the Fixed-Point Tool performs a global override of the fixed-point data types with double-precision data types, avoiding quantization effects. During simulation, the tool logs minimum value, maximum value, and overflow data for all blocks in the current system or subsystem in the run DoubleOverride.

- 5 Click the Fixed-Point Tool **Simulate** button  to run the simulation.

The Fixed-Point Tool simulates the model and displays the results on the **Contents** pane in the run named **DoubleOverride**.

Contents of: `ex_moving_average* (mmo-dbl)`

Column View: Simulation View [Show Details](#)

Name	Run	CompiledDT	SpecifiedDT	SimMin	SimMax	DesignMin	DesignMax
↳ Add1 : Accumulator	DoubleOverride	double	Inherit: Inherit via internal rule	0	10.086854311623828		
↳ Add1 : Output	DoubleOverride	double	fixdt(1,32,17)	0	10.086854311623828		
↳ Add2 : Accumulator	DoubleOverride	double	Inherit: Inherit via internal rule	0	5.038028402776449		
↳ Add2 : Output	DoubleOverride	double	fixdt(1,32,17)	0	5.038028402776449	-8	15
↳ Add3 : Accumulator	DoubleOverride	double	Inherit: Inherit via internal rule	0	2.5167860950974905		
↳ Add3 : Output	DoubleOverride	double	fixdt(1,32,17)	0	2.5167860950974905	-4	8
↳ Data Type Conversion1	DoubleOverride	double	fixdt(1,16,10)	0	5.048825908847379		
↳ Gain1	DoubleOverride	double	fixdt(1,32,17)	0	2.521242307678959		
↳ Gain2	DoubleOverride	double	fixdt(1,32,17)	0	1.5108372258966896		
↳ Gain3	DoubleOverride	double	fixdt(1,32,17)	0	1.005948869200801		
↳ Gain4	DoubleOverride	double	fixdt(1,16,1)	0	20.173708623247656		
↳ Out1	DoubleOverride		Inherit: auto			-20	40

- 6 On the **Automatic data typing for selected system** pane:
- Click **Configure** to display more options.
 - Select **Propose word lengths for specified fraction lengths**, then click **Apply**.
- 7 Click the **Propose word lengths** button.

The Fixed-Point Tool uses available range data to calculate data type proposals according to the following rules:

- Design minimum and maximum values take precedence over the simulation range.

The **Safety margin for design and derived min/max (%)** parameter specifies a range that differs from that defined by the design range. In this example, no safety margins are set.

- The tool observes the simulation range because you selected the **Simulation min/max** option.

The **Safety margin for simulation min/max (%)** parameter specifies a range that differs from that defined by the simulation range. In this example, no safety margins are set.

The Fixed-Point Tool analyzes the data types of all fixed-point blocks whose:

- **Lock output data type setting against changes by the fixed-point tools** parameter is not selected.
- **Output data type** parameter specifies a generalized fixed-point number.
- Data types are not inherited types.

For each object in the model, the Fixed-Point Tool proposes the minimum word length that avoids overflow for the collected range information. Because the target hardware is a 16-bit embedded processor, the Fixed-Point tool proposes word lengths based on the number of bits used by the processor for each data type. For more information, see “How the Fixed-Point Tool Uses Target Hardware Information” on page 38-49.

The tool proposes smaller word lengths for `Gain4` and `Gain4:Gain`. The tool calculated that their ideal word length is less than or equal to the character bit length for the embedded processor (**8**), so the tool rounds up the word length to **8**.

Contents of: ex_moving_average* (mmo-dbl)

Column View: Automatic Data Typing View [Show Details](#)

Name	ProposedDT	Run	CompiledDT	Accept	SimMin	SimMax	SpecifiedDT
Add1 : Accumulator	n/a	DoubleOverride	double		0	10.086854311623828	Inherit: Inherit via internal rule
Add1 : Output	fixdt(1,32,17)	DoubleOverride	double	<input type="checkbox"/>	0	10.086854311623828	fixdt(1,32,17)
Add2 : Accumulator	n/a	DoubleOverride	double		0	5.038028402776449	Inherit: Inherit via internal rule
Add2 : Output	fixdt(1,32,17)	DoubleOverride	double	<input type="checkbox"/>	0	5.038028402776449	fixdt(1,32,17)
Add3 : Accumulator	n/a	DoubleOverride	double		0	2.5167860950974905	Inherit: Inherit via internal rule
Add3 : Output	fixdt(1,32,17)	DoubleOverride	double	<input type="checkbox"/>	0	2.5167860950974905	fixdt(1,32,17)
Data Type Conversion1	fixdt(1,16,10)	DoubleOverride	double	<input type="checkbox"/>	0	5.048825908847379	fixdt(1,16,10)
Gain1	fixdt(1,32,17)	DoubleOverride	double	<input type="checkbox"/>	0	2.521242307678959	fixdt(1,32,17)
Gain1 : Gain	n/a	DoubleOverride					Inherit: Inherit via internal rule
Gain2	fixdt(1,32,17)	DoubleOverride	double	<input type="checkbox"/>	0	1.5108372258966896	fixdt(1,32,17)
Gain2 : Gain	n/a	DoubleOverride					Inherit: Inherit via internal rule
Gain3	fixdt(1,32,17)	DoubleOverride	double	<input type="checkbox"/>	0	1.005948869200801	fixdt(1,32,17)
Gain3 : Gain	n/a	DoubleOverride					Inherit: Inherit via internal rule
Gain4	fixdt(1,8,1)	DoubleOverride	double	<input checked="" type="checkbox"/>	0	20.173708623247656	fixdt(1,16,1)
Gain4 : Gain	fixdt(1,8,0)	DoubleOverride		<input checked="" type="checkbox"/>			fixdt(1,16,0)
Out1	n/a	DoubleOverride					Inherit: auto
Unit Delay1	n/a	DoubleOverride					
Unit Delay2	n/a	DoubleOverride					

- 8 To see how the target hardware affects the word length proposal, change the target hardware to FPGA/ASIC.
 - a In the model, select **Simulation > Model Configuration Parameters**.
 - b In the Configuration Parameters dialog box, select **Hardware Implementation**.
 - c On the **Hardware Implementation** pane, set **Device vendor** to ASIC/FPGA. Simulink automatically sets the **Device type** to ASIC/FPGA.
 - d Click **Apply** and close the Configuration Parameters dialog box.
- 9 On the Fixed-Point Tool **Automatic data typing for selected system** pane, click the **Propose word lengths** button.

Because the target hardware is an FPGA, there are no constraints on the word lengths that the Fixed-Point Tool proposes. The word length for **Gain4:Gain** is now 3.

Contents of: `ex_moving_average* (mmo-dbl)`

Column View: Automatic Data Typing View [Show Details](#)

Name	ProposedDT	Run	CompiledDT	Accept	SimMin	SimMax	SpecifiedDT
└─ Add1 : Accumulator	n/a	DoubleOverride	double		0	10.086854311623828	Inherit: Inherit via internal rule
└─ Add1 : Output	fixdt(1,22,17)	DoubleOverride	double	<input checked="" type="checkbox"/>	0	10.086854311623828	fixdt(1,32,17)
└─ Add2 : Accumulator	n/a	DoubleOverride	double		0	5.038028402776449	Inherit: Inherit via internal rule
└─ Add2 : Output	fixdt(1,22,17)	DoubleOverride	double	<input checked="" type="checkbox"/>	0	5.038028402776449	fixdt(1,32,17)
└─ Add3 : Accumulator	n/a	DoubleOverride	double		0	2.5167860950974905	Inherit: Inherit via internal rule
└─ Add3 : Output	fixdt(1,22,17)	DoubleOverride	double	<input checked="" type="checkbox"/>	0	2.5167860950974905	fixdt(1,32,17)
└─ Data Type Conversion 1	fixdt(1,14,10)	DoubleOverride	double	<input checked="" type="checkbox"/>	0	5.048825908847379	fixdt(1,16,10)
└─ Gain1	fixdt(1,20,17)	DoubleOverride	double	<input checked="" type="checkbox"/>	0	2.521242307678959	fixdt(1,32,17)
└─ Gain1 : Gain	n/a	DoubleOverride					Inherit: Inherit via internal rule
└─ Gain2	fixdt(1,19,17)	DoubleOverride	double	<input checked="" type="checkbox"/>	0	1.5108372258966896	fixdt(1,32,17)
└─ Gain2 : Gain	n/a	DoubleOverride					Inherit: Inherit via internal rule
└─ Gain3	fixdt(1,19,17)	DoubleOverride	double	<input checked="" type="checkbox"/>	0	1.005948869200801	fixdt(1,32,17)
└─ Gain3 : Gain	n/a	DoubleOverride					Inherit: Inherit via internal rule
└─ Gain4	fixdt(1,8,1)	DoubleOverride	double	<input checked="" type="checkbox"/>	0	20.173708623247656	fixdt(1,16,1)
└─ Gain4 : Gain	fixdt(1,3,0)	DoubleOverride		<input checked="" type="checkbox"/>			fixdt(1,16,0)
└─ Out1	n/a	DoubleOverride					Inherit: auto
└─ Unit Delay1	n/a	DoubleOverride					
└─ Unit Delay2	n/a	DoubleOverride					


Propose Data Types Using Multiple Simulations

In this section...
“About This Example” on page 38-58
“Running the Simulation” on page 38-60

About This Example

This example shows how to use the Fixed-Point Tool to propose fraction lengths for a model based on the simulation minimum and maximum values captured over multiple simulations.

This example uses the `ex_fpt_merge` model.

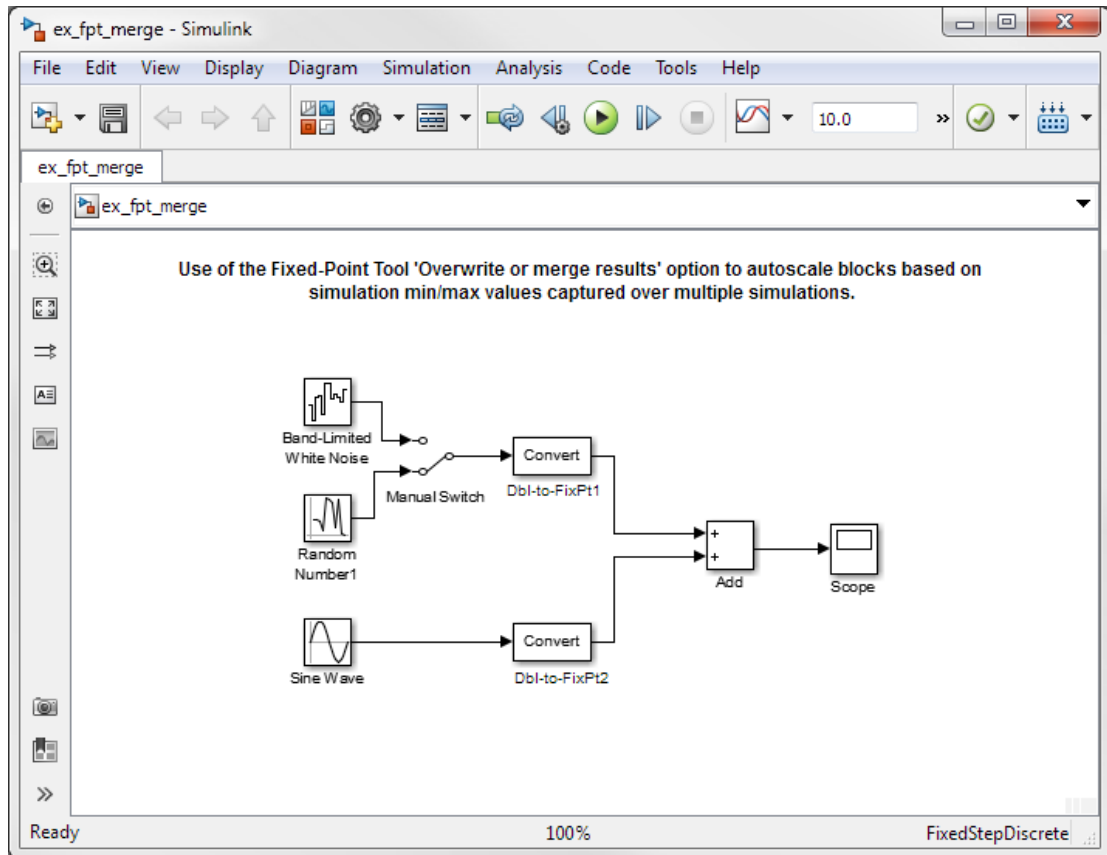

About the Model

The model contains a sine wave input and two alternate noise sources, band-limited white noise and random uniform noise. The software converts the sine wave input and selected noise signal to fixed point and then adds them.

- The Data Type Conversion block `Dbl-to-FixPt1` converts the double-precision noise input to the fixed-point data type `fixdt(1, 16, 15)`.
- The Data Type Conversion block `Dbl-to-FixPt2` converts the double-precision sine wave input to the fixed-point data type `fixdt(1, 16, 10)`.
- The Add block **Accumulator data type** is `fixdt(1, 32, 30)` and **Output data type** is `fixdt(1, 16, 14)`.

Merging Results from Two Simulation Runs

In this example, you use the Fixed-Point Tool to merge the results from two simulation runs. Merging results allows you to autoscale your model over the complete simulation range.

- 1 “Simulate the Model Using Random Uniform Noise” on page 38-60. Using the Fixed-Point Tool, you simulate the model with the random uniform noise signal and observe the simulation minimum and maximum values for the Add block. The Fixed-Point Tool uses these simulation settings:
 - **Fixed-point instrumentation mode:** Minimums, maximums and overflows
 - **Data type override:** Double
 - **Data type override applies to:** All numeric types
 - **Merge instrumentation results from multiple simulations** is not selected.

This run provides the simulation results for the random uniform noise input only.

- 2 “Simulate Model Using Band-Limited White Noise” on page 38-61. You select the band-limited white noise signal and run another simulation using the same Fixed-Point Tool simulation settings. The Fixed-Point Tool overwrites the results of the previous run.

This run provides the simulation range for the band-limited white noise input only.

- 3 “Merge Results” on page 38-62. You configure the Fixed-Point Tool to merge results. Select the random uniform noise input again, rerun the simulation, and observe the simulation results for the Add block.

This run provides the simulation range based on the entire set of input data for both noise sources.


- 4 “Propose Fraction Lengths Based on Merged Results” on page 38-62. The Fixed-Point Tool uses the merged simulation minimum and maximum values to propose scaling for each block to ensure maximum precision while spanning the full range of simulation values.

Running the Simulation

Simulate the Model Using Random Uniform Noise

- 1 Open the `ex_fpt_merge` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
ex_fpt_merge
```

- 2 From the model main menu, select **Analysis > Fixed-Point Tool**.
- 3 On the Fixed-Point Tool **Model settings** pane, click the **Model-wide double override and full instrumentation** button to set:
 - **Data type override** to **Double**. This option enables each of the model's subsystems to use its locally specified data type settings.
 - **Fixed-point instrumentation mode** to **Minimums, maximums and overflows**.
 - The run name to **DoubleOverride**.
- 4 In the Fixed-Point Tool, click the **Simulate** button .

The Simulink software simulates the `ex_fpt_merge` model, using the random uniform noise signal. Afterward, the Fixed-Point Tool **Contents** pane displays the simulation results for each block that logged fixed-point data. The tool stores the results in a run named **DoubleOverride**, denoted by the **DoubleOverride** label in the **Run** column.

- 5 The **SimMin** and **SimMax** values for the Add block are:

SimMin is -3.5822

SimMax is 2.7598

Simulate Model Using Band-Limited White Noise

- 1 In the model, double-click the switch to select the band-limited white noise signal.
- 2 In the Fixed-Point Tool, click the **Simulate** button.

The Simulink software simulates the `ex_fpt_merge` model, now using the band-limited white noise signal.

- 3 The changed values for **SimMin** and **SimMax** for the Add block are:

SimMin is now -2.5317

SimMax is now 3.1542

Merge Results

- 1 In the model, double-click the switch to select the random uniform noise signal.
- 2 On the Fixed-Point Tool **Data collection** pane, select **Merge results from multiple simulations**, click **Apply** and rerun the simulation.
- 3 The **SimMin** and **SimMax** values for the Add block now cover the entire simulation range for both the random uniform and band-limited white noise signals.

SimMin is -3.5822

SimMax is 3.1542

Propose Fraction Lengths Based on Merged Results

- 1 On the **Automatic data typing for selected system** pane, click the **Propose fraction lengths** button.

The Fixed-Point Tool analyzes the data types of all fixed-point blocks whose:

- **Lock output data type setting against changes by the fixed-point tools** parameter is not selected.
- **Output data type** parameter specifies a generalized fixed-point number.
- Data types are not inherited.

The Fixed-Point Tool uses the merged minimum and maximum values to propose fraction lengths for each block. These values ensure maximum precision while spanning the full range of simulation values. The tool displays the proposed data types in the **Contents** pane.

Name	Run	Accept	ProposedDT	SpecifiedDT	CompiledDT	SimMin	SimMax	ProposedMin	ProposedMax
Add : Accumulator	DoubleOverride	<input checked="" type="checkbox"/>	fixdt(1,32,29)	fixdt(1,32,30)	double	-3.58218376...	3.15421092...	-4	3.99999999...
Add : Output	DoubleOverride	<input checked="" type="checkbox"/>	fixdt(1,16,13)	fixdt(1,16,14)	double	-3.58218376...	3.15421092...	-4	3.99987792...
Band-Limited White Noise/Output	DoubleOverride	<input type="checkbox"/>	n/a	Inherit: Same as input	double	-1.60588986...	2.18629125...		
Band-Limited White Noise/Output : Gain	DoubleOverride	<input type="checkbox"/>	n/a	Inherit: Same as input					
Band-Limited White Noise/y	DoubleOverride	<input type="checkbox"/>	n/a	Inherit: auto					
Data Type Conversion	DoubleOverride	<input checked="" type="checkbox"/>	fixdt(1,16,13)	fixdt(1,16,15)	double	-2.89441760...	2.18629125...	-4	3.99987792...
Data Type Conversion1	DoubleOverride	<input checked="" type="checkbox"/>	fixdt(1,16,15)	fixdt(1,16,10)	double	-0.99992325...	0.99957360...	-1	0.99996948...
Manual Switch	DoubleOverride	<input type="checkbox"/>	n/a		double	-2.89441760...	2.18629125...		

View Simulation Results

In this section...

“Compare Runs” on page 38-63

“Compare Signals” on page 38-64


“Inspect Signals” on page 38-65

“Histogram Plot of Signal” on page 38-66


“See Also” on page 38-67

Compare Runs

To compare runs:


- 1 In one of the runs that you want to compare, select a logged signal.
- 2 From the Fixed-Point Tool menu, select **Results > Compare Runs** or click .
- 3 If there are more than two runs, in the **Compare Runs Selector** dialog box, select the run that you want to compare, and then click **OK**.

On the upper axes, the Simulation Data Inspector plots the signal in both selected runs. On the lower axes, the Simulation Data Inspector plots the difference between those runs.

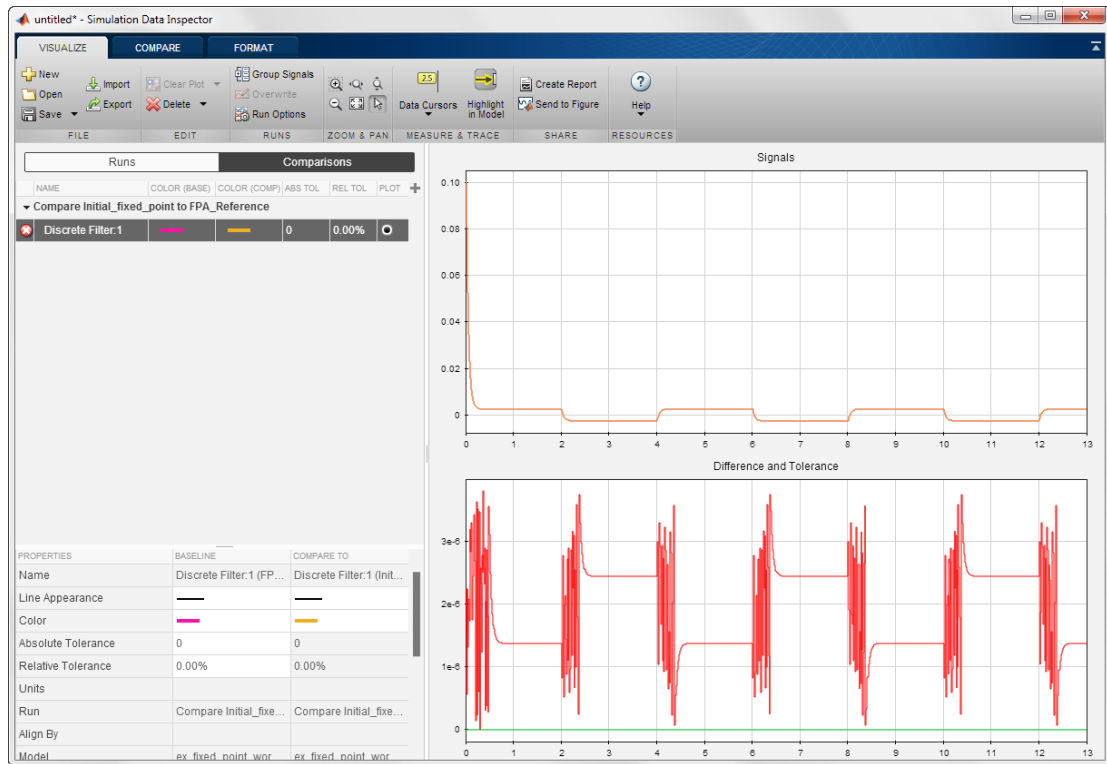


Compare Signals

To compare signals:


- 1 In one of the runs that you want to compare, select a logged signal.
- 2 From the Fixed-Point Tool menu, select **Results > Compare Signals** or click .
- 3 If there are more than two runs, in the **Compare Runs Selector** dialog box, select the run that you want to compare, and then click **OK**.

On the upper axes, the Simulation Data Inspector plots the signal in both selected runs. On the lower axes, the Simulation Data Inspector plots the difference between those runs.

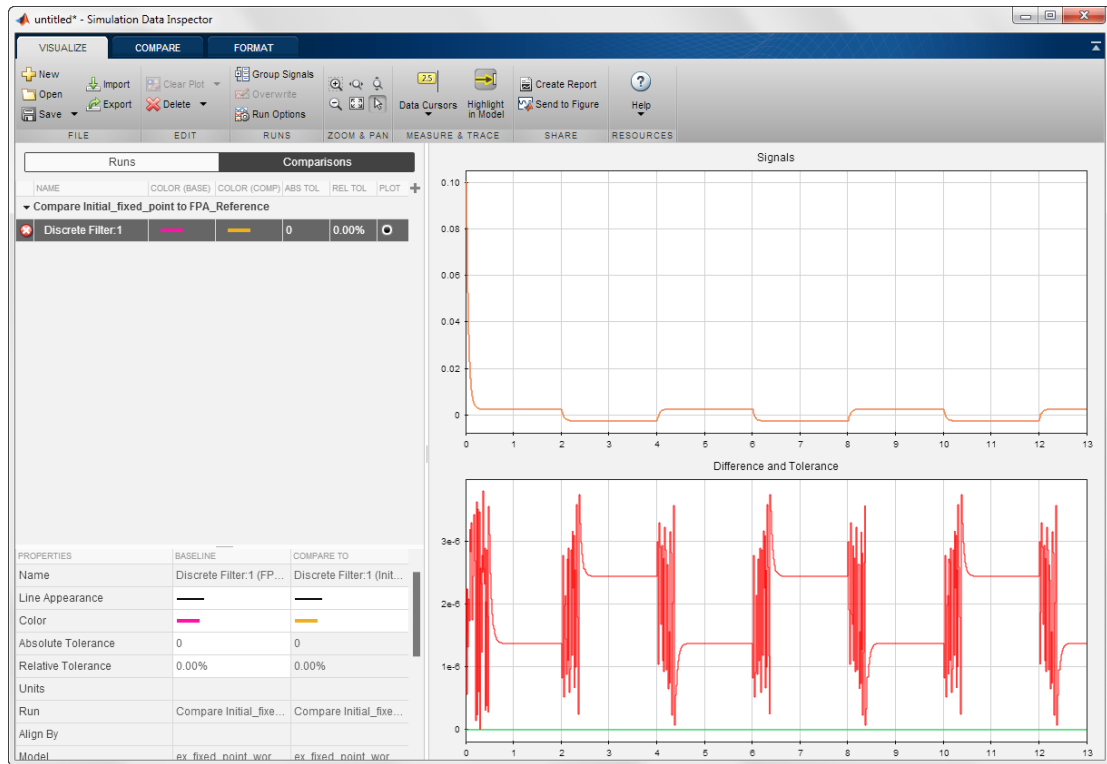


Inspect Signals

To inspect a signal:


- 1 Select the logged signal that you want to inspect.
- 2 From the Fixed-Point Tool menu, select **Results > Inspect Signal** or click .

The Simulation Data Inspector plots data as a function of time.

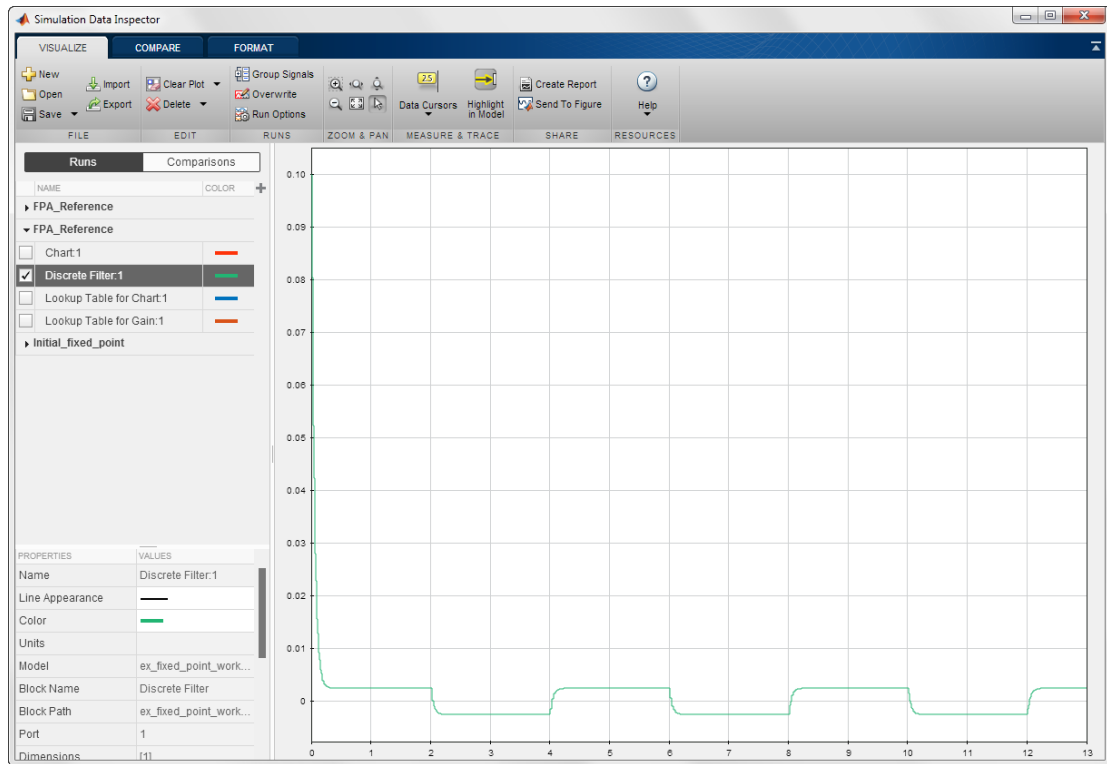

Histogram Plot of Signal

To view the histogram plot of a signal:


- 1 Select the logged signal that you want to plot.
- 2 From the Fixed-Point Tool menu, select **Results > Histogram Plot of Signal** or click .

The histogram plot helps you visualize the dynamic range of a signal. It provides information about the:

- Total number of samples (N).
- Maximum number of bits to prevent overflow.

- Number of times each bit has represented the data (as a percentage of the total number of samples).
- Number of times that exact zero occurred (without the effect of quantization). This number does not include the number of zeroes that occurred due to rounding.

You can use this information to estimate the word size required to represent the signal.

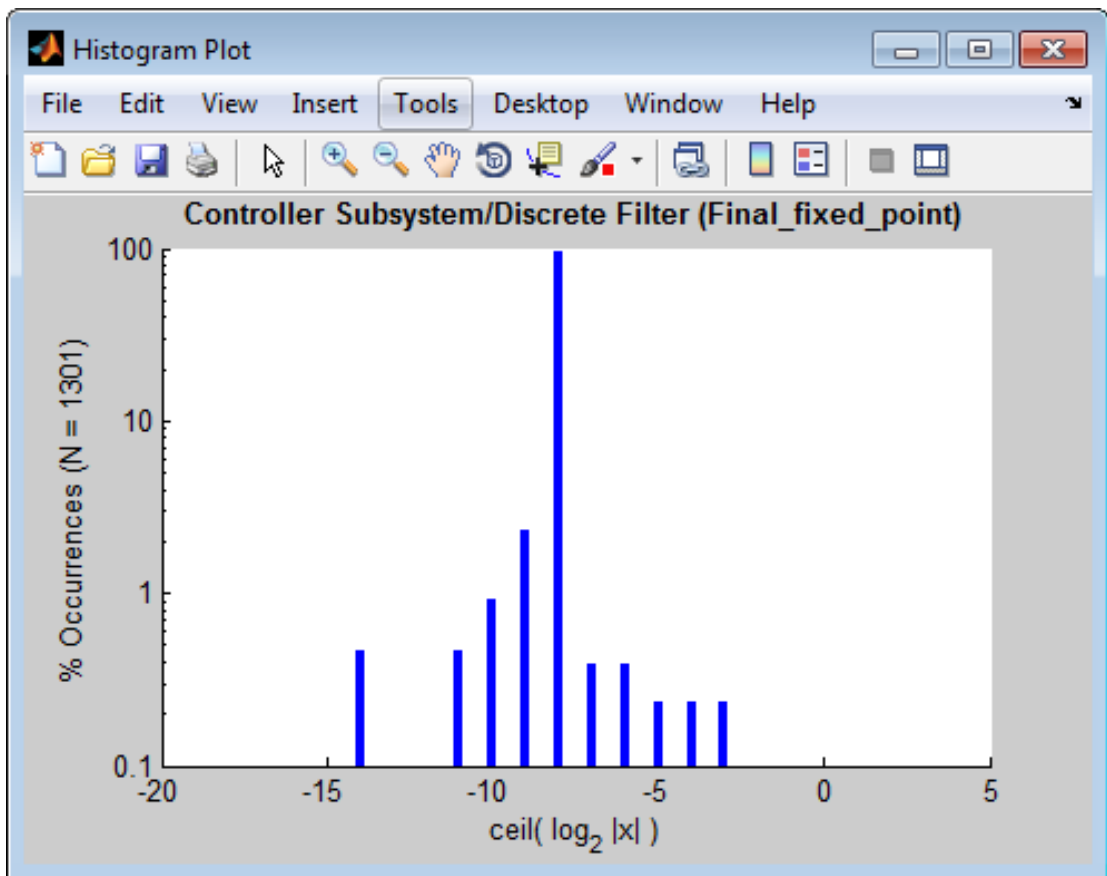

See Also

- “Viewing Results With the Simulation Data Inspector” on page 38-68
- “Propose Fraction Lengths Using Simulation Range Data”

Viewing Results With the Simulation Data Inspector

Why Use the Simulation Data Inspector

Using the Simulation Data Inspector to inspect and compare data after converting your floating-point model to fixed point facilitates tracking numerical error propagation.

When to Use the Simulation Data Inspector

Use the Simulation Data Inspector to:

- Plot multiple signals in one or more axes
- Compare a signal in different runs
- Compare all logged signal data from different runs
- Export signal logging results to a MAT-file
- Specify tolerances for signal comparison
- Create a report of the current view and data in the Simulation Data Inspector

What You Can Inspect in the Simulation Data Inspector

The Fixed-Point Tool uses the Simulation Data Inspector tool plotting capabilities that enable you to plot signals for graphical analysis. The tool can access signal data that resides in the MATLAB workspace, allowing you to plot simulation results associated with:

- Scope blocks whose **Save data to workspace** parameter is selected
- To Workspace blocks
- Root-level Outport blocks, when the **Output** check box on the **Data Import/Export** pane of the Configuration Parameters dialog box is selected
- Logged signal data

Tip The **Contents** pane of the Fixed-Point Tool displays an antenna icon  next to items that you can plot.

See Also

- “Validate System Behavior”
- `fxptdlg`

Range Analysis

- “How Range Analysis Works” on page 39-2
- “Derive Ranges” on page 39-7
- “Derive Ranges at the Subsystem Level” on page 39-9
- “View Derived Ranges in the Fixed-Point Tool” on page 39-11
- “Derive Ranges Using Design Ranges” on page 39-13
- “Derive Ranges Using Block Initial Conditions” on page 39-15
- “Derive Ranges Using Design Ranges for Simulink.Parameter Objects” on page 39-17
- “Insufficient Design Range Information” on page 39-20
- “Providing More Design Range Information” on page 39-23
- “Fixing Design Range Conflicts” on page 39-26
- “Derive Ranges for a Referenced Model” on page 39-28
- “Propose Data Types for a Referenced Model” on page 39-34
- “Deriving Ranges for a Referenced Model” on page 39-36
- “Intermediate Range Results” on page 39-38
- “Unsupported Simulink Software Features” on page 39-41
- “Supported and Unsupported Simulink Blocks” on page 39-43

How Range Analysis Works

In this section...

“Analyzing a Model with Range Analysis” on page 39-2

“Automatic Stubbing” on page 39-5

“Model Compatibility with Range Analysis” on page 39-6

Analyzing a Model with Range Analysis

The model that you want to analyze **must** be compatible with range analysis. If your model is not compatible, either replace unsupported blocks or divide the model so that you can analyze the parts of the model that are compatible. For more information, see “Model Compatibility with Range Analysis” on page 39-6.

The Fixed-Point Designer software performs a static range analysis of your model to derive minimum and maximum range values for signals in the model. The software analyzes the model behavior and computes the values that can occur during simulation for each block Output. The range of these values is called a *derived range*.

The software statically analyzes the ranges of the individual computations in the model based on:

- Specified design ranges, known as *design minimum and maximum* values, for example, minimum and maximum values specified for:
 - Inport and Outport blocks
 - Block outputs
 - Input, output, and local data used in MATLAB Function and Stateflow Chart blocks
 - Simulink data objects (`Simulink.Signal` and `Simulink.Parameter` objects)
- Inputs
- The semantics of each calculation in the blocks

If the model contains objects that the analysis cannot support, where possible, the software uses automatic stubbing. For more information, see “Automatic Stubbing” on page 39-5.

The range analysis tries to narrow the derived range by using all the specified design ranges in the model. The more design range information you specify, the more likely the range analysis is to succeed. As the software performs the analysis, it derives new range information for the model. The software then attempts to use this new information, together with the specified ranges, to derive ranges for the remaining objects in the model.

For models that contain floating-point operations, range analysis might report a range that is slightly larger than expected. This difference is due to rounding errors because the software approximates floating-point numbers with infinite-precision rational numbers for analysis and then converts to floating point for reporting.

The following table summarizes how the analysis derives range information and provides links to examples.

When...	How the Analysis Works	Examples
<p>You specify design minimum and maximum data for a block output.</p>	<p>The derived range at the block output is based on these specified values and on the following values for blocks connected to its inputs and outputs:</p> <ul style="list-style-type: none"> • Specified minimum and maximum values • Derived minimum and maximum values 	<p>“Derive Ranges Using Design Ranges” on page 39-13</p>
<p>A parameter on a block has initial conditions and a design range.</p>	<p>The analysis takes both factors into account by taking the union of the design range and the initial conditions.</p>	<p>“Derive Ranges Using Block Initial Conditions” on page 39-15</p>
<p>The model contains a parameter with a specified range and the parameter storage class is set to Auto.</p>	<p>The analysis does not take into account the range specified for the parameter. Instead, it uses the parameter value.</p>	<p>“Derive Ranges Using Design Ranges for Simulink.Parameter Objects” on page 39-17</p>
<p>The model contains a parameter with a specified range and the parameter storage class is not set to Auto.</p>	<p>The analysis takes into account the range specified for the parameter and ignores the value.</p>	<p>“Derive Ranges Using Design Ranges for Simulink.Parameter Objects” on page 39-17</p>
<p>The model contains insufficient design range information.</p>	<p>The analysis cannot determine derived ranges. Specify more design range information and rerun the analysis.</p>	<p>“Providing More Design Range Information” on page 39-23</p> <p>The analysis results might depend on block sorting order which determines the order in which the</p>

When...	How the Analysis Works	Examples
		software analyzes the blocks. For more information, see “Control and Display the Sorted Order”.
The model contains conflicting design range information.	The analysis cannot determine the derived minimum or derived maximum value for an object. The Fixed-Point Tool generates an error. To fix this error, examine the design ranges specified in the model to identify inconsistent design specifications. Modify them to make them consistent.	“Fixing Design Range Conflicts” on page 39-26

Automatic Stubbing

What is Automatic Stubbing?

Automatic stubbing is when the software considers only the interface of the unsupported objects in a model, not their actual behavior. Automatic stubbing lets you analyze a model that contains objects that the Fixed-Point Designer software does not support. However, if any unsupported model element affects the derivation results, the analysis might achieve only partial results.

How Automatic Stubbing Works

With automatic stubbing, when the range analysis comes to an unsupported block, the software ignores (“stubs”) that block. The analysis ignores the behavior of the block. As a result, the block output can take any value.

The software cannot “stub” all Simulink blocks, such as the Integrator block. See the blocks marked “not stunnable” in “Supported and Unsupported Simulink Blocks” on page 39-43.

Model Compatibility with Range Analysis

To verify that your model is compatible with range analysis, see:

- “Unsupported Simulink Software Features” on page 39-41
- “Supported and Unsupported Simulink Blocks” on page 39-43
- “Limitations of Support for Model Blocks” on page 39-53

Derive Ranges

- 1 Verify that your model is compatible with range analysis. See “Model Compatibility with Range Analysis”.
- 2 In Simulink, open your model and set it up for use with the Fixed-Point Tool. For more information, see “Set Up the Model”.
- 3 From the Simulink **Analysis** menu, select **Fixed-Point Tool**.
- 4 In the Fixed-Point Tool **Model Hierarchy** pane, select the system or subsystem of interest.
- 5 Use the Fixed-Point Advisor to prepare the model for conversion.
 - a In the Fixed-Point Tool **Fixed-point preparation for selected system** pane, click the **Fixed-Point Advisor** button.
 - b Run each task in the Fixed-Point Advisor. For more information, see “Preparation for Fixed-Point Conversion”.

The Fixed-Point Advisor:

- Checks the model against fixed-point guidelines.
 - Identifies unsupported blocks.
 - Removes output data type inheritance from blocks.
 - Allows you to promote simulation minimum and maximum values to design minimum and maximum values. This capability is useful if you have not specified design ranges and you have simulated the model with inputs that cover the full intended operating range. For more information, see “Specify block minimum and maximum values”.
- 6 In the **Settings for selected system** pane, set **Data type override** to **Double**, then click **Apply**.

This global override of the fixed-point data types using double-precision numbers avoids quantization effects.
 - 7 Optionally, in the **Data collection** pane **Store results in run** field, specify a run name. Specifying a unique run name avoids overwriting results from previous runs.
 - 8 In the Fixed-Point Tool, click the **Derive ranges for selected system** button.

The analysis runs and tries to derive range information for objects in the selected system. Your next steps depend on the analysis results.

Analysis Results	Fixed-Point Tool Behavior	Next Steps	For More Information
Successfully derives range data for the model.	Displays the derived minimum and maximum values for the blocks in the selected system.	Review the derived ranges to determine if the results are suitable for proposing data types. If not, you must specify additional design information and rerun the analysis.	“View Derived Ranges in the Fixed-Point Tool” on page 39-11
Fails because the model contains blocks that the software does not support.	Generates an error and provides information about the unsupported blocks.	To fix the error, review the error message information and replace the unsupported blocks.	“Model Compatibility with Range Analysis” on page 39-6
Cannot derive range data because the model contains conflicting design range information.	Generates an error.	To fix this error, examine the design ranges specified in the model to identify inconsistent design specifications. Modify them to make them consistent.	“Fixing Design Range Conflicts” on page 39-26
Cannot derive range data for an object because there is insufficient design range information specified on the model.	Highlights the results for the object.	Examine the model to determine which design range information is missing.	“Providing More Design Range Information” on page 39-23

Derive Ranges at the Subsystem Level

In this section...

“Deriving Ranges at the Subsystem Level” on page 39-9

“Derive Ranges at the Subsystem Level” on page 39-10

Deriving Ranges at the Subsystem Level

You can derive range information for individual atomic subsystems and atomic charts. When you derive ranges at the model level, the software takes into account all information in the scope of the model. When you derive ranges at the subsystem level only, the software treats the subsystem as a standalone unit and the derived ranges are based on only the local design range information specified in the subsystem or chart. Therefore, when you derive ranges at the subsystem level, the analysis results might differ from the results of the analysis at the model level.

For example, consider a subsystem that has an input with a design minimum of -10 and a design maximum of 10 that is connected to an input signal with a constant value of 1. When you derive ranges at the model level, the range analysis software uses the constant value 1 as the input. When you derive ranges at the subsystem level, the range analysis software does not take the constant value into account and instead uses [-10..10] as the range.

When to Derive Ranges at the Subsystem Level

Derive ranges at the subsystem level to facilitate:

- System validation

It is a best practice to analyze individual subsystems in your model one at a time. This practice makes it easier to understand the atomic behavior of the subsystem. It also makes debugging easier by isolating the source of any issues.

- Calibration

The results from the analysis at subsystem level are based only on the settings specified within the subsystem. The proposed data types cover the full intended design range of the subsystem. Based on these results, you can determine whether you can reuse the subsystem in other parts of your model.

Derive Ranges at the Subsystem Level

The complete procedure for deriving ranges is described in “Derive Ranges” on page 39-7.

To derive ranges at the subsystem level, the key points to remember are:

- The subsystem or subchart must be atomic.
- In the Fixed-Point Tool **Model Hierarchy** pane, select the subsystem of interest.
- In the **Settings for selected system** pane, set **Data type override** to **Double**, then click **Apply**.


Tip If the parent of the selected subsystem controls the data type override setting of the subsystem, first set the parent **Data type override** to **Use local settings** and then set the subsystem **Data type override** to **Double**.

This global override of the fixed-point data types using double-precision numbers avoids quantization effects.

- In the **Data collection** pane **Run name** field, specify a run name. Specifying a unique run name avoids overwriting results from previous runs. This run contains derived minimum and maximum values that take into account the full intended design range of the subsystem.

View Derived Ranges in the Fixed-Point Tool

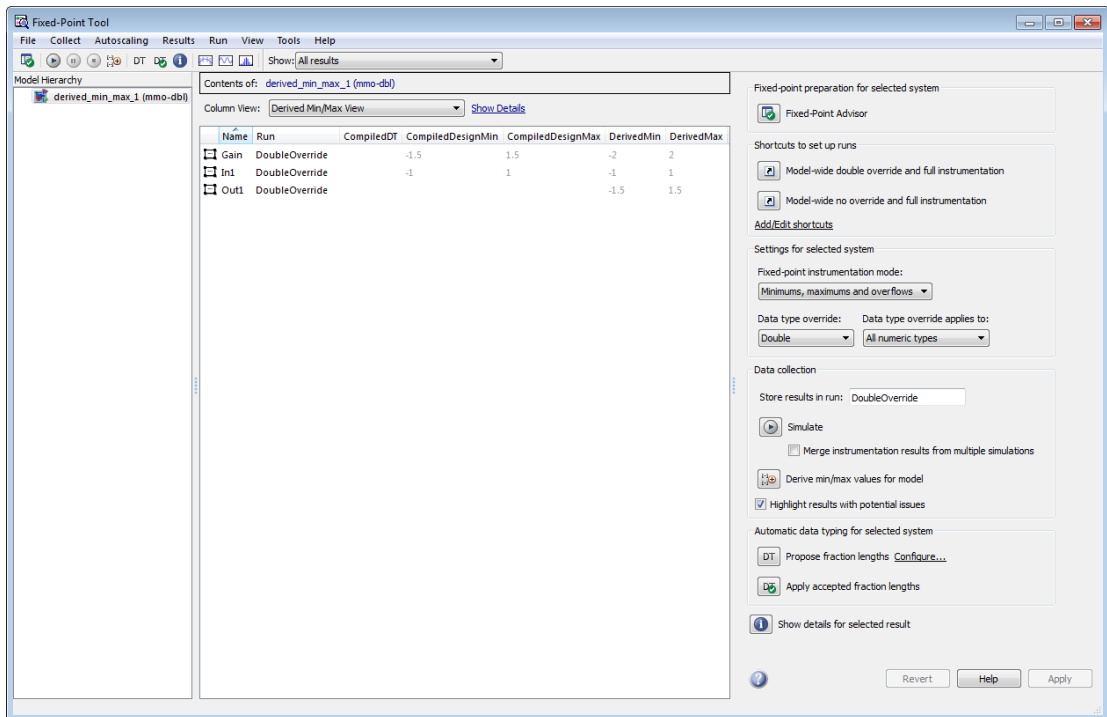


After you use the Fixed-Point Tool to derive ranges for a model, the Fixed-Point Tool **Contents** pane displays the derived minimum and maximum values for each object in the selected system.



If the analysis cannot derive a minimum or maximum value, the Fixed-Point Tool highlights the result. To fix the issue, examine the model to identify which objects have no specified design ranges and add this information. See “Insufficient Design Range Information” on page 39-20.

Contents of: `ex_derived_min_max_4` (mmo-dbl)

Column View: Derived Min/Max View [Show Details](#)


Name	Run	CompiledDT	CompiledDesignMin	CompiledDesignMax	DerivedMin	DerivedMax
 Gain	DoubleOverride	double	-1.5	1.5	-1.5	1.5
 In1	DoubleOverride	double	-1		-1	Inf
 Out1	DoubleOverride				-1.5	1.5

Derive Ranges Using Design Ranges

This example shows how the range analysis narrows the derived range for the Output block. This range is based on the range derived for the **Add** block using the design ranges specified on the two Inport blocks and the design range specified for the Add block.

- 1 Open the `ex_derived_min_max_1` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot,'toolbox','fixpoint','examples'))  
ex_derived_min_max_1
```

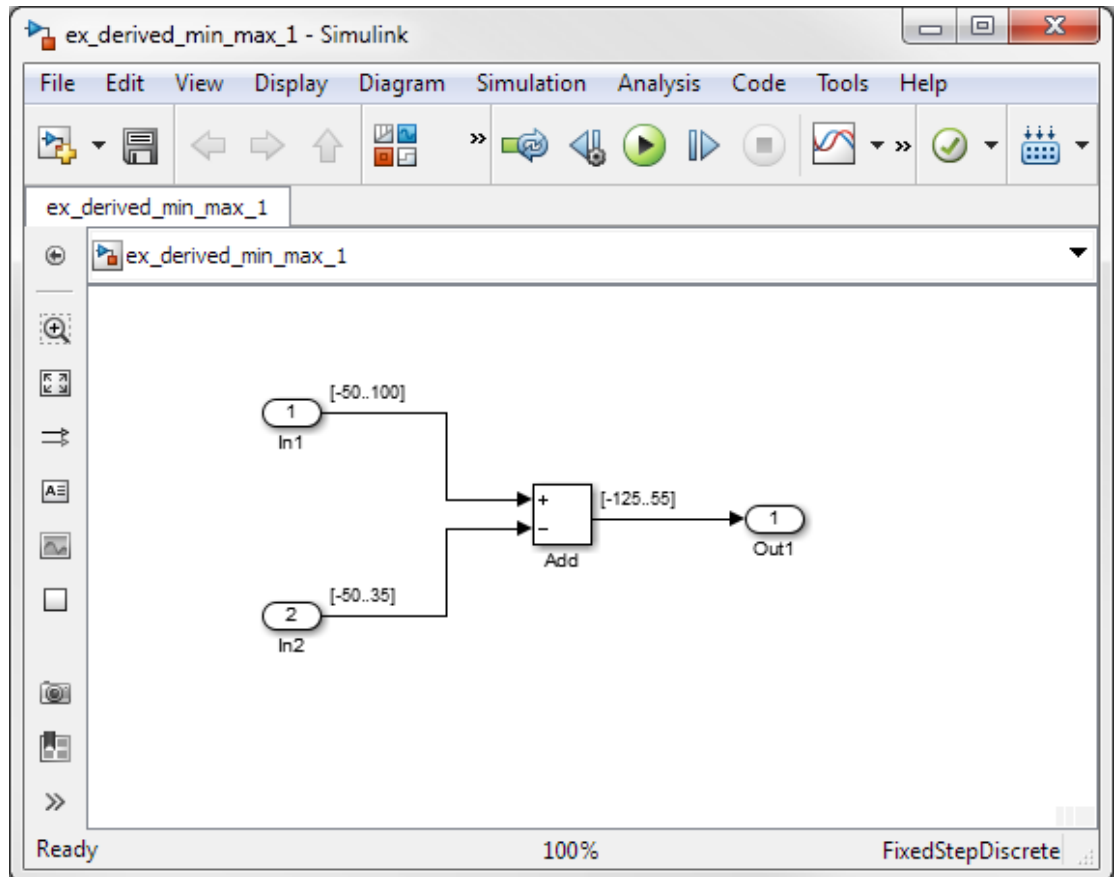

The model displays the specified design minimum and maximum values for each block.

- In1 design range is [-50 . . 100].
- In2 design range is [-50 . . 35].
- Add block design range is [-125 . . 55].

Tip To display design ranges in your model, from the model menu, select **Display > Signals & Ports** and select **Design Ranges**.

- 2 From the Simulink **Analysis** menu, select **Fixed-Point Tool**.
- 3 In the **Settings for selected system** pane, set **Data type override** to **Double**, then click **Apply**.

This global override of the fixed-point data types using double-precision numbers avoids quantization effects.

- 4 In the Fixed-Point Tool, click the **Derive ranges for selected system** button.

To calculate the derived range at the Add block input, the software uses the design minimum and maximum values specified for the Inport blocks, [-50 . . 100] and [-50 . . 35]. The derived range at the Add block input is [-85 . . 150].

In the **Contents** pane, the Fixed-Point Tool displays the derived and design minimum and maximum values for the blocks in the selected system.


- The derived range for the Add block output signal is narrowed to [-85 . . 55]. This derived range is the intersection of the range derived from the block inputs, [-85 . . 150], and the design minimum and maximum values specified for the block output, [-125 . . 55].
- The derived range for the Outport block Out1 is [-85 . . 55], the same as the Add block output.

Derive Ranges Using Block Initial Conditions

This example shows how range analysis takes into account block initial conditions.

- 1 Open the `ex_derived_min_max_2` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot,'toolbox','fixpoint','examples'))
ex_derived_min_max_2
```

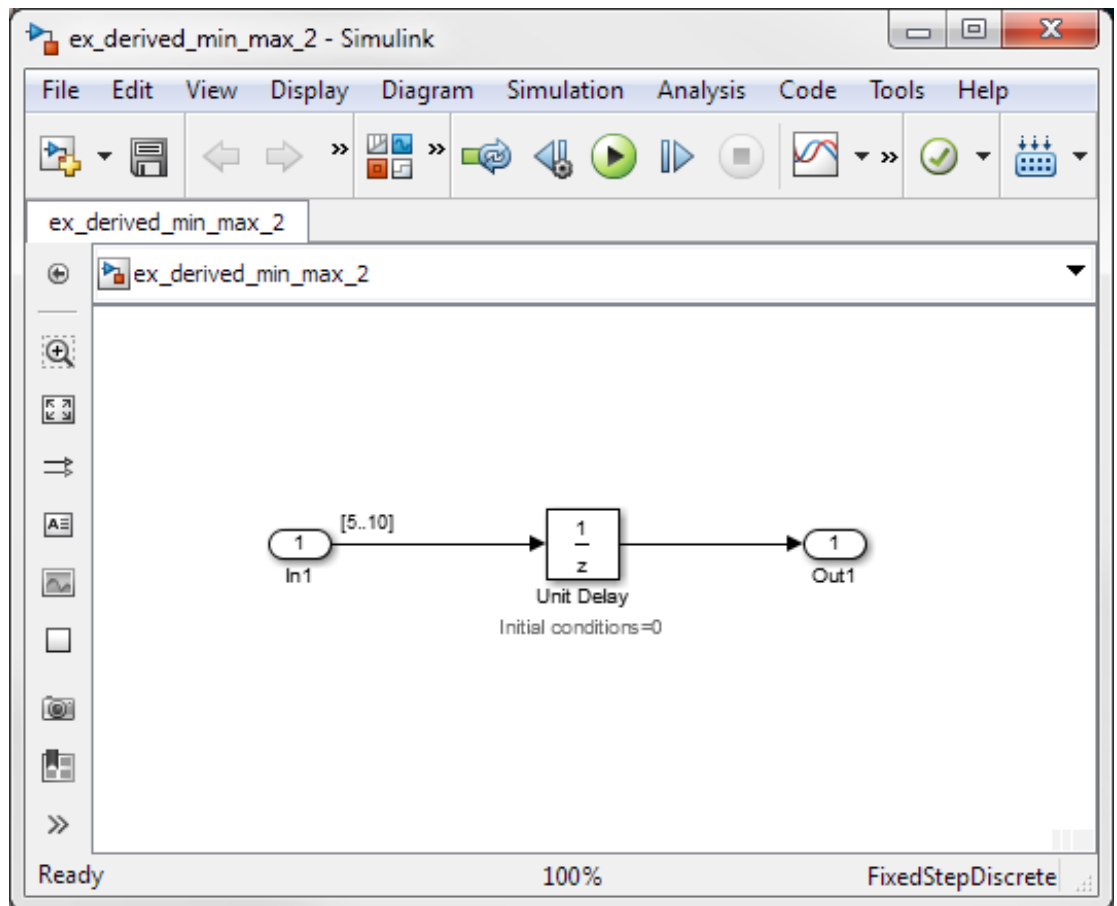

The model uses block annotations to display the specified design minimum and maximum values for the Inport block and the initial conditions for the Unit Delay block.

- In1 design range is [5 . . 10].
- Unit Delay block initial condition is 0.

Tip To display design ranges in your model, from the model menu, select **Display > Signals & Ports** and select **Design Ranges**.

- 2 From the Simulink **Analysis** menu, select **Fixed-Point Tool**.
- 3 In the **Settings for selected system** pane, set **Data type override** to Double, then click **Apply**.

This global override of the fixed-point data types using double-precision numbers avoids quantization effects.

- 4 In the Fixed-Point Tool, click the **Derive ranges for selected system** button.

In the **Contents** pane, the Fixed-Point Tool displays the derived minimum and maximum values for the blocks in the model.

The derived minimum and maximum range for the Outport block, Out1, is [0 . . 10]. The range analysis derives this range by taking the union of the initial value, 0, on the Unit Delay block and the design range on the block, [5 . . 10].

- 5 Change the initial value of the Unit Delay block to 7.
 - a Double-click the Unit Delay block.
 - b In the **Block Parameters** dialog box, set **Initial conditions** to 7, then click **OK**.
 - c In the Fixed-Point Tool, click the **Derive ranges for selected system** button.


Because the analysis takes the union of the initial conditions, 7, and the design range, [5 . . 10], on the Unit Delay block, the derived range for the block is still [5 . . 10].

Derive Ranges Using Design Ranges for Simulink.Parameter Objects

This example shows how the range analysis takes into account design range information for `Simulink.Parameter` objects unless the parameter storage class is set to Auto. If the parameter storage class is set to Auto, the analysis uses the value of the parameter.

- 1 Open the `ex_derived_min_max_3` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot,'toolbox','fixpoint','examples'))
ex_derived_min_max_3
```

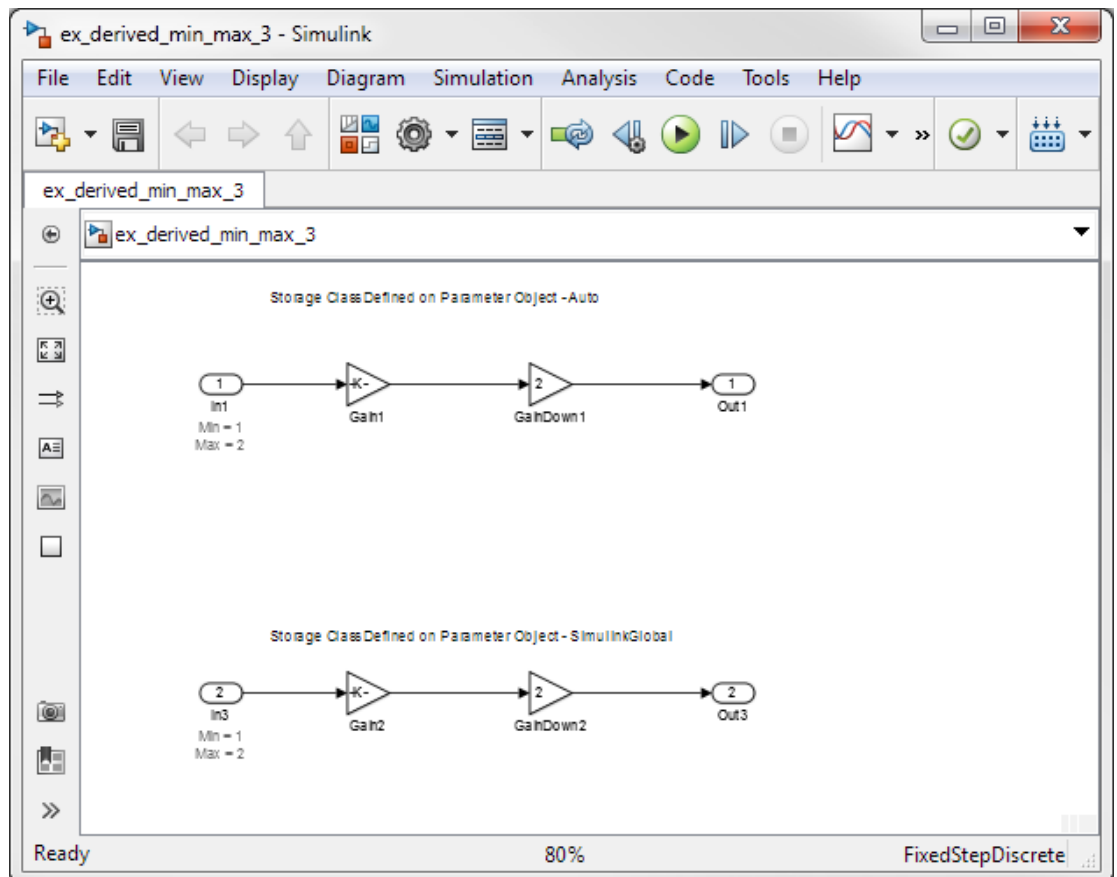

The model displays the specified design minimum and maximum values for the Inport blocks. The design range for both Inport blocks is [1 . . 2].

Tip To display design ranges in your model, from the model menu, select **Display > Signals & Ports** and select **Design Ranges**.

- 2 Examine the gain parameters for the Gain blocks.
 - a Double-click each Gain block and note the name of the Gain parameter on the Main tab.

Gain Block	Gain Parameter
Gain1	paramObjOne
Gain2	paramObjTwo

- b From the model menu, select **Tools > Model Explorer**.
- c In Model Explorer window, select the base workspace and view information for each of the gain parameters used in the model.

Gain Parameter	Type Information
paramObjOne	Simulink.Parameter object. Value 2. Storage class set to Auto.
paramObjTwo	Simulink.Parameter object. Value 2. Storage class set to SimulinkGlobal.

- 3 From the Simulink **Analysis** menu, select **Fixed-Point Tool**.
- 4 In the **Settings for selected system** pane, set **Data type override** to **Double** , then click **Apply**.

This global override of the fixed-point data types using double-precision numbers avoids quantization effects.

- 5 In the Fixed-Point Tool, click the **Derive ranges for selected system** button.

In the **Contents** pane, the Fixed-Point Tool displays the derived minimum and maximum values for the blocks in the model.


Block	Derived Range	Reason
Gain1	[2..4]	The gain parameter, paramObjOne, specified on Gain block Gain1 is a Simulink.Parameter object that has its storage class specified as Auto. The range analysis uses the value of the Simulink.Parameter object, which is 2, and ignores the design range specified for these parameters.
Gain2	[1..20]	The gain parameter, paramObjTwo, specified on Gain block Gain2 is a Simulink.Parameter object that has its storage class specified as SimulinkGlobal. The range analysis takes into account the design range, [1..10], specified for this parameter.

Insufficient Design Range Information

This example shows that if the analysis cannot derive range information because there is insufficient design range information, you can fix the issue by providing additional input design minimum and maximum values.

- 1 Open the `ex_derived_min_max_4` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot,'toolbox','fixpoint','examples'))
ex_derived_min_max_4
```

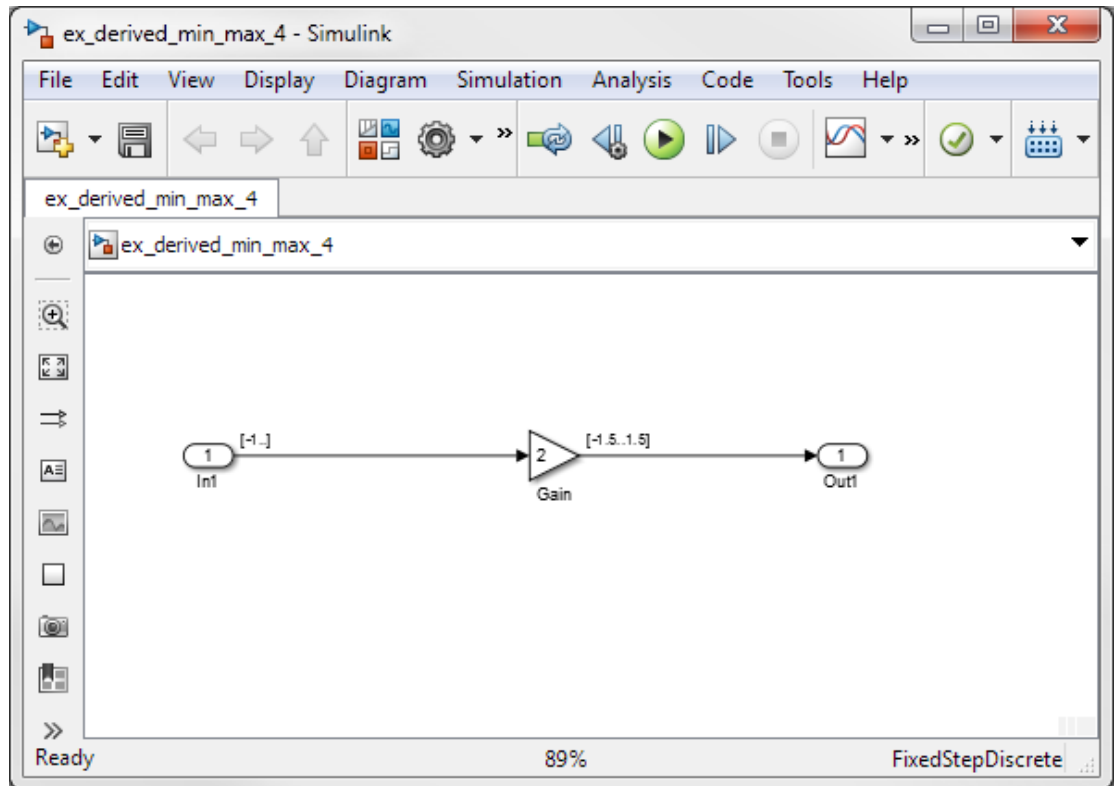

The model displays the specified design minimum and maximum values for the blocks in the model.

- The Inport block **In1** has a design minimum of -1 but no specified maximum value, as shown by the annotation, **Max=[]**.
- The Gain block has a design range of **[-1.5..1.5]**.
- The Outport block **Out1** has no design range specified, as shown by the annotations, **Min=[]**, **Max=[]**.

Tip To display design ranges in your model, from the model menu select **Display > Signals & Ports** and select **Design Ranges**.

- 2 From the Simulink **Analysis** menu, select **Fixed-Point Tool**.
- 3 In the **Settings for selected system** pane, set **Data type override** to **Double**, then click **Apply**.

This global override of the fixed-point data types using double-precision numbers avoids quantization effects.

- 4 In the Fixed-Point Tool, click the **Derive ranges for selected system** button.

In the **Contents** pane, the Fixed-Point Tool displays the derived minimum and maximum values for the blocks in the model. The range analysis is unable to derive a maximum value for the Inport block, **In1**. The tool highlights this result.

Contents of: `ex_derived_min_max_4 (mmo-dbl)`

Column View: Derived Min/Max View [Show Details](#)

	Name	Run	CompiledDT	CompiledDesignMin	CompiledDesignMax	DerivedMin	DerivedMax
	Gain	DoubleOverride	double	-1.5	1.5	-1.5	1.5
	In1	DoubleOverride	double	-1		-1	Inf
	Out1	DoubleOverride				-1.5	1.5

- 5 To fix the issue, specify a design maximum value for **In1**:
 - a In the model, double-click the Inport block, **In1**.
 - b In the block parameters dialog box, select the **Signal Attributes** tab.
 - c On this tab, set **Maximum** to 1 and click **OK**.

The model displays the updated maximum value in the block annotation for **In1**.

- 6 In the Fixed-Point Tool, click the **Derive ranges for selected system** button to rerun the range analysis.

The range analysis can now derive ranges for the Inport and Gain blocks.


Block	Derived Range	Reason
Inport In1	[-1 . . 1]	Uses specified design range on the block.
Gain	[-1.5 . . 1.5]	The design range specified on the Gain block is [-1.5 . . 1.5]. The derived range at the block input is [-1 . . 1] (the derived range at the output of In1). Therefore, because the gain is 2, the derived range at the Gain block output is the intersection of the propagated range, [-2 . . 2], and the design range, [-1.5 . . 1.5].
Outport In2	[-1.5 . . 1.5]	Same as Gain block output because no locally specified design range on Outport block.

Providing More Design Range Information

This example shows that if the analysis cannot derive range information because there is insufficient design range information, you can fix the issue by providing additional output design minimum and maximum values.

- 1 Open the `ex_derived_min_max_5` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot,'toolbox','fixpoint','examples'))
ex_derived_min_max_5
```

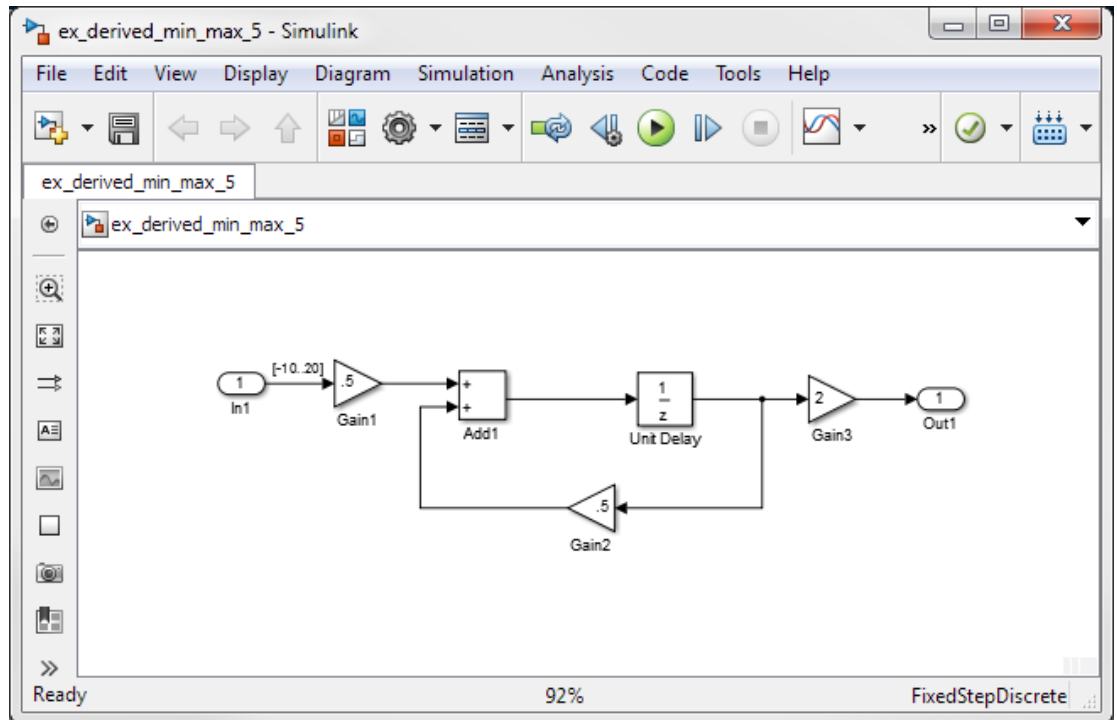

The model displays the specified design minimum and maximum values for the blocks in the model.

- The Inport block In1 has a design range of -10,20.
- The rest of the blocks in the model have no specified design range.

Tip To display design ranges in your model, from the model menu select **Display > Signals & Ports** and select **Design Ranges**.

- 2 From the Simulink **Analysis** menu, select **Fixed-Point Tool**.
- 3 In the **Settings for selected system** pane, set **Data type override** to **Double** , then click **Apply**.

This global override of the fixed-point data types using double-precision numbers avoids quantization effects.

- 4 In the Fixed-Point Tool, click the **Derive ranges for selected system** button.

In the **Contents** pane, the Fixed-Point Tool displays the derived minimum and maximum values for the blocks in the model. Because one of the Add block inputs is fed back from its output, the analysis is unable to derive an output range for the Add block or for any of the blocks connected to this output. The Fixed-Point Tool highlights these results.

Contents of: ex_derived_min_max_5* (dbl)

Column View: [Show Details](#)

Name	Run	CompiledDT	CompiledDesignMin	CompiledDesignMax	DerivedMin	DerivedMax
Add1 : Output	Run 1	double			-7.0223e+305	Inf
Gain1	Run 1	double			-5	10
Gain2	Run 1	double			-7.0223e+305	Inf
Gain3	Run 1	double			-2.8089e+306	Inf
In1	Run 1	double	-10	20	-10	20
Out1	Run 1	double			-2.8089e+306	Inf
Unit Delay	Run 1	double			-1.4045e+306	Inf

- 5 To fix the issue, specify design minimum and maximum values for **Out1**:
 - a In the model, double-click the Outputport block, **Out1**.
 - b In the block parameters dialog box, select the **Signal Attributes** tab.
 - c On this tab, set **Minimum** to **-20** and **Maximum** to **40** and click **OK**.
- 6 In the Fixed-Point Tool, click the **Derive ranges for selected system** button to rerun the range analysis.


The range analysis uses the minimum and maximum values specified for `Out1`, `[-20..40]` and the gain value of `Gain3`, `2`, to derive an input range for `Gain3`, `[-10..20]`. Because the input of `Gain3` feeds back to the input of the `Add` block, the analysis now derives ranges for all objects in the model.

Fixing Design Range Conflicts

This example shows how to fix design range conflicts. If you specify conflicting design minimum and maximum values in your model, the range analysis software reports an error. To fix this error, examine the design ranges specified in the model to identify inconsistent design specifications. Modify them to make them consistent. In this example, the output design range specified on the Outport block conflicts with the input design ranges specified on the Inport blocks.

- 1 Open the `ex_range_conflict` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot,'toolbox','fixpoint','examples'))
ex_range_conflict
```

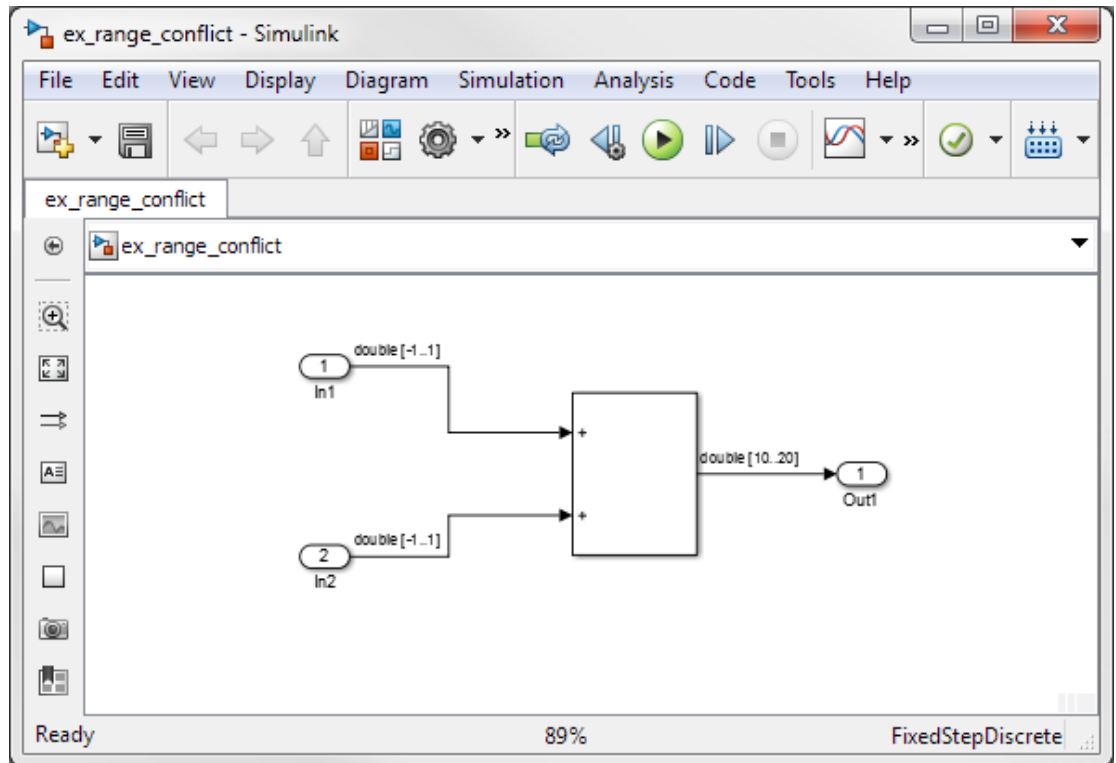

The model displays the specified design minimum and maximum values for the blocks in the model.

- The Inport blocks **In1** and **In2** have a design range of $[-1..1]$.
- The Outport block **Out1** has a design range of $[10..20]$.

Tip To display design ranges in your model, from the model menu select **Display > Signals & Ports** and select **Design Ranges**.

- 2 From the Simulink **Analysis** menu, select **Fixed-Point Tool**.
- 3 In the **Settings for selected system** pane, set **Data type override** to **Double**, then click **Apply**.

This global override of the fixed-point data types using double-precision numbers avoids quantization effects.

- 4 In the Fixed-Point Tool, click the **Derive ranges for selected system** button.

The Fixed-Point Tool generates an error because the range analysis fails. It reports an error because the derived range for the Sum block, $[-2..2]$ is outside the specified design range for the Outport block, $[10..20]$.

- 5 Close the error dialog box.
- 6 To fix the conflict, change the design range on the Outport block to $[-10..20]$ so that this range includes the derived range for the Sum block.
 - a In the model, double-click the Outport block.
 - b In the block parameters dialog box, click the **Signal Attributes** tab.
 - c On this tab, set **Minimum** to **-10** and click **OK**.
- 7 In the Fixed-Point Tool, click the **Derive ranges for selected system** button to rerun the range analysis.

The range analysis derives a minimum value of **-2** and a maximum value of **2** for the Outport block.


Derive Ranges for a Referenced Model

This example shows how to derive ranges for a model that contains multiple instances of the same referenced model.

Derive Ranges

- 1 Open the `ex_derived_sum_multi_instance` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot,'toolbox','fixpoint','examples'))
ex_derived_sum_multi_instance
```

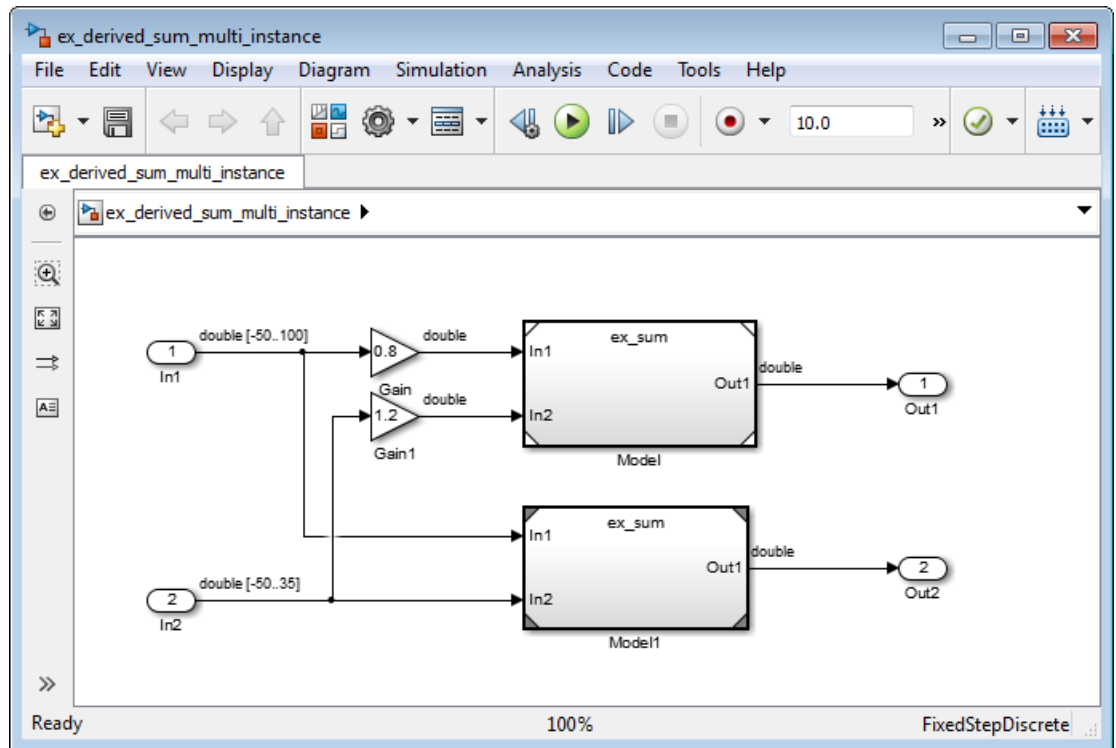


The model displays the specified design minimum and maximum values for the blocks in the model.

- The Inport block In1 has a design range of [-50 . . 100].
- The Inport block In2 has a design range of [-50 . . 35].

Tip To display design ranges in your model, from the model menu select **Display > Signals & Ports** and select **Design Ranges**.

The model contains two Model blocks that both reference the ex_sum model.

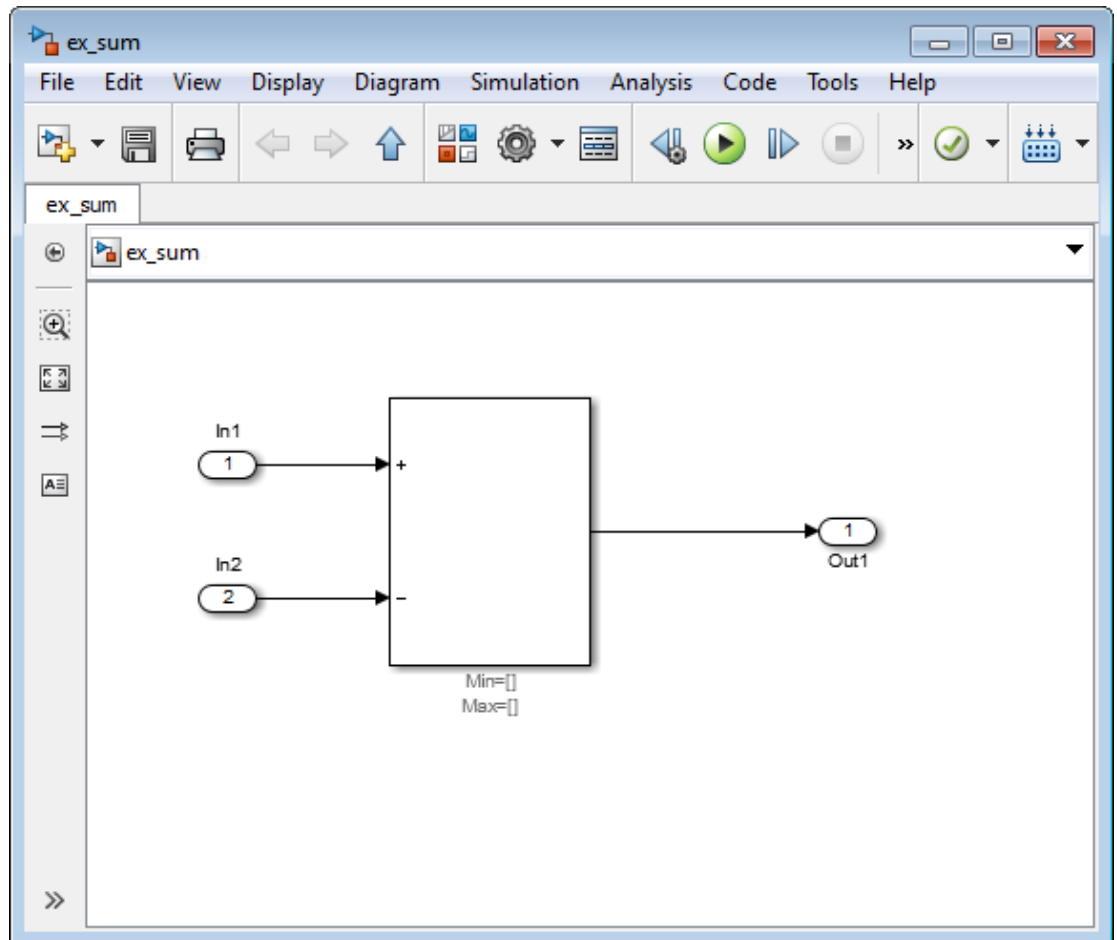

Initially, the Sum block has no design range information.

- 2 From the `ex_derived_sum_multi_instance` model **Analysis** menu, select **Fixed-Point Tool**.
- 3 In the Fixed-Point Tool **Model Hierarchy** pane, select the `ex_derived_sum_multi_instance` model.
- 4 In the **Settings for selected system** pane, set **Data type override** to Double.

This global override of the fixed-point data types using double-precision numbers avoids quantization effects.

- 5 In the Fixed-Point Tool Data collection pane, set **Run name** to `double_run` and then click **Apply**.

Providing a unique name for the run avoids accidentally overwriting results from previous runs and enables you to identify the run more easily.

- 6 In the Fixed-Point Tool **Model Hierarchy** pane, select the `ex_sum` model.

The **Data type override** setting is `Off`. The setting in the parent model does not affect the setting in the referenced model — you must change it manually in the referenced model.

- 7 For the `ex_sum` model, set **Data type override** to `Double` and then click **Apply**.

Changing the setting for any instance of the referenced model changes the setting on all instances and on the referenced model itself.

- 8 Save the models in a local writable folder.

The Fixed-Point Tool cannot derive ranges if your model contains unsaved changes.

- 9 In the Fixed-Point Tool, select the `ex_derived_sum_multi_instance` model and then click **Derive ranges for selected system**.

To calculate the derived ranges, the software uses the design minimum and maximum values specified for the Inport blocks in the top-level model, `In1` and `In2`.

In the **Contents** pane, the Fixed-Point Tool displays the derived and design minimum and maximum values for the blocks and referenced models in the `ex_derived_sum_multi_instance` model. Some of the derived values that the Fixed-Point Tool reports are slightly larger than expected. This difference is due to rounding errors because the software approximates floating-point numbers with infinite-precision rational numbers for analysis and then converts them to floating point for reporting.

Name	Run	CompiledDT	CompiledDesignMin	CompiledDesignMax	DerivedMin	DerivedMax
In1	double_run	double	-50	100	-50	100
Gain	double_run	double			-40.000000000000001	80.000000000000001
In2	double_run	double	-50	35	-50	35
Gain1	double_run	double			-60	42
Out1	double_run				-82.000000000000001	140.000000000000003
Out2	double_run				-85	150

View Derived Ranges for Referenced Model

- 1 In the **Model Hierarchy** pane, select the first instance of the referenced model, `Model(ex_sum)`.

The tool displays the derived minimum and maximum values for this instance of the referenced model, $[-82.001..140.001]$. This range is derived from the outputs of the two Gain blocks, $[-40, 80]$ and $[-60..42.001]$.

- 2 Select the second instance of the referenced model, `Model1(ex_sum)`.

The tool displays the derived values for the second instance, $[-85..150]$. This range is derived from the referenced model inputs, `In1` and `In2`, $[-50..100]$ and $[-50..35]$ respectively.

- 3 Select the node for the referenced model, `ex_sum`.

For this node, the Fixed-Point Tool displays the merged results for the derived range for the referenced model which is the union of the results for each instance of the model, $[-85..150]$.


Next, you set design range on Sum block in referenced model to see how the range analysis takes this information into account.

Add Design Range for Sum Block and Derive Ranges

- 1 In the `ex_sum` model, double-click the Sum block.
- 2 In the block parameters dialog box, on the **Signal Attributes** tab, set **Output minimum** to -125 and **Output maximum** to 50, click **OK**, and then save the model.

- 3 In the Fixed-Point Tool, select the `ex_derived_sum_multi_instance` model and then click **Derive ranges for selected system**.

This time, to calculate the derived ranges, the software uses the design minimum and maximum values specified for the Inport blocks in the parent model, `In1` and `In2`, and the design minimum and maximum values specified for the Sum block in the referenced model.

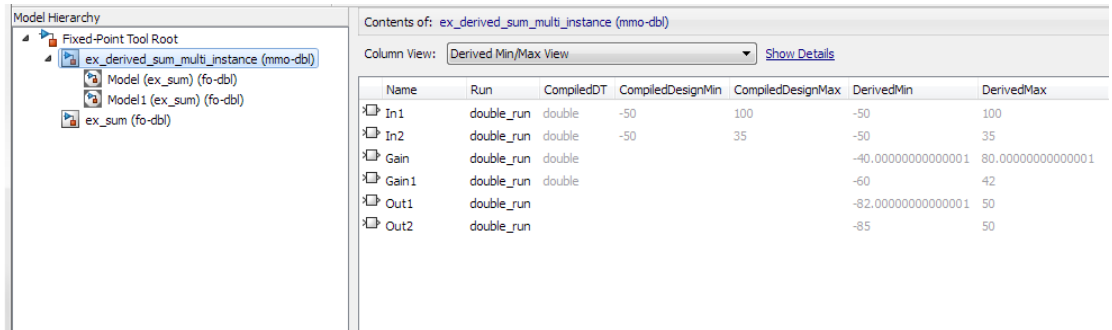

Model Hierarchy

- Fixed-Point Tool Root
 - ex_derived_sum_multi_instance (mmo-dbl)
 - Model (ex_sum) (fo-dbl)
 - Model1 (ex_sum) (fo-dbl)
 - ex_sum (fo-dbl)

Contents of: ex_derived_sum_multi_instance (mmo-dbl)


Column View: **Derived Min/Max View** [Show Details](#)

Name	Run	CompiledDT	CompiledDesignMin	CompiledDesignMax	DerivedMin	DerivedMax
In1	double_run	double	-50	100	-50	100
In2	double_run	double	-50	35	-50	35
Gain	double_run	double			-40.000000000000001	80.000000000000001
Gain1	double_run	double			-60	42
Out1	double_run				-82.000000000000001	50
Out2	double_run				-85	50

- 4 You can now propose data types for the model based on these derived minimum and maximum values.

Propose Data Types for a Referenced Model

This example shows how to propose data types for a referenced model. To run this example, you must first run the “Derive Ranges for a Referenced Model” example.

- 1 In the Fixed-Point Tool **Model Hierarchy** pane, select the `ex_derived_sum_multi_instance` model.
- 2 In the **Automatic data typing for selected system** pane, click the **Configure** link, set **Default data type of all floating-point signals** to `fixdt(1,16,4)` and then click **Apply**.
- 3 In the same pane, click **Propose fraction lengths**, .

The Fixed-Point Tool proposes fraction lengths for the inputs `In1` and `In2` based on the design minimum and maximum values specified on the blocks in the model and on the derived minimum and maximum values.

The tool does not propose data types for the other blocks because they use inherited data types. Instead, it displays `n/a` in the **ProposedDT** column. The Fixed-Point Tool might not be able to propose data types for other reasons, to view more information, click the **Result Details** tab.

The tool displays the proposed scaling in its **Contents** pane. It displays the Automatic Data Typing View to provide information, such as **ProposedDT**, **ProposedMin**, **ProposedMax**, which are relevant at this stage of the fixed-point conversion.

Contents of: `ex_derived_sum_multi_instance (mmo-dbl)`

Column View: Automatic Data Typing View [Show Details](#)

Name	Run	Accept	ProposedDT	SpecifiedDT	CompiledDT	SimMin	SimMax	ProposedMin	ProposedMax	OvfWrap	OvfSat
In1	double_run	<input checked="" type="checkbox"/>	fixdt(1,16,8)	double	double			-128	127.99609375		
In2	double_run	<input checked="" type="checkbox"/>	fixdt(1,16,9)	double	double			-64	63.998046875		
Gain	double_run		n/a	Inherit: Same as input	double						
Gain1	double_run		n/a	Inherit: Same as input	double						
Out1	double_run		n/a	Inherit: auto							
Out2	double_run		n/a	Inherit: auto							
Gain : Gain	double_run		n/a	Inherit: Inherit via internal rule							
Gain1 : Gain	double_run		n/a	Inherit: Inherit via internal rule							

- 4 After reviewing the data type proposals, click **Apply accepted fraction lengths** to apply the proposed data types to your model.

Deriving Ranges for a Referenced Model

In this section...

“Viewing Derived Minimum and Maximum Values for Referenced Models” on page 39-36

“Data Type Override Settings” on page 39-37

“See Also” on page 39-37

Viewing Derived Minimum and Maximum Values for Referenced Models

The Fixed-Point Tool derives minimum and maximum values for referenced models. The simulation mode is not relevant for the analysis — instances of the referenced models can be in any simulation mode.

The Fixed-Point Tool displays the top-level model that contains the referenced models and the referenced models in its **Model Hierarchy** pane. For example, the `ex_derived_sum_multi_instance` model contains two instances of the referenced model `ex_sum`. The Fixed-Point Tool displays both models and both instances of the referenced model in the model hierarchy.

The screenshot shows the Model Hierarchy pane on the left and the Contents pane on the right. The Model Hierarchy pane shows a tree structure starting with 'Fixed-Point Tool Root', followed by 'ex_derived_sum_multi_instance (mmo-dbl)', which contains 'Model (ex_sum) (fo-dbl)', 'Model1 (ex_sum) (fo-dbl)', and 'ex_sum (fo-dbl)'. The Contents pane shows the contents of 'ex_derived_sum_multi_instance (mmo-dbl)' with a 'Column View' set to 'Derived Min/Max View'. The table below shows the derived minimum and maximum values for various components.


Name	Run	CompiledDT	CompiledDesignMin	CompiledDesignMax	DerivedMin	DerivedMax
In1	double_run	double	-50	100	-50	100
Gain	double_run	double	-40.000000000000001	80.000000000000001	-40.000000000000001	80.000000000000001
In2	double_run	double	-50	35	-50	35
Gain1	double_run	double	-60	42	-60	42
Out1	double_run	double	-82.000000000000001	140.000000000000003	-82.000000000000001	140.000000000000003
Out2	double_run	double	-85	150	-85	150

If a model contains multiple instances of the referenced model, the tool displays each instance of the referenced model as well as a node for the referenced model. For example, here are the results for the first instance of the referenced model `ex_sum1` in `ex_multi_instance`.

The screenshot shows the Model Hierarchy pane on the left and the Contents pane on the right. The Model Hierarchy pane shows a tree structure starting with 'Fixed-Point Tool Root', followed by 'ex_derived_sum_multi_instance (fo-dbl)', which contains 'Model (ex_sum) (fo-dbl)', 'Model1 (ex_sum) (fo-dbl)', and 'ex_sum (fo-dbl)'. The Contents pane shows the contents of 'Model (ex_sum) (fo-dbl)' with a 'Column View' set to 'Derived Min/Max View'. The table below shows the derived minimum and maximum values for the 'Sum : Output' component.

Name	Run	CompiledDT	CompiledDesignMin	CompiledDesignMax	DerivedMin	DerivedMax
Sum : Output	double_run	double			-82.001	140.01


Here are the results for the second instance of `ex_sum1`.

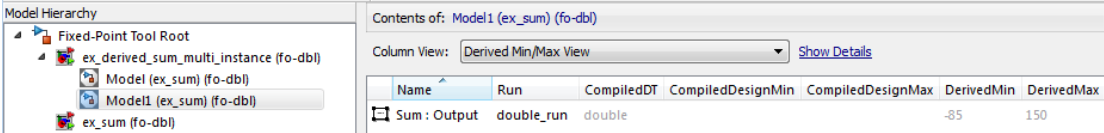

The screenshot shows the Model Hierarchy on the left and the Contents of Model1 (ex_sum) (fo-dbl) on the right. The Contents panel is set to 'Derived Min/Max View' and displays a table with the following data:

Name	Run	CompiledDT	CompiledDesignMin	CompiledDesignMax	DerivedMin	DerivedMax
Sum : Output	double_run	double			-85	150

In the referenced model node, the tool displays the union of the results for each instance of the referenced model.

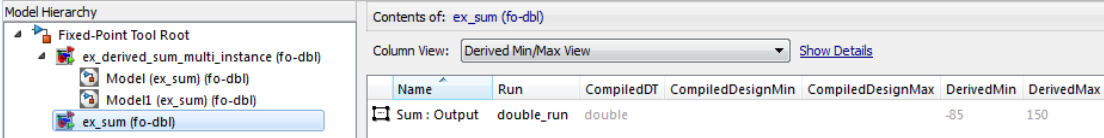

The screenshot shows the Model Hierarchy on the left and the Contents of ex_sum (fo-dbl) on the right. The Contents panel is set to 'Derived Min/Max View' and displays a table with the following data:

Name	Run	CompiledDT	CompiledDesignMin	CompiledDesignMax	DerivedMin	DerivedMax
Sum : Output	double_run	double			-85	150

Data Type Override Settings

When you derive minimum and maximum values for a model that contains referenced models, the data type override setting for the top-level model does not control the setting for the referenced models. You must specify the data type override setting separately for the referenced model.

You can set up user-defined shortcuts across referenced model boundaries. The factory default shortcuts apply only to the top-level model and so do not affect the settings of any referenced model.

When you change the fixed-point instrumentation and data type override settings for any instance of a referenced model, the settings change on all instances of the model and on the referenced model itself.

See Also


- “Derive Ranges for a Referenced Model” on page 39-28

Intermediate Range Results

This example shows the Intermediate Maximum and Intermediate Minimum results in the **Result Details** tab.


Open the model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
ex_intermediateRange
```

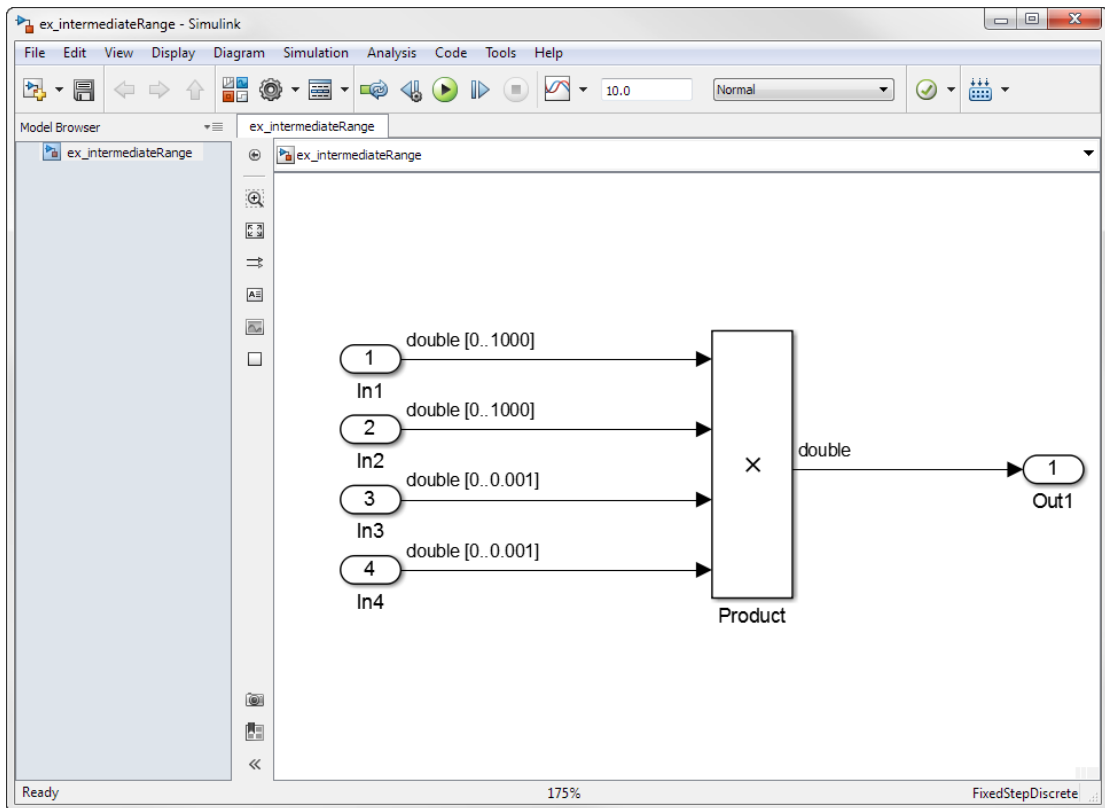

- 1 Press **CTRL+D** to update the diagram. Notice the design range information for each of the input ports.

- 2 Open the Fixed-Point Tool. From the model menu, select **Analysis > Fixed-Point Tool**.

- 3 Click the **Derive ranges for selected system** button .

The Fixed-Point Tool **Contents** pane displays the derived minimum and maximum values for each object in the `ex_intermediateRange` model.

- 4 In the **Automatic data typing for selected system** pane, click **Configure**.

Under **Default data type of all floating-point signals**, select `int32`.

- 5 Click the **Propose fraction lengths** button .

The proposed data types appear in the **Contents** pane of the Fixed-Point Tool.

- 6 Look at the proposed data type of the Product block. The Fixed-Point Tool proposed a data type with 32-bit word length and 11-bit fraction length. The derived maximum value of the Product block is 1, but the maximum representable value for the proposed data type is approximately 1,048,575.

To learn more about the data type proposal, in the **Contents** pane, select the product block and then click the **Result Details** tab.

- 7 In the Result Details tab, in the **Range Information** table, notice the row labeled **Intermediate**. After the first two inputs to the Product block are multiplied, the block has a maximum value of 1000000 before being multiplied by the next two inputs for a final maximum value of 1. The data type proposal for the Product block in this model is based on the intermediate minimum and maximum values. It is not based on the derived minimum and maximum values to prevent overflows at the intermediate stages of the block.

Workflow Result Details

ex_intermediateRange/Product

Proposed Data Type Summary

- There is a requirement for the data type of this result to match the data type of other results.
 - [Highlight Elements Sharing Same Data Type](#)

Property	Data Type	Minimum	Maximum	Precision
ProposedDT	fixdt(1,32,11)	-1048576	1048575.9995	0.0004882812
SpecifiedDT	double	-1.7976e+308	1.79769e+308	4.94065e-324

Range Information

Property	Minimum	Maximum
Shared derived	0	1.0000000000
Derived	0	1.0000000000
Intermediate	0	1000000

Unsupported Simulink Software Features

The software does not support the following Simulink software features. Avoid using these unsupported features.

Not Supported	Description
Variable-step solvers	<p>The software supports only fixed-step solvers.</p> <p>For more information, see “Choosing a Fixed-Step Solver”.</p>
Callback functions	<p>The software does not execute model callback functions during the analysis. The results that the analysis generates may behave inconsistently with the expected behavior.</p> <ul style="list-style-type: none"> • If a model or any referenced model calls a callback function that changes any block parameters, model parameters, or workspace variables, the analysis does not reflect those changes. • Changing the storage class of base workspace variables on model callback functions or mask initializations is not supported. • Callback functions called prior to analysis, such as the <code>PreLoadFcn</code> or <code>PostLoadFcn</code> model callbacks, are fully supported.
Model callback functions	<p>The software only supports model callback functions if the <code>InitFcn</code> callback of the model is empty.</p>
Algebraic loops	<p>The software does not support models that contain algebraic loops.</p> <p>For more information, see “Algebraic Loops”.</p>
Masked subsystem initialization functions	<p>The software does not support models whose masked subsystem initialization modifies any attribute of any workspace parameter.</p>
Variable-size signals	<p>The software does not support variable-size signals. A variable-size signal is a signal whose size (number of elements in a dimension), in addition to its values, can change during model execution.</p>
Arrays of buses	<p>The software does not support arrays of buses.</p>

Not Supported	Description
	For more information, see “Combine Buses into an Array of Buses”.
Multiword fixed-point data types	The software does not support multiword fixed-point data types.
Nonfinite data	The software does not support nonfinite data (for example, NaN and Inf) and related operations.
Signals with nonzero sample time offset	The software does not support models with signals that have nonzero sample time offsets.
Models with no output ports	The software only supports models that have one or more output ports.

Note: The software does not report initial or intermediate values for Stateflow variables. Range analysis will only report the ranges at the output of the block.

Supported and Unsupported Simulink Blocks

Overview of Simulink Block Support

The following tables summarize the analysis support for Simulink blocks. Each table lists all the blocks in each Simulink library and describes support information for that particular block. If the software does not support a given block, where possible, automatic stubbing considers the interface of the unsupported blocks, but not their behavior, during the analysis. However, if any of the unsupported blocks affect the simulation outcome, the analysis may achieve only partial results. If the analysis cannot use automatic stubbing for a block, the block is marked as “not stubbable”. For more information, see “Automatic Stubbing” on page 39-5.

Additional Math and Discrete Library

The software supports all blocks in the Additional Math and Discrete library.

Commonly Used Blocks Library

The Commonly Used Blocks library includes blocks from other libraries. Those blocks are listed under their respective libraries.

Continuous Library

Block	Support Notes
Derivative	Not supported
Integrator	Not supported and not stubbable
Integrator Limited	Not supported and not stubbable
PID Controller	Not supported
PID Controller (2 DOF)	Not supported
Second Order Integrator	Not supported and not stubbable
Second Order Integrator Limited	Not supported and not stubbable
State-Space	Not supported and not stubbable
Transfer Fcn	Not supported and not stubbable
Transport Delay	Not supported
Variable Time Delay	Not supported

Block	Support Notes
Variable Transport Delay	Not supported
Zero-Pole	Not supported and not stubbable

Discontinuities Library

The software supports all blocks in the Discontinuities library.

Discrete Library

Block	Support Notes
Delay	Supported
Difference	Supported
Discrete Derivative	Supported
Discrete Filter	The software analyzes through the filter. It does not derive any range information for the filter.
Discrete FIR Filter	The software analyzes through the filter. It does not derive any range information for the filter.
Discrete PID Controller	Supported
Discrete PID Controller (2 DOF)	Supported
Discrete State-Space	Not supported
Discrete Transfer Fcn	Supported
Discrete Zero-Pole	Not supported
Discrete-Time Integrator	Supported
First-Order Hold	Supported
Memory	Supported
Tapped Delay	Supported
Transfer Fcn First Order	Supported
Transfer Fcn Lead or Lag	Supported
Transfer Fcn Real Zero	Supported
Unit Delay	Supported
Zero-Order Hold	Supported

Logic and Bit Operations Library

The software supports all blocks in the Logic and Bit Operations library.

Lookup Tables Library

Block	Support Notes
Cosine	Supported
Direct Lookup Table (n-D)	Supported
Interpolation Using Prelookup	Not supported when: <ul style="list-style-type: none"> The Interpolation method parameter is Linear and the Number of table dimensions parameter is greater than 4. or <ul style="list-style-type: none"> The Interpolation method parameter is Linear and the Number of sub-table selection dimensions parameter is not 0.
1-D Lookup Table	Not supported when the Interpolation method or the Extrapolation method parameter is Cubic Spline .
2-D Lookup Table	Not supported when the Interpolation method or the Extrapolation method parameter is Cubic Spline .
n-D Lookup Table	Not supported when: <ul style="list-style-type: none"> The Interpolation method or the Extrapolation method parameter is Cubic Spline. or <ul style="list-style-type: none"> The Interpolation method parameter is Linear and the Number of table dimensions parameter is greater than 5.
Lookup Table Dynamic	Supported
Prelookup	Supported
Sine	Supported

Math Operations Library

Block	Support Notes														
Abs	Supported														
Add	Supported														
Algebraic Constraint	Supported														
Assignment	Supported														
Bias	Supported														
Complex to Magnitude-Angle	Not supported														
Complex to Real-Imag	Not supported														
Divide	Supported														
Dot Product	Supported														
Find Nonzero Elements	Supported														
Gain	Supported														
Magnitude-Angle to Complex	Not supported														
Math Function	<p>All signal types support the following Function parameter settings.</p> <table border="1"> <tbody> <tr> <td>conj</td> <td>hermitian</td> <td>magnitude^2</td> <td>mod</td> </tr> <tr> <td>rem</td> <td>reciprocal</td> <td>square</td> <td>transpose</td> </tr> </tbody> </table> <p>The software does not support the following Function parameter settings.</p> <table border="1"> <tbody> <tr> <td>10^u</td> <td>exp</td> <td>hypot</td> </tr> <tr> <td>log</td> <td>log10</td> <td>pow</td> </tr> </tbody> </table>	conj	hermitian	magnitude^2	mod	rem	reciprocal	square	transpose	10^u	exp	hypot	log	log10	pow
conj	hermitian	magnitude^2	mod												
rem	reciprocal	square	transpose												
10^u	exp	hypot													
log	log10	pow													
Matrix Concatenate	Supported														
MinMax	Supported														
MinMax Running Resettable	Supported														
Permute Dimensions	Supported														
Polynomial	Supported														
Product	Supported														

Block	Support Notes
Product of Elements	Supported
Real-Imag to Complex	Not supported
Reciprocal Sqrt	Not supported
Reshape	Supported
Rounding Function	Supported
Sign	Supported
Signed Sqrt	Not supported
Sine Wave Function	Not supported
Slider Gain	Supported
Sqrt	Not supported
Squeeze	Supported
Subtract	Supported
Sum	Supported
Sum of Elements	Supported
Trigonometric Function	Supported if Function is <code>sin</code> , <code>cos</code> , or <code>sincos</code> , and Approximation method is <code>CORDIC</code> .
Unary Minus	Supported
Vector Concatenate	Supported
Weighted Sample Time Math	Supported

Model Verification Library

The software supports all blocks in the Model Verification library.

Model-Wide Utilities Library

Block	Support Notes
Block Support Table	Supported
DocBlock	Supported
Model Info	Supported
Timed-Based Linearization	Not supported

Block	Support Notes
Trigger-Based Linearization	Not supported

Ports & Subsystems Library

Block	Support Notes
Atomic Subsystem	Supported
Code Reuse Subsystem	Supported
Configurable Subsystem	Supported
Enable	Supported
Enabled Subsystem	Range analysis does not consider the design minimum and maximum values specified for blocks connected to the output of the subsystem.
Enabled and Triggered Subsystem	Not supported when the trigger control signal specifies a fixed-point data type. Range analysis does not consider the design minimum and maximum values specified for blocks connected to the output of the subsystem.
For Each	Supported with the following limitations: <ul style="list-style-type: none"> • When For Each Subsystem contains another For Each Subsystem, not supported. • When For Each Subsystem contains one or more Simulink Design Verifier™ Test Condition, Test Objective, Proof Assumption, or Proof Objective blocks, not supported.
For Each Subsystem	Supported with the following limitations: <ul style="list-style-type: none"> • When For Each Subsystem contains another For Each Subsystem, not supported. • When For Each Subsystem contains one or more Simulink Design Verifier Test Condition, Test Objective, Proof Assumption, or Proof Objective blocks, not supported.
For Iterator Subsystem	Supported

Block	Support Notes
Function-Call Feedback Latch	Supported
Function-Call Generator	Supported
Function-Call Split	Supported
Function-Call Subsystem	Range analysis does not consider the design minimum and maximum values specified for blocks connected to the output of the subsystem.
If	Supported
If Action Subsystem	Supported
Inport	—
Model	Supported except for the limitations described in “Limitations of Support for Model Blocks” on page 39-53.
Model Variants	Supported except for the limitations described in “Limitations of Support for Model Blocks” on page 39-53.
Outport	Supported
Subsystem	Supported
Switch Case	Supported
Switch Case Action Subsystem	Supported
Trigger	Supported
Triggered Subsystem	Not supported when the trigger control signal specifies a fixed-point data type. Range analysis does not consider the design minimum and maximum values specified for blocks connected to the output of the subsystem.
Variant Subsystem	Supported
While Iterator Subsystem	Supported

Signal Attributes Library

The software supports all blocks in the Signal Attributes library.

Signal Routing Library

Block	Support Notes
Bus Assignment	Supported
Bus Creator	Supported
Bus Selector	Supported
Data Store Memory	<ul style="list-style-type: none"> When the Data Store Memory variable is tunable, range analysis considers the design ranges specified on the block, and ignores local model writes. When the Data Store Memory variable is not tunable, or Auto, the analysis considers only local model writes. The derived range is the range of the last write to the variable. When the Data Store Memory variable is defined outside of the analyzed system, range analysis uses design ranges.
Data Store Read	Supported
Data Store Write	Supported
Demux	Supported
Environment Controller	Supported
From	Supported
Goto	Supported
Goto Tag Visibility	Supported
Index Vector	Supported
Manual Switch	The Manual Switch block is compatible with the software, but the analysis ignores this block in a model.
Merge	Supported
Multiport Switch	Supported
Mux	Supported
Selector	Supported
Switch	Supported
Vector Concatenate	Supported

Sinks Library

Block	Support Notes
Display	Supported
Floating Scope	Supported
Outport (Out1)	Supported
Scope	Supported
Stop Simulation	Not supported and not stubbable
Terminator	Supported
To File	Supported
To Workspace	Supported
XY Graph	Supported

Sources Library

Block	Support Notes
Band-Limited White Noise	Not supported
Chirp Signal	Not supported
Clock	Supported
Constant	Supported unless Constant value is <code>inf</code> .
Counter Free-Running	Supported
Counter Limited	Supported
Digital Clock	Supported
Enumerated Constant	Supported
From File	Not supported. When MAT-file data is stored in MATLAB <code>timeseries</code> format, not stubbable.
From Workspace	Not supported
Ground	Supported
Inport (In1)	Supported
Pulse Generator	Supported

Block	Support Notes
Ramp	Supported
Random Number	Not supported and not stubbable
Repeating Sequence	Not supported
Repeating Sequence Interpolated	Not supported
Repeating Sequence Stair	Supported
Signal Builder	Not supported
Signal Generator	Not supported
Sine Wave	Not supported
Step	Supported
Uniform Random Number	Not supported and not stubbable

User-Defined Functions Library

Block	Support Notes
Fcn	Supports all operators except \wedge . Supports only the mathematical functions <code>abs</code> , <code>ceil</code> , <code>fabs</code> , <code>floor</code> , <code>rem</code> , and <code>sgn</code> .
Interpreted MATLAB Function	Not supported
MATLAB Function	<p>The software uses the specified design minimum and maximum values and returned derived minimum and maximum values for instances of variables that correspond to input and output ports. It does not consider intermediate instances of these variables. For example, consider a MATLAB Function block that contains the following code:</p> <pre>function y = fcn(u,v) %#codegen y = 2*u; y = y + v;</pre> <p>Range analysis considers the design ranges specified for <code>u</code> and <code>v</code> for the instance of <code>y</code> in <code>y = y + v;</code>; because this is the instance of <code>y</code> associated with the output of the block.</p>

Block	Support Notes
	The analysis does not consider design ranges for the instance of y in $y = 2*u$; because it is an intermediate instance.
Level-2 MATLAB S-Function	Not supported
S-Function	Not supported
S-Function Builder	Not supported
Simulink Function	Not supported

Limitations of Support for Model Blocks

The software supports the Model block with the following limitations. The software cannot analyze a model containing one or more Model blocks if:

- The referenced model is protected. Protected referenced models are encoded to obscure their contents. This allows third parties to use the referenced model without being able to view the intellectual property that makes up the model.

For more information, see “Protected Model”.

- The parent model or any of the referenced models returns an error when you set the **Configuration Parameters > Diagnostics > Connectivity > Element name mismatch** parameter to **error**.

You can use the **Element name mismatch** diagnostic along with bus objects so that your model meets the bus element naming requirements imposed by some blocks.

- The Model block uses asynchronous function-call inputs.
- Any of the Model blocks in the model reference hierarchy creates an artificial algebraic loop. If this occurs, take the following steps:
 - 1 On the **Diagnostics** pane of the Configuration Parameters dialog box, set the **Minimize algebraic loop** parameter to **error** so that Simulink reports an algebraic loop error.
 - 2 On the **Model Referencing** Pane of the Configuration Parameters dialog box, select the **Minimize algebraic loop occurrences** parameter.

Simulink tries to eliminate the artificial algebraic loop during simulation.

- 3 Simulate the model.

- 4** If Simulink cannot eliminate the artificial algebraic loop, highlight the location of the algebraic loop by selecting **Simulation > Update Diagram**.
- 5** Eliminate the artificial algebraic loop so that the software can analyze the model. Break the loop with Unit Delay blocks so that the execution order is predictable.

Note: For more information, see “Algebraic Loops”.

- The parent model uses the base workspace and the referenced model uses a data dictionary.
- The parent model and the referenced model have mismatched data type override settings. The data type override setting of the parent model and its referenced models must be the same, unless the data type override setting of the parent model is **Use local settings**. You can select the data type override settings for your model in the **Analysis** menu, in the Fixed Point Tool dialog box under the **Settings for selected system** pane.

Working with the MATLAB Function Block

- “Convert Model Containing MATLAB Function Block to Fixed Point” on page 40-2
- “Working with the MATLAB Function Block in the Fixed-Point Tool” on page 40-16
- “Detect Overflows in a MATLAB Function Block” on page 40-17
- “Derive Ranges of MATLAB Function Block Variables” on page 40-20

Convert Model Containing MATLAB Function Block to Fixed Point

This example shows how to use the Fixed-Point Tool to convert a model containing a MATLAB Function block to fixed point.

In this section...

“Open Model” on page 40-2

“Decouple the MATLAB Function Block” on page 40-4

“Collect Range Information” on page 40-5

“Propose Data Types” on page 40-5


“Examine Data Type Proposals” on page 40-6

“Apply Proposed Data Types” on page 40-8

“Verify Results” on page 40-13


Open Model

```
addpath(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))  
ex_kalman_filter
```

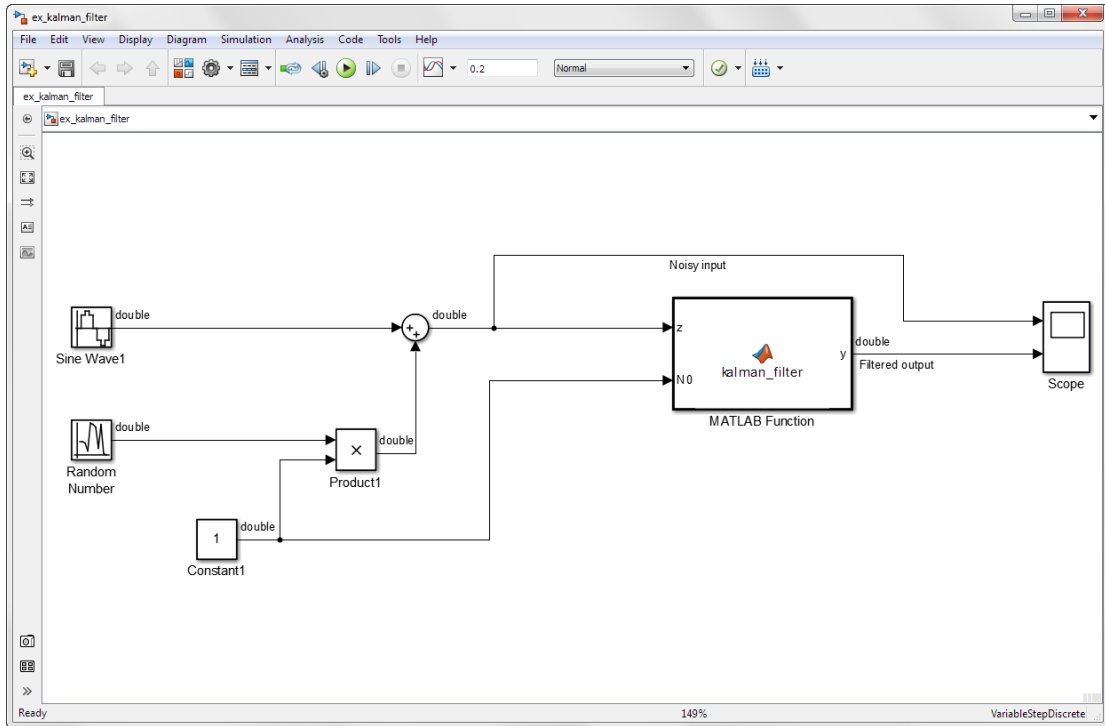This model generates a noisy sine signal, and then filters noise from the signal using a Kalman filter inside a MATLAB Function block.

Simulate the model. Inspect the noisy and filtered signals by double-clicking the Scope block.

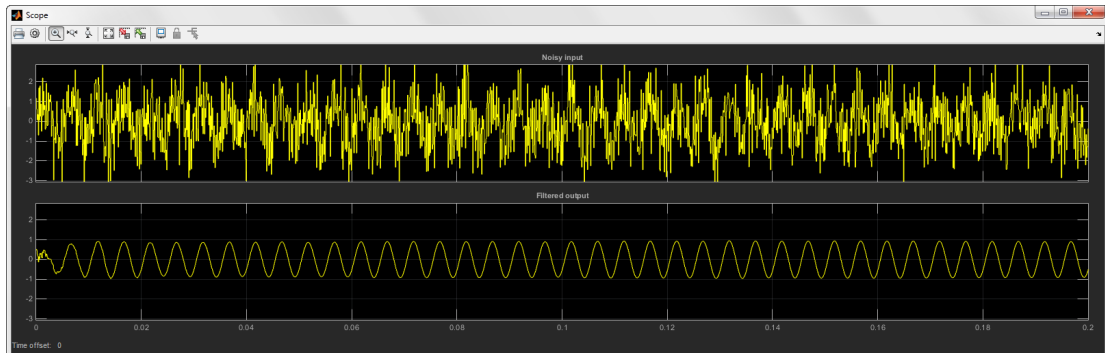


Inspect the Kalman Filter algorithm by double-clicking the MATLAB Function block.

Decouple the MATLAB Function Block

Decouple the MATLAB Function block from the model in order to isolate the system for conversion.

- 1 Open the Simulink Library Browser.
- 2 Under **Commonly Used Blocks**, drag three Data Type Conversion blocks into the model.
- 3 Insert each block at an input or output of the MATLAB Function block.
- 4 Open each Data Type Conversion block and set **Output data type** to **double**.
- 5 Click **OK** to close each block and apply the changes.

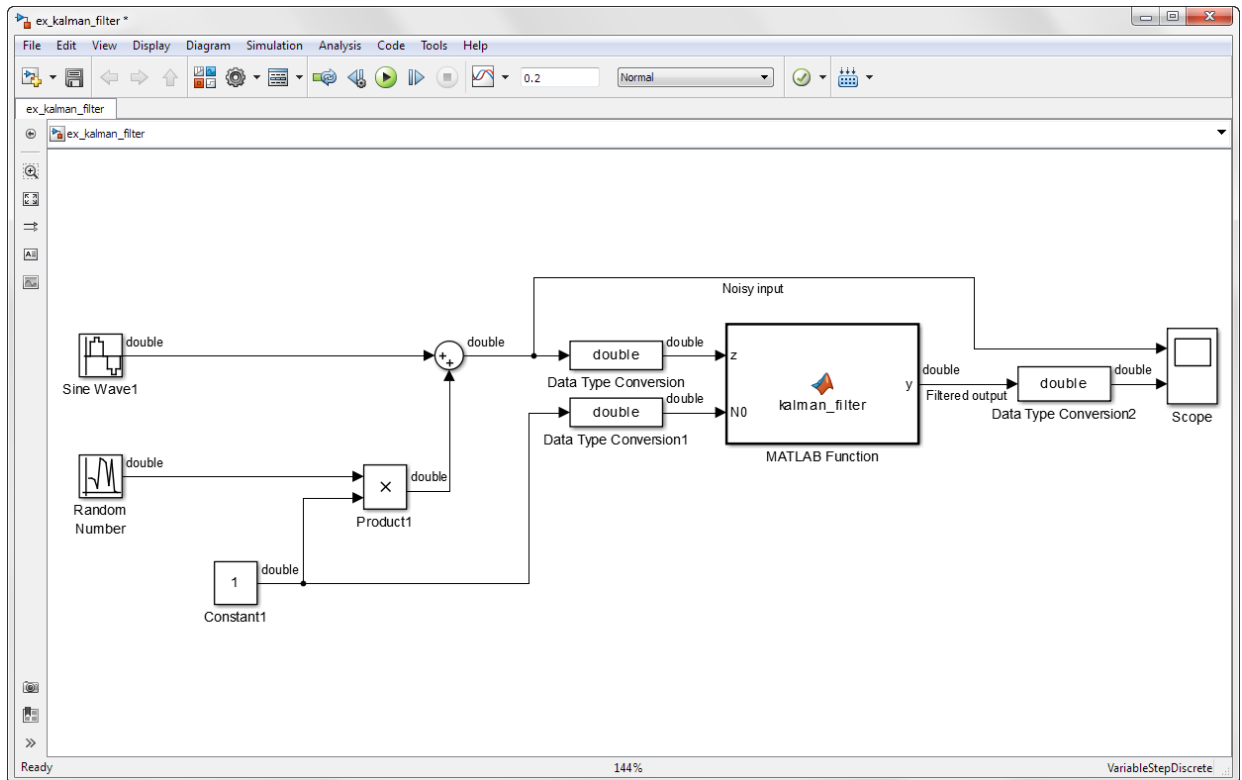


Collect Range Information

- 1 Right-click the MATLAB Function block and select **Fixed-Point Tool**.
- 2 In the **Model Hierarchy** pane, select **MATLAB Function**.
- 3 Under **Data collection**, click **Simulate** to store the range information in Run1.

Examine the range information in the **Contents** pane of the Fixed-Point Tool.

In the **Model Hierarchy** pane, notice that all of the functions called by the `kalman_filter` function are visible in the tree view.

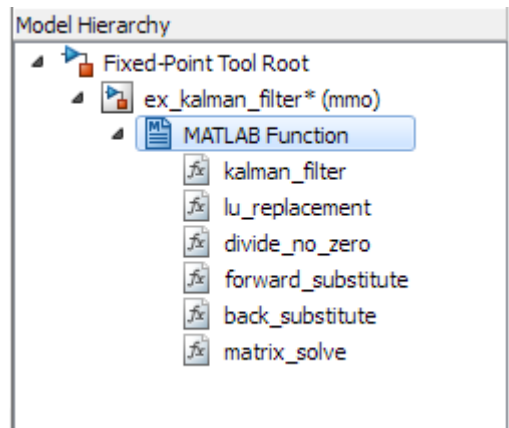

Propose Data Types


Configure the proposal settings and propose fixed-point data types for the model.

- 1 On the right side of the Fixed-Point Tool, under **Automatic data typing for selected system**, click **Configure**.
- 2 Set **Default data type of all floating point signals** to `int16`.

The Fixed-Point Tool uses the collected range information to propose data types using a 16-bit word length.

- 3 Click **Propose fraction lengths**.
- 4 The data type proposals appear in the **ProposedDT** column of the **Contents** pane.


Note: The **SpecifiedDT** column is always blank for MATLAB Function block variables.

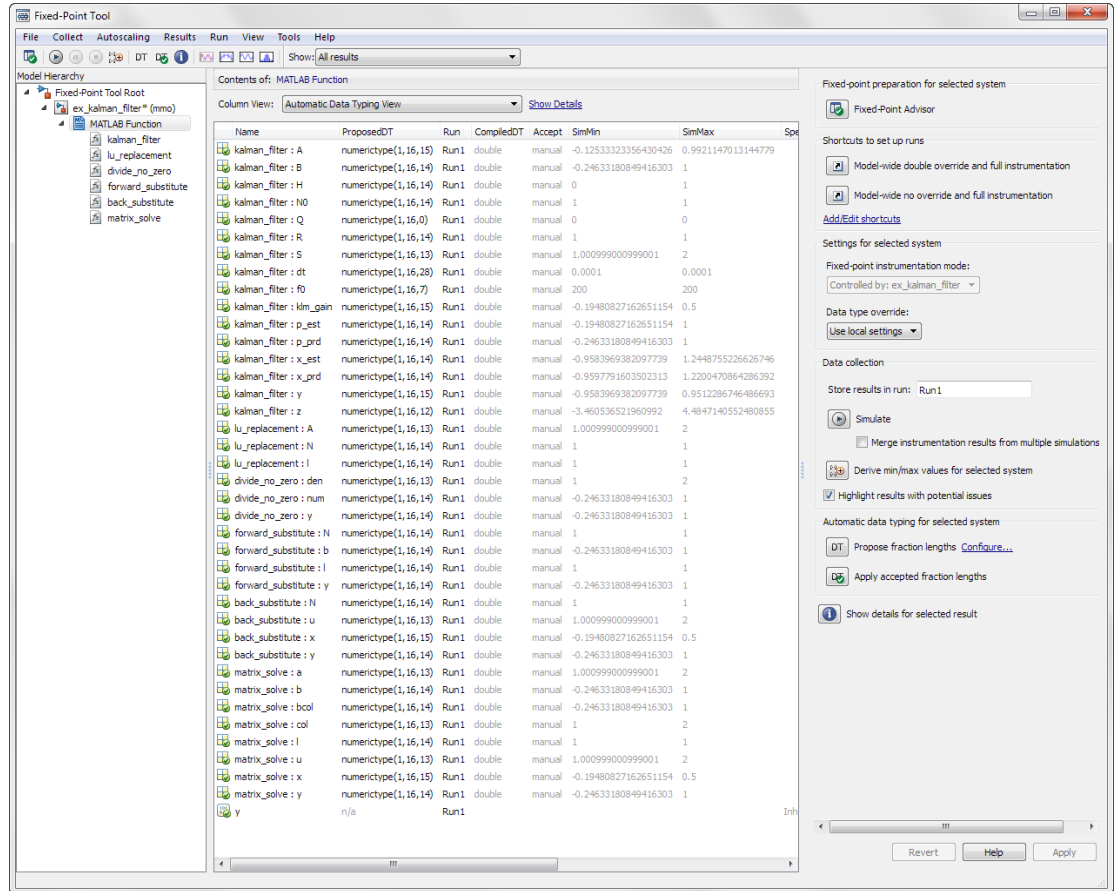

Examine Data Type Proposals

- 1 In the Fixed-Point Tool, on the **Contents** pane, right-click a variable whose data type you want to see. Select **Result Details**.

In the **Result Details** dialog box, you can view the details of the variable, including complexity, associated `fimath`, and the proposed data type.

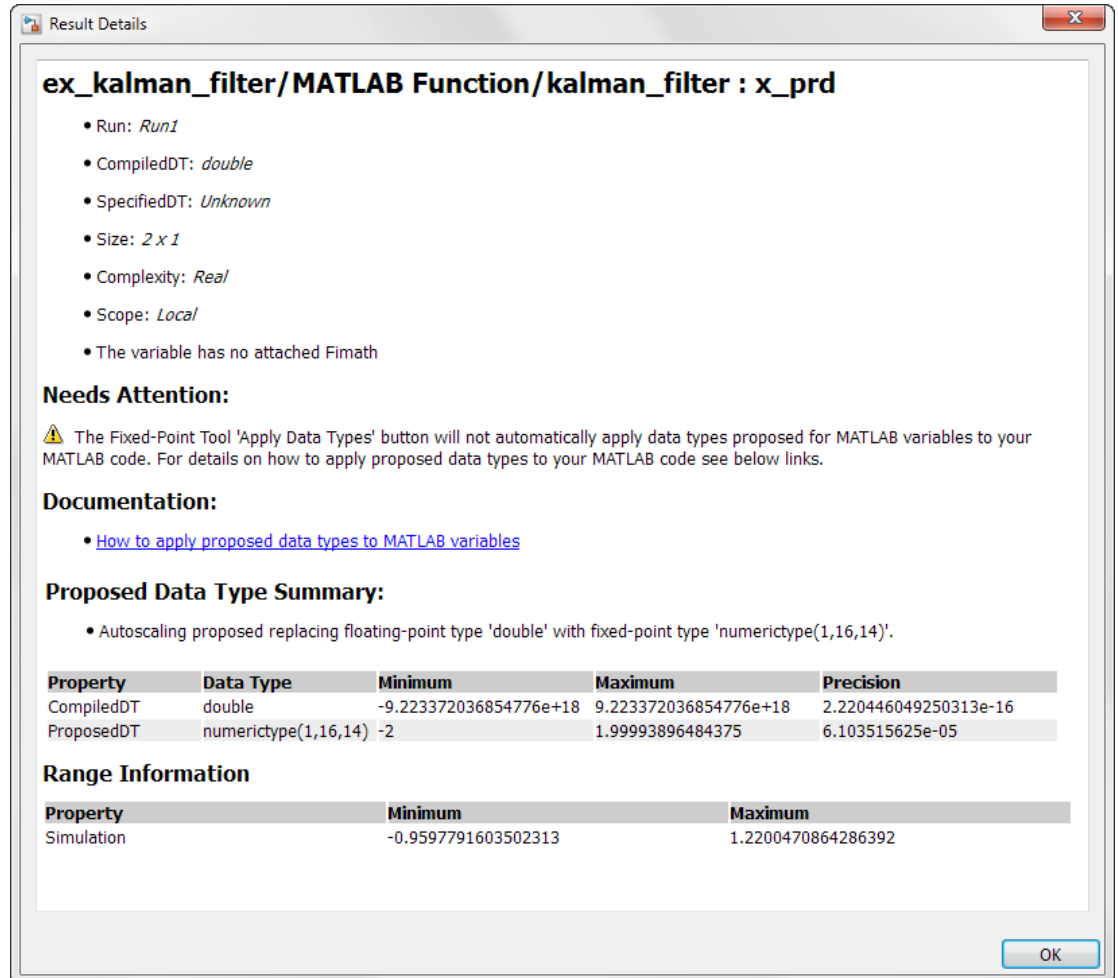

- 2 Click **OK** to close the **Result Details** dialog box.

Apply Proposed Data Types

Notice that the **Accept** column in the **Contents** pane shows `manual` for all of the variables inside of the MATLAB Function Block. You need to apply data types for MATLAB variables manually.

- 1 In the model, open the MATLAB Function block. Add a `kalman_filter_types` function that contains the data types proposed by the Fixed-Point Tool for the variables in the `kalman_filter` function.

```
function T = kalman_filter_types(dt)
    switch dt
        case 'double'
            T.f0 = double([]);
            T.dt = double([]);
            T.A = double([]);
            T.H = double([]);
            T.Q = double([]);
            T.R = double([]);
            T.x_est = double([]);
            T.p_est = double([]);
            T.x_prd = double([]);
            T.p_prd = double([]);
            T.S = double([]);
            T.B = double([]);
            T.klm_gain = double([]);
            T.y = double([]);
        case 'fixed'
            T.f0 = fi([],1,16,7);
            T.dt = fi([],1,16,28);
            T.A = fi([],1,16,15);
            T.H = fi([],1,16,14);
            T.Q = fi([],1,16,4);
            T.R = fi([],1,16,14);
            T.x_est = fi([],1,16,14);
            T.p_est = fi([],1,16,14);
            T.x_prd = fi([],1,16,14);
            T.p_prd = fi([],1,16,14);
            T.S = fi([],1,16,13);
            T.B = fi([],1,16,14);
            T.klm_gain = fi([],1,16,15);
            T.y = fi([],1,16,15);
    end
end
```

- 2 Make the `kalman_filter` function type-aware. Include a call to the `kalman_filter_types` function you just created. Set the input to `'double'`. Use the `cast` and `zeros` functions to cast the first instance of each variable to a type specified in the `kalman_filter_types` function.

To improve readability, you can define the variable type using the `zeros` function. Then define its value using subscripted assignment, as shown in the definitions for the variables *S* and *B*.

```
function y = kalman_filter(z,N0)
    %#codegen

    T = kalman_filter_types('double');

    f0 = cast(200, 'like', T.f0);
    dt = cast(1/1e4, 'like', T.dt);
    % Kalman filter initialization
    % State transition Matrix
    A = cast([cos(2*pi*f0*dt), -sin(2*pi*f0*dt);
             sin(2*pi*f0*dt), cos(2*pi*f0*dt)], 'like', T.A);

    % Measurement Matrix
    H = cast([1 0], 'like', T.H);

    % Process noise variance
    Q = cast(0, 'like', T.Q);
    % Measurement noise variance
    R = cast(N0, 'like', T.R);

    persistent x_est p_est
    if isempty(x_est)
        % Estimated state
        x_est = cast([0; 1], 'like', T.x_est);
        % Estimated error covariance
        p_est = cast(N0 * eye(2,2), 'like', T.p_est);
    end

    % Kalman algorithm
    % Predicted state and covariance
    x_prd = cast(A * x_est, 'like', T.x_prd);
    p_prd = cast(A * p_est * A' + Q, 'like', T.p_prd);

    % Estimation
    S = zeros(1,1, 'like', T.S);
```

```

B = zeros(1,2, 'like', T.B);

S(:) = H * p_prd' * H' + R;
B(:) = H * p_prd';
klm_gain = cast(matrix_solve(S,B)', 'like', T.klm_gain);

% Estimated state and covariance
x_est(:) = x_prd + klm_gain * (z - H * x_prd);
p_est(:) = p_prd - klm_gain * H * p_prd;

% Compute the estimated measurements
y = cast(H * x_est, 'like', T.y);

```

end

- 3 Create another function with a types table that specifies the data type for each variable in the `matrix_solve` function. Cast the first instance of each variable in the `matrix_solve` function to a type specified in the `matrix_solve_types` function.

```

function x = matrix_solve(a,b)
    %fixed-point friendly matrix solve: A * x = b
    T = matrix_solve_types('double');
    % initialize x
    x = zeros(size(a,1), size(b,2), 'like', T.x);
    % compute lu decomposition of a
    [l, u] = lu_replacement(a);
    % solve x = a\b for every column of b
    % through forward and backward substitution
    for col = 1:size(b,2)
        bcol = b(:,col);
        y = forward_substitute(l, bcol);
        x(:,col) = back_substitute(u, y);
    end
end

function T = matrix_solve_types(dt)
    switch dt
        case 'double'
            T.x = double([]);
        case 'fixed'
            T.x = fi([],1,16,15);
    end
end

```


- 4 Follow the same pattern for the other functions that `matrix_solve` calls: `forward_substitute`, `back_substitute`, and `lu_replacement`.

```
function [L,A]=lu_replacement(A)
    T = lu_replacement_types('double');
    % Fixed-point friendly LU
    N = cast(size(A,1), 'like', T.N);
    L = cast(eye(N), 'like', T.L);
    DivideType = numericitytype(1,64,32);
    for n=1:N-1
        piv = A(n,n);
        for k=n+1:N
            mult = divide_no_zero(DivideType,A(k,n),piv);
            A(k,:) = -mult*A(n,:) + A(k,:);
            L(k,n) = mult;
        end
    end
end

function T = lu_replacement_types(dt)
    switch dt
        case 'double'
            T.N = double([]);
            T.L = double([]);
        case 'fixed'
            T.N = int16([]);
            T.L = fi([],1,16,14);
    end
end

function y = forward_substitute(l,b)
    T = forward_substitute_types('double');
    % forward substitution
    DivideType = numericitytype(1,64,32);
    N = cast(size(b,1), 'like', T.N);
    y = zeros(N, 1, 'like', T.y);
    % forward substitution
    y(1) = divide_no_zero(DivideType,b(1),l(1,1));
    for n = 2:N
        acc = cast(0, 'like', T.acc);
        for k = 1:n-1
            acc(:) = acc + y(k)*l(n,k);
        end
        y(n) = divide_no_zero(DivideType, (b(n) - acc), l(n,n));
    end
end
```

```
        end

    end

function T = forward_substitute_types(dt)
    switch dt
        case 'double'
            T.N = double([]);
            T.y = double([]);
            T.acc = double([]);
        case 'fixed'
            T.N = int16([]);
            T.y = fi([],1,16,14);
            T.acc = fi([],1,32,28);
        end
    end

function x = back_substitute(u,y)
    T = back_substitute_types('double');
    % backwards substitution
    N = cast(size(u,1), 'like', T.N);
    DivideType = numerictype(1,64,32);
    x = zeros(N, 1, 'like', T.x);

    % backward substitution
    x(N) = divide_no_zero(DivideType,y(N),u(N,N));

    for n = (N-1):(-1):(1)
        acc = cast(0, 'like', T.acc);
        for k = n:(N)
            acc(:) = acc + x(k)*u(n,k);
        end
        x(n) = divide_no_zero(DivideType,(y(n) - acc),u(n,n));
    end

end



function T = back_substitute_types(dt)
    switch dt
        case 'double'
            T.N = double([]);
            T.x = double([]);
            T.acc = double([]);
        case 'fixed'
            T.N = int16([]);
```

```
T.x = fi([],1,16,15);  
T.acc = fi([],1,32,28);  
end  
end
```

- 5 Simulate the model to verify the connection between the new functions, and the MATLAB Function block.
- 6 Set up the model to use the fixed-point types.
 - In the `kalman_filter` function, change the input of the `kalman_filter_types` function call to `'fixed'`.
 - In the `matrix_solve`, `lu_replacement`, `forward_substitute`, and `back_substitute` functions, change the input of the call to the types table functions to `'fixed'`.
 - Change the output data type of the Data Type Conversion blocks in the model to the proposed data types.
 - Change the output data type of the Data Type Conversion block to `fixdt(1,16,12)`, the data type proposed for z .
 - Change the output data type of the Data Type Conversion1 to `fixdt(1,16,14)`, the data type proposed for $N0$.

Verify Results

Simulate the model. The model now uses fixed-point data types.

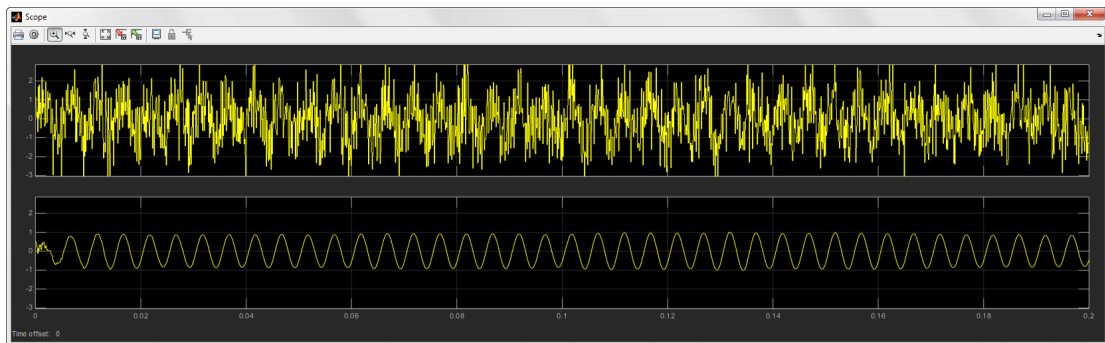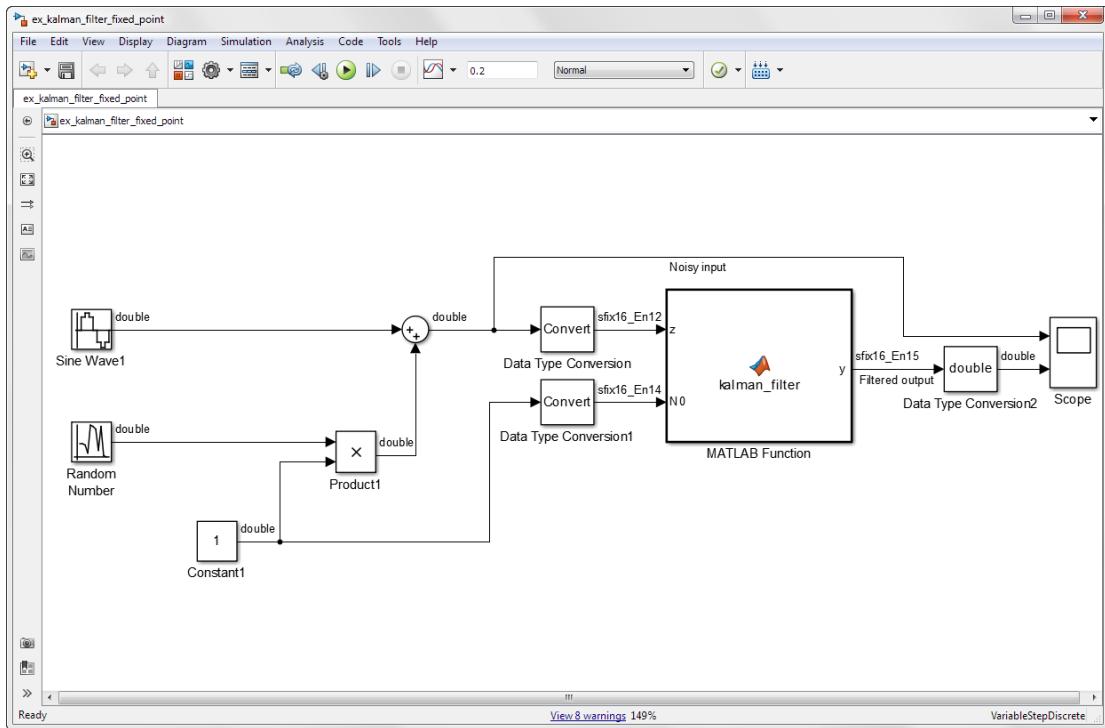

To see the final fixed-point version of this model, open the `ex_kalman_filter_fixed_point` model.

`ex_kalman_filter_fixed_point`

Related Examples

- “Detect Overflows in a MATLAB Function Block” on page 40-17

More About

- “Working with the MATLAB Function Block in the Fixed-Point Tool” on page 40-16

Working with the MATLAB Function Block in the Fixed-Point Tool

In this section...

“Best Practices for Working with a MATLAB Function Block in the Fixed-Point Tool” on page 40-16

“Limitations of Working with the MATLAB Function Block in the Fixed-Point Tool” on page 40-16

Best Practices for Working with a MATLAB Function Block in the Fixed-Point Tool

- Separate data type definitions from your algorithm by creating a separate function with a table of data type definitions. For more information on this approach, see “Manual Fixed-Point Conversion Best Practices”.
- While collecting range information, do not edit the MATLAB code in the MATLAB Function block. Editing the code will cause problems when trying to merge results.
- During the fixed-point conversion process using the Fixed-Point Tool, do not use the “Save as” option to save the MATLAB Function block with a different name. If you do, you might lose existing results for the original block.
- Override the data types in your model with scaled doubles to detect potential overflows within a MATLAB Function block. For an example, see “Detect Overflows in a MATLAB Function Block” on page 40-17.

Limitations of Working with the MATLAB Function Block in the Fixed-Point Tool

- The Fixed-Point Tool proposes data types for MATLAB Function block variables, but does not apply the proposed data types. You must apply the data types manually. For an example, see “Convert Model Containing MATLAB Function Block to Fixed Point” on page 40-2
- The software does not collect ranges for variables in MATLAB Function blocks used as a reference (library) block or in a referenced model.

Detect Overflows in a MATLAB Function Block

In this section...

“Set Data Type Override to Scaled Doubles” on page 40-17


“Propose New Data Types” on page 40-18

“Apply New Data Types” on page 40-19

Open the fixed-point model, `ex_kalman_filter_fixed_point`.

```
addpath(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
ex_kalman_filter_fixed_point
```

Double-click the Sine block and set the **Amplitude** to 2. Simulate the model.

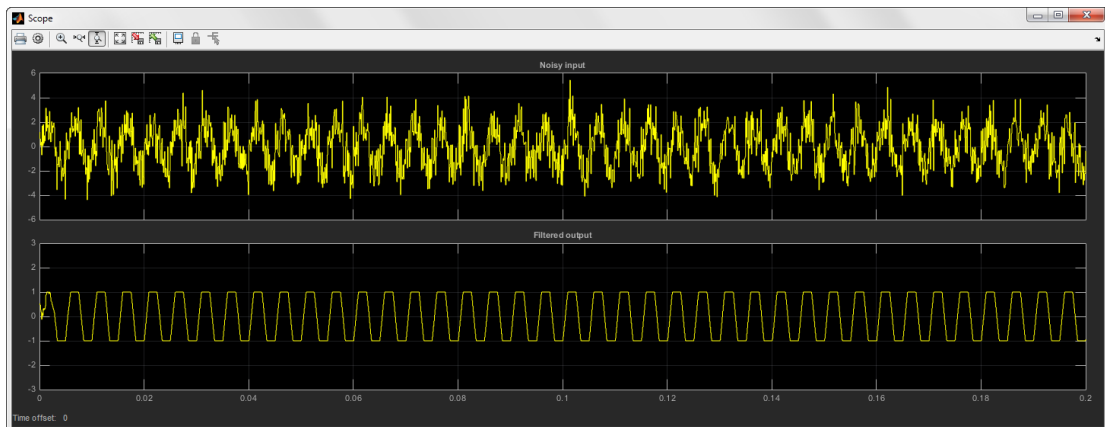


By examining the scope, you can see that a saturation occurred in the model. Use Data Type Override to collect new range data for the model.

Set Data Type Override to Scaled Doubles

- 1 Open the Fixed-Point Tool. Right-click the MATLAB Function block and select **Fixed-Point Tool** from the context menu.
- 2 In the **Settings for selected system** pane, set **Data type override** to **Scaled double**.

- 3 In the **Data collection** pane, store results in run `DetectOverflow`, and simulate.

In the contents pane, the row containing the `kalman_filter : y` variable is highlighted in red, indicating that this variable contains an overflow.

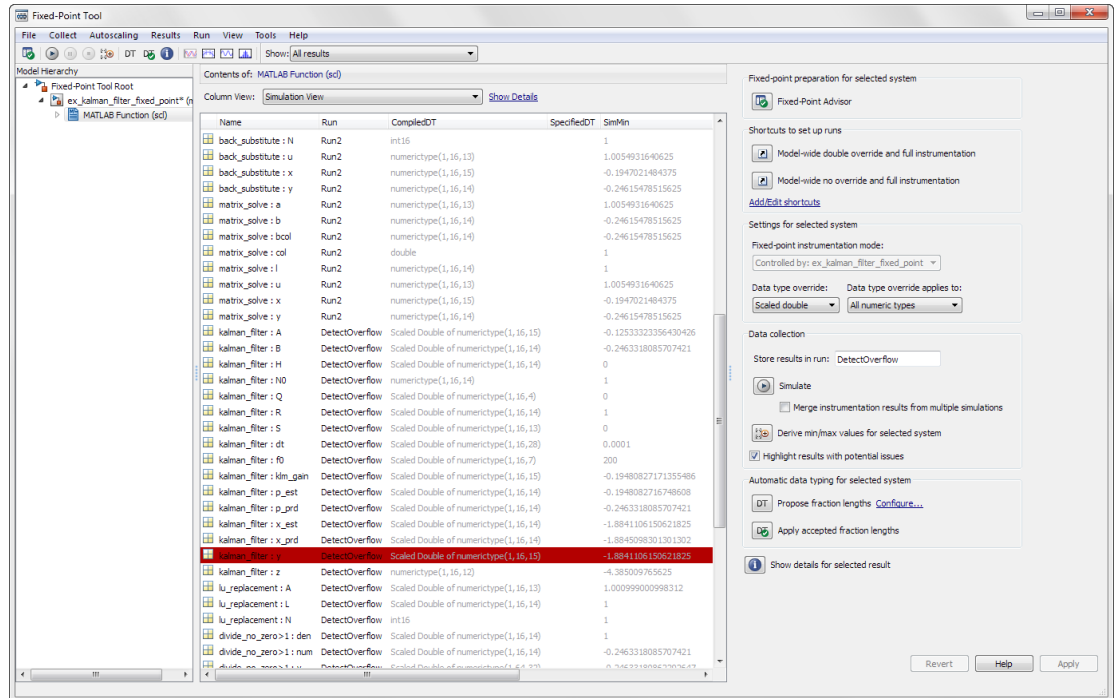

Propose New Data Types

- 1 In the **Automatic data typing for selected system** pane, click **Configure**.


Set **Default data type of all floating point signals** to `int16`.

- 2 Click **Propose fraction lengths**.
- 3 In the **Propose Data Types** dialog box, select `DetectOverflow` as the run to use for proposing data types. Click **OK**.
- 4 The Fixed-Point Tool warns that fraction length proposals typically use floating-point data. Click **OK** to proceed with the proposal.
- 5 The proposed data types appear in the **Contents** pane of the Fixed-Point Tool.

Notice that the Fixed-Point Tool proposed a new data type for y , the variable that overflowed.

Apply New Data Types

- 1 Double-click the MATLAB Function block to edit the data type of y .
- 2 Update the data type of y by editing the `kalman_filter_types` function. Change the row containing `T.y` to `fi([],1,16,14)`, the data type proposed by the Fixed-Point Tool.
- 3 Simulate the model in scaled doubles again. The new run contains no overflows.

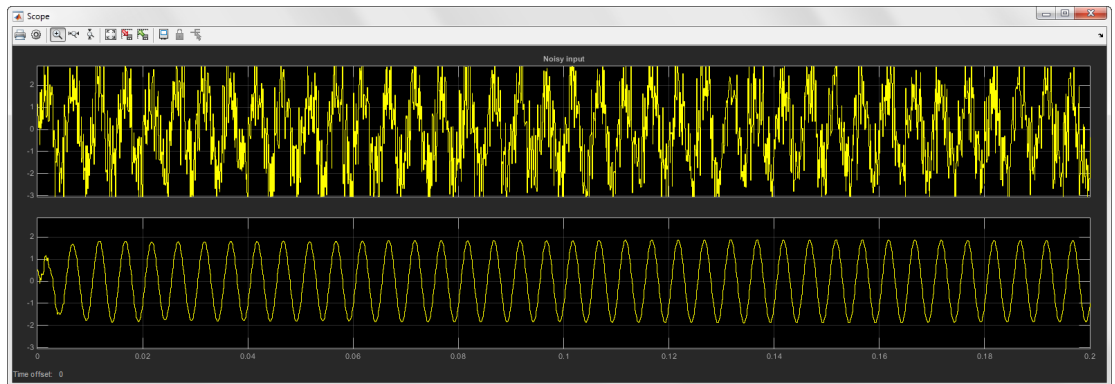

Related Examples

- “Convert Model Containing MATLAB Function Block to Fixed Point” on page 40-2

Derive Ranges of MATLAB Function Block Variables

This example shows how to use the Fixed-Point Tool to convert a model containing a MATLAB Function block to fixed point using range analysis.


Explore the Model

Open the folder where the model is located. At the MATLAB command line, enter:

```
cd(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
```

Copy the `ex_range_matlab_function_block.slx` file to a writable folder and open the model.

Update the diagram to view design range information for each of the input ports.

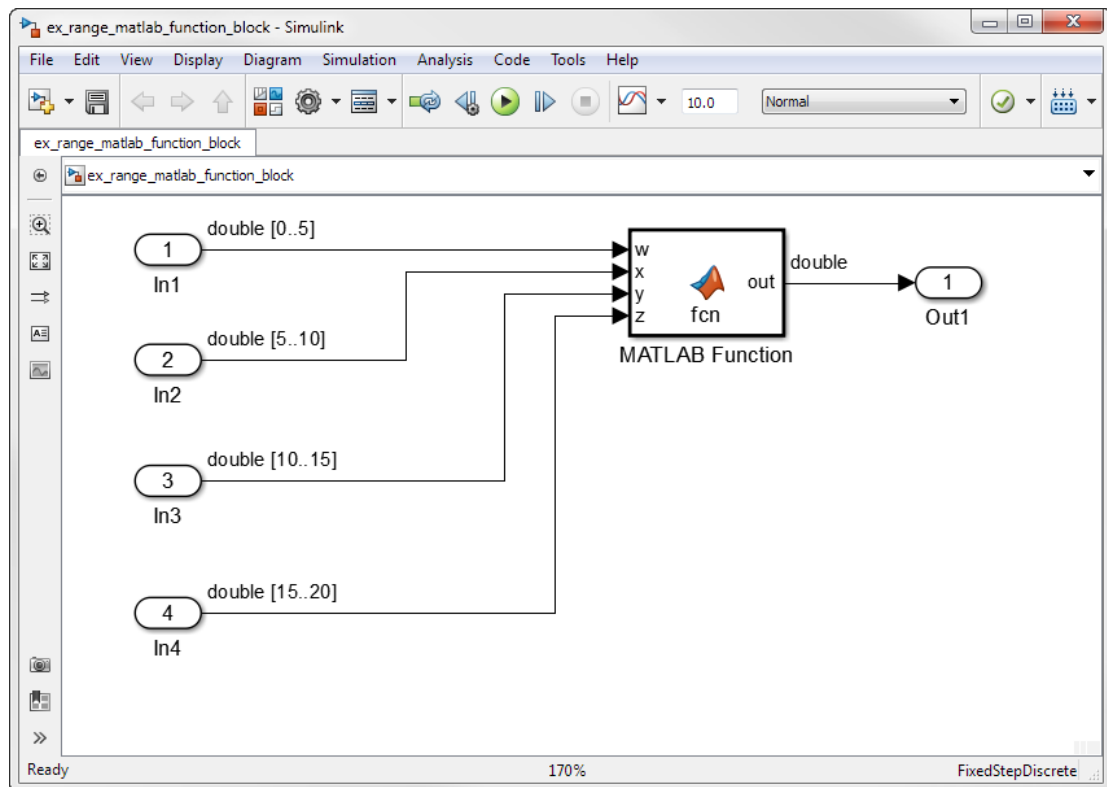

Open the MATLAB Function block. The function averages the four inputs.

```
function out = fcn(w,x,y,z)
%#codegen
sum = w+x+y+z;
out = sum/4;
end
```

Derive Ranges

- 1 Open the Fixed-Point Tool. Select **Analysis > Fixed-Point Tool**.
- 2 In the Fixed-Point Tool, in the **Workflow** tab, under **Data collection**, click the **Derive ranges for selected system** button to derive ranges for the MATLAB variables.

Examine the derived ranges in the **Contents** pane.


Propose Data Types

Configure the proposal settings and propose fixed-point data types for the model based on derived ranges.

- 1 In the workflow tab, under **Automatic data typing for selected system**, click **Configure**.
- 2 Set **Default data type of all floating point signals** to `int16`.

The Fixed-Point Tool uses the derived range information to propose data types using a 16-bit word length.

- 3 Click the **Propose fraction lengths** button.
- 4 The data type proposals appear in the **ProposedDT** column of the **Contents** pane.

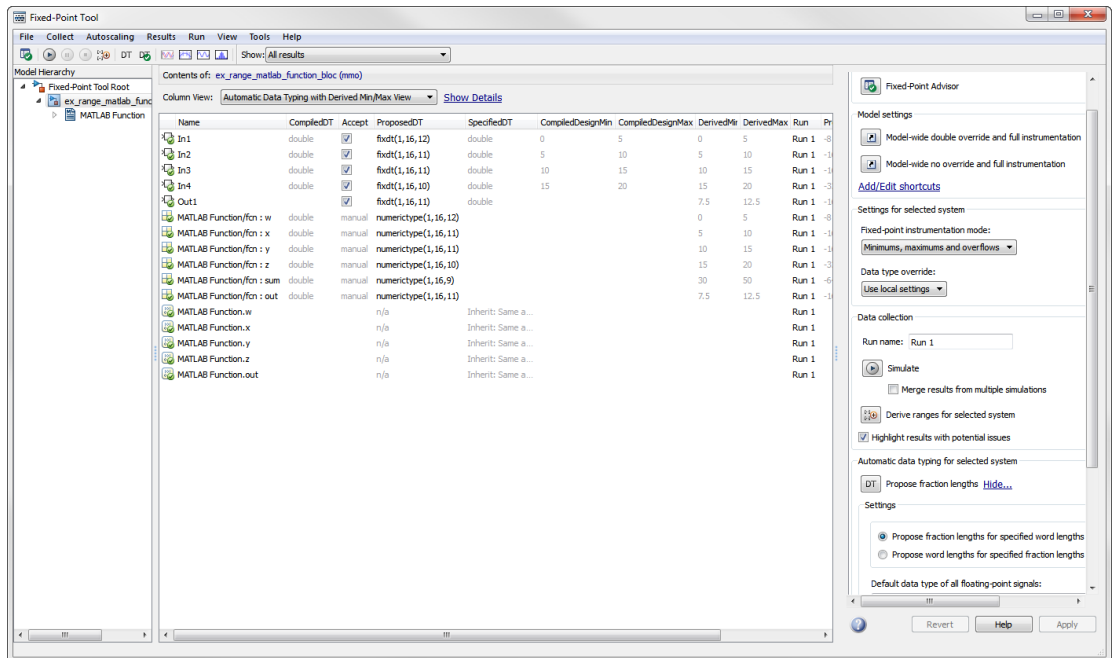

Apply Proposed Data Types

The **Accept** column in the **Contents** pane shows manual for all of the variables inside of the MATLAB Function Block. You need to apply data types for MATLAB variables manually. For an example of how to apply the proposed data types to the model, see “Apply Proposed Data Types” on page 40-8.

To see the final fixed-point version of this model, open the `ex_range_matlab_function_block_fixpt` model.

More About

- “Working with the MATLAB Function Block in the Fixed-Point Tool” on page 40-16

Working with Bus Objects in the Fixed-Point Workflow

- “Refine Data Types of a Model with Buses Using Simulation Data” on page 41-2
- “Convert a Model with Buses to Fixed-Point Using Range Analysis” on page 41-11
- “Bus Objects in the Fixed-Point Workflow” on page 41-20
- “Convert Model with Bus Object with Structure Initial Conditions to Fixed-Point” on page 41-24

Refine Data Types of a Model with Buses Using Simulation Data

In this section...
“Open and Simulate the Model” on page 41-2
“Use Data Type Override to Resolve Overflows” on page 41-3
“Propose New Fraction Lengths” on page 41-5
“Examine and Apply Proposed Types” on page 41-5
“Verify New Fixed-Point Settings” on page 41-8
“Save the Model and New Bus Data Types” on page 41-9


This example shows how to refine the fixed-point types of a model with bus objects based on simulation data. The following video provides an overview of automatic data typing and data type override for bus objects: Automatic Data Typing for Bus Objects.

Open and Simulate the Model

Open the `ex_bus_Fix` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))  
ex_bus_Fix
```

- 1 Press **Ctrl+D** to update the diagram. Notice the use of fixed-point data types in the model.

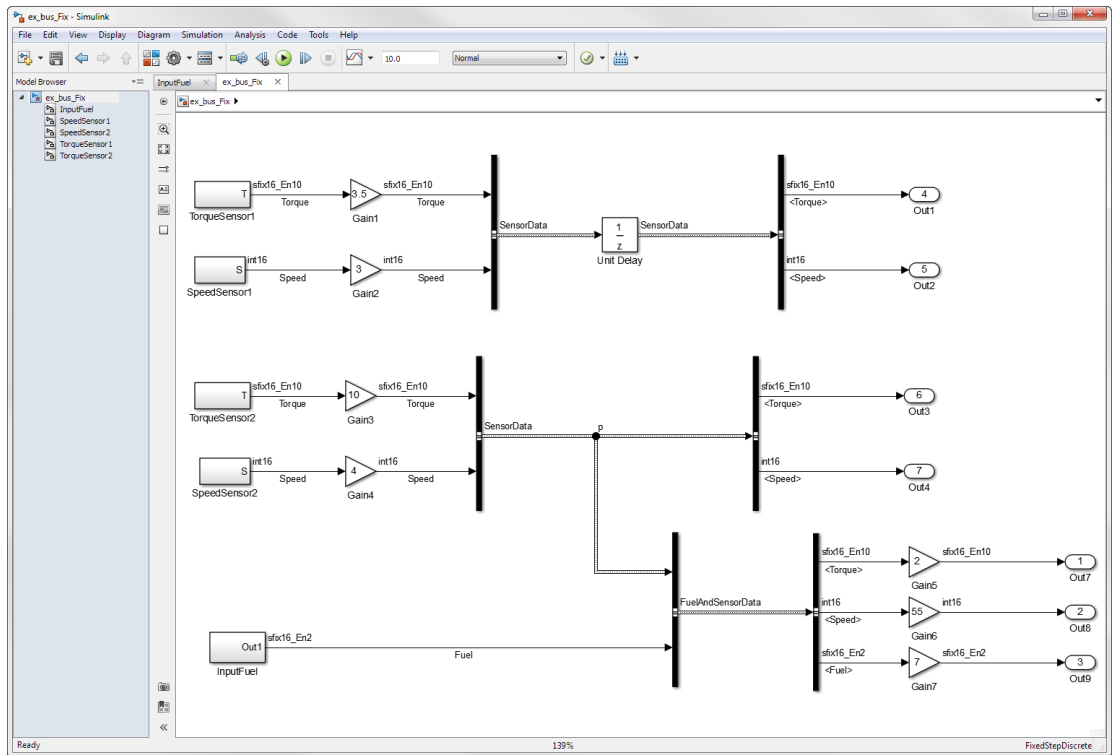


2 Simulate the model.

The **Diagnostic Viewer** warns that several overflows occurred during simulation.

Use Data Type Override to Resolve Overflows

- 1 Open the Fixed-Point Tool from the model menu by selecting **Analysis > Fixed-Point Tool**.

Because the **Fixed-point instrumentation mode** was set to **Minimums**, maximums and overflows, the rows containing the Gain3, Gain5, and Gain1 blocks are highlighted in red, indicating where the overflows occurred.

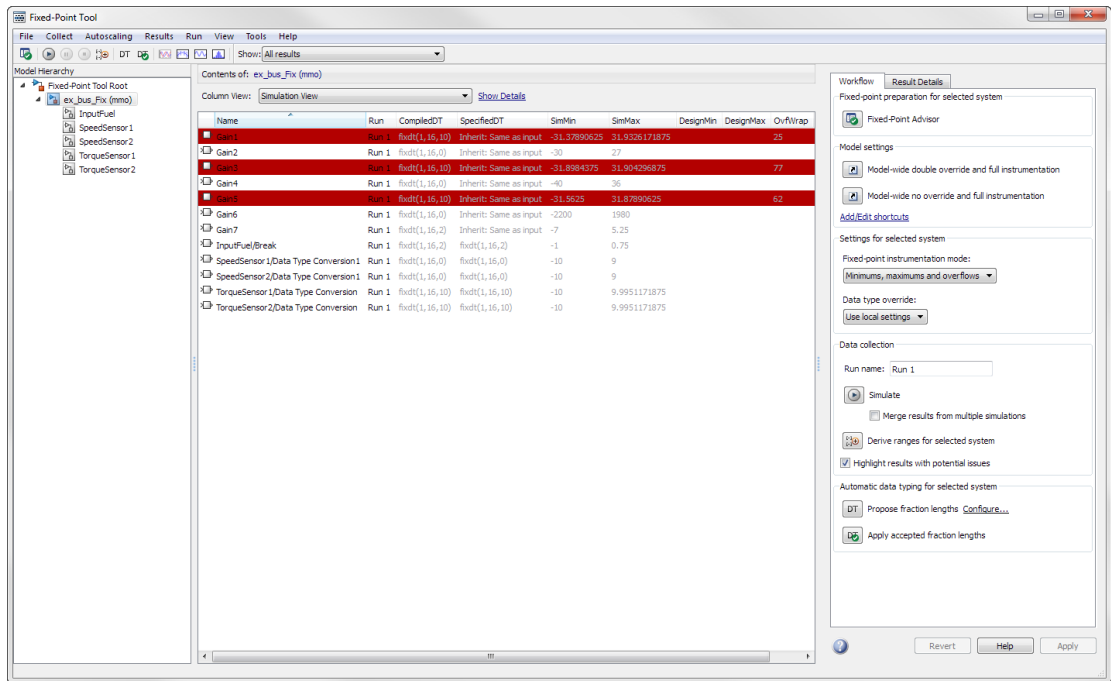

- 2 Obtain the ideal numerical behavior of the model by overriding all of the data types with floating-point singles.


In the **Settings for selected system** pane, set **Data type override** to **Single**. Set **Data type override applies to** to **All numeric types**.

- 3 In the **Data collection** pane, set **Run name** to **SingleOverride**. Click **Simulate**.

The model is simulated using floating-point singles, so this run does not contain any overflows.


- 4 Return to the model. A prefix has been added to the names on the bus signals. This prefix indicates that the bus objects are replaced by temporary overridden bus objects specifying single data types. For more information, see “Bus Naming Conventions with Data Type Override” on page 41-22.

Overridden bus objects are not stored in the base workspace, so you cannot see them in the Bus Editor. The Bus Editor continues to display the data types of the bus objects before they were overridden.

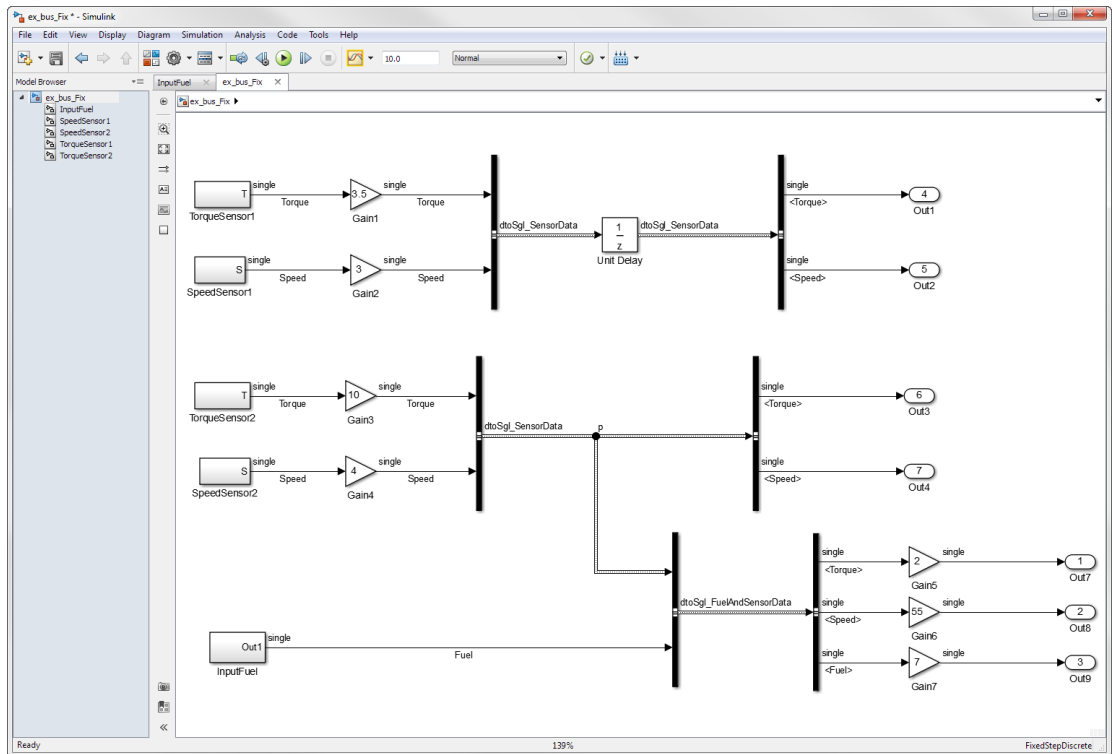

Propose New Fraction Lengths

Propose new fraction lengths for your model based on the simulation results from the SingleOverride run.

- 1 Click the **Propose fraction lengths** button .
- 2 In the **Propose Data Types** dialog box, select **SingleOverride** as the run to use for proposing data types. Click **OK**.


The proposed data types appear in the **Contents** pane of the Fixed-Point Tool.

Examine and Apply Proposed Types

Examine the new data types that the Fixed-Point Tool has proposed for `ex_bus_Fix`.

- 1 On the Fixed-Point Tool toolbar, select **Show > Groups that must share the same data type** to better understand the proposed data types.
- 2 In the **Contents** pane, right-click the column labeled **DTGroup** and select **Group by This Column**.

The Fixed-Point Tool organizes the **Contents** pane to group the elements by data type.

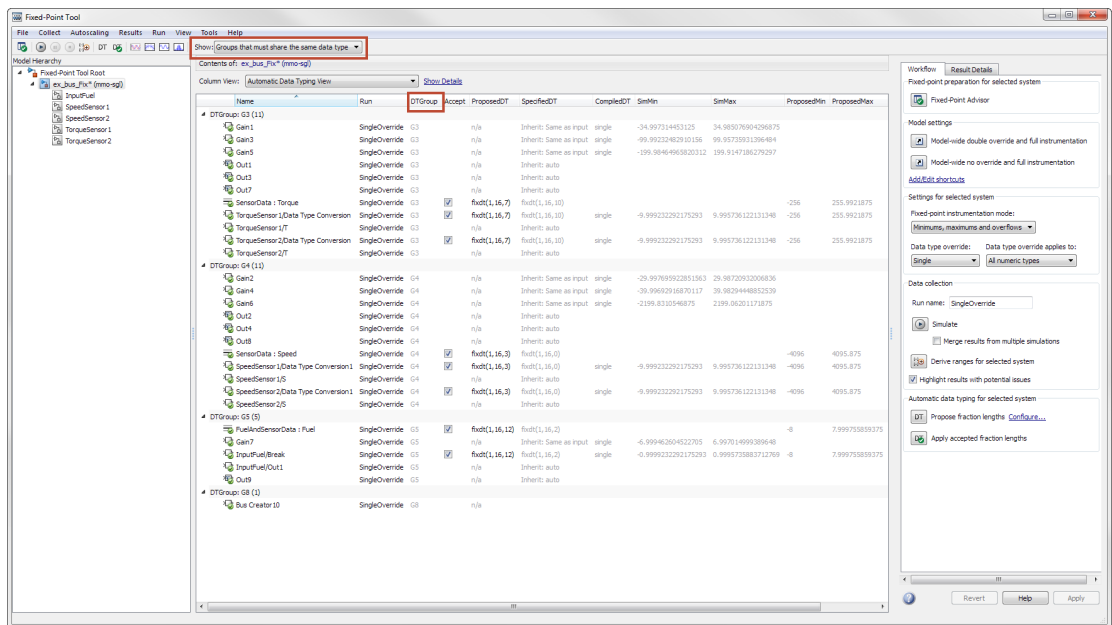

- 3 In the **Contents** pane, select the **SpeedSensor1S** bus element (element of the bus object). Click the **Result Details** tab.

In the **Result Details** tab, view the details of the proposed data type for the bus element. The data type proposal for a bus element is found by taking the union of the ranges of all blocks that must share the same data type, which includes all of the sources driving the bus element. The software then proposes a data type for this range.

The screenshot shows the 'Result Details' tab for a bus element named 'SensorData : Speed'. It displays a 'Proposed Data Type Summary' with a bullet point indicating a requirement for the data type to match other results. A link 'Highlight Elements Sharing Same Data Type' is provided. Below this is a table comparing 'ProposedDT' and 'SpecifiedDT' with their respective data types, minimums, maximums, and precision. Further down, a 'Range Information' table shows the minimum and maximum values for 'Shared Simulation', 'Shared Initial Value', and 'Initial Value'.

Proposed Data Type Summary

- There is a requirement for the data type of this result to match the data type of other results.
 - [Highlight Elements Sharing Same Data Type](#)


Property	Data Type	Minimum	Maximum	Precision
ProposedDT	fixdt(1,16,3)	-4096	4095.875	0.125
SpecifiedDT	fixdt(1,16,0)	-32768	32767	1


Range Information

Property	Minimum	Maximum
Shared Simulation	-2199.831054	2199.0620117
Shared Initial Value	0	0
Initial Value	0	0

The **Shared Simulation** minimum and maximum values of the **Range Information** table represent the union of the ranges of the sources driving the bus element. The data type proposal for **SensorData:Speed** is based on this range.

Right-click the bus element and select **Highlight Elements Sharing Same Data Type** to see all of the sources driving the bus element.

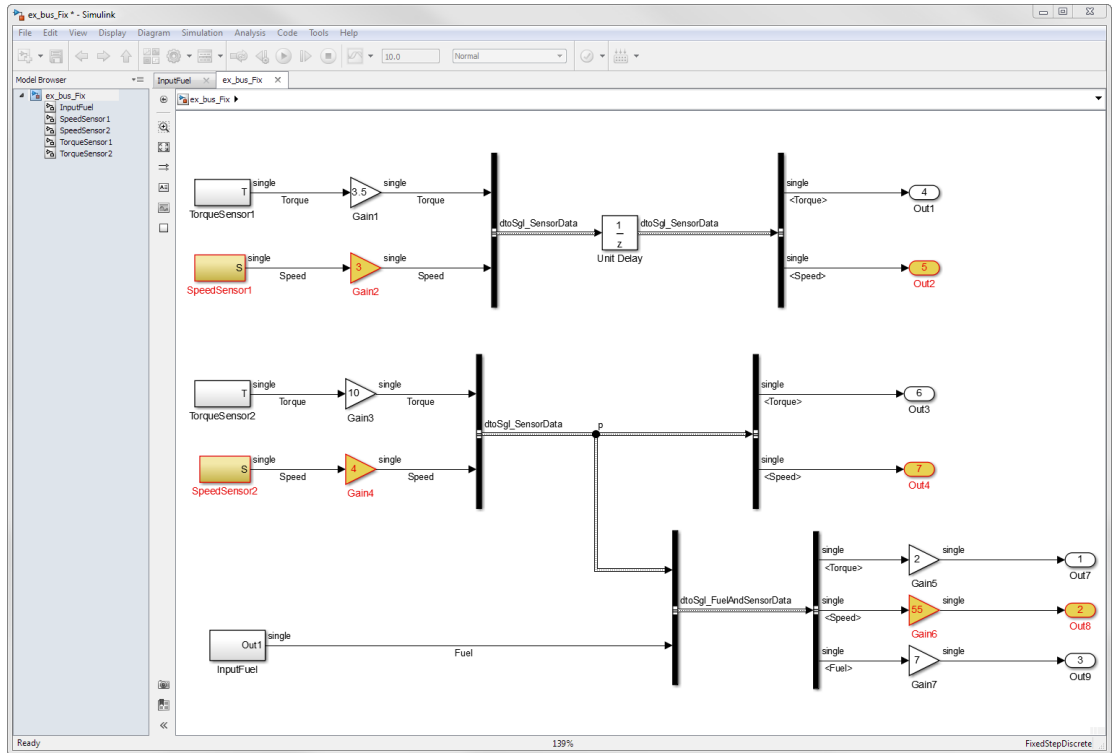

- Return to the Fixed-Point Tool **Workflow** tab. Click the **Apply accepted fraction lengths** button  to write the proposed data types to the model.


Verify New Fixed-Point Settings

- In the **Settings for selected system** pane, set **Data type override** to **Off** so when you simulate the model, it uses the new fixed-point types that you applied.
- Simulate the model. This time, store the results in **Fixed_Run**.
- In the Fixed-Point Tool **Contents** pane, verify that there are no overflows in **Fixed_Run**.
- Click **Compare Runs**



to launch the Simulation Data Inspector.

In the Simulation Data Inspector, compare the results of `Fixed_Run` to the results of the `SingleOverride` run.

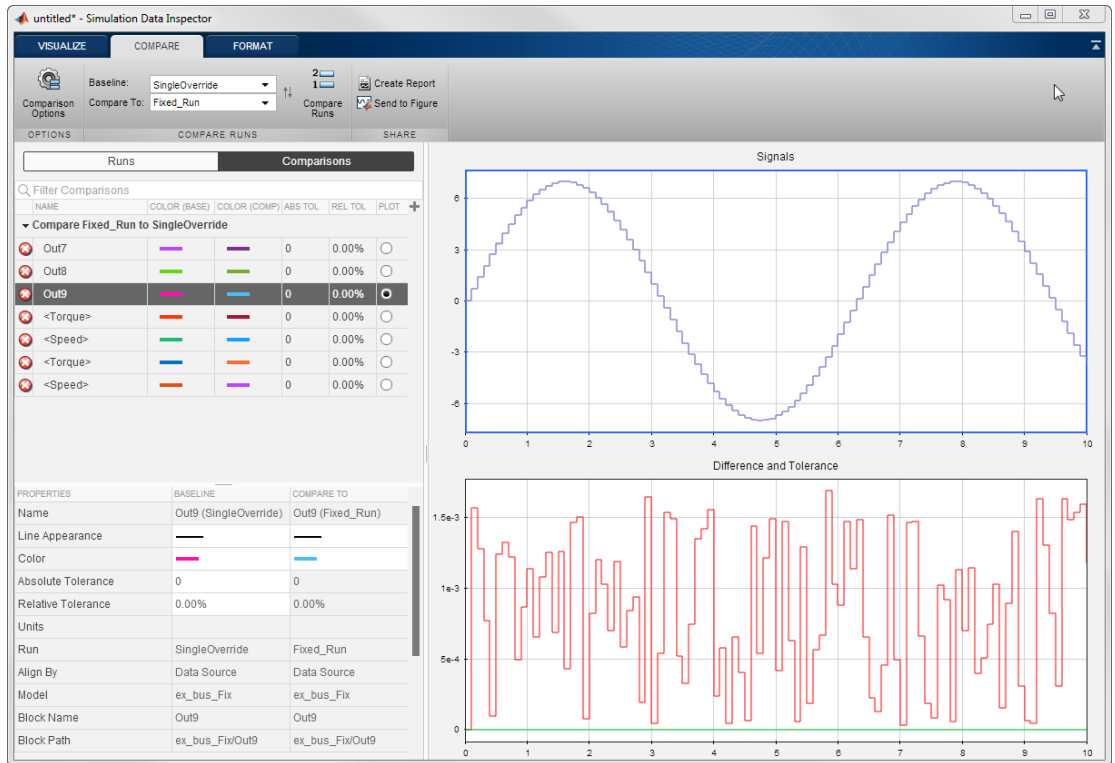

5 Return to the model. Notice that the bus objects no longer contain the prefixes.

Open the Bus Editor by clicking **Edit > Bus Editor**. You can now view the new, refined data types of the bus objects in the Bus Editor.

Save the Model and New Bus Data Types

Data types for bus elements are stored in the base workspace, not the model. To save the fixed-point data types for the bus elements in `ex_bus_Flt`, export them from the Bus Editor to a `.mat` file. For instructions, see [Export Bus Objects](#). Alternatively, you

can save workspace variables to a file at the MATLAB command line using the `save` function .

Convert a Model with Buses to Fixed-Point Using Range Analysis

In this section...

“Open and Simulate the Model” on page 41-11

“Set Design Minimums and Maximums” on page 41-12

“Open the Fixed-Point Tool and Run the Fixed-Point Advisor” on page 41-14

“Derive Minimum and Maximum Values” on page 41-15

“Propose Fraction Lengths” on page 41-15

“Examine and Apply Proposed Types” on page 41-15

“Verify New Fixed-Point Types” on page 41-18

“Save the Model and the New Bus Data Types” on page 41-19

This example shows how to use range analysis to convert a floating-point model that contains buses to a fixed-point model.


Open and Simulate the Model

Open the `ex_bus_Flt` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
ex_bus_Flt
```


- 1 Press `ctrl+d` to update the diagram and view the data types of each block in the model.

This model uses floating-point doubles for all signals.

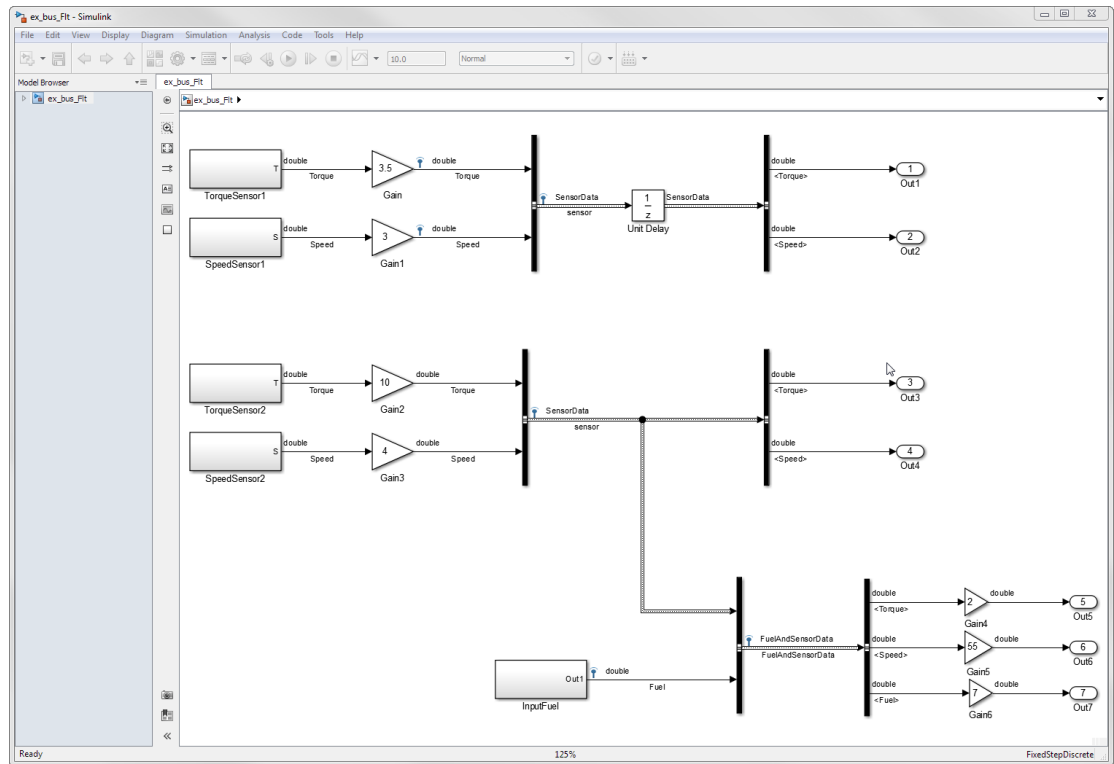

Set Design Minimums and Maximums

- 1 Open the TorqueSensor1 subsystem, and double-click the output port, T.
- 2 Under the **Signal Attributes** tab, notice that the design minimum and maximum have been set to -1 and 1, respectively.

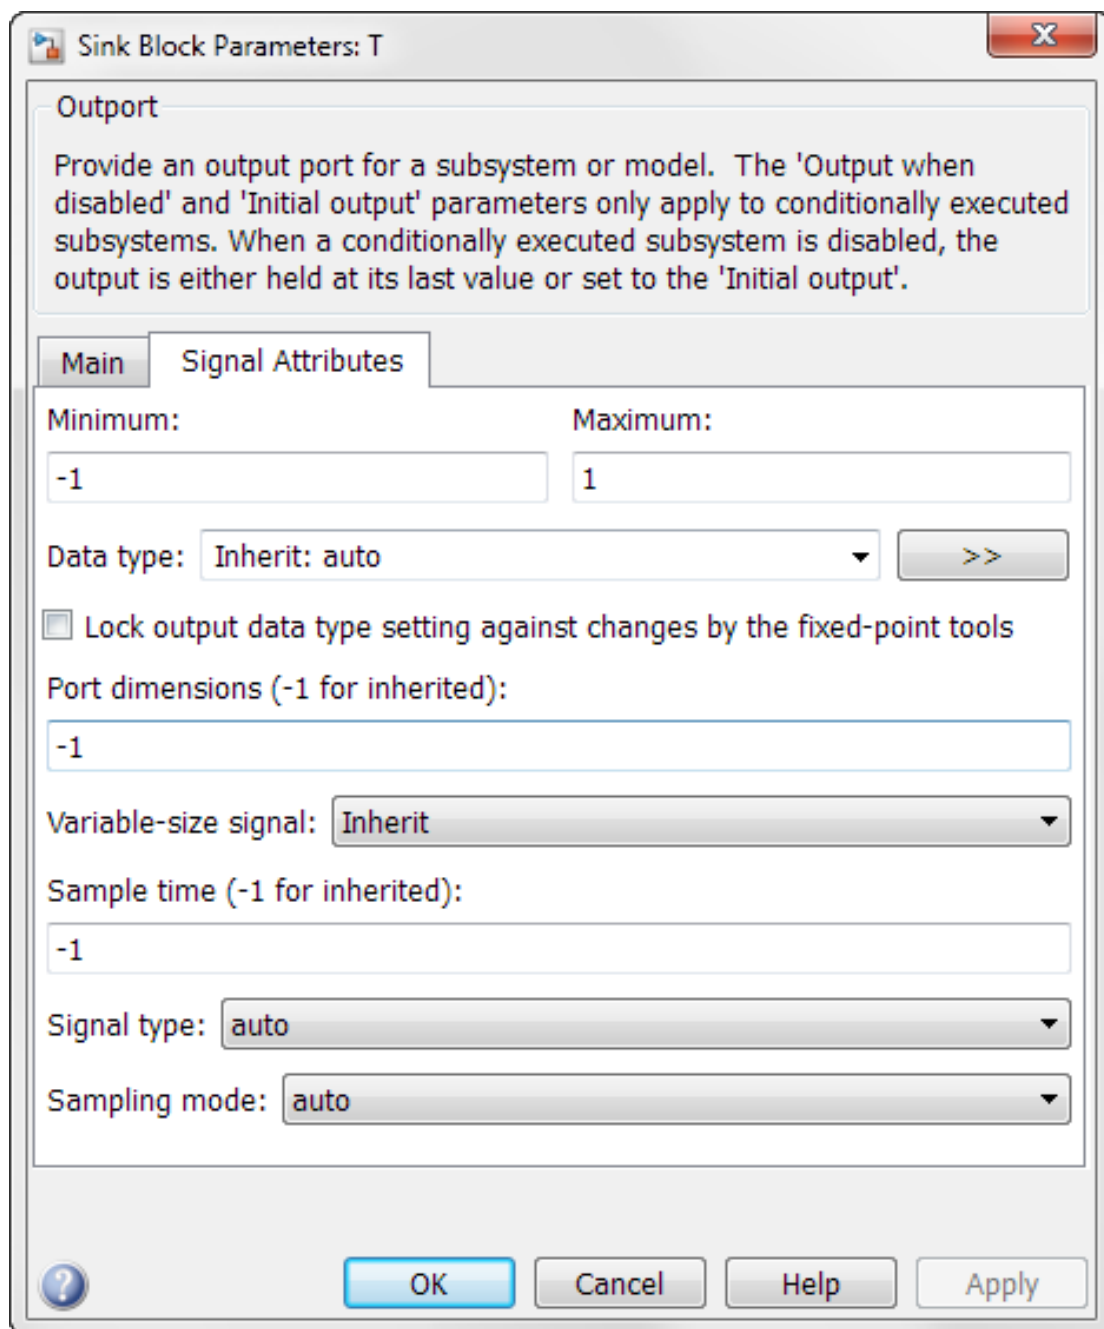

- 3 Notice that the TorqueSensor2, SpeedSensor1, SpeedSensor2, and InputFuel subsystems also have their design minimums and maximums set to -1 and 1.

Open the Fixed-Point Tool and Run the Fixed-Point Advisor

- 1 Open the Fixed-Point Tool from the model menu by selecting **Analysis > Fixed-Point Tool**.
- 2 In the **Fixed-point preparation for selected system** pane, open the Fixed-Point Advisor by clicking the **Fixed-Point Advisor** button.
- 3 Run each check in the **Prepare Model for Conversion** folder.

The **Address unsupported blocks** check warns that the Sine blocks do not support fixed-point data types. Because the Sine blocks are decoupled from the model with Data Type Conversion blocks, you do not need to take any further action.

All other tasks in this folder pass.

- 4 Run each check in the **Verify Fixed-Point Conversion Guidelines** folder.

The **Check bus usage** check advises you to configure your model to detect future changes that can result in improper bus usage.

In the **Configuration Parameters > Diagnostics > Connectivity** pane, set **Bus signal treated as vector:** to **error**.

Click **OK** and run the check again from the Fixed-Point Advisor.

This time the check passes. All other checks under **Verify Fixed-Point Conversion Guidelines** pass.

- 5 Run each check in the **Prepare for Data Typing and Scaling** folder.

The **Verify hardware selection** check fails. Because the target hardware is an embedded processor, the Fixed-Point Advisor recommends that you set this value to the hardware integer used by the embedded hardware. Set **Default data type of all floating point signals** to **Same as embedded hardware integer**.

Rerun the check. The task passes.

All other checks under **Prepare for Data Typing and Scaling** pass.


- 6 Run check 3 to return to the Fixed-Point Tool.

Derive Minimum and Maximum Values

- 1 Click the **Derive ranges for selected system** button .

The Fixed-Point Tool **Contents** pane displays the derived minimum and maximum values for each object in the `ex_bus_Flt` model.

Propose Fraction Lengths

- 1 Click the **Propose fraction lengths** button .


The proposed data types appear in the **Contents** pane of the Fixed-Point Tool.


Examine and Apply Proposed Types

Examine the new data types that the Fixed-Point Tool has proposed for `ex_bus_Flt`.

- 1 On the Fixed-Point Tool toolbar, select **Show > Groups that must share the same data type** to better understand the proposed data types.
- 2 In the **Contents** pane, right-click the column labeled **DTGroup** and select **Group by This Column**.

The Fixed-Point Tool organizes the contents pane to group the elements by data type.

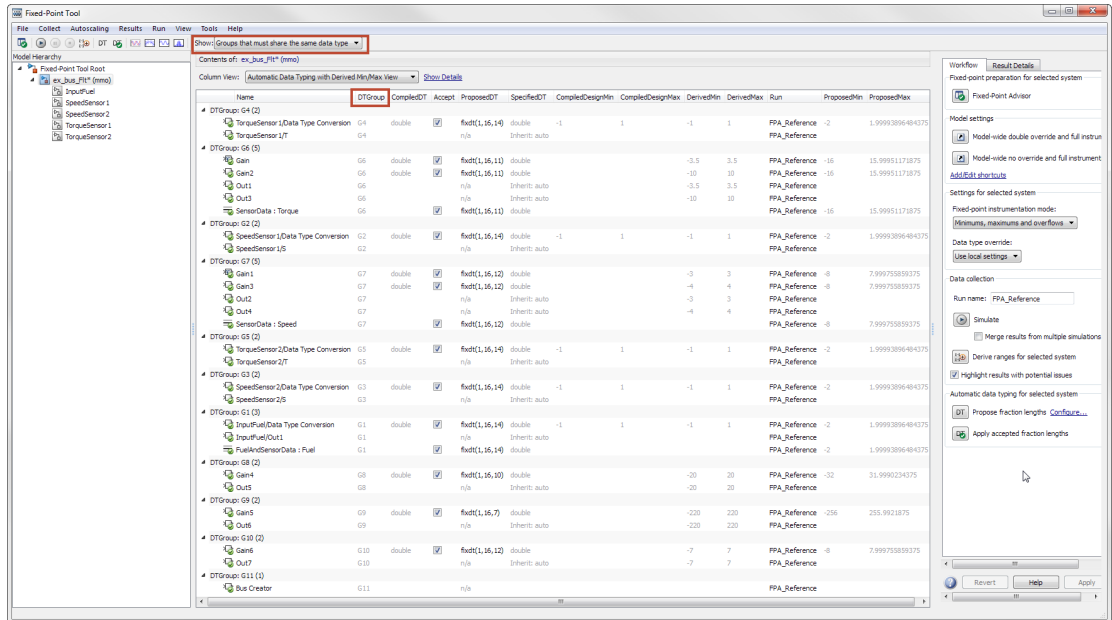

3 Select the  **SensorData : Speed** bus element (element of the bus object) and Click the **Result Details** tab.

In the **Result Details** tab, view the details of the proposed data type for the bus element. The software finds the data type proposal for a bus element by taking the union of the ranges of all blocks that must share the same data type, which includes all of the sources driving the bus element. It then proposes a data type for this range.

Workflow Result Details

SensorData : Speed

Proposed Data Type Summary

- There is a requirement for the data type of this result to match the data type of other results.
 - [Highlight Elements Sharing Same Data Type](#)


Property	Data Type	Minimum	Maximum	Precision
ProposedDT	fixdt(1,16,12)	-8	7.9997558593	0.0002441406
SpecifiedDT	double	-1.7976e+308	1.79769e+308	4.94065e-324


Range Information

Property	Minimum	Maximum
Shared Simulation	-3.999693030	3.9982944121
Shared Initial Value	0	0
Initial Value	0	0
Shared derived	-4	4

The **Shared Derived** minimum and maximum in the **Range Information** table represent the union of the ranges of the sources driving the bus element. The data type proposal for **SensorData:Speed** is based on this range.

- Right-click the bus element. Select **Highlight Elements Sharing Same Data Type** to see all of the sources driving the bus element.

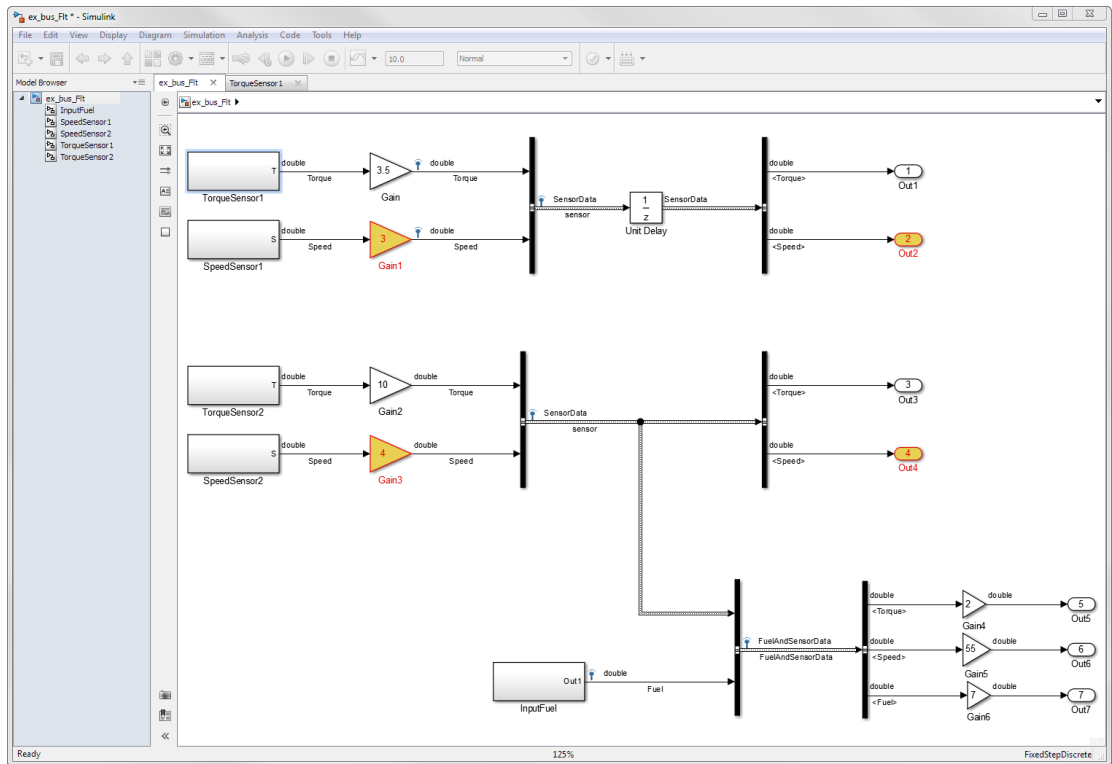

- 5 Return to the Fixed-Point Tool **Workflow** tab. Click the **Apply accepted fraction lengths** button  to write the proposed data types to the model.


Verify New Fixed-Point Types

- 1 Simulate the model. This time, store the results in `Fixed_Run`.
- 2 In the Fixed-Point Tool **Contents** pane, verify that there are no overflows in `Fixed_Run`.
- 3 Click **Compare Runs**



to launch the Simulation Data Inspector.

In the Simulation Data Inspector, compare the results of `Fixed_Run` to the results of `FPA_Reference`.

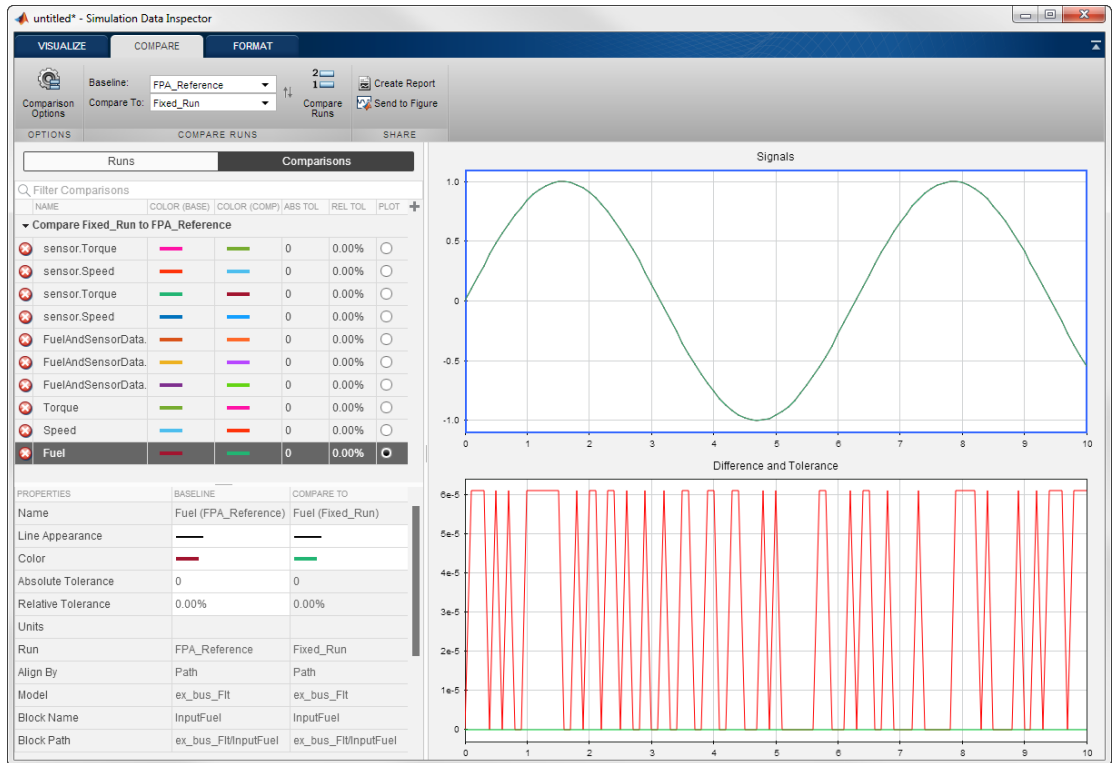

- 4 Open the Bus Editor from the model menu by clicking **Edit > Bus Editor**. You can now view the new fixed-point data types of the bus elements in the Bus Editor.

Save the Model and the New Bus Data Types

Data types for bus elements are stored in the base workspace, not the model. To save the fixed-point data types for the bus elements in `ex_bus_Fit`, export them from the Bus Editor to a `.mat` file. For instructions, see [Export Bus Objects](#). Alternatively, you can save workspace variables to a file at the MATLAB command line using the `save` function .


Bus Objects in the Fixed-Point Workflow

In this section...
“How Data Type Proposals Are Determined for Bus Objects” on page 41-20
“Bus Naming Conventions with Data Type Override” on page 41-22
“Limitations of Bus Objects in the Fixed-Point Workflow” on page 41-23

How Data Type Proposals Are Determined for Bus Objects

The data type proposal for a bus object is found by taking the union of the ranges of all sources driving the same bus element, and then proposing a data type for this range. The Fixed-Point Tool does not log minimum and maximum ranges for elements of a bus signal.

The following example shows how the software determines the data types for elements of bus objects.

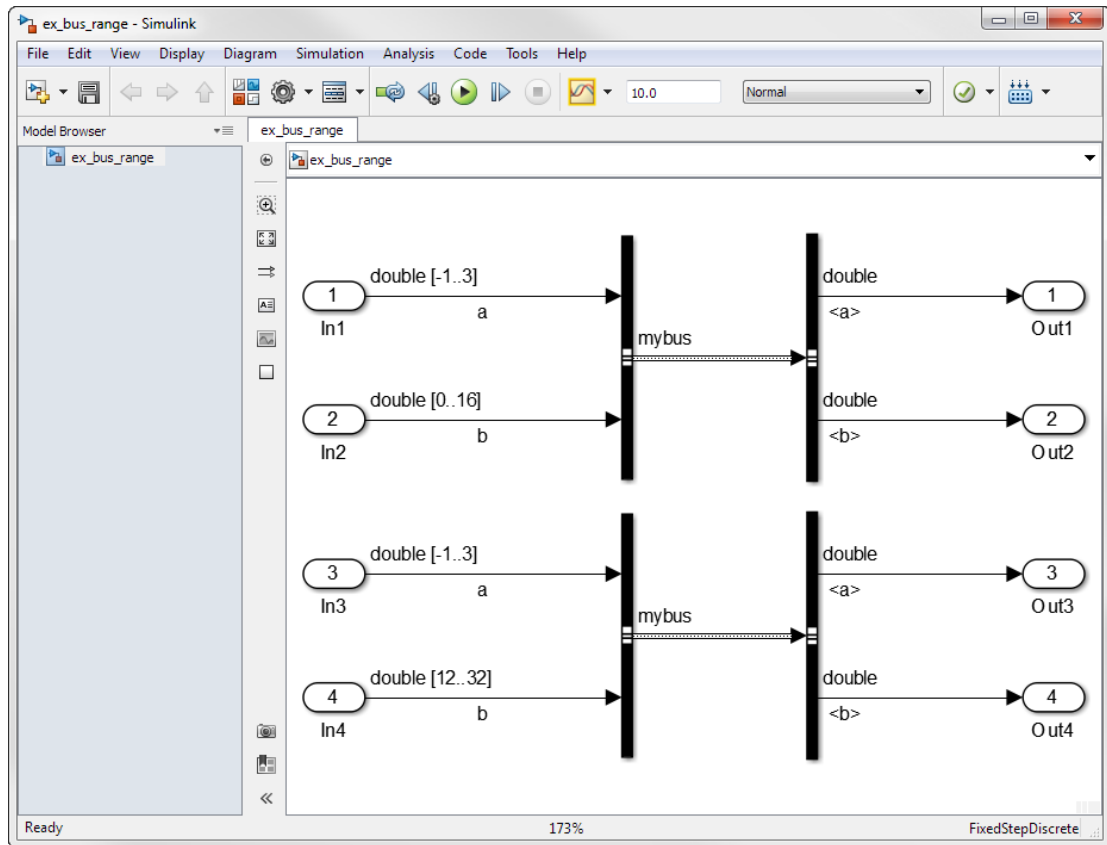

Each of the four input ports in this model have specified design ranges. The In2 and In4 input ports must share the same data type because they drive the same element of the mybus bus object.

The Fixed-Point Tool proposes a data type based on the union of these two ranges. After proposing data types for the model, in the **Result Details** tab for the mybus : b element of the bus object, notice the row labeled **Shared Design** in the **Range Information** table. The proposed data type is based on this range, which is the union of the design ranges of the In2 and In4 blocks.

The screenshot shows a software interface with two tabs: 'Workflow' and 'Result Details'. The 'Result Details' tab is active and displays the following information:

mybus : b

Proposed Data Type Summary

- There is a requirement for the data type of this result to match the data type of other results.
 - [Highlight Elements Sharing Same Data Type](#)

Property	Data Type	Minimum	Maximum	Precision
ProposedDT	fixdt(1,8,1)	-64	63.5	0.5
SpecifiedDT	double	-1.7976e+308	1.79769e+308	4.94065e-324

Range Information

Property	Minimum	Maximum
Shared Design	0	32

Bus Naming Conventions with Data Type Override

When you use Data Type Override on a model that contains buses, the Fixed-Point Tool generates a new bus which uses the overridden data type. To indicate that a model is using an overridden bus, the tool adds a prefix to the name of the original bus object. While a model is in an overridden state, a bus object named `myBUS` is renamed based on the following pattern.

DTO Mode	DTO Applies To		
	All numeric types	Floating point	Fixed point
Scaled Double	dtoScl_myBus	dtoSclFlt_myBus	dtoSclFxp_myBus
Double	dtoDb1_myBus	dtoDb1Flt_myBus	dtoDb1Fxp_myBus
Single	dtoSgl_myBus	dtoSglFlt_myBus	dtoSglFxp_myBus

Note: You cannot see bus objects with an overridden data type within the Bus Editor because they are not stored in the base workspace.

Limitations of Bus Objects in the Fixed-Point Workflow

An update diagram error can occur if any of the following conditions occur.

- Your model is in accelerator mode and has a bus object with an overridden data type at the output port.

To perform data type override, run the model in normal mode.

- The data types in your model are overridden and the model contains Stateflow charts that use MATLAB as the action language.
- Your model contains tunable MATLAB structures assigned to a bus signal (such as Unit Delay blocks with a structure as the initial condition, Stateflow data, and MATLAB structures from the workspace).

Change the structure to a non tunable structure to use the Fixed-Point Tool. Specify the structure fields as doubles to avoid unnecessary quantization effects. For more information on using a structure as an initial condition with bus objects, see “Data Type Mismatch and Structure Initial Conditions”.

- Your model contains a structure parameter specified through the mask of an atomic subsystem.

To use the Fixed-Point Tool, make the system non-atomic.

Related Examples

- “Refine Data Types of a Model with Buses Using Simulation Data” on page 41-2


Convert Model with Bus Object with Structure Initial Conditions to Fixed-Point

This example shows how to use the Fixed-Point Tool to convert a floating-point model that contains a bus signal with a structure as the initial condition to fixed-point.

- 1 Open the `ex_bus_struct` model.

```
addpath(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
ex_bus_struct
```


This model uses a structure as the initial condition in the Constant block. The structure fields of the Constant block and the elements of the SensorData bus object are specified as doubles.

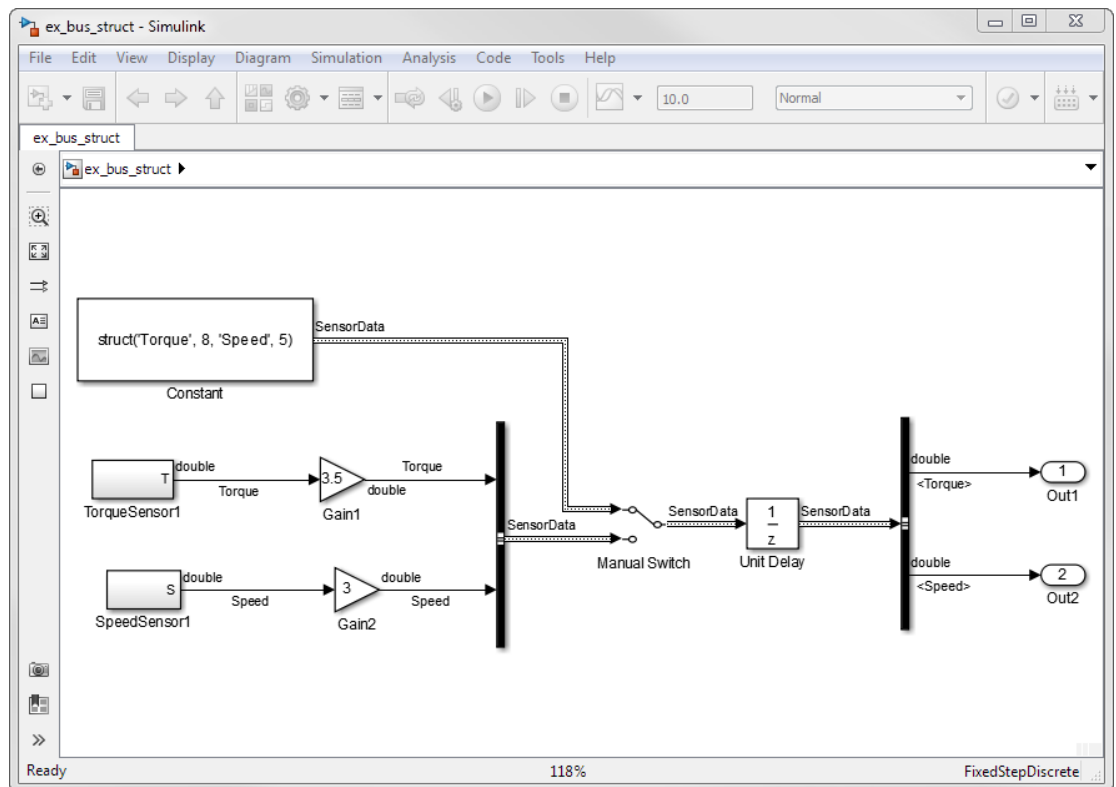

- 2 Open the Fixed-Point Tool by selecting **Analysis > Fixed-Point Tool**.
- 3 In the **Workflow** tab, under **Settings for selected system**, set the **Fixed-point instrumentation mode** to **Minimums, maximums and overflows**.
- 4 Collect simulation minimum and maximum values. From the **Data collection** pane, simulate the model.
- 5 Under **Automatic data typing for selected system**, click **Configure**. Set **Default data type of all floating-point signals** to `fixdt(1,16,4)`.

Click the **Propose fraction lengths** button to propose data types with 16-bit word length and best-precision fraction length.

- 6 Examine the data type proposals in the **Contents** pane and determine whether to accept the proposals.
- 7 Click the **Apply accepted fraction lengths** button to write the proposed data types to the model.
- 8 Under **Data collection**, enter `Fixed_Run` for **Run name** and simulate the model again using the new fixed-point data types.
- 9 In the model window, select **Edit > Bus editor**.

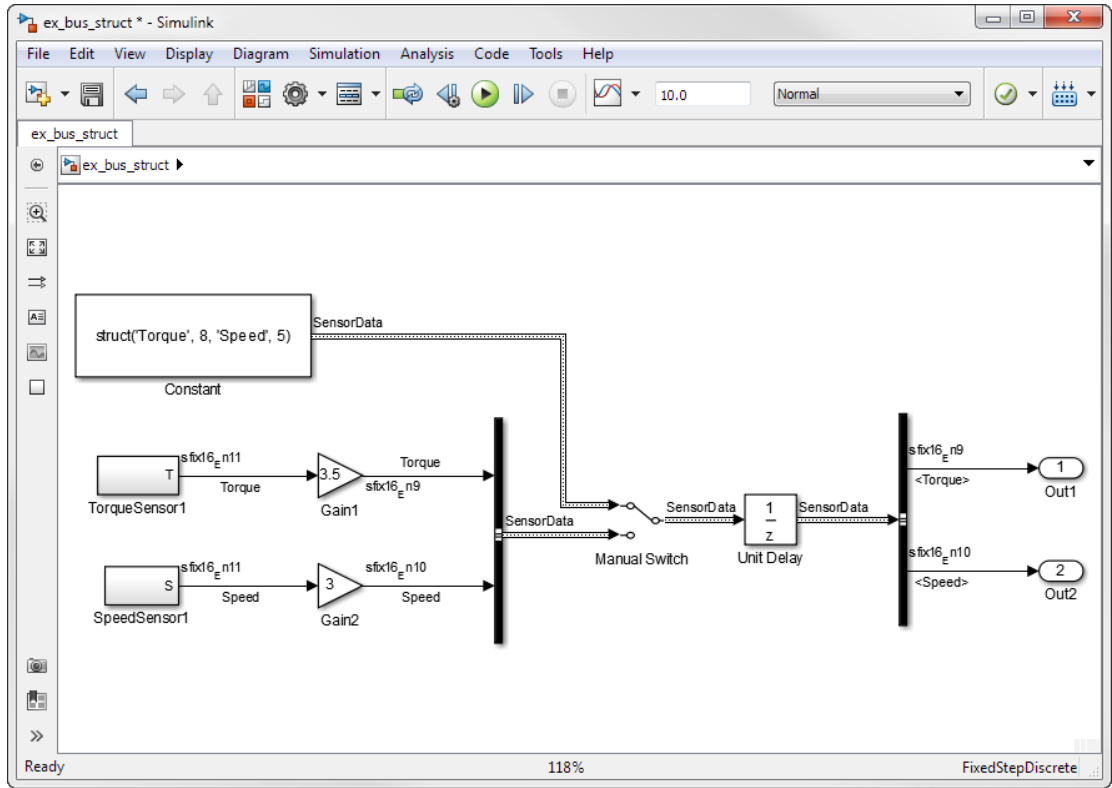

Bus Editor - Manage Bus Objects in the Base Workspace

Name	Data Type	Complexity	Dimensions	Dimensions Mode	Sampling Mode	Sample Time	Min	Max	Doc Units	Description
Torque	fixdt(1,16,9)	real	1	Fixed	Sample based	-1				
Speed	fixdt(1,16,10)	real	1	Fixed	Sample based	-1				

Simulink Bus: SensorData

Properties

Name: SensorData

Code generation options

Data scope: Auto

Header file:

Alignment: -1

The SensorData bus object now uses fixed-point data types. The initial condition of the Constant block still uses a non tunable structure using double data types. During compilation, an automatic casting of the data type of the structure field occurs so that it matches the data type of the bus signal.

If you generate code for a model that uses a structure as the initial condition for a bus signal, the values appear inline in the generated code.

Related Examples

- Parameter Tunability Loss
- “Refine Data Types of a Model with Buses Using Simulation Data” on page 41-2

More About

- “Bus Objects in the Fixed-Point Workflow” on page 41-20

Command Line Interface for the Fixed-Point Tool

- “The Command-Line Interface for the Fixed-Point Tool” on page 42-2
- “Convert a Model to Fixed Point Using the Command-Line” on page 42-4

The Command-Line Interface for the Fixed-Point Tool

The methods of the `DataTypeWorkflow.Converter` class allow you to collect simulation and derived data, propose and apply data types to the model, and analyze results. The class performs the same fixed-point conversion tasks as the Fixed-Point Tool. The following table summarizes the steps in the workflow and lists the appropriate classes and methods to use at each step.

Step in Workflow	Primary methods and classes for step in workflow
Set up model	<ul style="list-style-type: none"> <code>DataTypeWorkflow.Converter</code>
Prepare the model for fixed-point conversion	<ul style="list-style-type: none"> <code>DataTypeWorkflow.Converter.applySettingsFromShortcut</code> <code>DataTypeWorkflow.Converter.applySettingsFromRun</code>
Gather range information	<ul style="list-style-type: none"> <code>DataTypeWorkflow.Converter.deriveMinMax</code> <code>DataTypeWorkflow.Converter.simulateSystem</code>
Propose data types	<ul style="list-style-type: none"> <code>DataTypeWorkflow.ProposalSettings</code> <code>DataTypeWorkflow.Converter.proposeDataTypes</code>
Apply proposed data types	<ul style="list-style-type: none"> <code>DataTypeWorkflow.Converter.applyDataTypes</code>
Verify new fixed-point settings and analyze results	<ul style="list-style-type: none"> <code>DataTypeWorkflow.Converter.compareResults</code> <code>DataTypeWorkflow.Converter.compareRuns</code> <code>DataTypeWorkflow.Converter.results</code> <code>DataTypeWorkflow.Converter.saturationOverflows</code> <code>DataTypeWorkflow.Converter.wrapOverflows</code> <code>DataTypeWorkflow.Converter.proposalIssues</code>

Note: You should not use the Fixed-Point Tool and the command-line interface in the same conversion session.

To decide which workflow is right for you, consult the following table:

Capability	Fixed-Point Tool	Command-Line Interface
Populate runs to dataset	✓	✓

Capability	Fixed-Point Tool	Command-Line Interface
Delete result from dataset	✓	✓
Edit proposed data types	✓	
Selectively apply data type proposals	✓	
Run multiple simulations	✓	✓
Script workflow		✓

Related Examples

- “Convert a Model to Fixed Point Using the Command-Line”


Convert a Model to Fixed Point Using the Command-Line

This example shows how to refine the data types of a model using the MATLAB command-line.


- 1 Open the `fxpdemo_feedback` model.

`fxpdemo_feedback`

The Fixed-Point Tool opens automatically. Close the Fixed-Point Tool to use the command-line interface for fixed-point conversion.

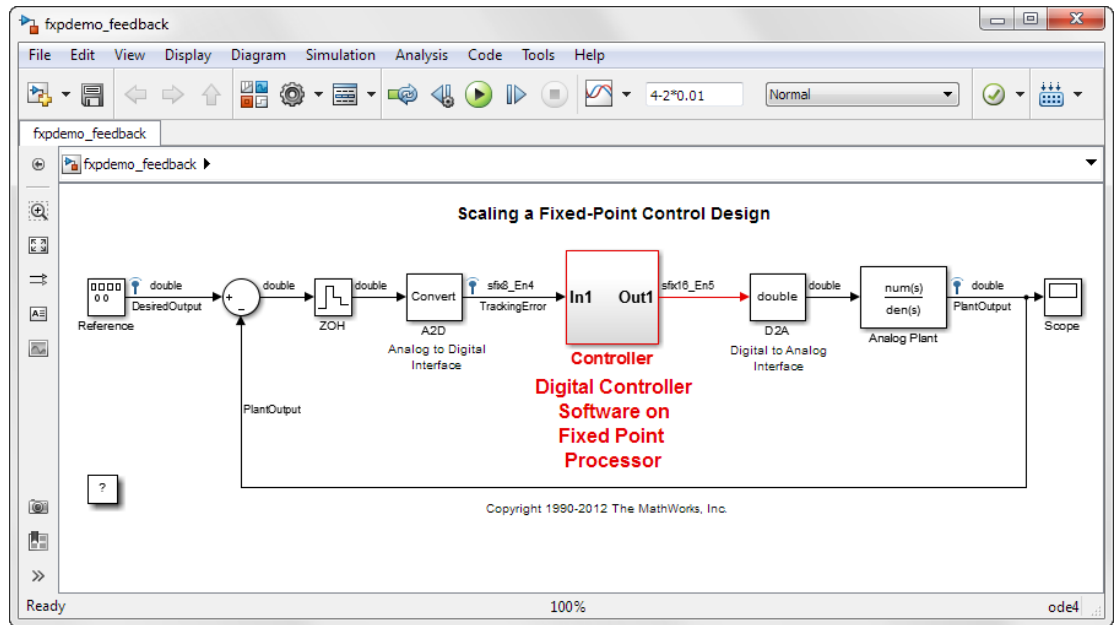

The `Controller` subsystem uses fixed-point data types.

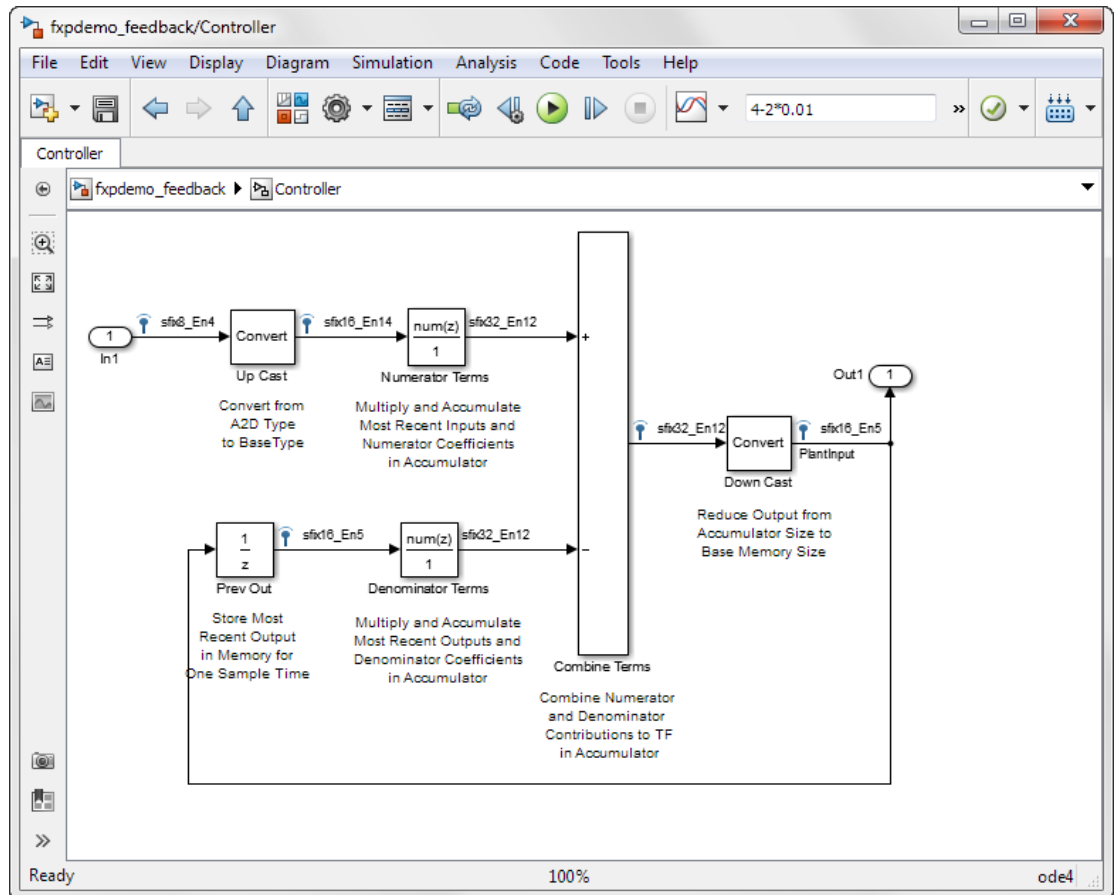

- 2 Create a `DataTypeWorkflow.Converter` object to autoscale the Controller subsystem of the `fxdemo_feedback` model.

```
converter = DataTypeWorkflow.Converter('fxdemo_feedback/Controller');
```

- 3 Simulate the model and store the results in `InitialRun`.

```
converter.CurrentRunName = 'InitialRun';
converter.simulateSystem();
```

- 4 Determine if there were any overflows in `InitialRun`.

```
saturationOverflows = converter.saturationOverflows('InitialRun')
```

```

saturations =

    Result with properties:
        ResultName: 'fxpdemo_feedback/Controller/Up Cast'
        SpecifiedDataType: 'fixdt(1,16,14)'
        CompiledDataType: 'fixdt(1,16,14)'
        ProposedDataType: ''
        Wraps: []
        Saturations: 23
        SimMin: -2
        SimMax: 1.9999
        DerivedMin: []
        DerivedMax: []
        RunName: 'InitialRun'
        Comments: ''

```

```
wraps = converter.wrapOverflows('InitialRun')
```

```
wraps =
```

```
[]
```

There was one saturation in `InitialRun`. This saturation occurred in the `Up Cast` block of the `Controller` subsystem. There were no wrapping overflows. Refine the data types of the model so that no saturations occur.

- 5 Use shortcuts to prepare the model for conversion. Find the shortcuts that are available for the system by accessing the `ShortcutsForSelectedSystem` property of the converter object.

```
converter.ShortcutsForSelectedSystem
```

```
ans =
```

```

'Model-wide double override and full instrumentation'
'Model-wide no override and full instrumentation'
'Model-wide single override and full instrumentation'
'Model-wide instrumentation off'

```

- 6 Gather a floating-point benchmark for the model. Apply the settings from a shortcut to override the entire model with doubles and turn on instrumentation.

```
converter.applySettingsFromShortcut('Model-wide double override and full instrument
```

This shortcut also updates the `CurrentRunName` property of the converter object.


```
converter.CurrentRunName
```

```
ans =
```

```
DoubleOverride
```

- 7 Simulate the model again to gather new range information. Store these results in `DoubleOverride`.

```
converter.simulateSystem();
```

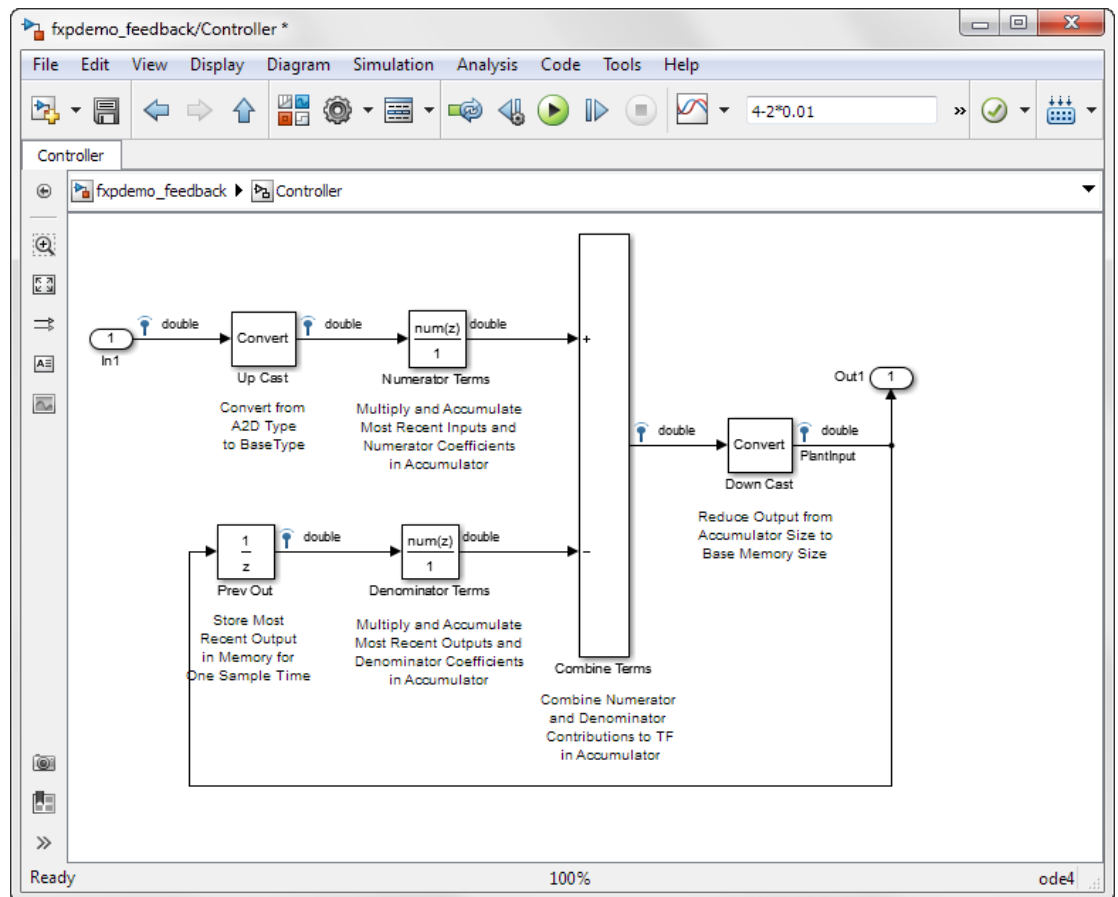

- 8 Create a `ProposalSettings` object to control the data type proposal settings. Set the floating point default data type to 16-bit word length. For all other properties, use the default values.

```
propSettings = DataTypeWorkflow.ProposalSettings;
propSettings.FloatingPointDefaultDataType = 'fixdt(1,16,0)'
```

```
propSettings =
```

```
ProposalSettings with properties:
```

```
ProposeWordLengthsForDefaultFractionLength: 0
ProposeFractionLengthsForDefaultWordLength: 1
    SimSafetyMargin: 0
    DesignSafetyMargin: 0
    UseSimMinMax: 1
    UseDerivedMinMax: 1
    FloatingPointDefaultDataType: 'fixdt(1,16,0)'
```

- 9 Propose data types for the system using the settings specified in the proposal settings object, `propSettings` and the range information gathered in the `'DoubleOverride'` run.

```
converter.proposeDataTypes('DoubleOverride', propSettings);
```

- 10 Apply the data types proposed for the `DoubleOverride` run to the model.

```
converter.applyDataTypes('DoubleOverride')
```


- 11 Turn off data type override by applying another shortcut to the model.

```
converter.applySettingsFromShortcut('Model-wide no override and full instrumentation')
```

- 12 Set up a new run and simulate the model with the new fixed-point data types.

```
converter.CurrentRunName = 'FixedRun';
converter.simulateSystem();
```

The model now uses the refined fixed-point types.

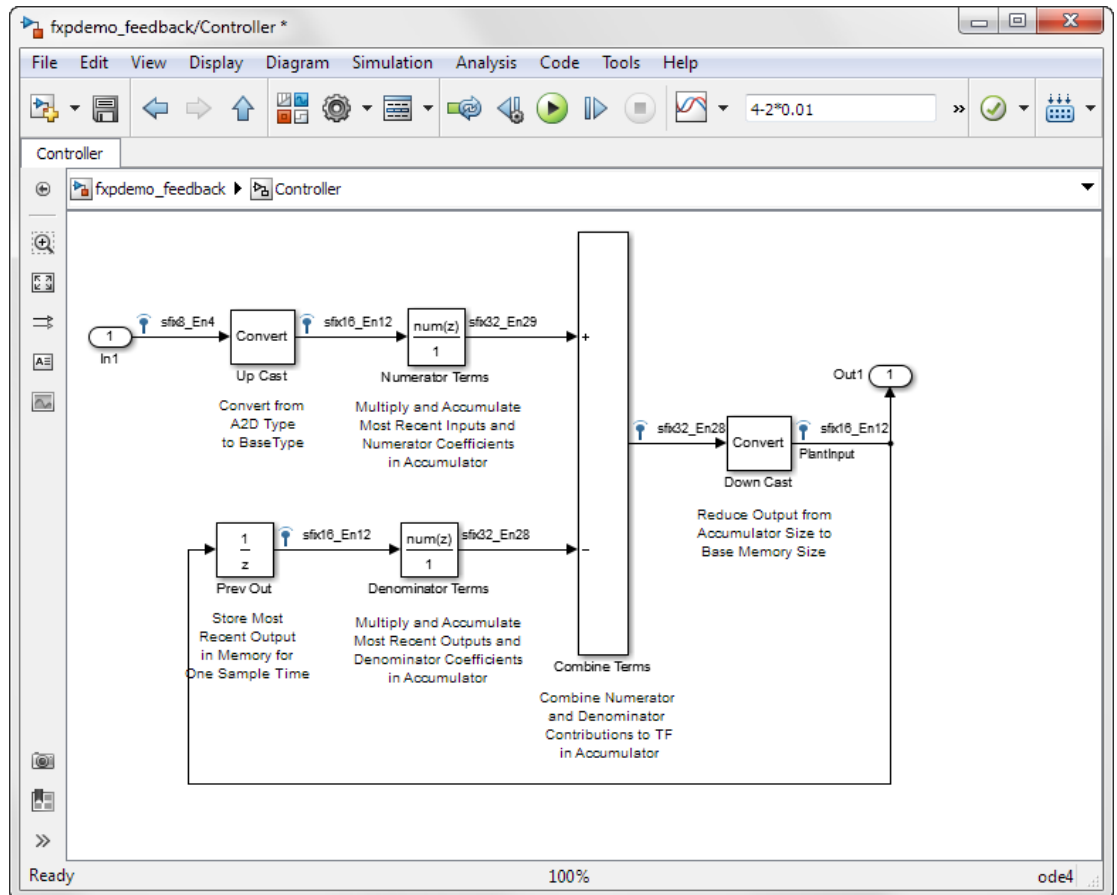

- 13 Create two **Result** objects to use to compare the ideal floating-point behavior to the fixed-point behavior.

```
DoubleOverrideResult = converter.results('DoubleOverride',@(r) (strcmp(r.ResultName
```

```
DoubleOverrideResult =
```

```
Result with properties:
```

```
    ResultName: 'fxpdemo_feedback/Controller/Down Cast'
SpecifiedDataType: 'fixdt(1,16,12)'
CompiledDataType: 'double'
```

```
ProposedDataType: 'fixdt(1,16,12)'  
Wraps: []  
Saturation: []  
SimMin: -2.4135  
SimMax: 4.3270  
DerivedMin: []  
DerivedMax: []  
RunName: 'DoubleOverride'  
Comments: {}
```

```
FixedRunResult = converter.results('FixedRun',@(r) (strcmp(r.ResultName, 'fxpdemo_f
```

```
FixedRunResult =
```

```
Result with properties:
```


```
ResultName: 'fxpdemo_feedback/Controller/Down Cast'  
SpecifiedDataType: 'fixdt(1,16,12)'  
CompiledDataType: 'fixdt(1,16,12)'  
ProposedDataType: ''  
Wraps: []  
Saturation: []  
SimMin: -2.4211  
SimMax: 4.3496  
DerivedMin: []  
DerivedMax: []  
RunName: 'FixedRun'  
Comments: ''
```

- 14** Compare the `Result` object from the `DoubleOverride` run to the `Result` object from the `FixedRun`.

```
diff = converter.compareResults(DoubleOverrideResult,FixedRunResult);
```

- 15** Plot the difference between the two signals.

```
f = figure;  
plot(diff.tol);  
hold on  
plot(diff.diff);
```

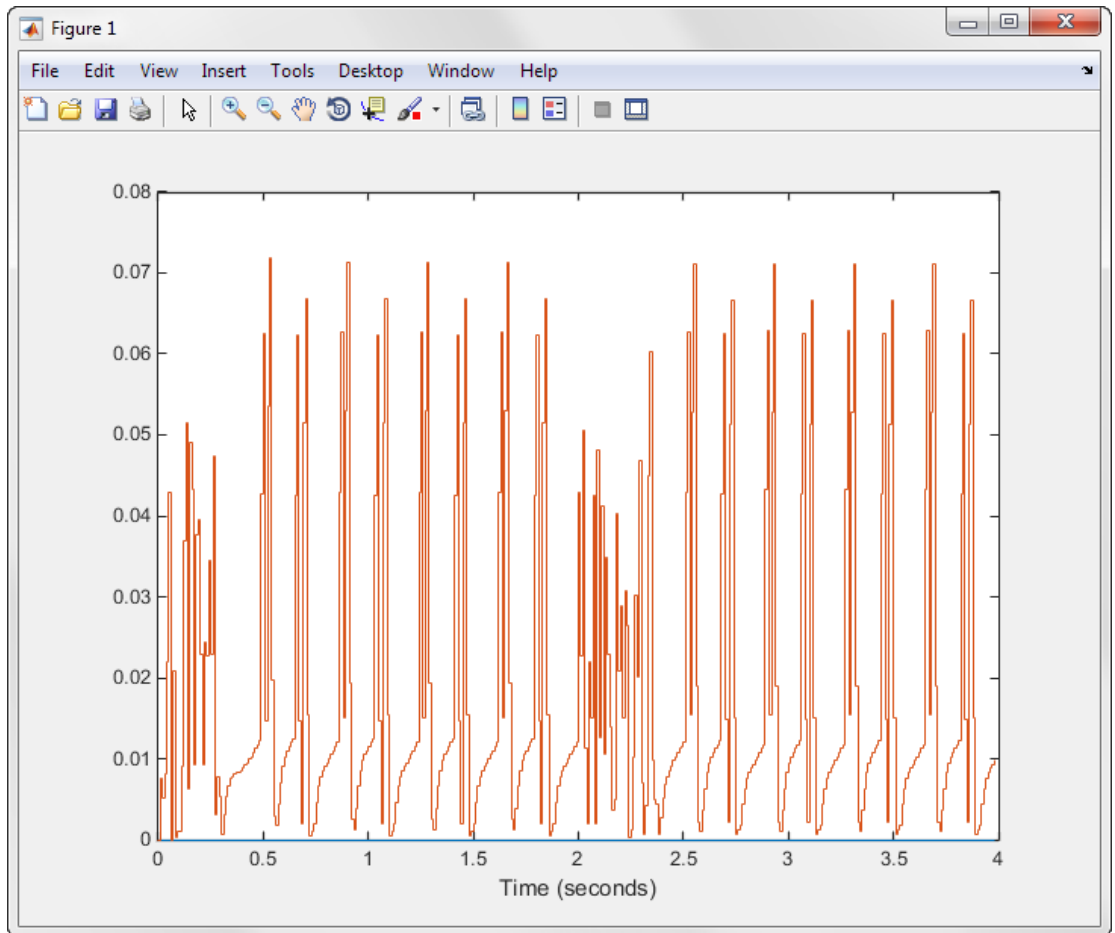

More About

- “The Command-Line Interface for the Fixed-Point Tool” on page 42-2

Code Generation

- “Generating and Deploying Production Code” on page 43-2
- “Code Generation Support” on page 43-3
- “Accelerating Fixed-Point Models” on page 43-5
- “Using External Mode or Rapid Simulation Target” on page 43-7
- “Optimize Your Generated Code” on page 43-9
- “Optimizing Your Generated Code with the Model Advisor” on page 43-32
- “Use the Model Advisor to Optimize Fixed-Point Operations in Generated Code” on page 43-40

Generating and Deploying Production Code

You can generate C code with the Fixed-Point Designer software by using the Simulink Coder product. The code generated from fixed-point models uses only integer types and automatically includes all operations, such as shifts, needed to account for differences in fixed-point locations. You can use the generated code on embedded fixed-point processors or on rapid prototyping systems even if they contain a floating-point processor. For more information about code generation, refer to the Simulink Coder documentation.

You can generate code for testing on a rapid prototyping system using products such as Simulink Real-Time™, Simulink Desktop Real-Time™, or dSPACE® software. The target compiler and processor may support floating-point operations in software or in hardware. In any case, the fixed-point portions of a model generate pure integer code and do not use floating-point operations. This allows valid bit-true testing even on a floating-point processor.

You can also generate code for non-real-time testing. For example, you can generate code to run in nonreal time on computers running any supported operating system. Even though the processors have floating-point hardware, the code generated by fixed-point blocks is pure integer code. The Generic Real-Time Target (GRT) in the Simulink Coder product and acceleration modes in the Simulink software are examples of where non-real-time code is generated and run.

When used with HDL Coder, Fixed-Point Designer lets you generate bit-true synthesizable Verilog® and VHDL® code from Simulink models, Stateflow charts, and MATLAB Function blocks.

Code Generation Support

In this section...

“Introduction” on page 43-3
“Languages” on page 43-3
“Data Types” on page 43-3
“Rounding Modes” on page 43-3
“Overflow Handling” on page 43-3
“Blocks” on page 43-4
“Scaling” on page 43-4

Introduction

All fixed-point blocks support code generation, except particular simulation features. The sections that follow describe the code generation support that the Fixed-Point Designer software provides. You must have a Simulink Coder license to generate C code or a HDL Coder license to generate HDL code.

Languages

C code generation is supported.

Data Types

Fixed-point code generation supports all integer and fixed-point data types that are supported by simulation. See “Supported Data Types” on page 30-18.

Rounding Modes

All rounding modes—Ceiling, Convergent, Floor, Nearest, Round, Simplest, and Zero—are supported.

Overflow Handling

- Saturation and wrapping are supported.

- Wrapping generates the most efficient code.
- Currently, you cannot choose to exclude saturation code automatically when hardware saturation is available. Select wrapping in order for the Simulink Coder product to exclude saturation code.

Blocks

All blocks generate code for all operations with a few exceptions. The Lookup Table Dynamic block generates code for all lookup methods except **Interpolation-Extrapolation**.

Scaling

Any binary-point-only scaling and [Slope Bias] scaling that is supported in simulation is supported, bit-true, in code generation.

Accelerating Fixed-Point Models

If the model meets the code generation restrictions, you can use Simulink acceleration modes with your fixed-point model. The acceleration modes can drastically increase the speed of some fixed-point models. This is especially true for models that execute a very large number of time steps. The time overhead to generate code for a fixed-point model is generally larger than the time overhead to set up a model for simulation. As the number of time steps increases, the relative importance of this overhead decreases.

Note: Rapid Accelerator mode does not support models with bus objects or 33+ bit fixed-point data types as parameters.

Every Simulink model is configured to have a start time and a stop time in the Configuration Parameters dialog box. Simulink simulations are usually configured for non-real-time execution, which means that the Simulink software tries to simulate the behavior from the specified start time to the stop time as quickly as possible. The time it takes to complete a simulation consists of two parts: overhead time and core simulation time, which is spent calculating changes from one time step to the next. For any model, the time it takes to simulate if the stop time is the same as the start time can be regarded as the overhead time. If the stop time is increased, the simulation takes longer. This additional time represents the core simulation time. Using an acceleration mode to simulate a model has an initially larger overhead time that is spent generating and compiling code. For any model, if the simulation stop time is sufficiently close to the start time, then Normal mode simulation is faster than an acceleration mode. But an acceleration mode can eliminate the overhead of code generation for subsequent simulations if structural changes to the model have not occurred.

In Normal mode, the Simulink software runs general code that can handle various situations. In an acceleration mode, code is generated that is tailored to the current usage. For fixed-point use, the tailored code is much leaner than the simulation code and executes much faster. The tailored code allows an acceleration mode to be much faster in the core simulation time. For any model, when the stop time is close to the start time, overhead dominates the overall simulation time. As the stop time is increased, there is a point at which the core simulation time dominates overall simulation time. Normal mode has less overhead compared to an acceleration mode when fresh code generation is necessary. Acceleration modes are faster in the core simulation portion. For any model, there is a stop time for which Normal mode and acceleration mode with fresh code generation have the same overall simulation time. If the stop time is decreased,

then Normal mode is faster. If the stop time is increased, then an acceleration mode has an increasing speed advantage. Eventually, the acceleration mode speed advantage is drastic.

Normal mode generally uses more tailored code for floating-point calculations compared to fixed-point calculations. Normal mode is therefore generally much faster for floating-point models than for similar fixed-point models. For acceleration modes, the situation often reverses and fixed point becomes significantly faster than floating point. As noted above, the fixed-point code goes from being general to highly tailored and efficient. Depending on the hardware, the integer-based fixed-point code can gain speed advantages over similar floating-point code. Many processors can do integer calculations much faster than similar floating-point operations. In addition, if the data bus is narrow, there can also be speed advantages to moving around 1-, 2-, or 4-byte integer signals compared to 4- or 8-byte floating-point signals.

Using External Mode or Rapid Simulation Target

In this section...

“Introduction” on page 43-7

“External Mode” on page 43-7

“Rapid Simulation Target” on page 43-8

Introduction

If you are using the Simulink Coder external mode or rapid simulation (RSim) target, there are situations where you might get unexpected errors when tuning block parameters. These errors can arise when you specify the **Best precision** scaling option for blocks that support constant scaling for best precision. See “Constant Scaling for Best Precision” on page 31-15 for a description of the constant scaling feature.

The sections that follow provide further details about the errors you might encounter. To avoid these errors, specify a scaling value instead of using the **Best precision** scaling option.

External Mode

If you change a parameter such that the binary point moves during an external mode simulation or during graphical editing, and you reconnect to the target, a checksum error occurs and you must rebuild the code. When you use **Best Precision** scaling, the binary point is automatically placed based on the value of a parameter. Each power of two roughly marks the boundary where a parameter value maps to a different binary point. For example, a parameter value of 1 to 2 maps to a particular binary point position. If you change the parameter to a value of 2 to 4, the binary point moves one place to the right, while if you change the parameter to a value of 0.5 to 1, it moves one place to the left.

For example, suppose a block has a parameter value of -2. You then build the code and connect in external mode. While connected, you change the parameter to -4. If the simulation is stopped and then restarted, this parameter change causes a binary point change. In external mode, the binary point is kept fixed. If you keep the parameter value of -4 and disconnect from the target, then when you reconnect, a checksum error occurs and you must rebuild the code.

Rapid Simulation Target

If a parameter change is great enough, and you are using the best precision mode for constant scaling, then you cannot use the RSim target.

If you change a block parameter by a sufficient amount (approximately a factor of two), the best precision mode changes the location of the binary point. Any change in the binary point location requires the code to be rebuilt because the model checksum is changed. This means that if best precision parameters are changed over a great enough range, you cannot use the rapid simulation target and a checksum error message occurs when you initialize the RSim executable.

Optimize Your Generated Code

In this section...
“Reducing ROM Consumption or Model Execution Time” on page 43-9
“Restrict Data Type Word Lengths” on page 43-10
“Avoid Fixed-Point Scalings with Bias” on page 43-10
“Wrap and Round to Floor or Simplest” on page 43-11
“Limit the Use of Custom Storage Classes” on page 43-12
“Limit the Use of Unevenly Spaced Lookup Tables” on page 43-12
“Minimize the Variety of Similar Fixed-Point Utility Functions” on page 43-13
“Handle Net Slope Computation” on page 43-13
“Use Division to Handle Net Slope Computation” on page 43-14
“Improve Numerical Accuracy of Simulation Results with Rational Approximations to Handle Net Slope” on page 43-15
“Improve Efficiency of Generated Code with Rational Approximations to Handle Net Slope” on page 43-20
“Use Integer Division to Handle Net Slope Computation” on page 43-26
“Optimize Generated Code Using Specified Minimum and Maximum Values” on page 43-26
“Eliminate Unnecessary Utility Functions Using Specified Minimum and Maximum Values” on page 43-29

Reducing ROM Consumption or Model Execution Time

Tip	Reduces ROM	Reduces Model Execution Time
“Restrict Data Type Word Lengths” on page 43-10	Yes	Yes
“Avoid Fixed-Point Scalings with Bias” on page 43-10	Yes	Yes
“Wrap and Round to Floor or Simplest” on page 43-11	Yes	Yes
“Limit the Use of Custom Storage Classes” on page 43-12	Yes	No
“Limit the Use of Unevenly Spaced Lookup Tables” on page 43-12	Yes	Yes

Tip	Reduces ROM	Reduces Model Execution Time
“Minimize the Variety of Similar Fixed-Point Utility Functions” on page 43-13	Yes	No
“Handle Net Slope Computation” on page 43-13	Dependent on model configuration, compiler, and target hardware	Dependent on model configuration, compiler, and target hardware
“Optimize Generated Code Using Specified Minimum and Maximum Values” on page 43-26	Yes	Yes

Restrict Data Type Word Lengths

If possible, restrict the fixed-point data type word lengths in your model so that they are equal to or less than the integer size of your target microcontroller. This results in fewer mathematical instructions in the microcontroller, and reduces ROM and execution time.

This recommendation strongly applies to global variables that consume global RAM. For example, Unit Delay blocks have discrete states that have the same word lengths as their input and output signals. These discrete states are global variables that consume global RAM, which is a scarce resource on many embedded systems.

For temporary variables that only occupy a CPU register or stack location briefly, the space consumed by a `long` is less critical. However, depending on the operation, the use of `long` variables in math operations can be expensive. Addition and subtraction of long integers generally requires the same effort as adding and subtracting regular integers, so that operation is not a concern. In contrast, multiplication and division with long integers can require significantly larger and slower code.

Avoid Fixed-Point Scalings with Bias

Whenever possible, avoid using fixed-point numbers with bias. In certain cases, if you choose biases carefully, you can avoid significant increases in ROM and execution time. Refer to “Recommendations for Arithmetic and Scaling” on page 32-40 for more information on how to choose appropriate biases in cases where it is necessary; for example if you are interfacing with a hardware device that has a built-in bias. In general, however, it is safer to avoid using fixed-point numbers with bias altogether.

Inputs to lookup tables are an important exception to this recommendation. If a lookup table input and the associated input data use the same bias, then there is no penalty associated with nonzero bias for that operation.

Wrap and Round to Floor or Simplest

For most fixed-point and integer operations, the Simulink software provides you with options on how overflows are handled and how calculations are rounded. Traditional handwritten code, especially for control applications, almost always uses the “no effort” rounding mode. For example, to reduce the precision of a variable, that variable is shifted right. For unsigned integers and two's complement signed integers, shifting right is equivalent to rounding to floor. To get results comparable to or better than what you expect from traditional handwritten code, you should round to floor in most cases.

The primary exception to this rule is the rounding behavior of signed integer division. The C language leaves this rounding behavior unspecified, but for most targets the “no effort” mode is round to zero. For unsigned division, everything is nonnegative, so rounding to floor and rounding to zero are identical.

You can improve code efficiency by setting the value of the **Model Configuration Parameters > Hardware Implementation > Production hardware > Signed integer division rounds to** parameter to describe how your production target handles rounding for signed division. For Product blocks that are doing only division, setting the **Integer rounding mode** parameter to the rounding mode of your production target gives the best results. You can also use the **Simplest** rounding mode on blocks where it is available. For more information, refer to “Rounding Mode: Simplest” on page 32-16.

The options for overflow handling also have a big impact on the efficiency of your generated code. Using software to detect overflow situations and saturate the results requires the code to be much bigger and slower compared to simply ignoring the overflows. When overflows are ignored for unsigned integers and two's complement signed integers, the results usually wrap around modulo 2^N , where N is the number of bits. Unhandled overflows that wrap around are highly undesirable for many situations.

However, because of code size and speed needs, traditional handwritten code contains very little software saturation. Typically, the fixed-point scaling is very carefully set so that overflow does not occur in most calculations. The code for these calculations safely ignores overflow. To get results comparable to or better than what you would expect from traditional handwritten code, the **Saturate on integer overflow** parameter should not be selected for Simulink blocks doing those calculations.

In a design, there might be a few places where overflow can occur and saturation protection is needed. Traditional handwritten code includes software saturation for these few places where it is needed. To get comparable generated code, the **Saturate on integer overflow** parameter should only be selected for the few Simulink blocks that correspond to these at-risk calculations.

A secondary benefit of using the most efficient options for overflow handling and rounding is that calculations often reduce from multiple statements requiring several lines of C code to small expressions that can be folded into downstream calculations. Expression folding is a code optimization technique that produces benefits such as minimizing the need to store intermediate computations in temporary buffers or variables. This can reduce stack size and make it more likely that calculations can be efficiently handled using only CPU registers. An automatic code generator can carefully apply expression folding across parts of a model and often see optimizations that might not be obvious. Automatic optimizations of this type often allow generated code to exceed the efficiency of typical examples of handwritten code.

Limit the Use of Custom Storage Classes

In addition to the tip mentioned in “Wrap and Round to Floor or Simplest” on page 43-11, to obtain the maximum benefits of expression folding you also need to make sure that the **Storage class** field in the Signal Properties dialog box is set to **Auto** for each signal. When you choose a setting other than **Auto**, you need to name the signal, and a separate statement is created in the generated code. Therefore, only use a setting other than **Auto** when it is necessary for global variables.

You can access the Signal Properties dialog box by selecting any connection between blocks in your model, and then selecting **Signal Properties** from the Simulink **Edit** menu.

Limit the Use of Unevenly Spaced Lookup Tables

If possible, use lookup tables with nontunable, evenly spaced axes. A table with an unevenly spaced axis requires a search routine and memory for each input axis, which increases ROM and execution time. However, keep in mind that an unevenly spaced lookup table might provide greater accuracy. You need to consider the needs of your algorithm to determine whether you can forgo some accuracy with an evenly spaced table in order to reduce ROM and execution time. Also note that this decision applies only to lookup tables with nontunable input axes, because tables with tunable input axes always have the potential to be unevenly spaced.

Minimize the Variety of Similar Fixed-Point Utility Functions

The Embedded Coder product generates fixed-point utility functions that are designed to handle specific situations efficiently. The Simulink Coder product can generate multiple versions of these optimized utility functions depending on what a specific model requires. For example, the division of `long` integers can, in theory, require eight varieties that are combinations of the output and the two inputs being signed or unsigned. A model that uses all these combinations can generate utility functions for all these combinations.

In some cases, it is possible to make small adjustments to a model that reduce the variety of required utility functions. For example, suppose that across most of a model signed data types are used, but in a small part of a model, a local decision to use unsigned data types is made. If it is possible to switch that portion of the model to use signed data types, then the overall variety of generated utility functions can potentially be reduced.

The best way to identify these opportunities is to inspect the generated code. For each utility function that appears in the generated code, you can search for all the call sites. If relatively few calls to the function are made, then trace back from the call site to the Simulink model. By modifying those places in the Simulink model, it is possible for you to eliminate the few cases that need a rarely used utility function.

Handle Net Slope Computation

The Fixed-Point Designer software provides an optimization parameter, **Use division for fixed-point net slope computation**, that controls how the software handles net slope computation. To learn how to enable this optimization, see “Use Division to Handle Net Slope Computation” on page 43-14.

When a change of fixed-point slope is not a power of two, net slope computation is necessary. Normally, net slope computation is implemented using an integer multiplication followed by shifts. Under certain conditions, net slope computation can be implemented using integer division or a rational approximation of the net slope. One of the conditions is that the net slope can be accurately represented as a rational fraction or as the reciprocal of an integer. Under this condition, the division implementation gives more accurate numerical behavior. Depending on your compiler and embedded hardware, a division implementation might be more desirable than the multiplication and shifts implementation. The generated code for the rational approximation and/or integer division implementation might require less ROM or improve model execution time.

When to Use Division for Fixed-Point Net Slope Computation

This optimization works if:

- The net slope can be approximated with a fraction or is the reciprocal of an integer.
- Division is more efficient than multiplication followed by shifts on the target hardware.

Note: The Fixed-Point Designer software is not aware of the target hardware. Before selecting this option, verify that division is more efficient than multiplication followed by shifts on your target hardware.

When Not to Use Division to Handle Net Slope Computation

This optimization does not work if:

- The software cannot perform the division using the production target `long` data type and therefore must use multiword operations.

Using multiword division does not produce code suitable for embedded targets. Therefore, do not use division to handle net slope computation in models that use multiword operations. If your model contains blocks that use multiword operations, change the word length of these blocks to avoid these operations.

- Net slope is a power of 2 or a rational approximation of the net slope contains division by a power of 2.

Binary-point-only scaling, where the net slope is a power of 2, involves moving the binary point within the fixed-point word. This scaling mode already minimizes the number of processor arithmetic operations.

Use Division to Handle Net Slope Computation

To enable this optimization:

- 1 In the **Configuration Parameters** dialog box, set **Optimization** > **Use division for fixed-point net slope computation** to On, or Use division for reciprocals of integers only

For more information, see “Use division for fixed-point net slope computation”.

- 2 On the **Hardware Implementation > Production hardware** pane, set the **Signed integer division rounds to** configuration parameter to **Floor** or **Zero**, as appropriate for your target hardware. The optimization does not occur if the **Signed integer division rounds to** parameter is **Undefined**.


Note: You must set this parameter to a value that is appropriate for the target hardware. Failure to do so might result in division operations that comply with the definition on the **Hardware Implementation** pane, but are inappropriate for the target hardware.

- 3 Set the **Integer rounding mode** of the blocks that require net slope computation (for example, Product, Gain, and Data Type Conversion) to **Simplest** or match the rounding mode of your target hardware.

Note: You can use the Model Advisor to alert you if you have not configured your model correctly for this optimization. Open the Model Advisor and run the **Identify questionable fixed-point operations** check. For more information, see “Use the Model Advisor to Optimize Fixed-Point Operations in Generated Code” on page 43-40.

Improve Numerical Accuracy of Simulation Results with Rational Approximations to Handle Net Slope

This example illustrates how setting the **Optimization > Use division for fixed-point net slope computation** parameter to **On** improves numerical accuracy. It uses the following model.

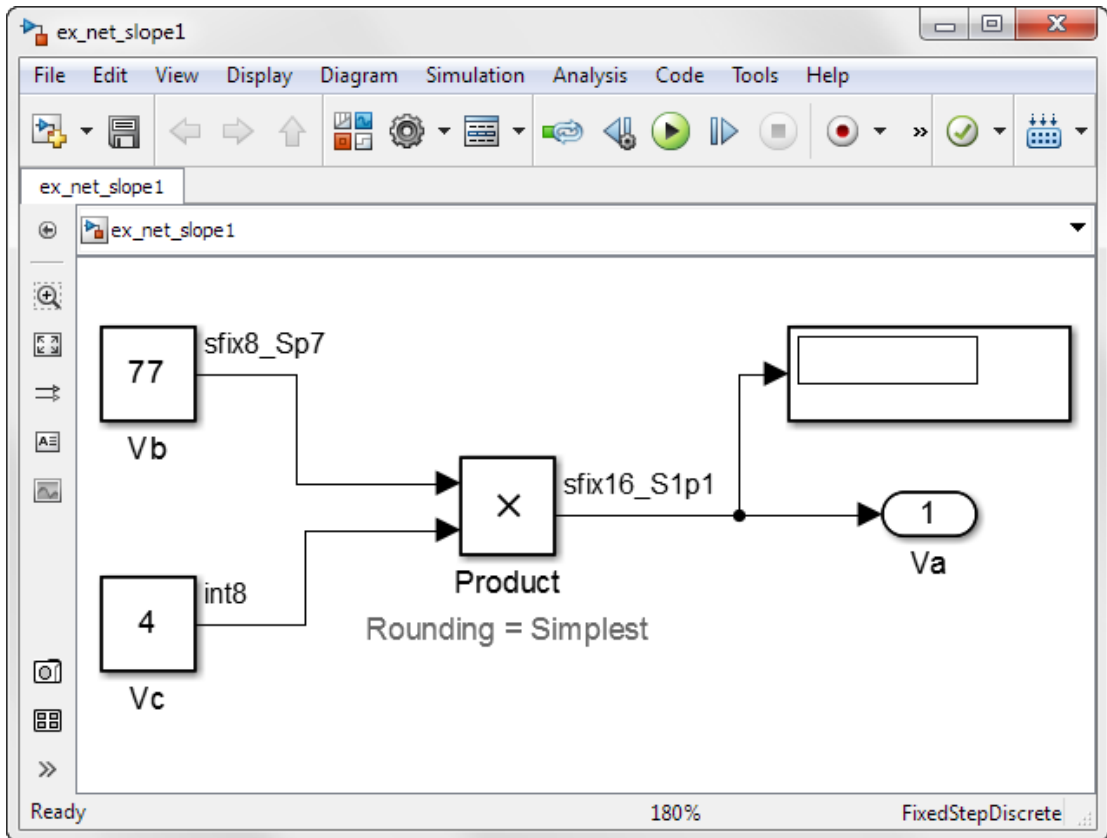

For the Product block in this model,

$$V_a = V_b \times V_c$$

These values are represented by the general [Slope Bias] encoding scheme described in “Scaling” on page 31-7: $V_i = S_i Q_i + B_i$.

Because there is no bias for the inputs or outputs:

$$S_a Q_a = S_b Q_b \cdot S_c Q_c, \text{ or}$$

$$Q_a = \frac{S_b S_c}{S_a} Q_b Q_c$$


where the net slope is:

$$\frac{S_b S_c}{S_a}$$

The net slope for the Product block is 7/11. Because the net slope can be represented as a fractional value consisting of small integers, you can use the **On** setting of the **Use division for fixed-point net slope computation** optimization parameter if your model and hardware configuration are suitable. For more information, see “When to Use Division for Fixed-Point Net Slope Computation” on page 43-14.

To set up the model and run the simulation:

- 1 For the Constant block Vb, set the **Output data type** to `fixdt(1, 8, 0.7, 0)`. For the Constant block Vc, set the **Output data type** to `fixdt(1, 8, 0)`.
- 2 For the Product block, set the **Output data type** to `fixdt(1, 16, 1.1, 0)`. Set the **Integer rounding mode** to `Simplest`.
- 3 Set the **Hardware Implementation > Production hardware > Signed integer division rounds to** configuration parameter to `Zero`.
- 4 Set the **Optimization > Use division for fixed-point net slope computation** to `Off`.
- 5 In your Simulink model window, select **Simulation > Run**.

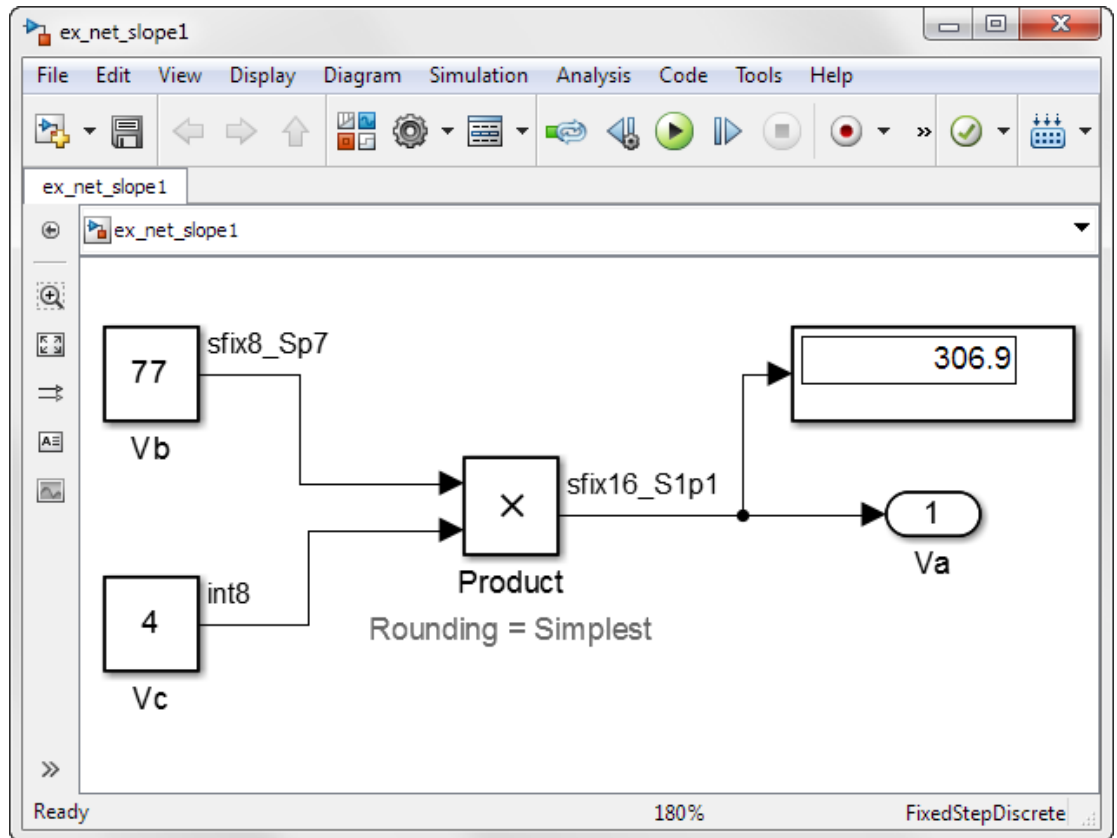


Because the simulation uses multiplication followed by shifts to handle the net slope computation, net slope precision loss occurs. This precision loss results in numerical inaccuracy: the calculated product is 306.9, not 308, as you expect.

Note: You can set up the Fixed-Point Designer software to provide alerts when precision loss occurs in fixed-point constants. For more information, see “Net Slope and Net Bias Precision” on page 32-26.

- 6 Set the **Optimization > Use division for fixed-point net slope computation** to On.

Save your model, and simulate again.

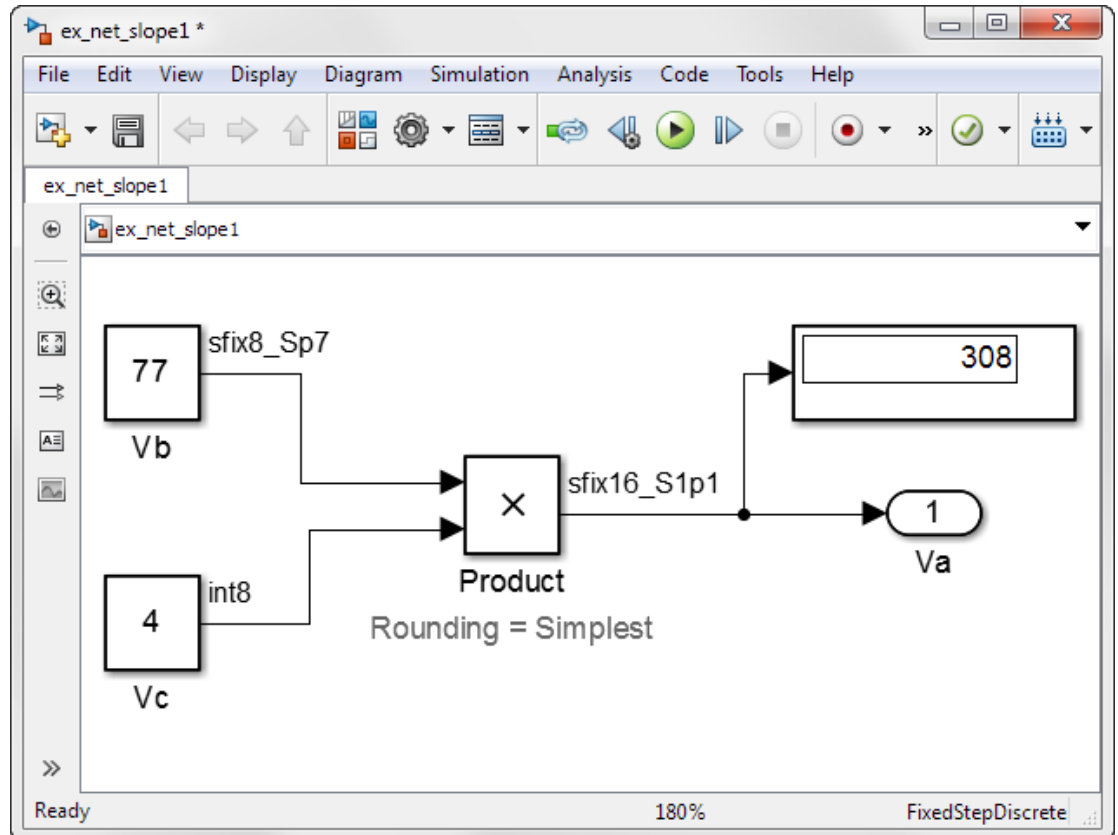

The software implements the net slope computation using a rational approximation instead of multiplication followed by shifts. The calculated product is 308, as you expect.

The optimization works for this model because:

- The net slope is representable as a fraction with small integers in the numerator and denominator.
- The **Hardware Implementation > Production hardware > Signed integer division rounds** to configuration parameter is set to Zero.

Note: This setting must match your target hardware rounding mode.


- The **Integer rounding mode** of the Product block in the model is set to `Simplest`.
- The model does not use multiword operations.

Improve Efficiency of Generated Code with Rational Approximations to Handle Net Slope

This example shows how setting the optimization parameter **Optimization > Use division for fixed-point net slope computation** to `On` improves the efficiency of generated code.

Note: The generated code is more efficient only if division is more efficient than multiplication followed by shifts on your target hardware.

This example uses the following model.

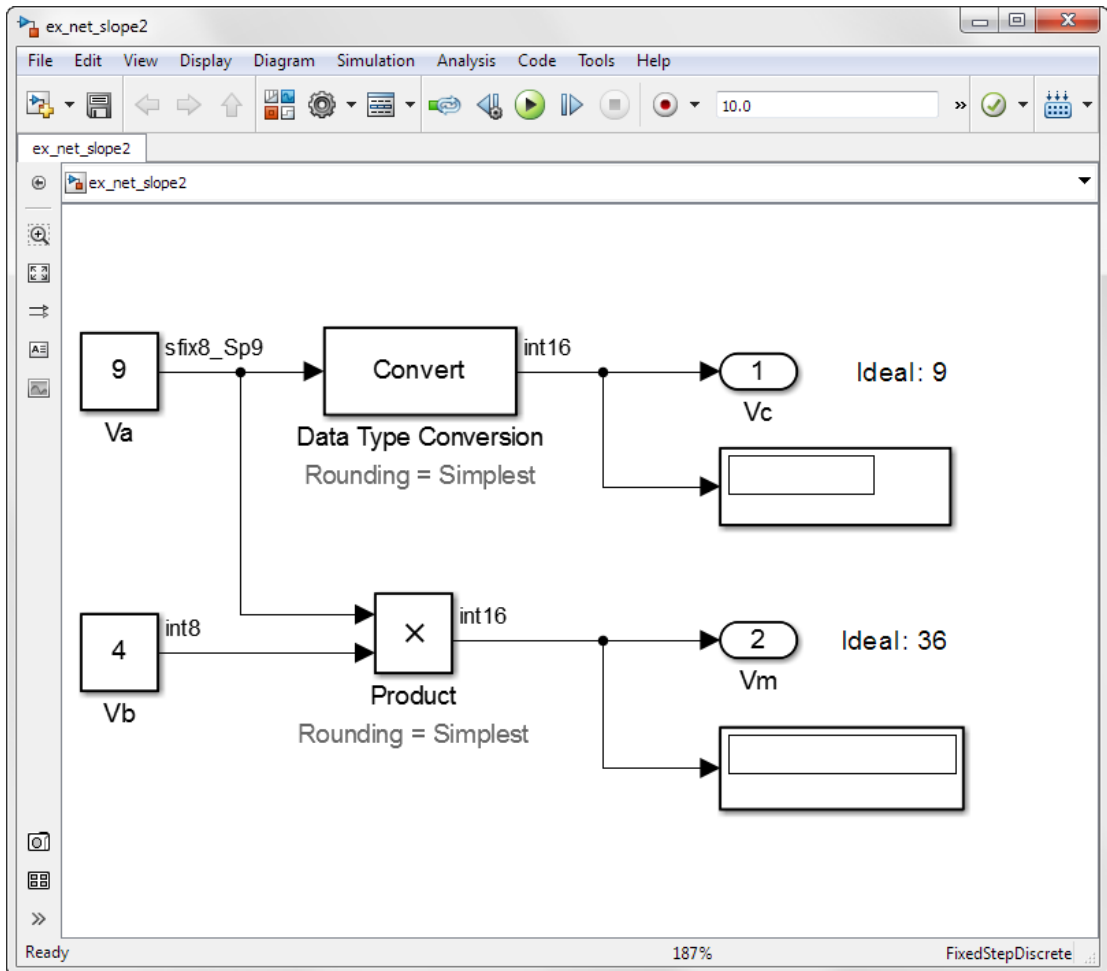

For the Product block in this model,

$$V_m = V_a \times V_b$$

These values are represented by the general [Slope Bias] encoding scheme described in "Scaling" on page 31-7: $V_i = S_i Q_i + B_i$.

Because there is no bias for the inputs or outputs:

$$S_m Q_m = S_a Q_a + S_b Q_b$$

, or

$$Q_m = \frac{S_a S_b}{S_m} Q_a Q_b$$

where the net slope is:

$$\frac{S_a S_b}{S_m}$$

The net slope for the Product block is 9/10.

Similarly, for the Data Type Conversion block in this model,

$$S_a Q_a + B_a = S_b Q_b + B_b$$

There is no bias. Therefore, the net slope is $\frac{S_b}{S_a}$. The net slope for this block is also 9/10.

Because the net slope can be represented as a fraction, you can set the **Optimization > Use division for fixed-point net slope computation** optimization parameter to **On** if your model and hardware configuration are suitable. For more information, see “When to Use Division for Fixed-Point Net Slope Computation” on page 43-14.

To set up the model and generate code:

- 1 For the Inport block Va, set the **Data type** to `fixdt(1, 8, 9/10, 0)`; for the Inport block Vb, set the **Data type** to `int8`.
- 2 For the Data Type Conversion block, set the **Integer rounding mode** to `Simplest`. Set the **Output data type** to `int16`.

- 3 For the Product block, set the **Integer rounding mode** to Simplest. Set the **Output data type** to int16.
- 4 Set the **Hardware Implementation > Production hardware > Signed integer division rounds to configuration parameter** to Zero.
- 5 Set the **Optimization > Use division for fixed-point net slope computation** to Off.
- 6 From the Simulink model menu, select **Code > C/C++ Code > Build Model**.


Conceptually, the net slope computation is 9/10 or 0.9:

```
Vc = 0.9 * Va;  
Vm = 0.9 * Va * Vb;
```

The generated code uses multiplication with shifts:

```
% For the conversion  
Vc = (int16_T)(Va * 115 >> 7);  
% For the multiplication  
Vm = (int16_T)((Va * Vb >> 1) * 29491 >> 14);
```

The ideal value of the net slope computation is 0.9. In the generated code, the approximate value of the net slope computation is $29491 \gg 15 = 29491/2^{15} = 0.899993896484375$. This approximation introduces numerical inaccuracy. For example, using the same model with constant inputs produces the following results.

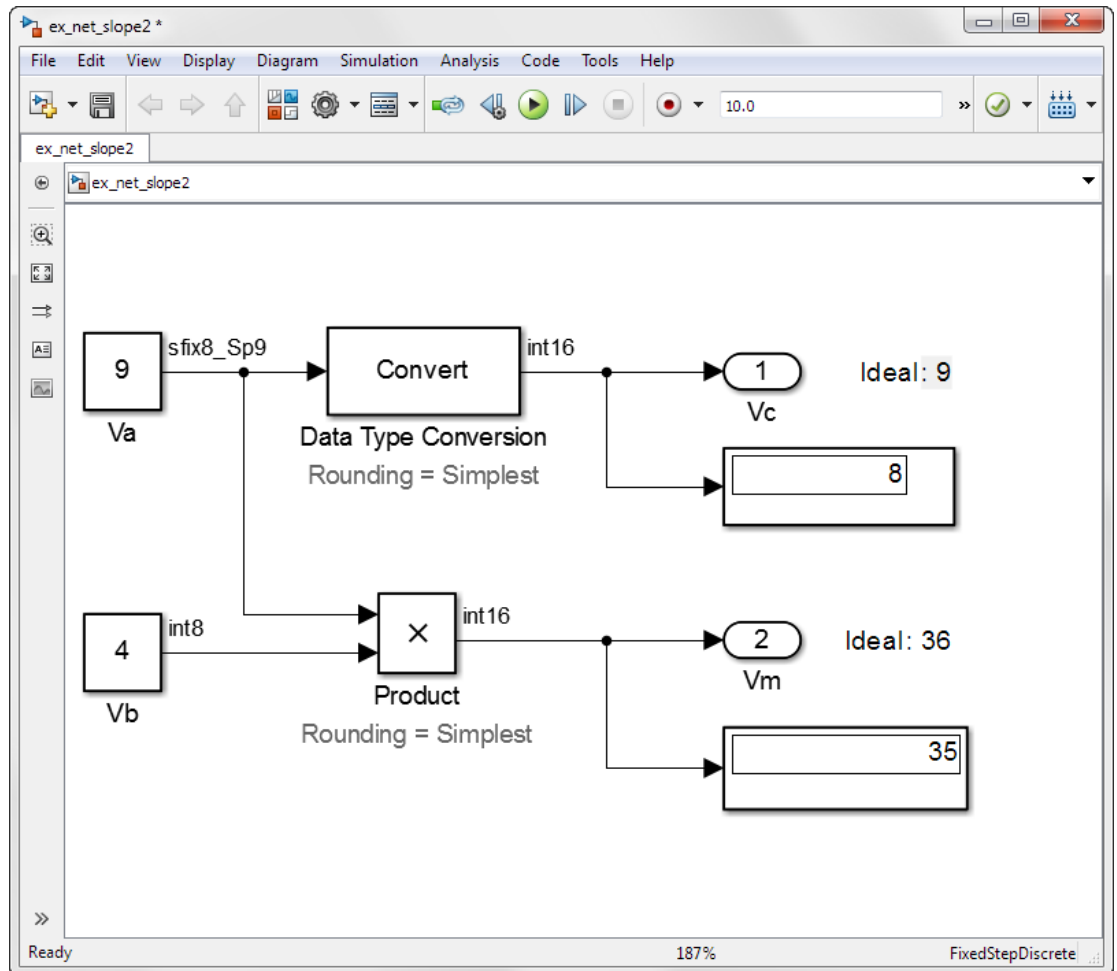

- 7 In the original model with inputs V_a and V_b , set the **Optimization > Use division for fixed-point net slope computation** parameter to On, update the diagram, and generate code again.


The generated code now uses integer division instead of multiplication followed by shifts:

```
% For the conversion
Vc = (int16_T)(Va * 9/10);
```

```
% For the multiplication
Vm = (int16_T)(Va * Vb * 9/10);
```

- 8 In the generated code, the value of the net slope computation is now the ideal value of 0.9. Using division, the results are numerically accurate.

In the model with constant inputs, set the **Optimization > Use division for fixed-point net slope computation** parameter to On and simulate the model.

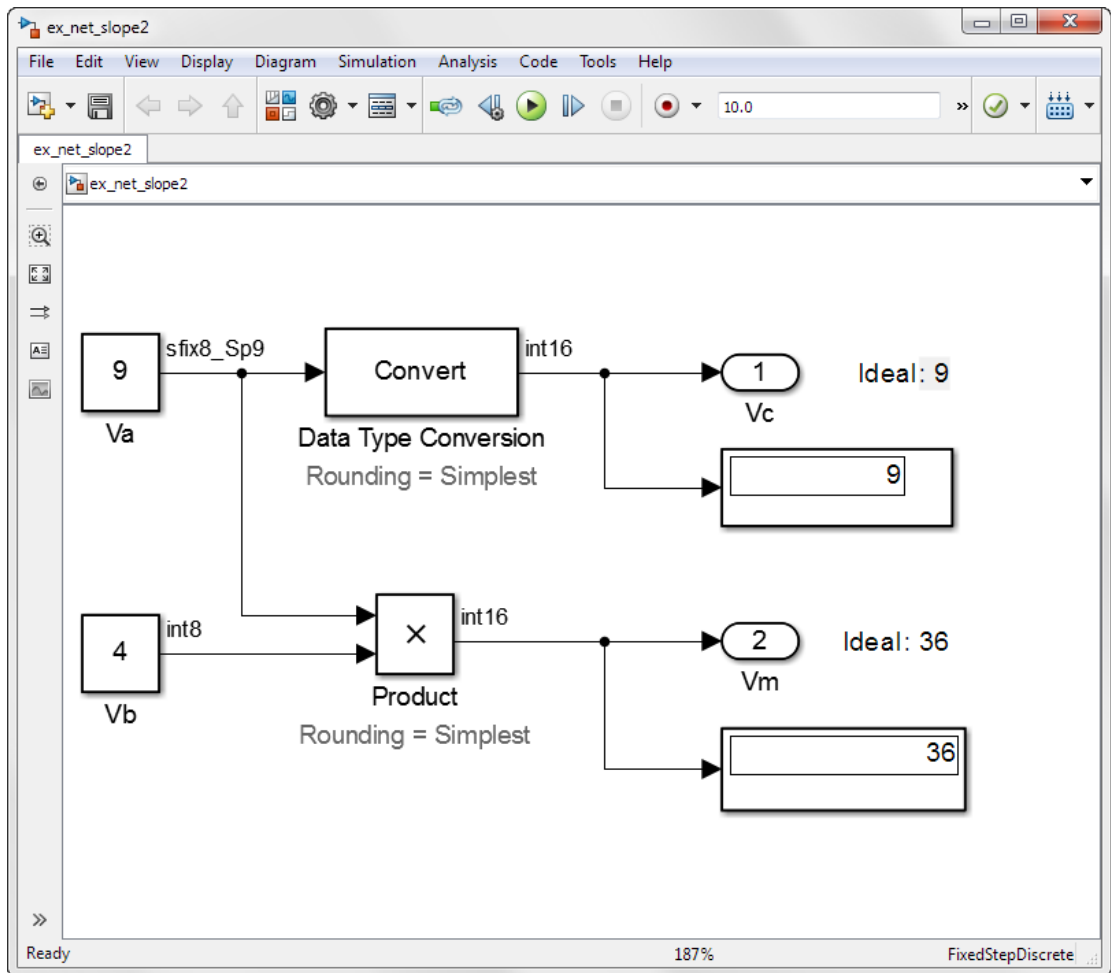

The optimization works for this model because the:

- Net slope is representable as a fraction with small integers in the numerator and denominator.
- **Hardware Implementation > Production hardware > Signed integer division rounds to** configuration parameter is set to **Zero**.

Note: This setting must match your target hardware rounding mode.

- For the Product and Data Type Conversion blocks in the model, the **Integer rounding mode** is set to **Simplest**.
- Model does not use multiword operations.

Use Integer Division to Handle Net Slope Computation

Setting the **Optimization > Use division for fixed-point net slope computation** parameter to **Use division for reciprocals of integers only** triggers the optimization only in cases where the net slope is the reciprocal of an integer. This setting results in a single integer division to handle net slope computations.

Optimize Generated Code Using Specified Minimum and Maximum Values

The Fixed-Point Designer software uses representable minimum and maximum values and constant values to determine if it is possible to optimize the generated code, for example, by eliminating unnecessary utility functions and saturation code from the generated code.

This optimization results in:

- Reduced ROM and RAM consumption
- Improved execution speed

When you select the **Optimize using specified minimum and maximum values** configuration parameter, the software takes into account input range information, also known as *design minimum and maximum*, that you specify for signals and parameters in your model. It uses these minimum and maximum values to derive range information

for downstream signals in the model and then uses this derived range information to simplify mathematical operations in the generated code whenever possible.

Prerequisites

The **Optimize using specified minimum and maximum values** parameter appears for ERT-based targets only and requires an Embedded Coder license when generating code.

How to Configure Your Model

To make optimization more likely:

- Provide as much design minimum and maximum information as possible. Specify minimum and maximum values for signals and parameters in the model for:
 - Inport and Outport blocks
 - Block outputs
 - Block inputs, for example, for the MATLAB Function and Stateflow Chart blocks
 - `Simulink.Signal` objects
- Before generating code, test the minimum and maximum values for signals and parameters. Otherwise, optimization might result in numerical mismatch with simulation. You can simulate your model with simulation range checking enabled. If errors or warnings occur, fix these issues before generating code.

How to Enable Simulation Range Checking

- 1 In your model, select **Simulation > Model Configuration Parameters** to open the Configuration Parameters dialog box.
 - 2 In the Configuration Parameters dialog box, select **Diagnostics > Data Validity**.
 - 3 On the **Data Validity** pane, under **Signals**, set **Simulation range checking** to **warning** or **error**.
- Use fixed-point data types with binary-point-only (power-of-two) scaling.
 - Provide design minimum and maximum information upstream of blocks as close to the inputs of the blocks as possible. If you specify minimum and maximum values for a block output, these values are most likely to affect the outputs of the blocks immediately downstream. For more information, see “Eliminate Unnecessary Utility Functions Using Specified Minimum and Maximum Values” on page 43-29.

How to Enable Optimization

- 1 In the Configuration Parameters dialog box, set the **Code Generation > System target file** to select an Embedded Real-Time (ERT) target (requires an Embedded Coder license).
- 2 Specify design minimum and maximum values for signals and parameters in your model using the tips in “How to Configure Your Model” on page 43-27.
- 3 Select the **Optimization > Optimize using specified minimum and maximum values** configuration parameter.

For more information, see “Optimize using the specified minimum and maximum values”.

Limitations

- This optimization does not occur for:
 - Multiword operations
 - Fixed-point data types with slope and bias scaling
 - Addition unless the fraction length is zero
- This optimization does not take into account minimum and maximum values for:
 - Merge block inputs. To work around this issue, use a `Simulink.Signal` object on the Merge block output and specify the range on this object.
 - Bus elements.
 - Conditionally-executed subsystem (such as a triggered subsystem) block outputs that are directly connected to an Outport block.

Outport blocks in conditionally-executed subsystems can have an initial value specified for use only when the system is not triggered. In this case, the optimization cannot use the range of the block output because the range might not cover the initial value of the block.

- There are limitations on precision because you specify the minimum and maximum values as double-precision values. If the true value of a minimum or maximum value cannot be represented as a double, ensure that you round the minimum and maximum values correctly so that they cover the true design range.
- If your model contains multiple instances of a reusable subsystem and each instance uses input signals with different specified minimum and maximum values, this optimization might result in different generated code for each subsystem so code

reuse does not occur. Without this optimization, the Simulink Coder software generates code once for the subsystem and shares this code among the multiple instances of the subsystem.

Eliminate Unnecessary Utility Functions Using Specified Minimum and Maximum Values

This example shows how the Fixed-Point Designer software uses the input range for a division operation to determine whether it can eliminate unnecessary utility functions from the generated code. It uses the `fxpdemo_min_max_optimization` model. First, you generate code without using the specified minimum and maximum values to see that the generated code contains utility functions to ensure that division by zero does not occur. You then turn on the optimization, and generate code again. With the optimization, the generated code does not contain the utility function because it is not necessary for the input range.

Generate Code Without Using Minimum and Maximum Values

First, generate code without taking into account the design minimum and maximum values for the first input of the division operation to show the code without the optimization. In this case, the software uses the representable ranges for the two inputs, which are both `uint16`. With these input ranges, it is not possible to implement the division with the specified precision using shifts, so the generated code includes a division utility function.

- 1 Run the example. At the MATLAB command line, enter:

```
fxpdemo_min_max_optimization
```

- 2 In the example window, double-click the **View Optimization Configuration** button.

The Optimization pane of the Configuration Parameters dialog box appears.

Note that the **Optimize using specified minimum and maximum values** parameter is not selected.

- 3 Double-click the **Generate Code** button.

The code generation report appears.

- 4 In the model, right-click the **Division with increased fraction length output type** block.

The context menu appears.

- 5 From the context menu, select **C/C++ Code > Navigate To C/C++ Code**.

The code generation report highlights the code generated for this block. The generated code includes a call to the `div_repeat_u32` utility function.

```
rtY.Out3 = div_repeat_u32((uint32_T)rtU.In5 << 16,  
    (uint32_T)rtU.In6, 1U);
```

- 6 Click the `div_repeat_u32` link to view the utility function, which contains code for handling division by zero.

Generate Code Using Minimum and Maximum Values

Next, generate code for the same division operation, this time taking into account the design minimum and maximum values for the first input of the Product block. These minimum and maximum values are specified on the Inport block directly upstream of the Product block. With these input ranges, the generated code implements the division by simply using a shift. It does not need to generate a division utility function, reducing both memory usage and execution time.

- 1 Double-click the Inport block labelled 5 to open the block parameters dialog box.
- 2 On the block parameters dialog box, select the **Signal Attributes** pane and note that:
 - The **Minimum** value for this signal is 1.
 - The **Maximum** value for this signal is 100.
- 3 Click **OK** to close the dialog box.
- 4 Double-click the **View Optimization Configuration** button.

The Optimization pane of the Configuration Parameters dialog box appears.

- 5 On this pane, select the **Optimize using specified minimum and maximum values** parameter and click **Apply**.
- 6 Double-click the **Generate Code** button.

The code generation report appears.

- 7 In the model, right-click the Division with increased fraction length output type block.

The context menu appears.

- 8 From the context menu, select **C/C++ Code > Navigate To C/C++ Code**.

The code generation report highlights the code generated for this block. This time the generated code implements the division with a shift operation and there is no division utility function.

```
tmp = rtU.In6;
rtY.Out3 = (uint32_T)tmp ==
  (uint32_T)0 ? MAX_uint32_T : ((uint32_T)rtU.In5 << 17) /
  (uint32_T)tmp;
```

Modify the Specified Minimum and Maximum Values

Finally, modify the minimum and maximum values for the first input to the division operation so that its input range is too large to guarantee that the value does not overflow when shifted. Here, you cannot shift a 16-bit number 17 bits to the right without overflowing the 32-bit container. Generate code for the division operation, again taking into account the minimum and maximum values. With these input ranges, the generated code includes a division utility function to ensure that no overflow occurs.

- 1 Double-click the Inport block labelled **5** to open the block parameters dialog box.
- 2 On the block parameters dialog box, select the **Signal Attributes** pane and set the **Maximum** value to **40000**, then click **OK** to close the dialog box.
- 3 Double-click the **Generate Code** button.

The code generation report appears.

- 4 In the model, right-click the **Division with increased fraction length output type** block.

The context menu appears.

- 5 From the context menu, select **C/C++ Code > Navigate To C/C++ Code**.

The code generation report highlights the code generated for this block. The generated code includes a call to the `div_repeat_32` utility function.

```
rtY.Out3 = div_repeat_u32((uint32_T)rtU.In5 << 16,
  (uint32_T)rtU.In6, 1U);
```

Optimizing Your Generated Code with the Model Advisor

In this section...

“Optimize Generated Code with Model Advisor” on page 43-32

“Identify Blocks that Generate Expensive Fixed-Point and Saturation Code” on page 43-33

“Identify Questionable Fixed-Point Operations” on page 43-36

“Identify Blocks that Generate Expensive Rounding Code” on page 43-38

Optimize Generated Code with Model Advisor

You can use the Simulink Model Advisor to help you configure your fixed-point models to achieve a more efficient design and optimize your generated code. To use the Model Advisor to check your fixed-point models:

- 1 From the **Analysis** menu of the model you want to analyze, select **Model Advisor**.
- 2 In the Model Advisor left pane, expand the **By Product** node and select **Embedded Coder**.
- 3 From the Model Advisor **Edit** menu, select **Select All** to enable all Model Advisor checks associated with the selected node. For fixed-point code generation, the most important check boxes to select are **Identify blocks that generate expensive fixed-point and saturation code**, **Identify questionable fixed-point operations**, **Identify blocks that generate expensive rounding code**, and **Check the hardware implementation**.
- 4 Click **Run Selected Checks**. Any tips for improving the efficiency of your fixed-point model appear in the Model Advisor window.

The sections that follow discuss fixed-point related checks and sub-checks found in the Model Advisor. The sections explain the checks, discuss their importance in fixed-point code generation, and offer suggestions for tweaking your model to optimize your generated code.

Identify Blocks that Generate Expensive Fixed-Point and Saturation Code

Identify Sum blocks for questionable fixed-point operations

- When the input range of a Sum block exceeds the output range, a range error occurs. Users can get any addition or subtraction their application requires by inserting data type conversion blocks before and/or after the sum block.
- When a Sum block has an input with a slope adjustment factor that does not equal the slope adjustment factor of the output, the mismatch requires the Sum block to perform a multiply operation each time the input is converted to the output's data type and scaling. The mismatch can be removed by changing the scaling of the output or the input.
- When the net sum of the Sum block input biases does not equal the bias of the output, the generated code includes one extra addition or subtraction instruction to correctly account for the net bias adjustment. Changing the bias of the output scaling can make the net bias adjustment zero and eliminate the need for the extra operation.

Identify Min Max blocks for questionable fixed-point operations

- When the input and output of the MinMax block have different data types, a conversion operation is required every time the block is executed. The model is more efficient with the same data types.
- When the data type and scaling of the input of the MinMax block does not match the data type and scaling of the output, a conversion is required before performing a relational operation. This could result in a range error when casting, or a precision loss each time a conversion is performed. Change the scaling of either the input or output to generate more efficient code.
- When the input of the MinMax block has a different slope adjustment factor than the output, the MinMax block requires a multiply operation each time the block is executed to convert the input to the data type and scaling of the output. You can correct the mismatch by changing the scaling of either the input or output.

Identify Discrete Integrator blocks for questionable fixed-point operations

- When the initial condition for the Discrete-Time Integrator blocks is used to initialize the state and output, the output equation generates excessive code and an extra global variable is required. It is recommended that you set the **Function Block Parameters > Initial condition setting** parameter to `State` (most efficient).

Identify Compare to Constant blocks for questionable fixed-point operations

- If the input data type of the Compare to Zero block cannot represent zero exactly, the input signal is compared to the closest representable value of zero, resulting in parameter overflow. To avoid this parameter overflow, select an input data type that can represent zero.
- If the Compare to Constant block's **Constant value** is outside the range that the input data type can represent, the input signal is compared to the closest representable value of the constant. This results in parameter overflow. To avoid this parameter overflow, select an input data type that can represent the **Constant value**, or change the **Constant value** to a value that can be accommodated by the input data type.

Identify Lookup Table blocks for questionable fixed-point operations

Efficiency trade-offs related to lookup table data are described in “Effects of Spacing on Speed, Error, and Memory Usage” on page 37-22. Based on these trade-offs, the Model Advisor identifies blocks where there is potential for efficiency improvements, such as:

- Lookup table input data is not evenly spaced.
- Lookup table input data is *not* evenly spaced when quantized, but it is very close to being evenly spaced.
- Lookup table input data is evenly spaced, but the spacing is not a power of two.

Check optimization and hardware implementation settings

- Integer division generated code contains protection against arithmetic exceptions such as division by zero, INT_MIN/-1, and LONG_MIN/-1. If you construct models making it impossible for exception triggering input combinations to reach a division operation, the protection code generated as part of the division operation is redundant.
- The index search method `Evenly-spaced points` requires a division operation, which can be computationally expensive.

Identify blocks that will invoke net slope computation

When a change of fixed-point slope is not a power of two, net slope computation is necessary. Normally, net slope computation is implemented using an integer multiplication followed by shifts. Under some conditions, an alternate implementation requires just an integer division by a constant. One of the conditions is that the net slope can be very accurately represented as the reciprocal of an integer. When this condition is

met, the division implementation produces more accurate numerical behavior. Depending on your compiler and embedded hardware, the division implementation might be more desirable than the multiplication and shifts implementation. The generated code might be more efficient in either ROM size or model execution size.

The Model Advisor alerts you when:

- You set the **Use division for fixed-point net slope computation** optimization parameter to 'On', but your model configuration is not compatible with this selection.
- Your model configuration is suitable for using division to handle net slope computation, but you do not set the **Use division for fixed-point net slope computation** to 'On' optimization parameter.

For more information, see “Handle Net Slope Computation” on page 43-13.

Identify product blocks that are less efficient

The number of multiplications and divisions that a block performs can have a big impact on accuracy and efficiency. The Model Advisor detects some, but not all, situations where rearranging the operations can improve accuracy, efficiency, or both.

One such situation is when a calculation using more than one division operation is computed. A general guideline from the field of numerical analysis is to multiply all the denominator terms together first, then do one and only one division. This improves accuracy and often speed in floating-point and especially fixed-point. This can be accomplished in Simulink by cascading Product blocks. Note that multiple divisions spread over a series of blocks are not detected by the Model Advisor.

Another situation is when a single Product block is configured to do more than one multiplication or division operation. This is supported, but if the output data type is integer or fixed-point, then better results are likely if this operation is split across several blocks each doing one multiplication or one division. Using several blocks allows the user to control the data type and scaling used for intermediate calculations. The choice of data types for intermediate calculations affects precision, range errors, and efficiency.

Check for expensive saturation code

Setting the **Saturate on integer overflow** parameter can produce condition checking code that your application might not require.

Check whether your application requires setting **Function Block Parameters > Signal Attributes > Saturate on integer overflow**. Otherwise, clear this parameter for the most efficient implementation of the block in the generated code.

Identify Questionable Fixed-Point Operations

This check identifies blocks that generate cumbersome multiplication and division operations, expensive conversion code, inefficiencies in lookup table blocks, and expensive comparison code.

Check for expensive multiplication code

- “Targeting an Embedded Processor” on page 33-4 discusses the capabilities and limitations of embedded processors. “Design Rules” on page 33-5 recommends that inputs to a multiply operation should not have word lengths larger than the base integer type of your processor. Multiplication with larger word lengths can always be handled in software, but that approach requires much more code and is much slower. The Model Advisor identifies blocks where undesirable software multiplications are required. Visual inspection of the generated code, including the generated multiplication utility function, will make the cost of these operations clear. It is strongly recommended that you adjust the model to avoid these operations.
- discusses the implementation details of fixed-point multiplication and division. That section shows the significant increase in complexity that occurs when signals with nonzero biases are involved in multiplication and division. It is strongly recommended that you make changes to eliminate the need for these complicated operations. Extra steps are required to implement the multiplication. Inserting a Data Type Conversion block before and after the block doing the multiplication allows the biases to be removed and allows the user to control data type and scaling for intermediate calculations. In many cases the Data Type Conversion blocks can be moved to the “edges” of a (sub)system. The conversion is only done once and all blocks can benefit from simpler bias-free math.

Check for expensive division code

The rounding behavior of signed integer division is not fully specified by C language standards. Therefore, the generated code for division is too large to provide bit-true agreement between simulation and code generation. To avoid integer division generated code that is too large, in the Configuration Parameters dialog box, on the **Hardware Implementation** pane, set the **Signed integer division rounds to** parameter to the recommended value.

Identify lookup blocks with uneven breakpoint spacing

Efficiency trade-offs related to lookup table data are described in “Effects of Spacing on Speed, Error, and Memory Usage” on page 37-22. Based on these trade-offs, the Model

Advisor identifies blocks where there is potential for efficiency improvements, and issues a warning when:

- Lookup table input data is not evenly spaced.
- Lookup table input data is *not* evenly spaced when quantized, but it is very close to being evenly spaced.
- Lookup table input data is evenly spaced, but the spacing is not a power of two.

Check for expensive pre-lookup division

For a Prelookup or n-D Lookup Table block, **Index search method** is **Evenly spaced points**. Breakpoint data does not have power of 2 spacing.

If breakpoint data is nontunable, it is recommended that you adjust the data to have even, power of 2 spacing. Otherwise, in the block parameter dialog box, specify a different **Index search method** to avoid the computation-intensive division operation.

Check for expensive data type conversions

When a block is configured such that it would generate inefficient code for a data type conversion, the Model Advisor generates a warning and makes suggestions on how to make your model more efficient.

Check for fixed-point comparisons with predetermined results

When you select `isNan`, `isFinite`, or `isInf` as the operation for the Relational Operator block, the block switches to one-input mode. In this mode, if the input data type is fixed point, boolean, or a built-in integer, the output is `FALSE` for `isInf` and `isNan`, `TRUE` for `isFinite`. This might result in dead code which will be eliminated by Simulink Coder.

Check for expensive binary comparison operations

- When the input data types of a Relational Operator block are not the same, a conversion operation is required every time the block is executed. If one of the inputs is invariant, then changing the data type and scaling of the invariant input to match the other input improves the efficiency of the model.
- When the inputs of a Relational Operator block have different ranges, there will be a range error when casting, and a precision loss each time a conversion is performed. You can insert Data Type Conversion blocks before the Relational Operator block to convert both inputs to a common data type that has enough range and precision to represent each input.

- When the inputs of a Relational Operator block have different slope adjustment factors, the Relational Operator block is required to perform a multiply operation each time the input with lesser positive range is converted to the data type and scaling of the input with greater positive range. The extra multiplication requires extra code, slows down the speed of execution, and usually introduces additional precision loss. By adjusting the scaling of the inputs, you can eliminate mismatched slopes.

Check for expensive comparison code

When your model is configured such that the generated code contains expensive comparison code, the Model Advisor generates a warning.

Identify Blocks that Generate Expensive Rounding Code

This check alerts you when rounding optimizations are available. To check for blocks that generate expensive rounding code, the Model Advisor performs the following sub-checks:

- Check for expensive rounding operations in multiplication and division
- Check optimization and Hardware Implementation settings (Lookup Blocks)
- Check for expensive rounding in a data type conversion
- Check for expensive rounding modes in the model

Traditional handwritten code, especially for control applications, almost always uses “no effort” rounding. For example, for unsigned integers and two's complement signed integers, shifting right and dropping the bits is equivalent to rounding to floor. To get results comparable to, or better than, what you expect from traditional handwritten code, use the simplest rounding mode. In general the simplest mode provides the minimum cost solution with no overflows. If the simplest mode is not available, round to floor.

The primary exception to this rule is the rounding behavior of signed integer division. The C standard leaves this rounding behavior unspecified, but for most production targets the “no effort” mode is to round to zero. For unsigned division, everything is nonnegative, so rounding to floor and rounding to zero are identical. To improve rounding efficiency, set **Model Configuration Parameters > Hardware Implementation > Production hardware > Signed integer division rounds to** using the mode that your production target uses.


Use the **Integer rounding mode** parameter on your model's blocks to simulate the rounding behavior of the C compiler that you use to compile code generated from the model. This setting appears on the **Signal Attributes** pane of the parameter dialog

boxes of blocks that can perform signed integer arithmetic, such as the Product block. To obtain the most efficient generated code, change the **Integer rounding mode** parameter of the block to the recommended setting.

For more information on properties to consider when choosing a rounding mode, see “Choosing a Rounding Method”.

Use the Model Advisor to Optimize Fixed-Point Operations in Generated Code

This example uses the following model.

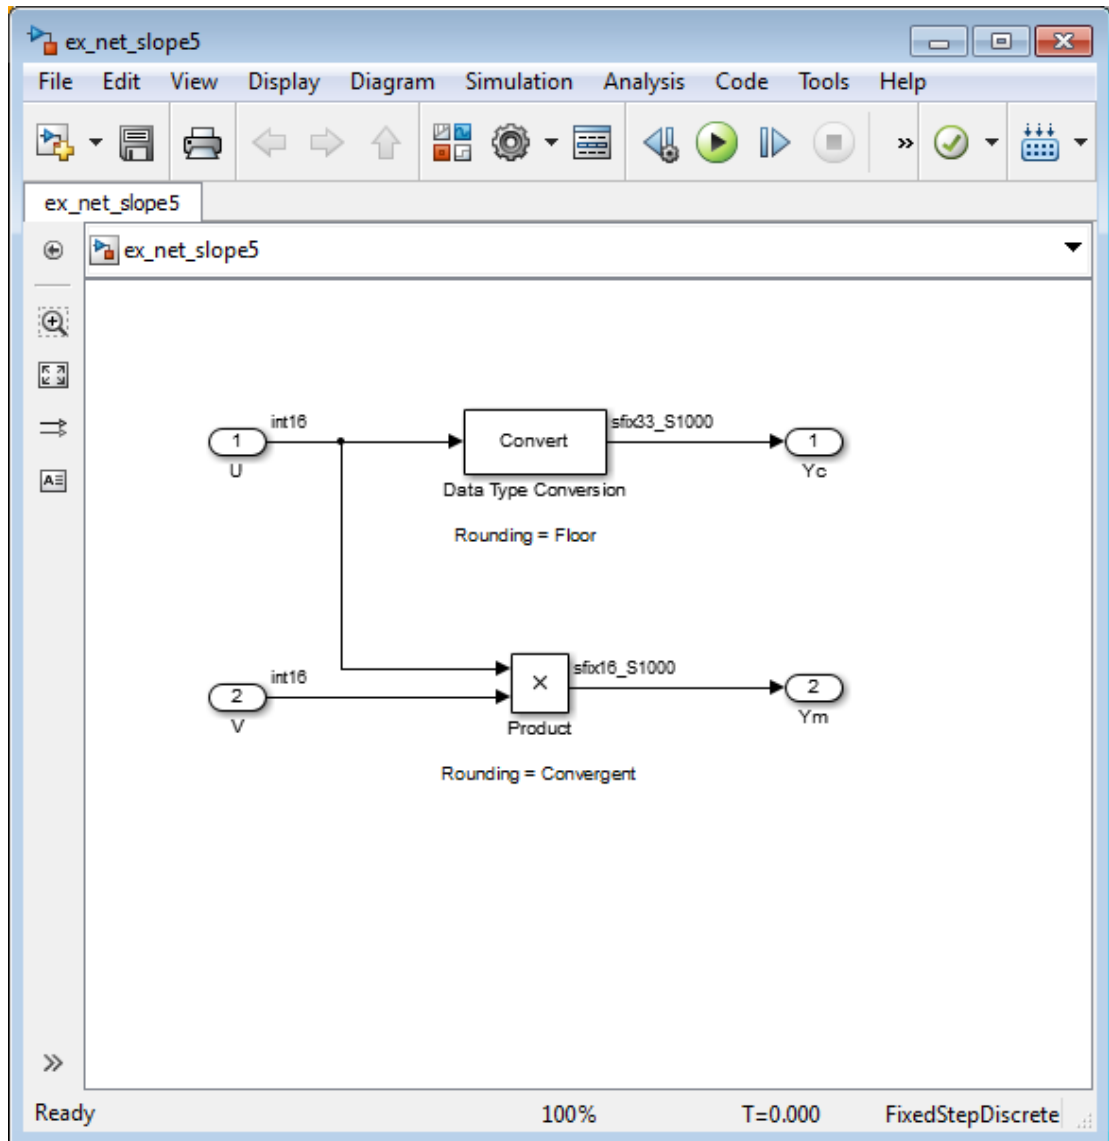

Open the `ex_net_slope5` model. At the MATLAB command line, enter:

```
addpath(fullfile(docroot,'toolbox','fixpoint','examples'))
```

ex_net_slope5

In this model, the net slope for the Data Type Conversion and Product blocks is 1/1000.

This model has the following properties:

- The **Data type** of the two Inport blocks, U and V, is set to `int16`.
- The **Integer rounding mode** of the Data Type Conversion block, is set to `Floor`, and the **Output data type** is set to `fixdt(1, 33, 1000, 0)`.

Note: Setting the **Output data type** word length greater than the length of the long data type results in multiword operations.

- The **Integer rounding mode** of the Product block, is set to `Convergent`, and the **Output data type** is set to `fixdt(1, 16, 1000, 0)`.
- The **Simulation > Model Configuration Parameters > Hardware Implementation > Production hardware > Signed integer division rounds to** configuration parameter is set to `Zero`.
- The **Optimization > Use division for fixed-point net slope computation** configuration parameter is set to `'On'`.

To run the Model Advisor checks:

- 1 From the model menu, select **Analysis > Model Advisor > Model Advisor**.
- 2 In the Model Advisor left pane, expand the **By Product** node and then expand the **Embedded Coder** node.
- 3 Select **Identify blocks that generate expensive fixed-point and saturation code**.
- 4 Click **Run this check**.

The Model Advisor warns that your model contains a block that will invoke net slope computation.

- 5 Make the suggested changes
 - a Double click the Data Type Conversion block and change the **Integer rounding mode** to `Simplest`.
 - b Change the **Output data type** from `fixdt(1, 33, 1000, 0)` to `fixdt(1, 16, 1000, 0)`, to avoid multiword operations.

c Save the model.

6 Rerun the check.

The check now passes.

7 Run the Model Advisor **Identify questionable fixed-point operations** check.

The check passes.

8 Select and run **Identify blocks that generate expensive rounding code**.


The Model Advisor warns that your model contains blocks that will generate expensive rounding code for multiplication and division. It also provides recommendations on how to change your model configuration to make it more efficient.

9 Make the suggested changes:

a Double click on the Product block, and change the **Integer rounding mode** to **Simplest**.

b Save the model.

This is your model configuration.

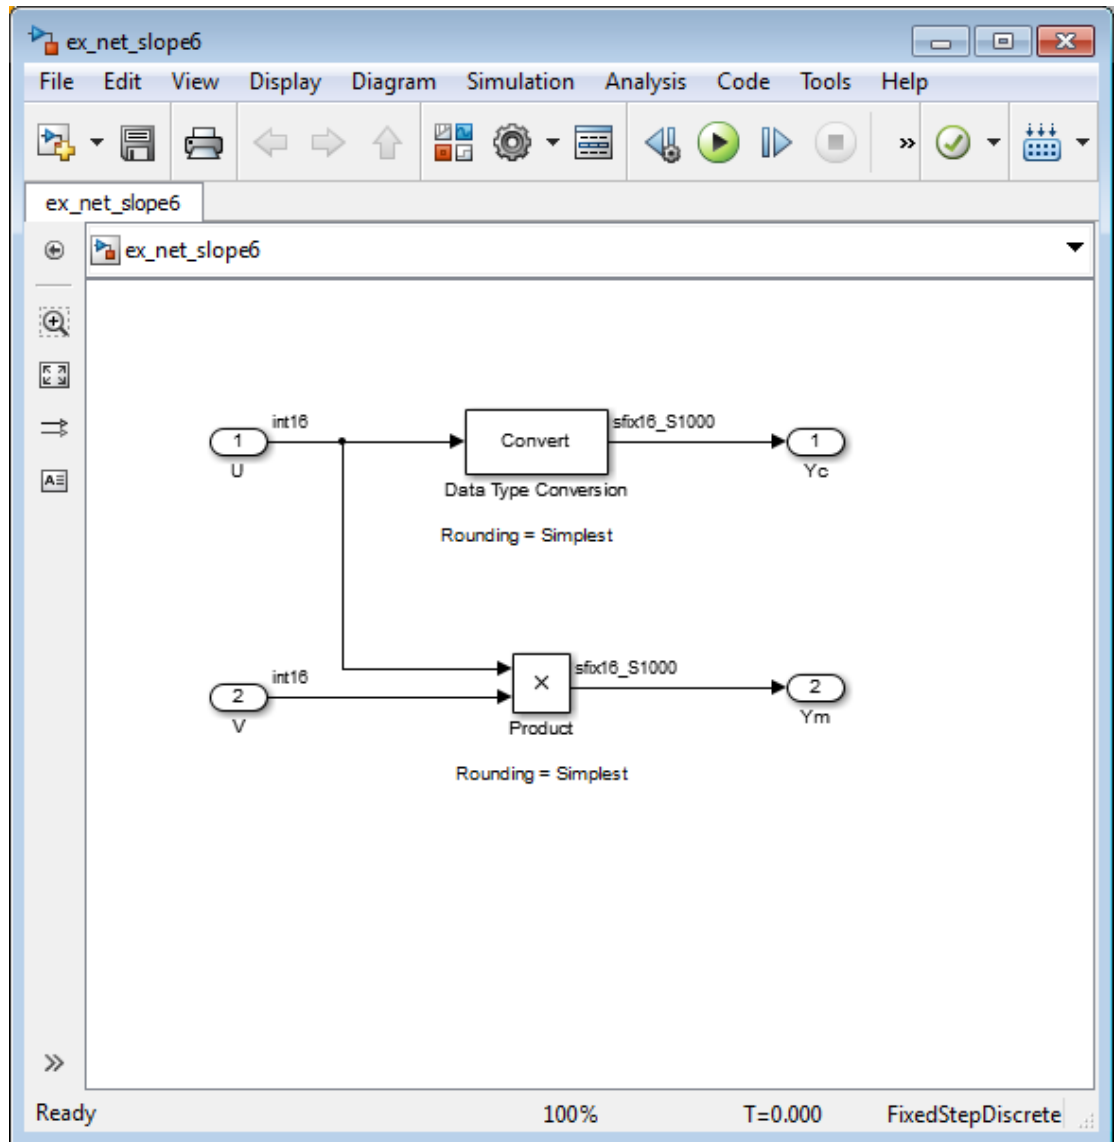


- 10 Rerun the Model Advisor **Identify blocks that generate expensive rounding code** check.

The check passes.

Fixed-Point Advisor Reference

- “Fixed-Point Advisor” on page 44-2
- “Preparing Model for Conversion” on page 44-6
- “Preparing for Data Typing and Scaling” on page 44-24
- “Return to the Fixed-Point Tool to Perform Data Typing and Scaling” on page 44-37

Fixed-Point Advisor

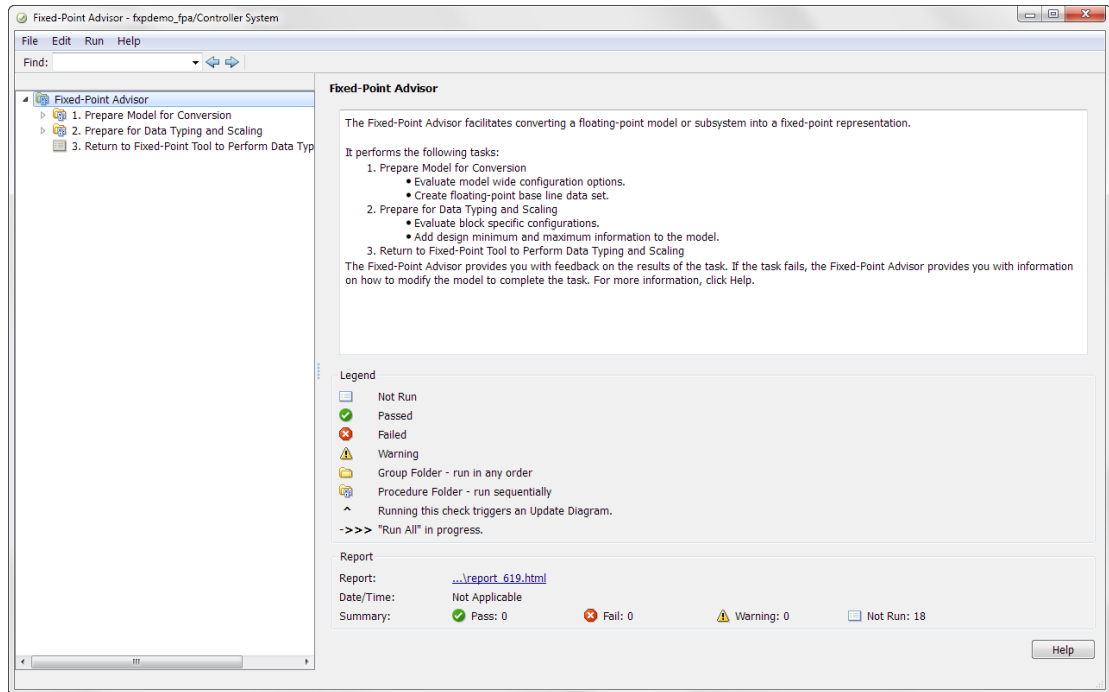

Fixed-Point Advisor Overview

The Fixed-Point Advisor is a tool you can use to prepare your model for conversion from floating-point data types to fixed-point data types. The Fixed-Point Advisor also makes recommendations for a model, such as model-level diagnostic settings and removal of inheritance rules. It configures the model for autoscaling by the Fixed-Point Tool. Therefore, even if your model uses only fixed-point data types, it is useful to run the Fixed-Point Advisor on the model prior to autoscaling.

The Fixed-Point Advisor performs checks on the entire model reference hierarchy. It checks the top model and referenced models against fixed-point guidelines and reports results for each referenced model.

Description

Use the Fixed-Point Advisor to:

- Set model-wide configuration options.
- Set block-specific dialog parameters.
- Check for unsupported blocks.

Procedures

Automatically Run Tasks

The following steps list how you can automatically run all tasks within a folder.

- 1 Click the **Run All** button. The tasks run in order until a task fails.
- 2 Fix the failure:
 - Manually fix the problem using the **Explore Result** button, if present.
 - Manually fix the problem by modifying the model as instructed in the Analysis Result box.
 - Automatically fix the problem using the **Modify All** button, if available.
- 3 Continue to run the tasks by selecting **Run > Continue**.

Run Individual Tasks

The following steps list how you can run an individual task.

- 1 Specify **Input Parameters**, if present.

- 2 Run the task by clicking **Run This Task**.
- 3 Review Results. The possible results are:
 - Pass:** Move on to the next task.
 - Warning:** Review results, decide whether to move on or fix.
 - Fail:** Review results, do not move on without fixing.
- 4 If Status is **Warning** or **Fail**, you can:
 - Manually fix the problem using the **Explore Result** button, if present.
 - Manually fix the problem by modifying the model.
 - Automatically fix the problem using the **Modify All** button, if available.
- 5 Once you have fixed a **Warning** or **Failed** task, rerun the task by clicking **Run This Task**.

Run to Selected Task

If you know that a particular task causes a failure, you might want to run all the tasks prior to this task and save a restore point before continuing the run. For more information about restore points, see “Save a Restore Point” on page 34-7. To run all tasks up to and including the currently selected task:

- 1 Select the last task that you want to run.
- 2 Right click this task to open the context menu.
- 3 From the context menu, select **Run to Selected Task** to run all tasks up to and including the selected task.

Note: If a task before the selected task fails, the Fixed-Point Advisor stops the run at the failed task.

Rerun a Task

You might want to rerun a task to see if changes you make result in a different answer. To rerun a task that you have run before:

- 1 Select the task that you want to rerun.
- 2 Specify input parameters, if present.
- 3 Run the task by clicking **Run This Task**.

The task reruns.

Caution All downstream tasks are reset to **Not Run** if:

- The task fails.
 - You click the **Modify All** button.
-

View a Run Summary

To view a complete run summary of **Pass**, **Failed**, **Warning**, and **Not Run** tasks:

- 1** Select the **Fixed-Point Advisor** folder.
- 2** Click the path link listed for Report. A report containing a summary of all tasks is displayed.

See Also

- “Best Practices” on page 34-2
- “Preparation for Fixed-Point Conversion” on page 34-2

Preparing Model for Conversion

In this section...
“Prepare Model for Conversion Overview” on page 44-7
“Verify model simulation settings” on page 44-8
“Verify update diagram status” on page 44-11
“Address unsupported blocks” on page 44-12
“Set up signal logging” on page 44-14
“Create simulation reference data” on page 44-15
“Verify Fixed-Point Conversion Guidelines Overview” on page 44-17
“Check model configuration data validity diagnostic parameters settings” on page 44-18
“Implement logic signals as Boolean data” on page 44-19
“Check bus usage” on page 44-20
“Simulation range checking” on page 44-21
“Check for implicit signal resolution” on page 44-22

Prepare Model for Conversion Overview

This folder contains tasks for configuring and setting up the model for data logging.

Description

Validate model-wide settings and create simulation reference data for downstream tasks.

See Also

- “Preparation for Fixed-Point Conversion” on page 34-2
- “Convert Floating-Point Model to Fixed Point”

Verify model simulation settings

Validate that model simulation settings allow signal logging and disable data type override to facilitate conversion to fixed point. Logged signals are used for analysis and comparison in later tasks.

Description

Ensures that fixed-point data can be logged in downstream tasks.

Results and Recommended Actions

Conditions	Recommended Action
The Fixed-Point Tool Data type override setting is not set to the correct value.	Set Data type override to Use local settings.
The Model Configuration Parameters Data Import/Export > Signal logging check box is set to off.	Set to on
The fipref <code>DataTypeOverride</code> property is not set to 'ForceOff'.	Set <code>DataTypeOverride</code> to 'ForceOff'
A Model Reference block is not in Normal mode.	Configure all referenced models that are in non-Normal mode to use Normal mode.
Note: If your model contains Model Reference blocks that are not in Normal mode, it does not make recommendations for them in subsequent tasks.	Use Modify All or manually configure each Model Reference block to use Normal mode: <ol style="list-style-type: none"> To identify which referenced model instances are not in Normal mode, click the Model Dependency Viewer link to open the Model Dependency Viewer. The viewer displays all instances and shows which mode they are in. To change the mode, select the referenced model, right-click, and then select Block Parameters (ModelReference). In the Block Parameters dialog box, set Simulation mode to Normal.

Conditions	Recommended Action
<p>A model in the model hierarchy is using a referenced configuration set instead of an active configuration set.</p>	<p>Tip Ignore this warning for protected models or any other models that you do not want the Fixed-Point Advisor to check.</p> <hr/> <p>Use Modify All or manually configure all models in the model hierarchy to use the active configuration set. See “Manage a Configuration Set”.</p> <p>If you use Modify All, the Fixed-Point Advisor creates an active configuration set by copying the referenced configuration set and configuring the model to use this new configuration set as the active set.</p> <p>If there are multiple reference sets, the Fixed-Point Advisor creates multiple new configuration sets.</p> <hr/> <p>Note: When a model uses a referenced configuration set, its configuration settings are read-only. Downstream tasks in the Fixed-Point Advisor make recommendations to tune configuration settings. If you do not update models to use an active configuration set, these tasks might generate warnings.</p>

Action Results

Clicking **Modify All**:

- Configures the model for recommended simulation settings and `fipref` objects. A table displays the current and previous block settings.
- Configures all referenced model instances to use Normal mode.
- Updates models in the model hierarchy that use referenced configuration sets to use an active configuration set.

See Also

- “Data Type Override”
- “Signal logging”
- “Data Type Override Preferences Using fipref”

Verify update diagram status

Verify update diagram succeeds.

Description

A model update diagram action is necessary for most down stream tasks.

Results and Recommended Actions

Conditions	Recommended Action
The model diagram does not update.	Fix the model. Verify that all required mat files are loaded.

See Also

“Update a Block Diagram” in the Simulink documentation

Address unsupported blocks

Identify blocks that do not support fixed-point data types.

Description

Blocks that do not support fixed-point data types cannot be converted.

Results and Recommended Actions

Conditions	Recommended Action
<p>Blocks that do not support fixed-point data types and cannot be converted exist in model.</p>	<ul style="list-style-type: none"> • Replace the block with the block specified in the Result pane by right-clicking the block and selecting the replacement from the context menu. <hr/> <p>Note: The Fixed-Point Advisor provides a preview of the replacement block. To view the replacement and verify its settings, click the Preview link. If the settings on the replacement block differ from the settings on the original block, set up the replacement block to match the original block.</p> <hr/> <ul style="list-style-type: none"> • Set the Approximation method of Trigonometric Function blocks to CORDIC. • Isolate the block by right-clicking the block and selecting Insert Data Type Conversion > All Ports. <p>The Fixed-Point Advisor provides separate results for each referenced model. For this task to pass, replace or isolate unsupported blocks in each referenced model.</p>

Tips

- Before inserting a replacement block, use the Preview link to view the replacement block. If necessary, update the settings on the replacement block to match the settings on the original block.

- If the Fixed-Point Advisor does not recommend a corresponding fixed-point block, replace the unsupported block with a number of lower-level blocks to provide the same functionality.
- The goal is to replace all blocks that do not support fixed-point data types. Using Data Type Conversion blocks to isolate blocks at this stage enables you to continue running through the conversion process. However, this will cause the **Summarize data type** task to fail downstream. To fix this failure, you must replace the block that does not support fixed-point data types.

See Also

The Simulink Block Data Type Support table summarizes characteristics of blocks in the Simulink and Fixed-Point Designer block libraries, including whether or not they support fixed-point data types. To view this table, enter the following command at the MATLAB command line:

```
showblockdatatypetable
```

Set up signal logging

Specify at least one signal of interest to log during simulation. Logged signals are used for analysis and comparison in other tasks. Suggested signals to log are model inports and outports.

Description

The Fixed-Point Advisor uses logged signals to compare the initial data type to the fixed-point data type.

Analysis Result and Recommended Actions

Conditions	Recommended Action
No signals are logged.	<p>If you are using simulation minimum and maximum values, specify at least one signal to be logged. Otherwise, ignore this warning.</p> <p>The Fixed-Point Advisor provides separate results for each referenced model. Specify at least one signal to be logged for each referenced model.</p>
A model in the model hierarchy is using a referenced configuration set and signal logging is disabled in this configuration set.	<p>Enable signal logging in the referenced configuration set.</p> <p>Return to the Verify model simulation settings task and configure all models to use an active configuration set.</p>

Tip

Log inports and outports of the system under conversion.

Create simulation reference data

Simulate the model using the current solver settings, and create reference data to use for comparison and analysis. If necessary, you can stop the simulation by selecting the waitbar and then pressing Ctrl+C. To set **Fixed-point instrumentation mode** to Minimums, maximums and overflows, click the **Modify All** button.

Description

Simulate the model using the current solver settings, create and archive reference signal data to use for comparison and analysis in downstream tasks.

Input Parameters

Merge results from multiple simulations

Merges new simulation minimum and maximum results with existing simulation results in the active run. Allows you to collect complete range information from multiple test benches. Does not merge signal logging results.

Results and Recommended Actions

Conditions	Recommended Action
Simulation does not run.	Fix errors so simulation will run.
Fixed-point instrumentation mode is not set to Minimums, maximums and overflows	<p>If you are using simulation minimum and maximum values, set Fixed-point instrumentation mode to Minimums, maximums and overflows. Otherwise, ignore this warning.</p> <p>The Fixed-Point Advisor provides separate results for each referenced model. Use Modify All or manually configure Fixed-point instrumentation mode for each referenced model. Then the Fixed-Point Advisor collects simulation reference data for the entire model reference hierarchy.</p> <p>If your model is using a referenced configuration set and signal logging is disabled in this configuration set, either enable signal logging</p>

Conditions	Recommended Action
	in the referenced configuration set or return to the Verify model simulation settings task and configure all models to use an active configuration set.

Action Results

Clicking **Modify All** sets **Fixed-point instrumentation mode** to **Minimums, maximums and overflows**. A table displays the current and previous block settings.

If your model contains referenced models, sets **Fixed-point instrumentation mode** to **Minimums, maximums and overflows** on all referenced models.

If your model is using a referenced configuration set and signal logging is disabled in this configuration set, **Modify All** is disabled.

Tips

- If the simulation is set up to have a long simulation time, after starting the run of this task you can stop the simulation by selecting the waitbar and then pressing **Ctrl+C**. This allows you to change the simulation time and continue without having to wait for the long simulation to complete.
- Specifying small simulation run times reduces task processing times. You can change the simulation run time in the Configuration Parameters dialog box. See “Start time” and “Stop time” in the Simulink reference for more information.

Verify Fixed-Point Conversion Guidelines Overview

Verify modeling guidelines related to fixed-point conversion goals.

Description

Validate model-wide settings.

See Also

- “Preparation for Fixed-Point Conversion” on page 34-2
- “Convert Floating-Point Model to Fixed Point”

Check model configuration data validity diagnostic parameters settings

Verify that **Model Configuration Parameters > Diagnostic > Data Validity** parameters are not set to error.

Description

If the **Model Configuration Parameters > Diagnostic > Data Validity** parameters are set to error, the model update diagram action fails in downstream tasks.

Results and Recommended Actions

Conditions	Recommended Action
Detect downcast is set to error.	Set all Model Configuration Parameters > Diagnostics > Data Validity > Parameters options to warning. The Fixed-Point Advisor provides separate results for each referenced model. Use Modify All or manually configure these options for each referenced model.
Detect overflow is set to error.	
Detect underflow is set to error.	
Detect precision loss is set to error.	
Detect loss of tunability is set to error.	

Action Results

Clicking **Modify All** sets all **Model Configuration Parameters > Diagnostics > Data Validity > Parameters** options to warning. A table displays the current and previous settings.

If your model contains referenced models, modifies these settings on all referenced models.

If your model is using a referenced configuration set, because the referenced configuration set is read-only, **Modify All** cannot update this parameter. Either manually modify the referenced configuration set or return to the **Verify model simulation settings** task and configure all models to use an active configuration set.

Implement logic signals as Boolean data

Confirm that Simulink simulations are configured to treat logic signals as Boolean data.

Description

Configuring logic signals as Boolean data optimizes the code generated in downstream tasks.

Results and Recommended Actions

Conditions	Recommended Action
Implement logic signals as Boolean data is set to off.	<p>Set Model Configuration Parameters > Optimization > Implement logic signals as Boolean data to on.</p> <p>The Fixed-Point Advisor provides separate results for each referenced model. Use Modify All or manually configure this option for each referenced model.</p>

Action Results

Clicking **Modify All** selects the model **Model Configuration Parameters > Optimization > Implement logic signals as Boolean data** check box. A table displays the current and previous parameter settings.

If your model contains referenced models, modifies this setting on all referenced models.

If your model is using a referenced configuration set, because the referenced configuration set is read-only, **Modify All** cannot update this parameter. Either manually modify the referenced configuration set or return to the **Verify model simulation settings** task and configure all models to use an active configuration set.

Check bus usage

Identify any Mux block used as a bus creator and any bus signal treated as a vector.

Description

This task identifies:

- Mux blocks that are bus creators
- Bus signals that the top-level model treats as vectors

Results and Recommended Actions

Conditions	Recommended Action
The Fixed-Point Advisor is not operating on a top-level model.	If this task is important to your conversion, start the Fixed-Point Advisor on the top-level model. Otherwise, you can ignore this warning.
The model is not configured to detect future changes that might result in improper bus usage.	Set Model Configuration Parameters > Diagnostics > Connectivity > Buses > Bus signal treated as vector to error. The Fixed-Point Advisor provides separate results for each referenced model. For this task to pass, manually configure this option for each referenced model.

Note: This task is a Simulink task. For more information, see “Check bus usage” in the Simulink documentation.

Simulation range checking

Verify that **Model Configuration Parameters > Diagnostics > Data Validity > Simulation range checking** is not set to none.

Description

If **Model Configuration Parameters > Diagnostics > Data Validity > Simulation range checking** is set to none, the simulation does not generate any range checking warnings.

Results and Recommended Actions

Conditions	Recommended Action
Model Configuration Parameters > Diagnostics > Data Validity > Simulation range checking is set to none.	<p>Set Model Configuration Parameters > Diagnostics > Data Validity > Simulation range checking to warning.</p> <p>The Fixed-Point Advisor provides separate results for each referenced model. For this task to pass, use Modify All or manually configure this option for each referenced model.</p>

Action Results

Clicking **Modify All** sets **Model Configuration Parameters > Diagnostics > Data Validity > Simulation range checking** to warning.

If your model contains referenced models, modifies this setting on all referenced models.

If your model is using a referenced configuration set, because the referenced configuration set is read-only, **Modify All** cannot update this parameter. Either manually modify the referenced configuration set or return to the **Verify model simulation settings** task and configure all models to use an active configuration set.

Check for implicit signal resolution

Check if model uses implicit signal resolution.

Description

Models with implicit signal resolution attempt to resolve all named signals and states to Simulink signal objects, which is inefficient and slows incremental code generation and model reference. This task identifies those signals and states for which you may turn off implicit signal resolution and enforce resolution.

Results and Recommended Actions

Conditions	Recommended Action
Model uses implicit signal resolution.	<ul style="list-style-type: none"> Set Model Configuration Parameters > Diagnostics > Data Validity > Signal resolution to Explicit only. Enforce resolution for each of the signals and states in the model by selecting Signal name must resolve to Simulink signal object. <p>The Fixed-Point Advisor provides separate results for each referenced model. For this task to pass, use Modify All or manually configure these options for each referenced model.</p>

Action Results

Clicking **Modify All** sets **Model Configuration Parameters > Diagnostics > Data Validity > Signal resolution** to **Explicit only** and enforces resolution for each of the signals and states in the model. Tables display the current and previous settings.

If your model contains referenced models, modifies these settings on all referenced models.

If your model is using a referenced configuration set, because the referenced configuration set is read-only, **Modify All** cannot update this parameter. Either manually modify the referenced configuration set or return to the **Verify model simulation settings** task and configure all models to use an active configuration set.

See Also

“Resolve Signal Objects for Output Data” in the Simulink documentation

Preparing for Data Typing and Scaling

In this section...
“Prepare for Data Typing and Scaling Overview” on page 44-25
“Review locked data type settings” on page 44-26
“Remove output data type inheritance” on page 44-27
“Relax input data type settings” on page 44-30
“Verify Stateflow charts have strong data typing with Simulink” on page 44-31
“Remove redundant specification between signal objects and blocks” on page 44-32
“Verify hardware selection” on page 44-34
“Specify block minimum and maximum values” on page 44-36

Prepare for Data Typing and Scaling Overview

Configure blocks with data type inheritance or constraints to avoid data type propagation errors.

Description

The block settings from this folder simplify the initial data typing and scaling. The optimal block configuration is achieved in later stages. The tasks in this folder are preparation for automatic data typing.

Tips

Block output and parameter minimum and maximum values can be specified in this step.

See Also

- “Preparation for Fixed-Point Conversion” on page 34-2
- “Convert Floating-Point Model to Fixed Point”

Review locked data type settings

Review blocks that currently have their data types locked down and will be excluded from automatic data typing.

Description

When blocks have their data types locked, the Fixed-Point Advisor excludes them from automatic data typing. This task identifies blocks that have locked data types so that you can unlock them.

Results and Recommended Actions

Conditions	Recommended Action
Blocks have locked data types.	Unlock data types on blocks that currently have locked data types. The Fixed-Point Advisor provides separate results for each referenced model. For this task to pass, use Modify All or unlock data types on blocks for all referenced models.

Action Results

Clicking **Modify All** unlocks data types on blocks that currently have locked data types.

If your model contains referenced models, unlocks data types on blocks for all referenced models.

Remove output data type inheritance

Identify blocks with an inherited output signal data type.

Description

Inherited data types might lead to data type propagation errors.

For floating-point inheritance blocks with floating-point inputs or outputs, the Fixed-Point Advisor replaces the inheritance with the fixed-point data type specified by the user. For floating-point inheritance blocks with fixed-point output and other Simulink and DSP System Toolbox and Communications System Toolbox blocks, the Fixed-Point Advisor now detects inheritance and replaces it with the compiled data type.

What are Floating-Point Inheritance Blocks?

For floating-point inheritance blocks, when inputs are floating-point, all internal and output data types are floating point.

Note: This task is preparation for automatic data typing, not actual automatic data typing.

Input Parameters

Data type for blocks with floating-point inheritance

Enter a default fixed-point data type to use for floating-point inheritance blocks, or select one from the list:

- undefined
- int8
- uint8
- int16
- uint16
- int32
- uint32
- fixdt(1,16,4)

Results and Recommended Actions

Conditions	Recommended Action
An input parameter is invalid.	Enter or select a valid value for the Data type for blocks with floating-point inheritance input parameter. The value of this parameter applies to the entire model reference hierarchy.
The system or subsystems contain floating-point inheritance blocks that have floating-point inputs.	Set the block output data type to the recommended data type. Remove floating-point inheritance for these blocks by explicitly configuring the Output data type or Output data type mode parameter to the recommended value where possible. The recommended value is based on the value that you specify for the Data type for blocks with floating-point inheritance input parameter. The Fixed-Point Advisor provides separate results for each referenced model. For this task to pass, remove floating-point inheritance for all blocks in all referenced models.
Blocks or Stateflow output data in the current system or subsystems have inherited output data types.	Remove output data type inheritance for blocks by explicitly configuring the Output data type or Output data type mode parameter to the recommended value where possible. Remove output data type inheritance for Logical Operator blocks by clearing the Require all inputs and outputs to have the same data type parameter parameter. Remove Stateflow output data type inheritance by explicitly configuring the output data Type property. The Fixed-Point Advisor provides separate results for each referenced model. For this task to pass, remove output data type inheritance in all referenced models.

Action Results

Clicking **Modify All** explicitly configures the output data types to the recommended values where possible. Tables list the previous and current data types for the reconfigured blocks.

If your model contains referenced models, where possible, explicitly configures the output data types to the recommended values for all referenced models.

Relax input data type settings

Identify blocks with input data type constraints.

Description

Blocks that have input data type constraints might lead to data type propagation errors.

Note: This task is preparation for automatic data typing, not actual automatic data typing.

Results and Recommended Actions

Conditions	Recommended Action
The input data types of blocks or Stateflow charts in the current system or subsystems have constraints.	<p>Explicitly configure flexible input data types for blocks by setting the <code>InputSameDT</code> parameter to <code>off</code> where possible.</p> <p>Explicitly configure Logical Operator blocks to have flexible input data types by setting the <code>AllPortsSameDT</code> parameter to <code>off</code>.</p> <p>Explicitly configure flexible Stateflow chart input data types by setting the <code>Type</code> method to <code>Inherited</code>.</p>

Action Results

Clicking **Modify All** explicitly configures the specified settings to the recommended value where possible. A table lists the previous and current settings for the reconfigured blocks.

If your model contains referenced models, where possible, explicitly configures the output data types to the recommended values for all referenced models.

Tip

Removing unnecessary data setting restrictions makes it more likely that the **Propose data types** task will succeed downstream.

Verify Stateflow charts have strong data typing with Simulink

Verify all Stateflow charts are configured to have strong data typing with Simulink I/O.

Description

Identify mismatches between input or output fixed-point data in Stateflow charts and their counterparts in Simulink models.

Note: This task is preparation for automatic data typing, not actual automatic data typing.

Results and Recommended Actions

Conditions	Recommended Action
Stateflow charts do not have strong data typing with Simulink I/O.	<p>Select the Use Strong Data Typing with Simulink I/O check box in the chart properties dialog.</p> <p>The Fixed-Point Advisor provides separate results for each referenced model. For this task to pass, use Modify All or manually configure this setting in each referenced model.</p>

Action Results

Clicking **Modify All** configures all Stateflow charts to have strong data typing with Simulink I/O.

If your model contains referenced models, configures this setting for all referenced models.

Remove redundant specification between signal objects and blocks

Identify and remove redundant data type specification originating from blocks and Simulink signal objects.

Description

This task prepares your model for automatic data typing by identifying and removing redundant data type specification originating from blocks and Simulink signal objects.

Note: You must rerun this task whenever you delete or manipulate a Simulink signal object in the base workspace.

Input Parameters

Remove redundant specification from

Select from the list:

Blocks

Identify and remove redundant data type specification from blocks.

Signal objects

Identify and remove redundant data type specification from Simulink signal objects.

Results and Recommended Actions

Conditions	Recommended Action
Blocks associated with Simulink signal objects do not have their data type specification set to a passive mode.	Set the data type specification of these blocks to a passive mode, such as Inherit via back propagation . The Fixed-Point Advisor provides separate results for each referenced model. For this task to pass, use Modify All or manually configure this setting in each referenced model.
Simulink signal objects associated with blocks do not have their data type specification set to a passive mode.	Set the data type specification of these Simulink signal objects to Auto . The Fixed-Point Advisor provides separate results for each referenced model. For this task

Conditions	Recommended Action
	to pass, use Modify All or manually configure this setting in each referenced model.

Action Results

Clicking **Modify All** explicitly configures the properties of the blocks or Simulink signal objects to the recommended value where possible. A table displays the current and previous settings.

If your model contains referenced models, where possible, configures these settings for all referenced models.

Verify hardware selection

Verify target hardware setting.

Description

Review the hardware device settings and verify they are the settings you intend to use.

Input Parameters

Default type of all floating-point signals

Enter a default fixed-point data type to use for all floating-point signals, or select one from the list. For FPGA/ASIC targets, specify the type explicitly.

Remain floating-point

Use this setting if you are converting only part of the model to fixed point and want to leave the rest of the model as floating point.

Same as embedded hardware integer

Use this setting if the hardware device specified is a microprocessor.

int8

int16

int32

fixdt(1,16,4)

Results and Recommended Actions

Conditions	Recommended Action
The model's Model Configuration Parameters > Hardware Implementation device parameters are not specified.	Provide values for Model Configuration Parameters > Hardware Implementation > Device vendor and Device type parameters.
Default data type of all floating-point signals is set to Remain floating-point.	The Fixed-Point Advisor provides results for each referenced model. For this task to pass, manually configure this setting in each referenced model. All referenced models must use the same hardware settings. For microprocessors, set to Same as embedded hardware integer . For FPGA/ASIC, set the data type explicitly. The Fixed-Point Advisor uses the sign and word length of this data type.

See Also

- “Device type”
- “Device vendor”

Specify block minimum and maximum values

Specify block output and parameter minimum and maximum values.

Description

Block output and parameter minimum and maximum values are used for fixed-point data typing in other tasks. Typically, they are determined during the design process based on the system you are creating.

Note: This task is preparation for automatic data typing, not actual automatic data typing.

Results and Recommended Actions

Conditions	Recommended Action
Minimum and maximum values are not specified for Inport blocks.	Specify minimum and maximum values for Inport blocks.
Warning if no simulation minimum or maximum for any signals.	If you are using simulation minimum and maximum data, return to “Create simulation reference data” to set up signal logging.

Tips

- In this task, you can specify minimum and maximum values for any block.
- You can promote simulation minimum and maximum values to output minimum and maximum values using the Model Advisor Result Explorer, launched by clicking the **Explore Result** button. In the center pane of the Model Advisor Result Explorer, use the check boxes in the **PromoteSimMinMax** column to promote values.
- If you do not specify block minimum and maximum values, the **Propose data types** task might fail later in the conversion.

See Also

“Batch-Fix Warnings or Failures” in the Simulink documentation.

Return to the Fixed-Point Tool to Perform Data Typing and Scaling

Close the Fixed-Point Advisor and return to the Fixed-Point Tool to autoscale your model.

See Also

- “Preparation for Fixed-Point Conversion” on page 34-2

Troubleshooting

- “Frequently Asked Questions About Fixed-Point Numbers” on page 45-2
- “Decide Which Workflow Is Right For Your Application” on page 45-6
- “Tips for Making Generated Code More Efficient” on page 45-7
- “Know When a Function is Supported for Instrumentation and Acceleration” on page 45-9
- “What to Do If a Function Is Not Supported for Fixed-Point Conversion” on page 45-10
- “Common Errors and Warnings” on page 45-12
- “Why Does the Fixed-Point Converter App Not Propose Data Types for System Objects?” on page 45-14
- “Prevent The Fixed-Point Tool From Overriding Integer Data Types” on page 45-15
- “Why Did The Fixed-Point Tool Not Propose Data Types?” on page 45-16
- “Frequently Asked Questions About Fixed-Point Numbers” on page 45-17
- “What to Do When a Block Is Not Supported For Fixed-Point Conversion” on page 45-18
- “Why am I missing data type proposals for MATLAB Function block variables?” on page 45-20
- “Data Type Mismatch and Structure Initial Conditions” on page 45-21

Frequently Asked Questions About Fixed-Point Numbers

In this section...

“What Is the Difference Between Fixed-Point and Built-In Integer Types?” on page 45-2

“Negative Fraction Length” on page 45-2

“Fraction Length Greater Than Word Length” on page 45-3

“fi Constructor Does Not Follow globalfimath Rules” on page 45-5

What Is the Difference Between Fixed-Point and Built-In Integer Types?

There are several distinct differences between fixed-point data types and the built-in integer types in MATLAB. The most notable difference, is that the built-in integer data types can only represent whole numbers, while the fixed-point data types also contain information on the position of the binary point, or the scaling of the number. This scaling allows the fixed-point data types to represent both integers and non-integers. There are also slight differences in how math is performed with these types. Fixed-point types allow you to specify rules for math using the `fimath` object, including overflow and rounding modes. However, the built-in types have their own internal rules for arithmetic operations. See “Integers” for more information on how math is performed using built-in types.

Negative Fraction Length

A negative fraction length occurs when the input value of a `fi` object contains trailing zeros before the decimal point. For example,

```
x = fi(16000,1,8)
```

produces a fixed-point number with the specified signedness and word length, and best precision fraction length.

```
x =
```

```
16000
```

```
DataTypeMode: Fixed-point: binary point scaling
Signedness: Signed
WordLength: 8
```

```
FractionLength: -7
```

View the binary representation of x .

```
disp(bin(x))
```

```
01111101
```

There are seven implicit zeros at the end of this number before the binary point because the fraction length of x is -7 .

Convert from binary to decimal the binary representation of x with seven zero bits appended to the end.

```
bin2dec('011111010000000')
```

```
ans =
```

```
16000
```

The result is the real world value of x .

You can also find the real world value using the equation

$$\text{Real World Value} = \text{Stored Integer Value} \times 2^{-\text{Fraction Length}}$$

Start by finding the stored integer of x .

```
Q = storedInteger(x)
```

```
Q =
```

```
125
```

Use the stored integer to find the real world value of x .

```
real_world_value = double(Q) * 2^-x.FractionLength
```

```
real_world_value =
```

```
16000
```

Fraction Length Greater Than Word Length

A fraction length greater than the word length of a fixed-point number occurs when the number has an absolute value less than one and contains leading zeros.

```
x = fi(.0234,1,8)
```

```
x =
```

```
0.0234
```

```
        DataTypeMode: Fixed-point: binary point scaling  
        Signedness: Signed  
        WordLength: 8  
        FractionLength: 12
```

View the binary representation of x.

```
disp(bin(x))
```

```
01100000
```

There are four implied leading zeros after the binary point and before the binary representation of the stored integer because the fraction length of x is four greater than the word length.

Convert from binary to decimal the binary representation of x with four leading zeros, and scale this value according to the fraction length.

```
bin2dec('000001100000')*2^(-12)
```

```
ans =
```

```
0.0234
```

The result is the real world value of x.

You can also find the real world value using the equation

Real World Value = Stored Integer Value $\times 2^{-\text{Fraction Length}}$.

Start by finding the stored integer of x.

```
Q = storedInteger(x)
```

```
Q =
```

```
96
```

Use the stored integer to find the real world value of x.

```
real_world_value = double(Q) * 2^-x.FractionLength
real_world_value =
    0.0234
```

fi Constructor Does Not Follow globalfimath Rules

If no `fimath` properties are used in the argument of the `fi` constructor, then it always uses nearest rounding and saturates on overflow for the creation of the `fi` object, regardless of any `globalfimath` settings.

If this behavior is undesirable for your application, you can do one of the following:

- Use the `cast` function to create a `fi` object using the `globalfimath` rules.

```
G = globalfimath('RoundingMethod', 'Floor', 'OverflowAction', 'Wrap');
cast(x, 'like', fi([],1,16,10))
```

- Specify `fimath` properties in the `fi` constructor.

```
fi(x,1,16,10,'RoundingMethod','Floor','OverflowAction','Wrap');
```

Note: When you create a `fi` object using the `cast` function, the resulting `fi` object does not have a local `fimath`. When you create a `fi` object with `fimath` properties in the constructor, the `fi` object does have a local `fimath`.

Decide Which Workflow Is Right For Your Application

There are two primary workflows available for converting MATLAB code to fixed-point code.

- **Manual Workflow**

The manual workflow provides the most control to optimize the fixed-point types, but requires a greater understanding of fixed-point concepts.

For more information, see “Manual Fixed-Point Conversion Best Practices”.

- **Automated Workflow**

The Fixed-Point Converter app enables you to convert your MATLAB code to fixed-point code without requiring extensive preexisting knowledge of fixed-point concepts. However, this workflow provides less control over your data types.

For more information, see “Automated Fixed-Point Conversion Best Practices”.

	Manual Workflow	Automated Workflow
Fully automated conversion		✓
Less fixed-point expertise required		✓
Quick turnaround time		✓
Simulation range analysis	✓	✓
Static range analysis		✓
Iterative workflow	✓	
Portable design	✓	✓
Greatest control and optimization of data types	✓	
Data type proposal	✓	✓
Histogram logging	✓	✓
Code coverage		✓
Automatic plotting of output variables for comparison		✓

Tips for Making Generated Code More Efficient

In this section...

“fimath Settings for Efficient Code” on page 45-7

“Replace Functions With More Efficient Fixed-Point Implementations” on page 45-7

fimath Settings for Efficient Code

The default settings of the `fimath` object are:

- `RoundingMethod`: `Nearest`
- `OverflowAction`: `Saturate`
- `ProductMode`: `FullPrecision`
- `SumMode`: `FullPrecision`

These settings offer the smallest rounding error and prevent overflows. However, they can result in extra logic in generated code. For leaner code, it is recommended that you match the `fimath` settings to the settings of your processor.

- The `KeepLSB` setting for `ProductMode` and `SumMode` models the behavior of integer operations in the C language. `KeepMSB` for `ProductMode` models the behavior of many DSP devices.
- Different rounding methods require different amounts of overhead code. Setting the `RoundingMethod` property to `FLOOR`, which is equivalent to two’s complement truncation, provides the most efficient rounding implementation for most operations. For the divide function, the most efficient `RoundingMethod` is `Zero`
- The standard method for handling overflows is to wrap using modulo arithmetic. Other overflow handling methods create costly logic. It is recommended that you set the `OverflowAction` property to `Wrap` when possible.

Replace Functions With More Efficient Fixed-Point Implementations

CORDIC

The CORDIC-based algorithms are among the most hardware friendly because they require only iterative shift-add operations. Replacing functions with one of the CORDIC

implementations can make your generated code more efficient. For a list of the CORDIC functions, and examples of them being implemented, see “CORDIC”.

Lookup tables

You can implement some functions more efficiently by using a lookup table approach. For an example, see “Implement Fixed-Point Log2 Using Lookup Table”.

Division

Division is often not supported by hardware. When possible, it is best to avoid division operations.

When the denominator is a power of two, you can rewrite the division as a bitshift operation.

$x/8$

can be rewritten as

`bitsra(x,3)`

Other times it is more efficient to implement division as a multiplication by a reciprocal.

$x/5$

can be rewritten as

$x*0.2$

Know When a Function is Supported for Instrumentation and Acceleration

There are several steps you can take to identify the features which could result in errors during conversion.

- `%#codegen` and `coder . screener`

Add the `%#codegen` pragma to the top of the MATLAB file that is being converted to fixed point. Adding this directive instructs the MATLAB Code Analyzer to help you diagnose and fix violations that would result in errors during when you try to accelerate or instrument your code.

The `coder . screener` function takes your function as its input argument and warns you of anything in your code that is not supported for codegen. Codegen support is essential for minimum and maximum logging and data type proposals.

- Consult the table of supported functions

See “Language Support” for a table of features supported for code generation and fixed-point conversion.

For information on what to do if a function is not supported for fixed-point conversion, see “What to Do If a Function Is Not Supported for Fixed-Point Conversion” on page 45-10.

What to Do If a Function Is Not Supported for Fixed-Point Conversion

In this section...

“Isolate the Unsupported Functions” on page 45-10

“Create a Replacement Function” on page 45-10

Isolate the Unsupported Functions

When you encounter a function that is not supported for conversion, you can temporarily leave that part of the algorithm in floating point.

The following code returns an error because the `log` function is not supported for fixed-point inputs.

```
x = fi(rand(3),1,16,15);
y = log(x)
```

Cast the input, `x`, to a double, and then cast the output back to a fixed-point data type.

```
y = fi(log(double(x)),1,16)
y =
    -0.2050    -0.0906    -1.2783
    -0.0990    -0.4583    -0.6035
    -2.0637    -2.3275    -0.0435
```

```
        DataTypeMode: Fixed-point: binary point scaling
        Signedness: Signed
        WordLength: 16
        FractionLength: 13
```

This casting allows you to continue with your conversion until you can find a replacement.

Create a Replacement Function

Lookup Table Approximation

You can replace many functions that are not supported for fixed-point conversion with a lookup table. For an example, see “Implement Fixed-Point Log2 Using Lookup Table”.

Polynomial Approximation

You can approximate the results of a function that is not supported for fixed-point with a polynomial approximation. For an example, see “Calculate Fixed-Point Arctangent”.

User-Authored Function

You can also write your own function that supports fixed-point inputs. For example, using the `mod` function, which does support fixed-point inputs, you can write your own version of the `rem` function, which does not support fixed-point inputs.

Common Errors and Warnings

In this section...

“fi*non-fi Errors” on page 45-12

“Data Type Mismatch Errors” on page 45-12

“Mismatched fimath Errors” on page 45-13

fi*non-fi Errors

Original Algorithm		New Algorithm
<pre>function y = myProduct(x) y = 1; for n = 1:length(x) y(:) = y*x(n); end end</pre>	<p><i>Issue:</i></p> <p>When multiplying a fixed-point variable by a non-fixed-point variable, the variable that does not have a fixed-point type can only be a constant.</p> <p><i>Fix:</i></p> <p>Before instrumenting your code, cast the non-fi variable to an acceptable fixed-point type.</p>	<pre>function y = myProduct(x) y = ones(1,1, 'like', x(1))*x(1); for n = 1:length(x) y(:) = y*x(n); end end</pre>

Data Type Mismatch Errors

Original Algorithm		New Algorithm
<p><i>Function:</i></p> <pre>function y = mysum(x,T) %#codegen y = zeros(size(x), 'like', T); for n = 1:length(x) y = y + x(n); end end</pre>	<p><i>Issue:</i></p> <p>y uses the default fimath setting FullPrecision for the SumMode property. At each iteration of the for-loop in the function mysum, the word length of y grows by one bit. During simulation in MATLAB, there is no issue because data types can easily change in</p>	<p><i>Function:</i></p> <pre>function y = mysum(x,T) %#codegen y = zeros(size(x), 'like', T.y); for n = 1:length(x) y(:) = y + x(n); end end</pre> <p><i>Types Table:</i></p> <pre>function T = mytypes(dt)</pre>

Original Algorithm		New Algorithm
<pre> switch(dt) case 'fixed' F = fimath('RoundingMethod', 'Wrap'); T.x = fi([],1,16,11, F); T.y = fi([],1,16,6, F); end end </pre>	<p>MATLAB. However, a type mismatch error occurs at build time because data types must remain static in C.</p> <p><i>Fix:</i></p> <p>Rewrite the function to use subscripted assignment within the for-loop.</p> <p>By rewriting $y = y + x(n)$ as $y(:) = y + x(n)$, the value on the right is assigned in to the data type of y. This assignment preserves the <code>numericType</code> of y and avoids the type mismatch error.</p>	<pre> switch(dt) case 'fixed' F = fimath('RoundingMethod', 'Wrap'); T.x = fi([],1,16,11, F); T.y = fi([],1,16,6, F); end end </pre>

Mismatched fimath Errors

Original Algorithm		New Algorithm
<p><i>Function:</i></p> <pre> function y = mysum(x,T) %#codegen y = zeros(size(x), 'like', T); for n = 1:length(x) y(:) = y + x(n); end end </pre>	<p><i>Issue:</i></p> <p>If two <code>fi</code> object operands have an attached <code>fimath</code>, the <code>fimaths</code> must be equal.</p> <p><i>Fix:</i></p>	<p><i>Function:</i></p> <pre> function y = mysum(x,T) %#codegen y = zeros(size(x), 'like', T.y); for n = 1:length(x) y(:) = removefimath(y) + x(n); end end </pre>
<p><i>Types Table:</i></p> <pre> function T = mytypes(dt) switch(dt) case 'fixed' T.x = fi([],1,16,0, 'RoundingMethod', 'Wrap'); T.y = fi([],1,16,0, 'RoundingMethod', 'Wrap'); end end end </pre>	<p>Use the <code>removefimath</code> function to remove the <code>fimath</code> of one of the variables in just one instance. By removing the <code>fimath</code>, you avoid the “mismatched <code>fimath</code>” error without permanently changing the <code>fimath</code> of the variable.</p>	<p><i>Types Table:</i></p> <pre> function T = mytypes(dt) switch(dt) case 'fixed' T.x = fi([],1,16,0, 'RoundingMethod', 'Wrap'); T.y = fi([],1,16,0, 'RoundingMethod', 'Wrap'); end end end </pre>

Why Does the Fixed-Point Converter App Not Propose Data Types for System Objects?

The Fixed-Point Converter app might not display simulation range data or data type proposals for a System object because:

- The app displays range information for a subset of DSP System Toolbox System objects only. For a list of supported System objects, see [Converting System Objects to Fixed-Point Using the Fixed-Point Converter App](#).
- The System object is not configured to use custom fixed-point settings.

If the system object is not configured correctly, the proposed data type column appears dimmed and displays `Full precision` or `Same as...` to show the current property setting.

Related Examples

- “Use the Fixed-Point Converter App with a System object”


Prevent The Fixed-Point Tool From Overriding Integer Data Types

When performing data type override (DTO) on a selected system, the Fixed-Point Tool overrides the output data types of each block in the system. The only blocks that are never affected by DTO are blocks with `boolean` or enumerated output data types, or blocks that are untouched by DTO by design (for example, lookup table blocks). Depending on your application, you might want certain signals to preserve their data type (for example, blocks that represent indices). To prevent the Fixed-Point Tool from overriding the data type of a specific block, set the `Data type override` setting of the `numericity` of the block to `Off`.

- 1 Open the Block Parameters dialog box by double-clicking the block.
- 2 Under the **Signal Attributes** tab, open the Data Type Assistant by clicking



- 3 Set **Data type override** to `Off`.

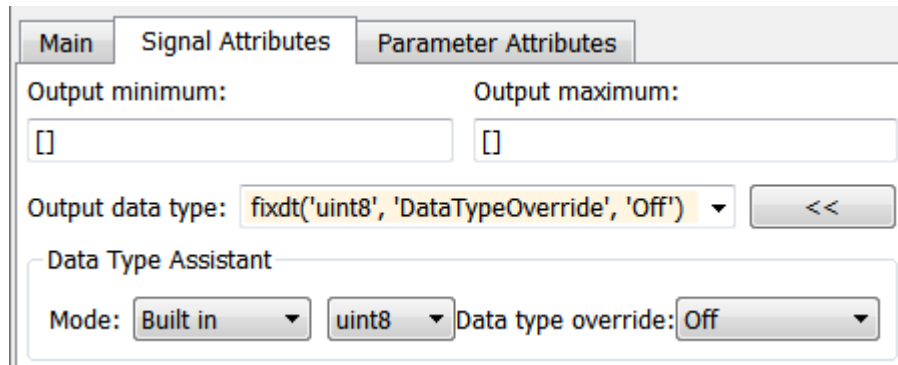

You can set this override to off at the command line by changing the Data Type Override setting of a signal's `numericity`. In this example, the output data type of this block remains a built-in `uint8` even after performing data type override.

Why Did The Fixed-Point Tool Not Propose Data Types?

In this section...

“Inherited Output Data Types” on page 45-16

“Inadequate Range Information” on page 45-16

Inherited Output Data Types

If the output data types of your blocks are set to an inherited rule (such as `Inherit: auto`), then the Fixed-Point Tool, by design, does not propose new data types for those blocks. Blocks with inherited output data types use internal block rules to determine the output data type of the block. The Fixed-Point Tool marks the proposal for these blocks as N/A.

If it is not your intent to use an inherited data type, remove the output data type inheritance of the block to get a data type proposal.

It is recommended that you use the Fixed-Point Advisor to prepare your model for conversion. The Fixed-Point Advisor provides guidance about model and block configuration settings to prepare for automatic conversion to fixed point using the Fixed-Point Tool. The check **Remove output data type inheritance** removes all unintentional output data type inheritance from your model.

Inadequate Range Information

The Fixed-Point Tool bases its data type proposition on range information collected through simulation, derivation, and design ranges that you provide. Before proposing data types, you must collect range information which the Fixed-Point Tool uses to propose data types.

Collect range information through simulation, or by deriving minimum and maximum values for the selected system.

The Fixed-Point Advisor check **Create simulation reference data** creates reference data to use for comparison and analysis.

Frequently Asked Questions About Fixed-Point Numbers

In this section...


“Fraction Length Greater Than Word Length” on page 45-17

“Negative Fraction Length” on page 45-17

Fraction Length Greater Than Word Length

A fraction length greater than the word length of a fixed-point number occurs when the number has an absolute value less than one and contains leading zeros.



In the following example, the fixed-point tool proposed a data type with a fraction length that is four greater than the word length. A binary representation of this number consists of the binary point, four implied leading zeros, followed by the binary representation of the stored integer: . X X X X 0 1 1 0 0 0 0, where the x’s represent the implied zeros.

Name	Run	CompiledDT	Accept	ProposedDT	SimMin	SimMax
 Gain	Run1	double	<input checked="" type="checkbox"/>	fixdt(1,8,12)	0.0234	0.0234

Negative Fraction Length

A negative fraction length occurs when the number contains trailing zeros before the decimal point.


In the following example, the fixed-point tool proposed a data type with a negative fraction length. A binary representation of this number consists of the binary representation of the stored integer, followed by seven implied zeros, and then the binary point: 0 1 1 1 1 0 1 X X X X X X ., where the x’s represent the implied zeros.

Name	Run	CompiledDT	Accept	ProposedDT	SimMin	SimMax
 Gain	Run 1	double	<input checked="" type="checkbox"/>	fixdt(1,8,-7)	16000	16000
 Out1	Run 1		<input type="checkbox"/>	n/a		


What to Do When a Block Is Not Supported For Fixed-Point Conversion

Isolate the Block

If you encounter a block that is not supported for fixed-point conversion, you can isolate the block by decoupling it with a Data Type Converter block. This workaround is useful when you do not intend to use the unsupported block on an embedded processor. One example of this is if the Chirp Signal block in the Sources library, which does not support fixed-point outputs, is used to generate a signal for simulation data.

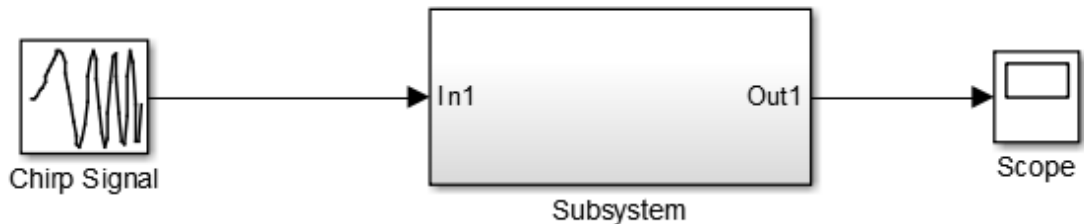

The subsystem shown is designed for use on an embedded processor and must be converted to fixed point. The Chirp Signal block creates simulation data. The Chirp Signal block supports only floating-point double outputs. However, if you decouple the Chirp Signal from the rest of the model by inserting a data type converter block after the Chirp Signal block, you can use the Fixed-Point Tool to continue converting the subsystem to fixed point.

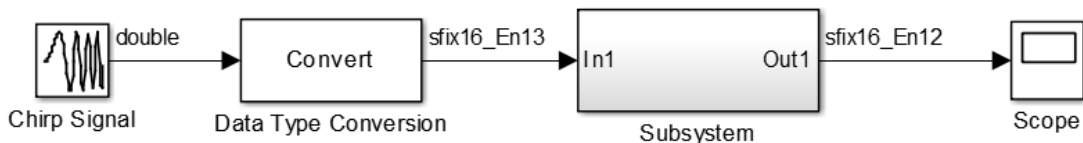

Lookup Table Block Implementation

Many blocks that are not supported by the Fixed-Point Tool can be approximated with a lookup table block. Design an efficient fixed-point implementation of an unsupported

block by using the `fixpt_look1_func_approx` and `fixpt_look1_func_plot` functions. For an example, see “Approximate the Square Root Function”.

User-Authored Blocks

You can create your own block which is supported by the Fixed-Point Tool from one of the blocks in the User-Defined Functions Library.

Why am I missing data type proposals for MATLAB Function block variables?

Fixed-Point Tool will not propose data types for variables in code inside a MATLAB Function block that is not executed during simulation.

- Update your input source so that all sections of your code are executed during simulation
- This section of code may not be necessary. Delete the portion of code that is not exercised during simulation.

Data Type Mismatch and Structure Initial Conditions


A data type mismatch occurs when the data type of a tunable structure does not match the data type of the assigned bus signal. Data type mismatch can also occur when you specify a structure parameter through the mask of an atomic subsystem. Overriding data types and converting to fixed-point using the Fixed-Point Tool can introduce this data type mismatch in your model.

Enable Inline Parameters


When you assign a block with a tunable structure as the initial condition to a bus signal, and the data type of the structure and the bus do not match, an error occurs when you simulate. Enable inline parameters to convert the tunable structure to a structure of constant values.

- 1 Open the `ex_parameter_tunability` model.

```
addpath(fullfile(docroot, 'toolbox', 'fixpoint', 'examples'))
ex_parameter_tunability
```

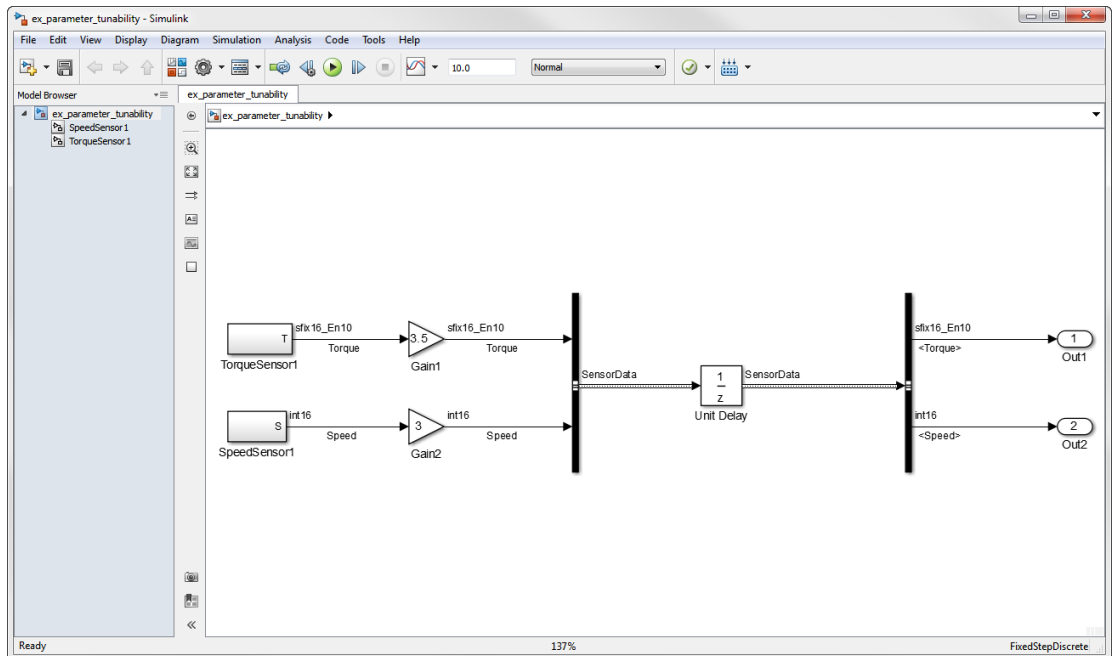

- 2 Open the Unit Delay block dialog box to view the parameters. The initial condition is a structure.

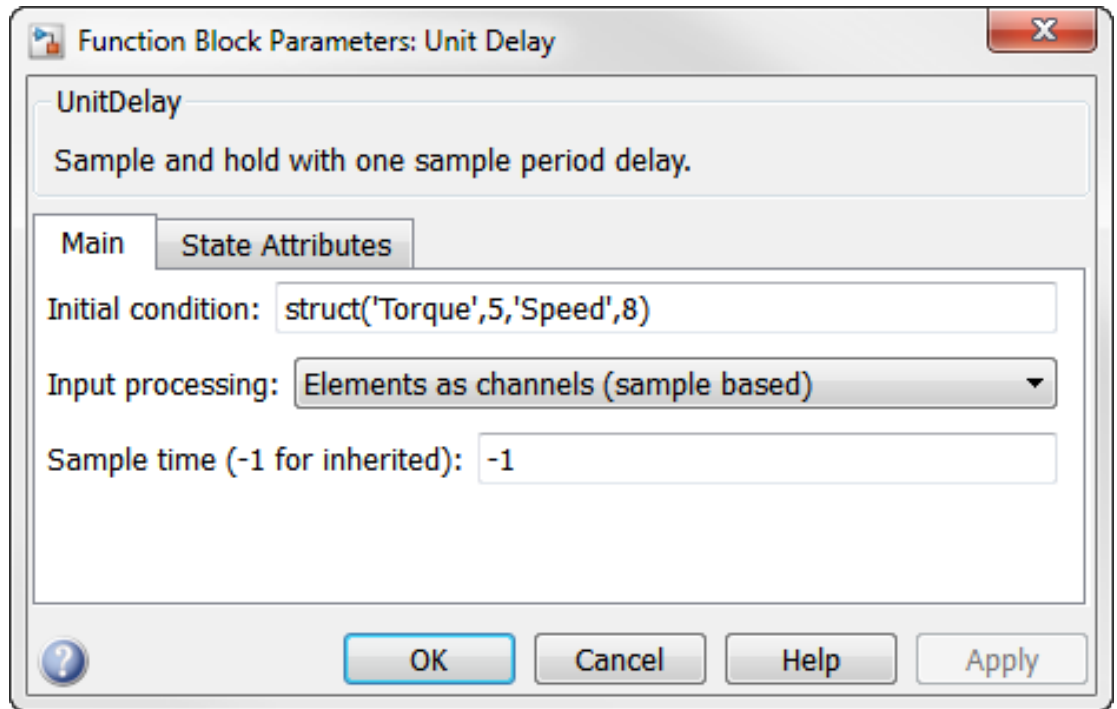

- 3 Update the diagram.

Update diagram fails for this model because the bus `SensorData` uses fixed-point data types and the MATLAB structure for initialization in the Unit Delay block uses doubles.

- 4 In the **Configuration Parameters** > **Optimization** > **Signals and Parameters** pane, select the **Inline parameters** checkbox.

This option transforms tunable parameters into constant values. The inline parameter becomes a constant in the generated code, and is no longer tunable.


- 5 Update the diagram again. The model updates without errors or warnings.

If you want to maintain tunability of the structure, consider using a `Simulink.Parameter` object to define the structure. For more information, see “Specify Bus Signal Initial Conditions Using Simulink.Parameter Objects” on page 45-24.

Specify Bus Signal Initial Conditions Using Simulink.Parameter Objects

This example shows how to replace a structure initial condition with a `Simulink.Parameter` object. This approach allows the structure to maintain its tunability.

- 1 Double-click the Unit Delay block to view the block parameters. The Unit Delay block uses a structure initial condition.

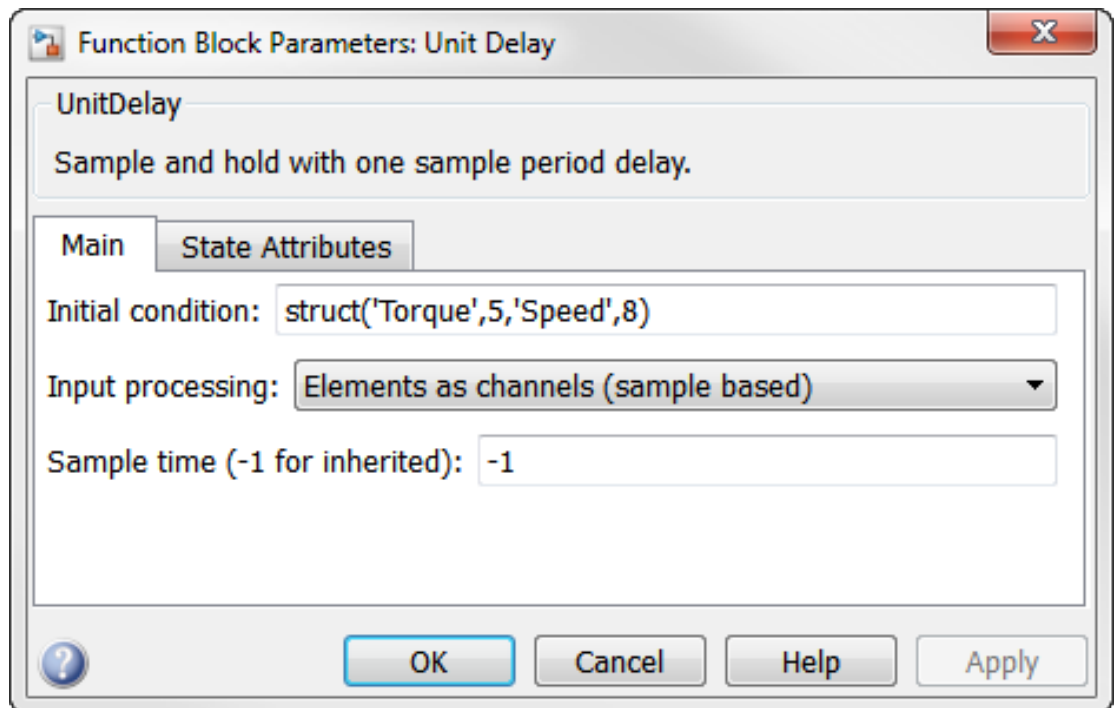

- 2 Define a `Simulink.Parameter` object at the MATLAB command line. Set the data type of the parameter object to the bus object `SensorData`. Set the value of the parameter object to the specified structure.

```
P = Simulink.Parameter;  
P.DataType = 'Bus: SensorData';  
P.Value = struct('Torque',5,'Speed',8);
```


- 3 In the Unit Delay block dialog box, set **Initial condition** to **P**, the `Simulink.Parameter` object you defined. The structure defined in the `Simulink.Parameter` object remains tunable.

Data Type Mismatch and Masked Atomic Subsystems

A data type mismatch occurs when a structure initial condition drives a bus signal that you specified using a masked atomic subsystem.

Change the subsystem to non atomic, or specify the structure parameter using a `Simulink.Parameter` object (as described in “Specify Bus Signal Initial Conditions Using `Simulink.Parameter` Objects” on page 45-24) to avoid the data type mismatch error.

Related Examples

- “Convert Model with Bus Object with Structure Initial Conditions to Fixed-Point”
- “Bus Objects in the Fixed-Point Workflow”

Writing Fixed-Point S-Functions

This appendix discusses the API for user-written fixed-point S-functions, which enables you to write Simulink C S-functions that directly handle fixed-point data types. Note that the API also provides support for standard floating-point and integer data types. You can find the files and examples associated with this API in the following locations:

- `matlabroot/simulink/include/`
- `matlabroot/toolbox/simulink/fixedandfloat/fixpdemos/`

Data Type Support

In this section...
“Supported Data Types” on page A-2
“The Treatment of Integers” on page A-3
“Data Type Override” on page A-3

Supported Data Types

The API for user-written fixed-point S-functions provides support for a variety of Simulink and Fixed-Point Designer data types, including

- Built-in Simulink data types
 - `single`
 - `double`
 - `uint8`
 - `int8`
 - `uint16`
 - `int16`
 - `uint32`
 - `int32`
- Fixed-point Simulink data types, such as
 - `sfix16_En15`
 - `ufix32_En16`
 - `ufix128`
 - `sfix37_S3_B5`
- Data types resulting from a data type override with `Scaled double`, such as
 - `flts16`
 - `flts16_En15`
 - `fltu32_S3_B5`

For more information, see “Fixed-Point Data Type and Scaling Notation” on page 31-17.

The Treatment of Integers

The API treats integers as fixed-point numbers with trivial scaling. In [Slope Bias] representation, fixed-point numbers are represented as $real\text{-}world\ value = (slope \times integer) + bias$.

In the trivial case, $slope = 1$ and $bias = 0$.

In terms of binary-point-only scaling, the binary point is to the right of the least significant bit for trivial scaling, meaning that the fraction length is zero:

$$real\text{-}world\ value = integer \times 2^{-fraction\ length} = integer \times 2^0.$$

In either case, trivial scaling means that the real-world value is equal to the stored integer value:

$$real\text{-}world\ value = integer.$$

All integers, including Simulink built-in integers such as `uint8`, are treated as fixed-point numbers with trivial scaling by this API. However, Simulink built-in integers are different in that their use does not cause a Fixed-Point Designer software license to be checked out.

Data Type Override

The Fixed-Point Tool enables you to perform various data type overrides on fixed-point signals in your simulations. This API can handle signals whose data types have been overridden in this way:

- A signal that has been overridden with `Single` is treated as a Simulink built-in `single`.
- A signal that has been overridden with `Double` is treated as a Simulink built-in `double`.
- A signal that has been overridden with `Scaled double` is treated as being of data type `ScaledDouble`.


`ScaledDouble` signals are a hybrid between floating-point and fixed-point signals, in that they are stored as `doubles` with the scaling, sign, and word length information retained. The value is stored as a floating-point `double`, but as with a fixed-point number, the distinction between the stored integer value and the real-world value remains. The scaling information is applied to the stored integer `double` to obtain the real-world value. By storing the value in a `double`, overflow and precision issues are

almost always eliminated. Refer to any individual API function reference page at the end of this appendix to learn how that function treats `ScaledDouble` signals.

For more information about the Fixed-Point Tool and data type override, see “Fixed-Point Tool” and the `fxptdlg` reference page.

Structure of the S-Function

The following diagram shows the basic structure of an S-function that directly handles fixed-point data types.

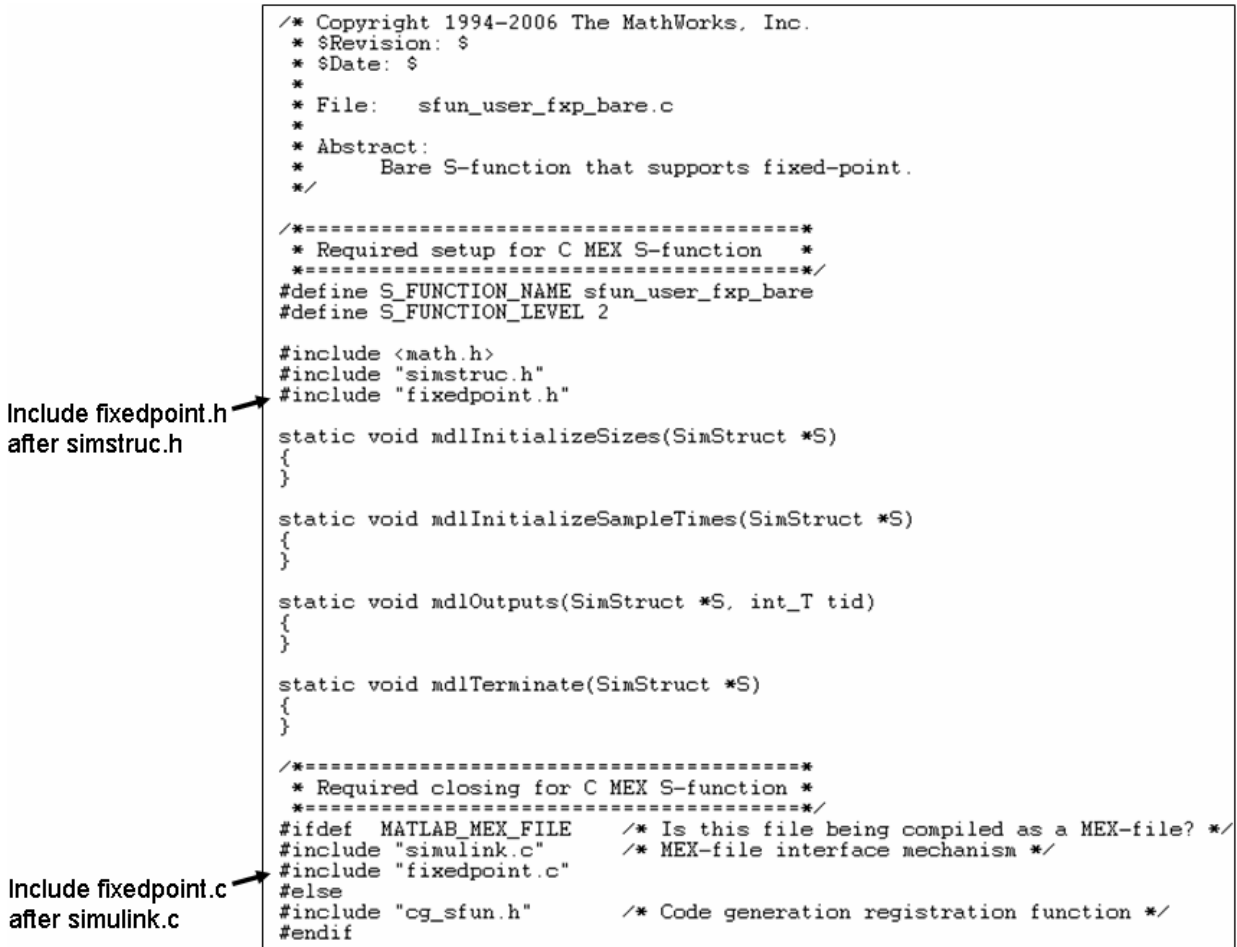

The callouts in the diagram alert you to the fact that you must include `fixedpoint.h` and `fixedpoint.c` at the appropriate places in the S-function. The other elements of the S-function displayed in the diagram follow the standard requirements for S-functions.

To learn how to create a MEX-file for your user-written fixed-point S-function, see “Create MEX-Files” on page A-20.

Storage Containers

In this section...

“Introduction” on page A-7

“Storage Containers in Simulation” on page A-7

“Storage Containers in Code Generation” on page A-10

Introduction

While coding with the API for user-written fixed-point S-functions, it is important to keep in mind the difference between storage container size, storage container word length, and signal word length. The sections that follow discuss the containers used by the API to store signals in simulation and code generation.

Storage Containers in Simulation

In simulation, signals are stored in one of several types of containers of a specific size.

Storage Container Categories

During simulation, fixed-point signals are held in one of the types of storage containers, as shown in the following table. In many cases, signals are represented in containers with more bits than their specified word length.

Fixed-Point Storage Containers

Container Category	Signal Word Length	Container Word Length	Container Size
FXP_STORAGE_INT8 (signed) FXP_STORAGE_UINT8 (unsigned)	1 to 8 bits	8 bits	1 byte
FXP_STORAGE_INT16 (signed) FXP_STORAGE_UINT16 (unsigned)	9 to 16 bits	16 bits	2 bytes
FXP_STORAGE_INT32 (signed) FXP_STORAGE_UINT32 (unsigned)	17 to 32 bits	32 bits	4 bytes
FXP_STORAGE_OTHER_SINGLE_WORD	33 to word length of long data type	Length of long data type	Length of long data type


Container Category	Signal Word Length	Container Word Length	Container Size
FXP_STORAGE_MULTIWORD	Greater than the word length of long data type to 128 bits	Multiples of length of long data type to 128 bits	Multiples of length of long data type to 128 bits

When the number of bits in the signal word length is less than the size of the container, the word length bits are always stored in the least significant bits of the container. The remaining container bits must be sign extended:


- If the data type is unsigned, the sign extension bits must be cleared to zero.
- If the data type is signed, the sign extension bits must be set to one for strictly negative numbers, and cleared to zero otherwise.

For example, a signal of data type `sfix6_En4` is held in a `FXP_STORAGE_INT8` container. The signal is held in the six least significant bits. The remaining two bits are set to zero when the signal is positive or zero, and to one when it is negative.


8-bit container for a signed, 6-bit signal that is positive or zero

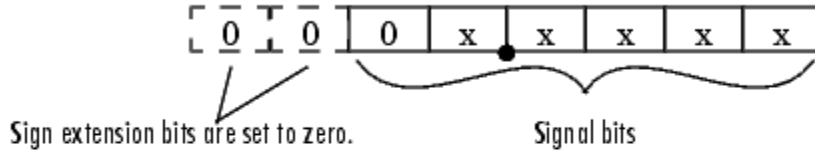

8-bit container for a signed, 6-bit signal that is negative

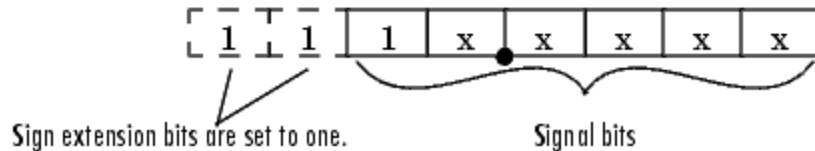

A signal of data type `ufix6_En4` is held in a `FXP_STORAGE_UINT8` container. The signal is held in the six least significant bits. The remaining two bits are always cleared to zero.

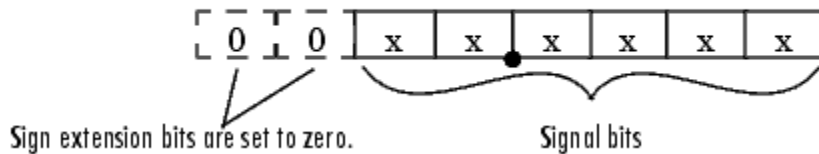8-bit container for an unsigned, 6-bit signal

The signal and storage container word lengths are returned by the `ssGetDataTypeFxpWordLength` and `ssGetDataTypeFxpContainWordLen` functions, respectively. The storage container size is returned by the `ssGetDataTypeStorageContainerSize` function. The container category is returned by the `ssGetDataTypeStorageContainCat` function, which in addition to those in the table above, can also return the following values.

Other Storage Containers

Container Category	Description
<code>FXP_STORAGE_UNKNOWN</code>	Returned if the storage container category is unknown
<code>FXP_STORAGE_SINGLE</code>	The container type for a Simulink single
<code>FXP_STORAGE_DOUBLE</code>	The container type for a Simulink double
<code>FXP_STORAGE_SCALEDDOUBLE</code>	The container type for a data type that has been overridden with Scaled double

Storage Containers in Simulation Example

An `sfix24_En10` data type has a word length of 24, but is actually stored in 32 bits during simulation. For this signal,

- `ssGetDataTypeStorageContainCat` returns `FXP_STORAGE_INT32`.
- `ssGetDataTypeStorageContainerSize` or `sizeof()` returns 4, which is the storage container size in bytes.
- `ssGetDataTypeFxpContainWordLen` returns 32, which is the storage container word length in bits.
- `ssGetDataTypeFxpWordLength` returns 24, which is the data type word length in bits.

Storage Containers in Code Generation

The storage containers used by this API for code generation are not always the same as those used for simulation. During code generation, a native C data type is always used. Floating-point data types are held in C `double` or `float`. Fixed-point data types are held in C signed and unsigned `char`, `short`, `int`, or `long`.

Emulation

Because it is valuable for rapid prototyping and hardware-in-the-loop testing, the emulation of smaller signals inside larger containers is supported in code generation. For example, a 29-bit signal is supported in code generation if there is a C data type available that has at least 32 bits. The rules for placing a smaller signal into a larger container, and for dealing with the extra container bits, are the same in code generation as for simulation.

If a smaller signal is emulated inside a larger storage container in simulation, it is not necessarily emulated in code generation. For example, a 24-bit signal is emulated in a 32-bit storage container in simulation. However, some DSP chips have native support for 24-bit quantities. On such a target, the C compiler can define an `int` or a `long` to be exactly 24 bits. In this case, the 24-bit signal is held in a 32-bit container in simulation, and in a 24-bit container in code generation.

Conversely, a signal that was not emulated in simulation might need to be emulated in code generation. For example, some DSP chips have minimal support for integers. On such chips, `char`, `short`, `int`, and `long` might all be defined to 32 bits. In that case, it is necessary to emulate 8- and 16-bit fixed-point data types in code generation.

Storage Container TLC Functions

Since the mapping of storage containers in simulation to storage containers in code generation is not one-to-one, the Target Language Compiler (TLC) functions for storage containers are different from those in simulation:

- `FixPt_DataTypeNativeType`
- `FixPt_DataTypeStorageDouble`
- `FixPt_DataTypeStorageSingle`
- `FixPt_DataTypeStorageScaledDouble`
- `FixPt_DataTypeStorageSInt`
- `FixPt_DataTypeStorageUInt`

- `FixPt_DataTypeStorageSLong`
- `FixPt_DataTypeStorageULong`
- `FixPt_DataTypeStorageSShort`
- `FixPt_DataTypeStorageUShort`
- `FixPt_DataTypeStorageMultiword`

The first of these TLC functions, `FixPt_DataTypeNativeType`, is the closest analogue to `ssGetDataTypeInfoStorageContainerCat` in simulation. `FixPt_DataTypeNativeType` returns a TLC string that specifies the type of the storage container, and the Simulink Coder product automatically inserts a `typedef` that maps the string to a native C data type in the generated code.

For example, consider a fixed-data type that is held in `FXP_STORAGE_INT8` in simulation. `FixPt_DataTypeNativeType` will return `int8_T`. The `int8_T` will be `typedef'd` to a `char`, `short`, `int`, or `long` in the generated code, depending upon what is appropriate for the target compiler.

The remaining TLC functions listed above return `TRUE` or `FALSE` depending on whether a particular standard C data type is used to hold a given API-registered data type. Note that these functions do not necessarily give mutually exclusive answers for a given registered data type, due to the fact that C data types can potentially overlap in size. In C,

$$\text{sizeof(char)} \leq \text{sizeof(short)} \leq \text{sizeof(int)} \leq \text{sizeof(long)}.$$

One or more of these C data types can be, and very often are, the same size.

Data Type IDs

In this section...

“The Assignment of Data Type IDs” on page A-12

“Registering Data Types” on page A-13

“Setting and Getting Data Types” on page A-15


“Getting Information About Data Types” on page A-15

“Converting Data Types” on page A-17

The Assignment of Data Type IDs


Each data type used in your S-function is assigned a data type ID. You should always use data type IDs to get and set information about data types in your S-function.

In general, the Simulink software assigns data type IDs during model initialization on a “first come, first served” basis. For example, consider the generalized schema of a block diagram below.



The Simulink software assigns a data type ID for each output data type in the diagram in the order it is requested. For simplicity, assume that the order of request occurs from left to right. Therefore, the output of block A may be assigned data type ID 13, and the output of block B may be assigned data type ID 14. The output data type of block C is the same as that of block A, so the data type ID assigned to the output of block C is also 13. The output of block D is assigned data type ID 15.

Now if the blocks in the model are rearranged,



The Simulink software still assigns the data type IDs in the order in which they are used. Therefore each data type might end up with a different data type ID. The output of block A is still assigned data type ID 13. The output of block D is now next in line and is assigned data type ID 14. The output of block B is assigned data type ID 15. The output data type of block C is still the same as that of block A, so it is also assigned data type ID 13.

This table summarizes the two cases described above.

Block	Data Type ID in Model_1	Data Type ID in Model_2
A	13	13
B	14	15
C	13	13
D	15	14

This example illustrates that there is no strict relationship between the attributes of a data type and the value of its data type ID. In other words, the data type ID is not assigned based on the characteristics of the data type it is representing, but rather on when that data type is first needed.

Note Because of the nature of the assignment of data type IDs, you should always use API functions to extract information from a data type ID about a data type in your S-function.

Registering Data Types

The functions in the following table are available in the API for user-written fixed-point S-functions for registering data types in simulation. Each of these functions will return a data type ID. To see an example of a function being used, go to the file and line indicated in the table.

Data Type Registration Functions

Function	Description	Example of Use
<code>ssRegisterDataTypeFxpBinaryPoint</code>	Register a fixed-point data type with binary-point-only scaling and return its data type ID	<code>sfun_user_fxp_asr.c</code> Line 252
<code>ssRegisterDataTypeFxpFSlopeFixExpBias</code>	Register a fixed-point data type with [Slope Bias] scaling specified in terms of fractional slope, fixed exponent, and bias, and return its data type ID	Not Available
<code>ssRegisterDataTypeFxpScaledDouble</code>	Register a scaled double data type with [Slope Bias] scaling specified in terms of fractional slope, fixed exponent, and bias, and return its data type ID	Not Available
<code>ssRegisterDataTypeFxpSlopeBias</code>	Register a data type with [Slope Bias] scaling and return its data type ID	<code>sfun_user_fxp_dtprop.c</code> Line 319

Preassigned Data Type IDs

The Simulink software registers its built-in data types, and those data types always have preassigned data type IDs. The built-in data type IDs are given by the following tokens:

- `SS_DOUBLE`
- `SS_SINGLE`
- `SS_INT8`
- `SS_UINT8`
- `SS_INT16`
- `SS_UINT16`
- `SS_INT32`

- SS_UINT32
- SS_BOOLEAN

You do not need to register these data types. If you attempt to register a built-in data type, the registration function simply returns the preassigned data type ID.

Setting and Getting Data Types

Data type IDs are used to specify the data types of input and output ports, run-time parameters, and DWork states. To set fixed-point data types for quantities in your S-function, the procedure is as follows:

- 1 Register a data type using one of the functions listed in the table Data Type Registration Functions. A data type ID is returned to you.

Alternately, you can use one of the preassigned data type IDs of the Simulink built-in data types.

- 2 Use the data type ID to set the data type for an input or output port, run-time parameter, or DWork state using one of the following functions:

- ssSetInputPortDataType
- ssSetOutputPortDataType
- ssSetRunTimeParamInfo
- ssSetDWorkDataType

To get the data type ID of an input or output port, run-time parameter, or DWork state, use one of the following functions:

- ssGetInputPortDataType
- ssGetOutputPortDataType
- ssGetRunTimeParamInfo
- ssGetDWorkDataType

Getting Information About Data Types

You can use data type IDs with functions to get information about the built-in and registered data types in your S-function. The functions in the following tables are available in the API for extracting information about registered data types. To see an example of a function being used, go to the file and line indicated in the table. Note

that data type IDs can also be used with all the standard data type access methods in `simstruc.h`, such as `ssGetDataTypeSize`.

Storage Container Information Functions

Function	Description	Example of Use
<code>ssGetDataTypeFxpContainWordLen</code>	Return the word length of the storage container of a registered data type	<code>sfun_user_fxp_ContainWordLenProbe.c</code> Line 181
<code>ssGetDataTypeStorageContainCat</code>	Return the storage container category of a registered data type	<code>sfun_user_fxp_asr.c</code> Line 294
<code>ssGetDataTypeStorageContainerSi</code>	Return the storage container size of a registered data type	<code>sfun_user_fxp_StorageContainSizeProbe.c</code> Line 171

Signal Data Type Information Functions

Function	Description	Example of Use
<code>ssGetDataTypeFxpIsSigned</code>	Determine whether a fixed-point registered data type is signed or unsigned	<code>sfun_user_fxp_asr.c</code> Line 254
<code>ssGetDataTypeFxpWordLength</code>	Return the word length of a fixed-point registered data type	<code>sfun_user_fxp_asr.c</code> Line 255
<code>ssGetDataTypeIsFixedPoint</code>	Determine whether a registered data type is a fixed-point data type	<code>sfun_user_fxp_const.c</code> Line 127
<code>ssGetDataTypeIsFloatingPoint</code>	Determine whether a registered data type is a floating-point data type	<code>sfun_user_fxp_IsFloatingPointProbe.c</code> Line 176
<code>ssGetDataTypeIsFxpFltApiComp</code>	Determine whether a registered data type is supported by the API for user-written fixed-point S-functions	<code>sfun_user_fxp_asr.c</code> Line 184
<code>ssGetDataTypeIsScalingPow2</code>	Determine whether a registered data type has power-of-two scaling	<code>sfun_user_fxp_asr.c</code> Line 203

Function	Description	Example of Use
<code>ssGetDataTypeInfoScalingTrivial</code>	Determine whether the scaling of a registered data type is slope = 1, bias = 0	<code>sfun_user_fxp_IsScalingTrivialProbe.c</code> Line 171

Signal Scaling Information Functions

Function	Description	Example of Use
<code>ssGetDataTypeInfoBias</code>	Return the bias of a registered data type	<code>sfun_user_fxp_dtprop.c</code> Line 243
<code>ssGetDataTypeInfoFixedExponent</code>	Return the exponent of the slope of a registered data type	<code>sfun_user_fxp_dtprop.c</code> Line 237
<code>ssGetDataTypeInfoFracSlope</code>	Return the fractional slope of a registered data type	<code>sfun_user_fxp_dtprop.c</code> Line 234
<code>ssGetDataTypeInfoFractionLength</code>	Return the fraction length of a registered data type with power-of-two scaling	<code>sfun_user_fxp_asr.c</code> Line 256
<code>ssGetDataTypeInfoTotalSlope</code>	Return the total slope of the scaling of a registered data type	<code>sfun_user_fxp_dtprop.c</code> Line 240

Converting Data Types

The functions in the following table allow you to convert values between registered data types in your fixed-point S-function.

Data Type Conversion Functions

Function	Description	Example of Use
<code>ssFxpConvert</code>	Convert a value from one data type to another data type.	Not Available
<code>ssFxpConvertFromRealWorldValue</code>	Convert a value of data type <code>double</code> to another data type.	Not Available
<code>ssFxpConvertToRealWorldValue</code>	Convert a value of any data type to a <code>double</code> .	Not Available

Overflow Handling and Rounding Methods

In this section...

“Tokens for Overflow Handling and Rounding Methods” on page A-18

“Overflow Logging Structure” on page A-19

Tokens for Overflow Handling and Rounding Methods

The API for user-written fixed-point S-functions provides functions for some mathematical operations, such as conversions. When these operations are performed, a loss of precision or overflow may occur. The tokens in the following tables allow you to control the way an API function handles precision loss and overflow. The data type of the overflow handling methods is `fxpModeOverflow`. The data type of the rounding modes is `fxpModeRounding`.

Overflow Handling Tokens

Token	Description	Example of Use
<code>FXP_OVERFLOW_SATURATE</code>	Saturate overflows	Not Available
<code>FXP_OVERFLOW_WRAP</code>	Wrap overflows	Not Available

Rounding Method Tokens

Token	Description	Example of Use
<code>FXP_ROUND_CEIL</code>	Round to the closest representable number in the direction of positive infinity	Not Available
<code>FXP_ROUND_CONVERGENT</code>	Round toward nearest integer with ties rounding to nearest even integer	Not Available
<code>FXP_ROUND_FLOOR</code>	Round to the closest representable number in the direction of negative infinity	Not Available
<code>FXP_ROUND_NEAR</code>	Round to the closest representable number, with the exact midpoint rounded in the direction of positive infinity	Not Available
<code>FXP_ROUND_NEAR_ML</code>	Round toward nearest. Ties round toward negative infinity for negative numbers, and toward positive infinity for positive numbers	Not Available

Token	Description	Example of Use
<code>FXP_ROUND_SIMPLEST</code>	Automatically chooses between round toward floor and round toward zero to produce generated code that is as efficient as possible	Not Available
<code>FXP_ROUND_ZERO</code>	Round to the closest representable number in the direction of zero	Not Available

Overflow Logging Structure

Math functions of the API, such as `ssFxpConvert`, can encounter overflows when carrying out an operation. These functions provide a mechanism to log the occurrence of overflows and to report that log back to the caller.

You can use a fixed-point overflow logging structure in your S-function by defining a variable of data type `fxpOverflowLogs`. Some API functions, such as `ssFxpConvert`, accept a pointer to this structure as an argument. The function initializes the logging structure and maintains a count of each the following events that occur while the function is being performed:

- Overflows
- Saturations
- Divide-by-zeros

When a function that accepts a pointer to the logging structure is invoked, the function initializes the event counts of the structure to zero. The requested math operations are then carried out. Each time an event is detected, the appropriate event count is incremented by one.

The following fields contain the event-count information of the structure:

- `OverflowOccurred`
- `SaturationOccurred`
- `DivisionByZeroOccurred`

Create MEX-Files

To create a MEX-file for a user-written fixed-point C S-function on either Windows or UNIX[®] systems:

- In your S-function, include `fixedpoint.c` and `fixedpoint.h`. For more information, see “Structure of the S-Function” on page A-5.
- Pass an extra argument, `-lfixedpoint`, to the `mex` command. For example,

```
mex('sfun_user_fxp_asr.c', '-lfixedpoint')
```

Fixed-Point S-Function Examples

The following files in *matlabroot/toolbox/simulink/fixedandfloat/fixpdemos/* are examples of S-functions written with the API for user-written fixed-point S-functions:

- `sfun_user_fxp_asr.c`
- `sfun_user_fxp_BiasProbe.c`
- `sfun_user_fxp_const.c`
- `sfun_user_fxp_ContainWordLenProbe.c`
- `sfun_user_fxp_dtprop.c`
- `sfun_user_fxp_FixedExponentProbe.c`
- `sfun_user_fxp_FracLengthProbe.c`
- `sfun_user_fxp_FracSlopeProbe.c`
- `sfun_user_fxp_IsFixedPointProbe.c`
- `sfun_user_fxp_IsFloatingPointProbe.c`
- `sfun_user_fxp_IsFxpFltApiCompatProbe.c`
- `sfun_user_fxp_IsScalingPow2Probe.c`
- `sfun_user_fxp_IsScalingTrivialProbe.c`
- `sfun_user_fxp_IsSignedProbe.c`
- `sfun_user_fxp_prodsum.c`
- `sfun_user_fxp_StorageContainCatProbe.c`
- `sfun_user_fxp_StorageContainSizeProbe.c`
- `sfun_user_fxp_TotalSlopeProbe.c`
- `sfun_user_fxp_U32BitRegion.c`
- `sfun_user_fxp_WordLengthProbe.c`

Related Examples

- “Get the Input Port Data Type” on page A-23
- “Set the Output Port Data Type” on page A-25
- “Interpret an Input Value” on page A-26
- “Write an Output Value” on page A-28

- “Determine Output Type Using the Input Type” on page A-30

Get the Input Port Data Type

Within your S-function, you might need to know the data types of different ports, runtime parameters, and DWorks. In each case, you will need to get the data type ID of the data type, and then use functions from this API to extract information about the data type.

For example, suppose you need to know the data type of your input port. To do this,

- 1 Use `ssGetInputPortDataType`. The data type ID of the input port is returned.
- 2 Use API functions to extract information about the data type.

The following lines of example code are from `sfun_user_fxp_dtprop.c`.

In lines 191 and 192, `ssGetInputPortDataType` is used to get the data type ID for the two input ports of the S-function:

```
dataTypeIdU0 = ssGetInputPortDataType( S, 0 );
dataTypeIdU1 = ssGetInputPortDataType( S, 1 );
```

Further on in the file, the data type IDs are used with API functions to get information about the input port data types. In lines 205 through 226, a check is made to see whether the input port data types are `single` or `double`:

```
storageContainerU0 = ssGetDataTypeInfoStorageContainer( S,
dataTypeIdU0 );
storageContainerU1 = ssGetDataTypeInfoStorageContainer( S,
dataTypeIdU1 );
if ( storageContainerU0 == FXP_STORAGE_DOUBLE ||
storageContainerU1 == FXP_STORAGE_DOUBLE )
{
/* Doubles take priority over all other rules.
* If either of first two inputs is double,
* then third input is set to double.
*/
dataTypeIdU2Desired = SS_DOUBLE;
}
else if ( storageContainerU0 == FXP_STORAGE_SINGLE ||
storageContainerU1 == FXP_STORAGE_SINGLE )
{
/* Singles take priority over all other rules,
* except doubles.
* If either of first two inputs is single
```

```
* then third input is set to single.
*/
dataTypeIdU2Desired = SS_SINGLE;
}
else
```

In lines 227 through 244, additional API functions are used to get information about the data types if they are neither `single` nor `double`:

```
{
    isSignedU0 = ssGetDataTypeIdSigned( S, dataTypeIdU0 );
    isSignedU1 = ssGetDataTypeIdSigned( S, dataTypeIdU1 );

    wordLengthU0 = ssGetDataTypeIdWordLength( S, dataTypeIdU0 );
    wordLengthU1 = ssGetDataTypeIdWordLength( S, dataTypeIdU1 );

    fracSlopeU0 = ssGetDataTypeIdFracSlope( S, dataTypeIdU0 );
    fracSlopeU1 = ssGetDataTypeIdFracSlope( S, dataTypeIdU1 );

    fixedExponentU0 = ssGetDataTypeIdFixedExponent( S, dataTypeIdU0 );
    fixedExponentU1 = ssGetDataTypeIdFixedExponent( S, dataTypeIdU1 );

    totalSlopeU0 = ssGetDataTypeIdTotalSlope( S, dataTypeIdU0 );
    totalSlopeU1 = ssGetDataTypeIdTotalSlope( S, dataTypeIdU1 );

    biasU0 = ssGetDataTypeIdBias( S, dataTypeIdU0 );
    biasU1 = ssGetDataTypeIdBias( S, dataTypeIdU1 );
}
```

The functions used above return whether the data types are signed or unsigned, as well as their word lengths, fractional slopes, exponents, total slopes, and biases. Together, these quantities give full information about the fixed-point data types of the input ports.

Related Examples

- “Set the Output Port Data Type” on page A-25

Set the Output Port Data Type

You may want to set the data type of various ports, run-time parameters, or DWorks in your S-function.

For example, suppose you want to set the output port data type of your S-function. To do this,

- 1 Register a data type by using one of the functions listed in the table Data Type Registration Functions. A data type ID is returned.

Alternately, you can use one of the predefined data type IDs of the Simulink built-in data types.

- 2 Use `ssSetOutputPortDataType` with the data type ID from Step 1 to set the output port to the desired data type.

In the example below from lines 336 - 352 of `sfun_user_fxp_const.c`, `ssRegisterDataTypeFxpBinaryPoint` is used to register the data type. `ssSetOutputPortDataType` then sets the output data type either to the given data type ID, or to be dynamically typed:

```

/* Register data type
 */
if ( notSizesOnlyCall )
{
    DataTypeId DataTypeId = ssRegisterDataTypeFxpBinaryPoint(
        S,
        V_ISSIGNED,
        V_WORDLENGTH,
        V_FRACTIONLENGTH,
        1 /* true means obey data type override setting for
this subsystem */ );

    ssSetOutputPortDataType( S, 0, DataTypeId );
}
else
{
    ssSetOutputPortDataType( S, 0, DYNAMICALLY_TYPED );
}

```

Related Examples

- “Interpret an Input Value” on page A-26

Interpret an Input Value

Suppose you need to get the value of the signal on your input port to use in your S-function. You should write your code so that the pointer to the input value is properly typed, so that the values read from the input port are interpreted correctly. To do this, you can use these steps, which are shown in the example code below:

- 1** Create a void pointer to the value of the input signal.
- 2** Get the data type ID of the input port using `ssGetInputPortDataType`.
- 3** Use the data type ID to get the storage container type of the input.
- 4** Have a case for each input storage container type you want to handle. Within each case, you will need to perform the following in some way:
 - Create a pointer of the correct type according to the storage container, and cast the original void pointer into the new fully typed pointer (see **a** and **c**).
 - You can now store and use the value by dereferencing the new, fully typed pointer (see **b** and **d**).

For example,

```
static void mdlOutputs(SimStruct *S, int_T tid)
{
    const void *pVoidIn =
        (const void *)ssGetInputPortSignal( S, 0 ); (1)

    DTypeId dataTypeIdU0 = ssGetInputPortDataType( S, 0 ); (2)

    fxpStorageContainerCategory storageContainerU0 =
        ssGetDataTypeIdStorageContainerCat( S, dataTypeIdU0 ); (3)

    switch ( storageContainerU0 )
    {
        case FXP_STORAGE_UINT8: (4)
        {
            const uint8_T *pU8_Properly_Typed_Pointer_To_U0; (a)

            uint8_T u8_Stored_Integer_U0; (b)

            pU8_Properly_Typed_Pointer_To_U0 =
                (const uint8_T *)pVoidIn; (c)
        }
    }
}
```

```
    u8_Stored_Integer_U0 =
    *pU8_Properly_Typed_Pointer_To_U0; (d)

    <snip: code that uses input when it's in a uint8_T>
    }
    break;

case FXP_STORAGE_INT8: (4)
    {
        const int8_T *pS8_Properly_Typed_Pointer_To_U0; (a)

        int8_T s8_Stored_Integer_U0; (b)

        pS8_Properly_Typed_Pointer_To_U0 =
        (const int8_T *)pVoidIn; (c)

        s8_Stored_Integer_U0 =
        *pS8_Properly_Typed_Pointer_To_U0; (d)

        <snip: code that uses input when it's in a int8_T>
    }
    break;
```

Related Examples

- “Write an Output Value” on page A-28

Write an Output Value

Suppose you need to write the value of the output signal to the output port in your S-function. You should write your code so that the pointer to the output value is properly typed. To do this, you can use these steps, which are followed in the example code below:

- 1 Create a void pointer to the value of the output signal.
- 2 Get the data type ID of the output port using `ssGetOutputPortDataType`.
- 3 Use the data type ID to get the storage container type of the output.
- 4 Have a case for each output storage container type you want to handle. Within each case, you will need to perform the following in some way:
 - Create a pointer of the correct type according to the storage container, and cast the original void pointer into the new fully typed pointer (see **a** and **c**).
 - You can now write the value by dereferencing the new, fully typed pointer (see **b** and **d**).

For example,

```
static void mdlOutputs(SimStruct *S, int_T tid)
{
    <snip>

    void *pVoidOut = ssGetOutputPortSignal( S, 0 ); (1)

    DTypeId dataTypeIdY0 = ssGetOutputPortDataType( S, 0 ); (2)

    fxpStorageContainerCategory storageContainerY0 =
        ssGetDataTypeStorageContainCat( S,
        dataTypeIdY0 ); (3)

    switch ( storageContainerY0 )
    {
        case FXP_STORAGE_UINT8: (4)
        {
            const uint8_T *pU8_Properly_Typed_Pointer_To_Y0; (a)

            uint8_T u8_Stored_Integer_Y0; (b)

            <snip: code that puts the desired output stored integer
            value in to temporary variable u8_Stored_Integer_Y0>

            pU8_Properly_Typed_Pointer_To_Y0 =
            (const uint8_T *)pVoidOut; (c)

            *pU8_Properly_Typed_Pointer_To_Y0 =
            u8_Stored_Integer_Y0; (d)
        }
    }
}
```

```
    }  
    break;  
  
    case FXP_STORAGE_INT8: (4)  
    {  
        const int8_T *pS8_Properly_Typed_Pointer_To_Y0; (a)  
  
        int8_T s8_Stored_Integer_Y0; (b)  
  
        <snip: code that puts the desired output stored integer  
value in to temporary variable s8_Stored_Integer_Y0>  
  
        pS8_Properly_Typed_Pointer_To_Y0 =  
(const int8_T *)pVoidY0; (c)  
  
        *pS8_Properly_Typed_Pointer_To_Y0 =  
s8_Stored_Integer_Y0; (d)  
  
    }  
    break;  
  
<snip>
```

Related Examples

- “Determine Output Type Using the Input Type” on page A-30

Determine Output Type Using the Input Type

The following sample code from lines 243 through 261 of `sfun_user_fxp_asr.c` gives an example of using the data type of the input to your S-function to calculate the output data type. Notice that in this code

- The output is signed or unsigned to match the input **(a)**.
- The output is the same word length as the input **(b)**.
- The fraction length of the output depends on the input fraction length and the number of shifts **(c)**.

```
#define MDL_SET_INPUT_PORT_DATA_TYPE
static void mdlSetInputPortDataType(SimStruct *S, int port,
    DTypeId dataTypeIdInput)
{
    if ( isDataTypeSupported( S, dataTypeIdInput ) )
    {
        DTypeId dataTypeIdOutput;

        ssSetInputPortDataType( S, port, dataTypeIdInput );

        dataTypeIdOutput = ssRegisterDataTypeFxpBinaryPoint(
            S,
            ssGetDataTypeFxpIsSigned( S, dataTypeIdInput ), (a)
            ssGetDataTypeFxpWordLength( S, dataTypeIdInput ), (b)
            ssGetDataTypeFractionLength( S, dataTypeIdInput )
            - V_NUM_BITS_TO_SHIFT_RGHT, (c)
            0 /* false means do NOT obey data type override
               setting for this subsystem */ );

        ssSetOutputPortDataType( S, 0, dataTypeIdOutput );
    }
}
```


API Function Reference

ssFxpConvert

Convert value from one data type to another

Syntax

```
extern void ssFxpConvert (SimStruct *S,  
                          void *pVoidDest,  
                          size_t sizeofDest,  
                          DTypeId dataTypeIdDest,  
                          const void *pVoidSrc,  
                          size_t sizeofSrc,  
                          DTypeId dataTypeIdSrc,  
                          fxpModeRounding roundMode,  
                          fxpModeOverflow overflowMode,  
                          fxpOverflowLogs *pFxpOverflowLogs)
```

Arguments

S

SimStruct representing an S-function block.

pVoidDest

Pointer to the converted value.

sizeofDest

Size in memory of the converted value.

dataTypeIdDest

Data type ID of the converted value.

pVoidSrc

Pointer to the value you want to convert.

sizeofSrc

Size in memory of the value you want to convert.

dataTypeIdSrc

Data type ID of the value you want to convert.

roundMode

Rounding mode you want to use if a loss of precision is necessary during the conversion. Possible values are `FXP_ROUND_CEIL`, `FXP_ROUND_CONVERGENT`, `FXP_ROUND_FLOOR`, `FXP_ROUND_NEAR`, `FXP_ROUND_NEAR_ML`, `FXP_ROUND_SIMPLEST` and `FXP_ROUND_ZERO`.

overflowMode

Overflow mode you want to use if overflow occurs during the conversion. Possible values are `FXP_OVERFLOW_SATURATE` and `FXP_OVERFLOW_WRAP`.

pFxpOverflowLogs

Pointer to the fixed-point overflow logging structure.

Description

This function converts a value of any registered built-in or fixed-point data type to any other registered built-in or fixed-point data type.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

None

See Also

`ssFxpConvertFromRealWorldValue`, `ssFxpConvertToRealWorldValue`

ssFxpConvertFromRealWorldValue

Convert value of data type `double` to another data type

Syntax

```
extern void ssFxpConvertFromRealWorldValue
    (SimStruct *S,
     void *pVoidDest,
     size_t sizeofDest,
     DTypeId dataTypeIdDest,
     double dblRealWorldValue,
     fxpModeRounding roundMode,
     fxpModeOverflow overflowMode,
     fxpOverflowLogs *pFxpOverflowLogs)
```

Arguments

`S`

SimStruct representing an S-function block.

`pVoidDest`

Pointer to the converted value.

`sizeofDest`

Size in memory of the converted value.

`dataTypeIdDest`

Data type ID of the converted value.

`dblRealWorldValue`

Double value you want to convert.

`roundMode`

Rounding mode you want to use if a loss of precision is necessary during the conversion. Possible values are `FXP_ROUND_CEIL`, `FXP_ROUND_CONVERGENT`, `FXP_ROUND_FLOOR`, `FXP_ROUND_NEAR`, `FXP_ROUND_NEAR_ML`, `FXP_ROUND_SIMPLEST` and `FXP_ROUND_ZERO`.

`overflowMode`

Overflow mode you want to use if overflow occurs during the conversion. Possible values are `FXP_OVERFLOW_SATURATE` and `FXP_OVERFLOW_WRAP`.

`pFxpOverflowLogs`

Pointer to the fixed-point overflow logging structure.

Description

This function converts a `double` value to any registered built-in or fixed-point data type.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

None

See Also

`ssFxpConvert`, `ssFxpConvertToRealWorldValue`

ssFxpConvertToRealWorldValue

Convert value of any data type to double

Syntax

```
extern double ssFxpConvertToRealWorldValue (SimStruct *S,  
                                             const void *pVoidSrc,  
                                             size_t sizeofSrc,  
                                             DTypeId dataTypeIdSrc)
```

Arguments

`S`

SimStruct representing an S-function block.

`pVoidSrc`

Pointer to the value you want to convert.

`sizeofSrc`

Size in memory of the value you want to convert.

`dataTypeIdSrc`

Data type ID of the value you want to convert.

Description

This function converts a value of any registered built-in or fixed-point data type to a double.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

None

See Also

ssFxpConvert, ssFxpConvertFromRealWorldValue

ssFxpGetU32BitRegion

Return stored integer value for 32-bit region of real, scalar signal element

Syntax

```
extern uint32 ssFxpGetU32BitRegion(SimStruct *S,  
                                   const void *pVoid  
                                   DTypeId dataTypeId  
                                   unsigned int regionIndex)
```

Arguments

S

SimStruct representing an S-function block.

pVoid

Pointer to the storage container of the real, scalar signal element in which the 32-bit region of interest resides.

dataTypeId

Data type ID of the registered data type corresponding to the signal.

regionIndex

Index of the 32-bit region whose stored integer value you want to retrieve, where 0 accesses the least significant 32-bit region.

Description

This function returns the stored integer value in the 32-bit region specified by **regionIndex**, associated with the fixed-point data type designated by **dataTypeId**. You can use this function with any fixed-point data type, including those with word sizes less than 32 bits. If the fixed-point word size is less than 32 bits, the remaining bits are sign extended.

This function generates an error if **dataTypeId** represents a floating-point data type.

To view an example model whose S-functions use the `ssFxpGetU32BitRegion` function, at the MATLAB prompt, enter `fxpdemo_sfun_user_U32BitRegion`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

See Also

`ssFxpSetU32BitRegion`

ssFxpGetU32BitRegionCompliant

Determine whether S-function is compliant with the U32 bit region interface

Syntax

```
extern ssFxpSGetU32BitRegionCompliant(SimStruct *S,  
                                     int *result)
```

Arguments

S

SimStruct representing an S-function block.

result

- 1 if S-function calls `ssFxpSetU32BitRegionCompliant` to declare compliance with memory footprint for fixed-point data types with 33 or more bits
- 0 if S-function does not call `ssFxpSetU32BitRegionCompliant`

Description

This function checks whether the S-function calls `ssFxpSetU32BitRegionCompliant` to declare compliance with the memory footprint for fixed-point data types with 33 or more bits. Before calling any other Fixed-Point Designer API function on data with 33 or more bits, you must call `ssFxpSetU32BitRegionCompliant` as follows:

```
ssFxpSetU32BitRegionCompliant(S,1);
```

Note: The Fixed-Point Designer software assumes that S-functions that use fixed-point data types with 33 or more bits without calling `ssFxpSetU32BitRegionCompliant` are using the obsolete memory footprint that existed until R2007b. Either redesign these S-functions or isolate them using the library `fixpt_legacy_sfun_support`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

See Also

`ssFxpSetU32BitRegionCompliant`

ssFxpSetU32BitRegion

Set stored integer value for 32-bit region of real, scalar signal element

Syntax

```
extern ssFxpSetU32BitRegion(SimStruct *S,  
                             void *pVoid  
                             DTypeId dataTypeId  
                             uint32 regionValue  
                             unsigned int regionIndex)
```

Arguments

S

SimStruct representing an S-function block.

pVoid

Pointer to the storage container of the real, scalar signal element in which the 32-bit region of interest resides.

dataTypeId

Data type ID of the registered data type corresponding to the signal.

regionValue

Stored integer value that you want to assign to a 32-bit region.

regionIndex

Index of the 32-bit region whose stored integer value you want to set, where 0 accesses the least significant 32-bit region.

Description

This function sets `regionValue` as the stored integer value of the 32-bit region specified by `regionIndex`, associated with the fixed-point data type designated by `dataTypeId`. You can use this function with any fixed-point data type, including those with word sizes less than 32 bits. If the fixed-point word size is less than 32 bits, ensure that the remaining bits are sign extended.

This function generates an error if `dataTypeId` represents a floating-point data type, or if the stored integer value that you set is invalid.

To view an example model whose S-functions use the `ssFxpSetU32BitRegion` function, at the MATLAB prompt, enter `fxpdemo_sfund_user_U32BitRegion`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

See Also

`ssFxpGetU32BitRegion`

ssFxpSetU32BitRegionCompliant

Declare compliance with the U32 bit region interface for fixed-point data types with 33 or more bits

Syntax

```
extern ssFxpSetU32BitRegionCompliant(SimStruct *S,  
                                     int Value)
```

Arguments

S

SimStruct representing an S-function block.

Value

- 1 declare compliance with memory footprint for fixed-point data types with 33 or more bits.

Description

This function declares compliance with the Fixed-Point Designer bit region interface for data types with 33 or more bits. The memory footprint for data types with 33 or more bits varies between MATLAB host platforms and might change between software releases. To make an S-function robust to memory footprint changes, use the U32 bit region interface. You can use identical source code on different MATLAB host platforms and with any software release from R2008b. If the memory footprint changes between releases, you do not have to recompile U32 bit region compliant S-functions.

To make an S-function U32 bit region compliant, before calling any other Fixed-Point Designer API function on data with 33 or more bits, you must call this function as follows:

```
ssFxpSetU32BitRegionCompliant(S,1);
```

If an S-function block contains a fixed-point data type with 33 or more bits, call this function in mdlInitializeSizes().

Note: The Fixed-Point Designer software assumes that S-functions that use fixed-point data types with 33 or more bits without calling `ssFxpSetU32BitRegionCompliant` are using the obsolete memory footprint that existed until R2007b. Either redesign these S-functions or isolate them using the library `fixpt_legacy_sfun_support`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

See Also

`ssFxpGetU32BitRegionCompliant`

ssGetDataTypeBias

Return bias of registered data type

Syntax

```
extern double ssGetDataTypeBias(SimStruct *S, DTypeId  
                               dataTypeId)
```

Arguments

S

SimStruct representing an S-function block.

dataTypeId

Data type ID of the registered data type for which you want to know the bias.

Description

Fixed-point numbers can be represented as
real-world value = (slope × integer) + bias.

This function returns the bias of a registered data type:

- For both trivial scaling and power-of-two scaling, 0 is returned.
- If the registered data type is `ScaledDouble`, the bias returned is that of the nonoverridden data type.

This function errors out when `ssGetDataTypeIsFxpFltApiCompat` returns `FALSE`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

FixPt_DataTypeInfo

See Also

ssGetDataTypeInfoFixedExponent, ssGetDataTypeInfoFracSlope,
ssGetDataTypeInfoTotalSlope

ssGetDataTypeIdFixedExponent

Return exponent of slope of registered data type

Syntax

```
extern int ssGetDataTypeIdFixedExponent (SimStruct *S, DTypeId
                                         dataTypeId)
```

Arguments

S

SimStruct representing an S-function block.

dataTypeId

Data type ID of the registered data type for which you want to know the exponent.

Description

Fixed-point numbers can be represented as
real-world value = (slope × integer) + bias,

where the slope can be expressed as
slope = fractional slope × 2^{exponent}.

This function returns the exponent of a registered fixed-point data type:

- For power-of-two scaling, the exponent is the negative of the fraction length.
- If the data type has trivial scaling, including for data types `single` and `double`, the exponent is 0.
- If the registered data type is `ScaledDouble`, the exponent returned is that of the nonoverridden data type.

This function errors out when `ssGetDataTypeIdIsFxpFltApiCompat` returns `FALSE`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

FixPt_DataTypeFixedExponent

See Also

ssGetDataTypeBias, ssGetDataTypeFracSlope, ssGetDataTypeTotalSlope

ssGetDataFracSlope

Return fractional slope of registered data type

Syntax

```
extern double ssGetDataFracSlope(SimStruct *S, DTypeId  
                                dataTypeId)
```

Arguments

S

SimStruct representing an S-function block.

dataTypeId

Data type ID of the registered data type for which you want to know the fractional slope.

Description

Fixed-point numbers can be represented as
real-world value = (slope × integer) + bias,

where the slope can be expressed as
slope = fractional slope × 2^{exponent}.

This function returns the fractional slope of a registered fixed-point data type. To get the total slope, use `ssGetDataTotalSlope`:

- For power-of-two scaling, the fractional slope is 1.
- If the data type has trivial scaling, including data types `single` and `double`, the fractional slope is 1.
- If the registered data type is `ScaledDouble`, the fractional slope returned is that of the nonoverridden data type.

This function errors out when `ssGetDataIsFxpFltApiCompat` returns `FALSE`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

FixPt_DataTypeFracSlope

See Also

ssGetDataTypeBias, ssGetDataTypeFixedExponent, ssGetDataTypeTotalSlope

ssGetDataTypeFractionLength

Return fraction length of registered data type with power-of-two scaling

Syntax

```
extern int ssGetDataTypeFractionLength (SimStruct *S, DTypeId  
                                         dataTypeId)
```

Arguments

S

SimStruct representing an S-function block.

dataTypeId

Data type ID of the registered data type for which you want to know the fraction length.

Description

This function returns the fraction length, or the number of bits to the right of the binary point, of the data type designated by `dataTypeId`.

This function errors out when `ssGetDataTypeIsScalingPow2` returns `FALSE`.

This function also errors out when `ssGetDataTypeIsFxpFltApiCompat` returns `FALSE`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

FixPt_DataTypeInfoLength

See Also

ssGetDataTypeInfoWordLength

ssGetDataTypeFxpContainWordLen

Return word length of storage container of registered data type

Syntax

```
extern int ssGetDataTypeFxpContainWordLen (SimStruct *S,  
                                           DTypeId dataTypeId)
```

Arguments

S

SimStruct representing an S-function block.

dataTypeId

Data type ID of the registered data type for which you want to know the container word length.

Description

This function returns the word length, in bits, of the storage container of the fixed-point data type designated by `dataTypeId`. This function does not return the size of the storage container or the word length of the data type. To get the storage container size, use `ssGetDataTypeStorageContainerSize`. To get the data type word length, use `ssGetDataTypeFxpWordLength`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

Examples

An `sfix24_En10` data type has a word length of 24, but is actually stored in 32 bits during simulation. For this signal,

- `ssGetDataFxpContainWordLen` returns 32, which is the storage container word length in bits.
- `ssGetDataFxpWordLength` returns 24, which is the data type word length in bits.
- `ssGetDataStorageContainerSize` or `sizeof()` returns 4, which is the storage container size in bytes.

TLC Functions

`FixPt_DataTypeFxpContainWordLen`

See Also

`ssGetDataFxpWordLength`, `ssGetDataStorageContainCat`,
`ssGetDataStorageContainerSize`

ssGetDataTypeFxpIsSigned

Determine whether fixed-point registered data type is signed or unsigned

Syntax

```
extern int ssGetDataTypeFxpIsSigned (SimStruct *S, DTypeId  
                                     dataTypeId)
```

Arguments

S

SimStruct representing an S-function block.

dataTypeId

Data type ID of the registered fixed-point data type for which you want to know whether it is signed.

Description

This function determines whether a registered fixed-point data type is signed:

- If the fixed-point data type is signed, the function returns **TRUE**. If the fixed-point data type is unsigned, the function returns **FALSE**.
- If the registered data type is **ScaledDouble**, the function returns **TRUE** or **FALSE** according to the signedness of the nonoverridden data type.
- If the registered data type is **single** or **double**, this function errors out.

This function errors out when `ssGetDataTypeIsFxpFltApiCompat` returns **FALSE**.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

FixPt_DataTypeFxpIsSigned

ssGetDataTypeFxpWordLength

Return word length of fixed-point registered data type

Syntax

```
extern int ssGetDataTypeFxpWordLength (SimStruct *S, DTypeId  
                                       dataTypeId)
```

Arguments

S

SimStruct representing an S-function block.

dataTypeId

Data type ID of the registered fixed-point data type for which you want to know the word length.

Description

This function returns the word length of the fixed-point data type designated by `dataTypeId`. This function does not return the word length of the container of the data type. To get the container word length, use `ssGetDataTypeFxpContainWordLen`:

- If the registered data type is fixed point, this function returns the total word length including any sign bits, integer bits, and fractional bits.
- If the registered data type is `ScaledDouble`, this function returns the word length of the nonoverridden data type.
- If registered data type is `single` or `double`, this function errors out.

This function errors out when `ssGetDataTypeIsFxpFltApiCompat` returns `FALSE`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

Examples

An `sfixed24_en10` data type has a word length of 24, but is actually stored in 32 bits during simulation. For this signal,

- `ssGetDataTypeFxpWordLength` returns 24, which is the data type word length in bits.
- `ssGetDataTypeFxpContainWordLen` returns 32, which is the storage container word length in bits.
- `ssGetDataTypeStorageContainerSize` or `sizeof()` returns 4, which is the storage container size in bytes.

TLC Functions

`FixPt_DataTypeFxpWordLength`

See Also

`ssGetDataTypeFxpContainWordLen`, `ssGetDataTypeFractionLength`,
`ssGetDataTypeStorageContainerSize`

ssGetDataTypesFixedPoint

Determine whether registered data type is fixed-point data type

Syntax

```
extern int ssGetDataTypeIdIsFixedPoint(SimStruct *S, DTypeId  
                                       dataTypeId)
```

Arguments

`S`

SimStruct representing an S-function block.

`dataTypeId`

Data type ID of the registered data type for which you want to know whether it is fixed-point.

Description

This function determines whether a registered data type is a fixed-point data type:

- This function returns **TRUE** if the registered data type is fixed-point, and **FALSE** otherwise.
- If the registered data type is a pure Simulink integer, such as `int8`, this function returns **TRUE**.
- If the registered data type is `ScaledDouble`, this function returns **FALSE**.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

FixPt_DataTypeIsFixedPoint

See Also

ssGetDataTypeIsFloatingPoint

ssGetDataTypelsFloatingPoint

Determine whether registered data type is floating-point data type

Syntax

```
extern int ssGetDataTypeIsFloatingPoint (SimStruct *S, DTypeId  
                                         dataTypeId)
```

Arguments

S

SimStruct representing an S-function block.

dataTypeId

Data type ID of the registered data type for which you want to know whether it is floating-point.

Description

This function determines whether a registered data type is **single** or **double**:

- If the registered data type is either **single** or **double**, this function returns **TRUE**, and **FALSE** is returned otherwise.
- If the registered data type is **ScaledDouble**, this function returns **FALSE**.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

FixPt_DataTypeIsFloatingPoint

See Also

ssGetDataTypeIsFixedPoint

ssGetDataTypesFxpFltApiCompat

Determine whether registered data type is supported by API for user-written fixed-point S-functions

Syntax

```
extern int ssGetDataTypeIdIsFxpFltApiCompat(SimStruct *S, DTypeId  
                                             dataTypeId)
```

Arguments

S

SimStruct representing an S-function block.

dataTypeId

Data type ID of the registered data type for which you want to determine compatibility with the API for user-written fixed-point S-functions.

Description

This function determines whether the registered data type is supported by the API for user-written fixed-point S-functions. The supported data types are all standard Simulink data types, all fixed-point data types, and data type override data types.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

None. Checking for API-compatible data types is done in simulation. Checking for API-compatible data types is not supported in TLC.

ssGetDataTypesScalingPow2

Determine whether registered data type has power-of-two scaling

Syntax

```
extern int ssGetDataTypeIsScalingPow2 (SimStruct *S, DTypeId  
                                       dataTypeId)
```

Arguments

S

SimStruct representing an S-function block.

dataTypeId

Data type ID of the registered data type for which you want to know whether the scaling is strictly power-of-two.

Description

This function determines whether the registered data type is scaled strictly by a power of two. Fixed-point numbers can be represented as *real-world value* = (*slope* × *integer*) + *bias*,

where the slope can be expressed as

$$\text{slope} = \text{fractional slope} \times 2^{\text{exponent}}.$$

When *bias* = 0 and *fractional slope* = 1, the only scaling factor that remains is a power of two:

$$\text{real-world value} = (2^{\text{exponent}} \times \text{integer}) = (2^{\text{fraction length}} \times \text{integer}).$$

Trivial scaling is considered a case of power-of-two scaling, with the exponent being equal to zero.

Note Many fixed-point algorithms are designed to accept only power-of-two scaling. For these algorithms, you can call `ssGetDataTypeIsScalingPow2` in

`mdlSetInputPortDataType` and `mdlSetOutputPortDataType`, to prevent unsupported data types from being accepted.

This function errors out when `ssGetDataTypeIsFxpFltApiCompat` returns `FALSE`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

`FixPt_DataTypeIsScalingPow2`

See Also

`ssGetDataTypeIsScalingTrivial`

ssGetDataTypesScalingTrivial

Determine whether scaling of registered data type is slope = 1, bias = 0

Syntax

```
extern int ssGetDataTypeIsScalingTrivial (SimStruct *S, DTypeId  
                                         dataTypeId)
```

Arguments

S

SimStruct representing an S-function block.

dataTypeId

Data type ID of the registered data type for which you want to know whether the scaling is trivial.

Description

This function determines whether the scaling of a registered data type is trivial. In [Slope Bias] representation, fixed-point numbers can be represented as *real-world value = (slope × integer) + bias*.

In the trivial case, *slope = 1* and *bias = 0*.

In terms of binary-point-only scaling, the binary point is to the right of the least significant bit for trivial scaling, meaning that the fraction length is zero:

$$\textit{real-world value} = \textit{integer} \times 2^{-\textit{fraction length}} = \textit{integer} \times 2^0.$$

In either case, trivial scaling means that the real-world value is simply equal to the stored integer value:

$$\textit{real-world value} = \textit{integer}.$$

Scaling is always trivial for pure integers, such as `int8`, and also for the true floating-point types `single` and `double`.

This function errors out when `ssGetDataTypeIsFxpFltApiCompat` returns `FALSE`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

`FixPt_DataTypeIsScalingTrivial`

See Also

`ssGetDataTypeIsScalingPow2`

ssGetDataTypeNameOfChunks

Return number of chunks in multiword storage container of registered data type

Syntax

```
extern int ssGetDataTypeNameOfChunks(SimStruct *S,  
                                     DTypeId dataTypeId)
```

Arguments

S

SimStruct representing an S-function block.

dataTypeId

Data type ID of the registered data type for which you want to know the number of chunks in its multiword storage container.

Description

This function returns the number of chunks in the multiword storage container of the fixed-point data type designated by `dataTypeId`. This function is valid only for a registered data type whose storage container uses a multiword representation. You can use the `ssGetDataTypeNameStorageContainCat` function to identify the storage container category; for multiword storage containers, the function returns the category `FXP_STORAGE_MULTIWORD`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

See Also

ssGetDataTypeNameOfChunks

ssGetDataTypeStorageContainCat

Return storage container category of registered data type

Syntax

```
extern fxpStorageContainerCategory
ssGetDataTypeStorageContainCat(SimStruct *S, DTypeId dataTypeId)
```

Arguments

S

SimStruct representing an S-function block.

dataTypeId

Data type ID of the registered data type for which you want to know the container category.

Description

This function returns the storage container category of the data type designated by `dataTypeId`. The container category returned by this function is used to store input and output signals, run-time parameters, and DWorks during Simulink simulations.

During simulation, fixed-point signals are held in one of the types of containers shown in the following table. Therefore in many cases, signals are represented in containers with more bits than their actual word length.

Fixed-Point Storage Containers

Container Category	Signal Word Length	Container Word Length	Container Size
FXP_STORAGE_INT8 (signed) FXP_STORAGE_UINT8 (unsigned)	1 to 8 bits	8 bits	1 byte
FXP_STORAGE_INT16 (signed) FXP_STORAGE_UINT16 (unsigned)	9 to 16 bits	16 bits	2 bytes

Container Category	Signal Word Length	Container Word Length	Container Size
FXP_STORAGE_INT32 (signed) FXP_STORAGE_UINT32 (unsigned)	17 to 32 bits	32 bits	4 bytes
FXP_STORAGE_OTHER_SINGLE_WORD	33 to word length of long data type	Length of long data type	Length of long data type
FXP_STORAGE_MULTIWORD	Greater than the word length of long data type to 128 bits	Multiples of length of long data type to 128 bits	Multiples of length of long data type to 128 bits

When the number of bits in the signal word length is less than the size of the container, the word length bits are always stored in the least significant bits of the container. The remaining container bits must be sign extended to fit the bits of the container:

- If the data type is unsigned, then the sign-extended bits must be cleared to zero.
- If the data type is signed, then the sign-extended bits must be set to one for strictly negative numbers, and cleared to zero otherwise.

The `ssGetDataTypeStorageContainCat` function can also return the following values.

Other Storage Containers

Container Category	Description
FXP_STORAGE_UNKNOWN	Returned if the storage container category is unknown
FXP_STORAGE_SINGLE	Container type for a Simulink <code>single</code>
FXP_STORAGE_DOUBLE	Container type for a Simulink <code>double</code>
FXP_STORAGE_SCALEDDOUBLE	Container type for a data type that has been overridden with <code>Scaled double</code>

This function errors out when `ssGetDataTypeIsFxpFltApiCompat` returns `FALSE`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

Because the mapping of storage containers in simulation to storage containers in code generation is not one-to-one, the TLC functions for storage containers in TLC are different from those in simulation. Refer to “Storage Container TLC Functions” on page A-10 for more information:

- `FixPt_DataTypeInfoNativeType`
- `FixPt_DataTypeInfoStorageDouble`
- `FixPt_DataTypeInfoStorageSingle`
- `FixPt_DataTypeInfoStorageScaledDouble`
- `FixPt_DataTypeInfoStorageSInt`
- `FixPt_DataTypeInfoStorageUInt`
- `FixPt_DataTypeInfoStorageSLong`
- `FixPt_DataTypeInfoStorageULong`
- `FixPt_DataTypeInfoStorageSShort`
- `FixPt_DataTypeInfoStorageUShort`

See Also

`ssGetDataTypeInfoStorageContainerSize`

ssGetDataTypeIdStorageContainerSize

Return storage container size of registered data type

Syntax

```
extern size_t ssGetDataTypeIdStorageContainerSize
                (SimStruct *S, DTypeId
                dataTypeId)
```

Arguments

S

SimStruct representing an S-function block.

dataTypeId

Data type ID of the registered data type for which you want to know the container size.

Description

This function returns the storage container size of the data type designated by `dataTypeId`. This function returns the same value as would the `sizeof()` function; it does not return the word length of either the storage container or the data type. To get the word length of the storage container, use `ssGetDataTypeIdFxpContainWordLen`. To get the word length of the data type, use `ssGetDataTypeIdFxpWordLength`.

The container of the size returned by this function stores input and output signals, run-time parameters, and DWorks during Simulink simulations. It is also the appropriate size measurement to pass to functions like `memcpy()`.

This function errors out when `ssGetDataTypeIdIsFxpFltApiCompat` returns `FALSE`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

Examples

An `sfixed24_en10` data type has a word length of 24, but is actually stored in 32 bits during simulation. For this signal,

- `ssGetDataTypeInfoStorageContainerSize` or `sizeof()` returns 4, which is the storage container size in bytes.
- `ssGetDataTypeInfoFxpContainWordLen` returns 32, which is the storage container word length in bits.
- `ssGetDataTypeInfoFxpWordLength` returns 24, which is the data type word length in bits.

TLC Functions

`FixPt_GetDataTypeInfoStorageContainerSize`

See Also

`ssGetDataTypeInfoFxpContainWordLen`, `ssGetDataTypeInfoFxpWordLength`,
`ssGetDataTypeInfoStorageContainCat`

ssGetDataTypeIdTotalSlope

Return total slope of scaling of registered data type

Syntax

```
extern double ssGetDataTypeIdTotalSlope (SimStruct *S, DTypeId
                                         dataTypeId)
```

Arguments

S

SimStruct representing an S-function block.

dataTypeId

Data type ID of the registered data type for which you want to know the total slope.

Description

Fixed-point numbers can be represented as
real-world value = (slope × integer) + bias,

where the slope can be expressed as
slope = fractional slope × 2^{exponent}.

This function returns the total slope, rather than the fractional slope, of the data type designated by dataTypeId. To get the fractional slope, use `ssGetDataTypeIdFracSlope`:

- If the registered data type has trivial scaling, including `double` and `single` data types, the function returns a total slope of 1.
- If the registered data type is `ScaledDouble`, the function returns the total slope of the nonoverridden data type. Refer to the examples below.

This function errors out when `ssGetDataTypeIdIsFxpFltApiCompat` returns `FALSE`.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

Examples

The data type `sfix32_En4` becomes `flts32_En4` with data type override. The total slope returned by this function in either case is 0.0625 (2^{-4}).

The data type `ufix16_s7p98` becomes `fltu16_s7p98` with data type override. The total slope returned by this function in either case is 7.98 .

TLC Functions

`FixPt_DataTypeTotalSlope`

See Also

`ssGetDataTypeBias`, `ssGetDataTypeFixedExponent`, `ssGetDataTypeFracSlope`

ssLogFixptInstrumentation

Record information collected during simulation

Syntax

```
extern void ssLogFixptInstrumentation
    (SimStruct *S,
     double minValue,
     double maxValue,
     int countOverflows,
     int countSaturation,
     int countDivisionsByZero,
     char *pStrName)
```

Arguments

S

SimStruct representing an S-function block.

minValue

Minimum output value that occurred during simulation.

maxValue

Maximum output value that occurred during simulation.

countOverflows

Number of overflows that occurred during simulation.

countSaturation

Number of saturations that occurred during simulation.

countDivisionsByZero

Number of divisions by zero that occurred during simulation.

*pStrName

The string argument is currently unused.

Description

`ssLogFixptInstrumentation` records information collected during a simulation, such as output maximum and minimum, any overflows, saturations, and divisions by zero that occurred. The Fixed-Point Tool displays this information after a simulation.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

ssRegisterDataTypeFxpBinaryPoint

Register fixed-point data type with binary-point-only scaling and return its data type ID

Syntax

```
extern DTypeId ssRegisterDataTypeFxpBinaryPoint
    (SimStruct *S,
     int isSigned,
     int wordLength,
     int fractionLength,
     int obeyDataTypeOverride)
```

Arguments

S

SimStruct representing an S-function block.

isSigned

TRUE if the data type is signed.

FALSE if the data type is unsigned.

wordLength

Total number of bits in the data type, including any sign bit.

fractionLength

Number of bits in the data type to the right of the binary point.

obeyDataTypeOverride

TRUE indicates that the **Data Type Override** setting for the subsystem is to be obeyed. Depending on the value of **Data Type Override**, the resulting data type could be **Double**, **Single**, **Scaled double**, or the fixed-point data type specified by the other arguments of the function.

FALSE indicates that the **Data Type Override** setting is to be ignored.

Description

This function fully registers a fixed-point data type with the Simulink software and returns a data type ID. Note that unlike the standard Simulink function `ssRegisterDataType`, you do not need to take any additional registration steps. The data type ID can be used to specify the data types of input and output ports, run-time parameters, and DWork states. It can also be used with all the standard data type access methods in `simstruc.h`, such as `ssGetDataTypeSize`.

Use this function if you want to register a fixed-point data type with binary-point-only scaling. Alternatively, you can use one of the other fixed-point registration functions:

- Use `ssRegisterDataTypeFxpFSlopeFixExpBias` to register a data type with [Slope Bias] scaling by specifying the word length, fractional slope, fixed exponent, and bias.
- Use `ssRegisterDataTypeFxpScaledDouble` to register a scaled double.
- Use `ssRegisterDataTypeFxpSlopeBias` to register a data type with [Slope Bias] scaling.

If the registered data type is not one of the Simulink built-in data types, a Fixed-Point Designer software license is checked out. To prevent a Fixed-Point Designer software license from being checked out when you simply open or view a model, protect registration calls with

```
if (ssGetSimMode(S) != SS_SIMMODE_SIZES_CALL_ONLY )
    ssRegisterDataType...
```

Note Because of the nature of the assignment of data type IDs, you should always use API functions to extract information from a data type ID about a data type in your S-function. For more information, refer to “Data Type IDs” on page A-12.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

None. Data types should be registered in the Simulink software. Registration of data types is not supported in TLC.

See Also

ssRegisterDataTypeFxpFSlopeFixExpBias,
ssRegisterDataTypeFxpScaledDouble, ssRegisterDataTypeFxpSlopeBias

ssRegisterDataTypeFxpFSlopeFixExpBias

Register fixed-point data type with [Slope Bias] scaling specified in terms of fractional slope, fixed exponent, and bias, and return its data type ID

Syntax

```
extern DTypeId ssRegisterDataTypeFxpFSlopeFixExpBias
    (SimStruct *S,
     int isSigned,
     int wordLength,
     double fractionalSlope,
     int fixedExponent,
     double bias,
     int obeyDataTypeOverride)
```

Arguments

S

SimStruct representing an S-function block.

isSigned

TRUE if the data type is signed.

FALSE if the data type is unsigned.

wordLength

Total number of bits in the data type, including any sign bit.

fractionalSlope

Fractional slope of the data type.

fixedExponent

Exponent of the slope of the data type.

bias

Bias of the scaling of the data type.

obeyDataTypeOverride

TRUE indicates that the **Data Type Override** setting for the subsystem is to be obeyed. Depending on the value of **Data Type Override**, the resulting data type could be **Double**, **Single**, **Scaled double**, or the fixed-point data type specified by the other arguments of the function.

FALSE indicates that the **Data Type Override** setting is to be ignored.

Description

This function fully registers a fixed-point data type with the Simulink software and returns a data type ID. Note that unlike the standard Simulink function `ssRegisterDataType`, you do not need to take any additional registration steps. The data type ID can be used to specify the data types of input and output ports, run-time parameters, and DWork states. It can also be used with all the standard data type access methods in `simstruc.h`, such as `ssGetDataTypeSize`.

Use this function if you want to register a fixed-point data type by specifying the word length, fractional slope, fixed exponent, and bias. Alternatively, you can use one of the other fixed-point registration functions:

- Use `ssRegisterDataTypeFxpBinaryPoint` to register a data type with binary-point-only scaling.
- Use `ssRegisterDataTypeFxpScaledDouble` to register a scaled double.
- Use `ssRegisterDataTypeFxpSlopeBias` to register a data type with [Slope Bias] scaling.

If the registered data type is not one of the Simulink built-in data types, a Fixed-Point Designer software license is checked out. To prevent a Fixed-Point Designer software license from being checked out when you simply open or view a model, protect registration calls with

```
if (ssGetSimMode(S) != SS_SIMMODE_SIZES_CALL_ONLY )  
    ssRegisterDataType...
```

Note Because of the nature of the assignment of data type IDs, you should always use API functions to extract information from a data type ID about a data type in your S-function. For more information, refer to “Data Type IDs” on page A-12.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

None. Data types should be registered in the Simulink software. Registration of data types is not supported in TLC.

See Also

`ssRegisterDataTypeFxpBinaryPoint`, `ssRegisterDataTypeFxpScaledDouble`,
`ssRegisterDataTypeFxpSlopeBias`

ssRegisterDataTypeFxpScaledDouble

Register scaled double data type with [Slope Bias] scaling specified in terms of fractional slope, fixed exponent, and bias, and return its data type ID

Syntax

```
extern DTypeId ssRegisterDataTypeFxpScaledDouble
    (SimStruct *S,
     int isSigned,
     int wordLength,
     double fractionalSlope,
     int fixedExponent,
     double bias,
     int obeyDataTypeOverride)
```

Arguments

S

SimStruct representing an S-function block.

isSigned

TRUE if the data type is signed.

FALSE if the data type is unsigned.

wordLength

Total number of bits in the data type, including any sign bit.

fractionalSlope

Fractional slope of the data type.

fixedExponent

Exponent of the slope of the data type.

bias

Bias of the scaling of the data type.

obeyDataTypeOverride

TRUE indicates that the **Data Type Override** setting for the subsystem is to be obeyed. Depending on the value of **Data Type Override**, the resulting data type could be `Double`, `Single`, `Scaled double`, or the fixed-point data type specified by the other arguments of the function.

FALSE indicates that the **Data Type Override** setting is to be ignored.

Description

This function fully registers a fixed-point data type with the Simulink software and returns a data type ID. Note that unlike the standard Simulink function `ssRegisterDataType`, you do not need to take any additional registration steps. The data type ID can be used to specify the data types of input and output ports, run-time parameters, and `DWork` states. It can also be used with all the standard data type access methods in `simstruc.h`, such as `ssGetDataTypeSize`.

Use this function if you want to register a scaled double data type. Alternatively, you can use one of the other fixed-point registration functions:

- Use `ssRegisterDataTypeFxpBinaryPoint` to register a data type with binary-point-only scaling.
- Use `ssRegisterDataTypeFxpFSlopeFixExpBias` to register a data type with [Slope Bias] scaling by specifying the word length, fractional slope, fixed exponent, and bias.
- Use `ssRegisterDataTypeFxpSlopeBias` to register a data type with [Slope Bias] scaling.

If the registered data type is not one of the Simulink built-in data types, a Fixed-Point Designer software license is checked out. To prevent a Fixed-Point Designer software license from being checked out when you simply open or view a model, protect registration calls with

```
if (ssGetSimMode(S) != SS_SIMMODE_SIZES_CALL_ONLY )  
    ssRegisterDataType...
```

Note Because of the nature of the assignment of data type IDs, you should always use API functions to extract information from a data type ID about a data type in your S-function. For more information, refer to “Data Type IDs” on page A-12.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

None. Data types should be registered in the Simulink software. Registration of data types is not supported in TLC.

See Also

`ssRegisterDataTypeFxpBinaryPoint`,
`ssRegisterDataTypeFxpFSlopeFixExpBias`, `ssRegisterDataTypeFxpSlopeBias`

`ssRegisterDataTypeFxpSlopeBias`

Register data type with [Slope Bias] scaling and return its data type ID

Syntax

```
extern DTypeId ssRegisterDataTypeFxpSlopeBias
    (SimStruct *S,
     int isSigned,
     int wordLength,
     double totalSlope,
     double bias,
     int obeyDataTypeOverride)
```

Arguments

`S`

SimStruct representing an S-function block.

`isSigned`

TRUE if the data type is signed.

FALSE if the data type is unsigned.

`wordLength`

Total number of bits in the data type, including any sign bit.

`totalSlope`

Total slope of the scaling of the data type.

`bias`

Bias of the scaling of the data type.

`obeyDataTypeOverride`

TRUE indicates that the **Data Type Override** setting for the subsystem is to be obeyed. Depending on the value of **Data Type Override**, the resulting data type could be `Double`, `Single`, `Scaled double`, or the fixed-point data type specified by the other arguments of the function.

FALSE indicates that the **Data Type Override** setting is to be ignored.

Description

This function fully registers a fixed-point data type with the Simulink software and returns a data type ID. Note that unlike the standard Simulink function `ssRegisterDataType`, you do not need to take any additional registration steps. The data type ID can be used to specify the data types of input and output ports, run-time parameters, and DWork states. It can also be used with all the standard data type access methods in `simstruc.h`, such as `ssGetDataTypeSize`.

Use this function if you want to register a fixed-point data type with [Slope Bias] scaling. Alternately, you can use one of the other fixed-point registration functions:

- Use `ssRegisterDataTypeFxpBinaryPoint` to register a data type with binary-point-only scaling.
- Use `ssRegisterDataTypeFxpFSlopeFixExpBias` to register a data type with [Slope Bias] scaling by specifying the word length, fractional slope, fixed exponent, and bias.
- Use `ssRegisterDataTypeFxpScaledDouble` to register a scaled double.

If the registered data type is not one of the Simulink built-in data types, a Fixed-Point Designer software license is checked out. To prevent a Fixed-Point Designer software license from being checked out when you simply open or view a model, protect registration calls with

```
if (ssGetSimMode(S) != SS_SIMMODE_SIZES_CALL_ONLY )  
    ssRegisterDataType...
```

Note Because of the nature of the assignment of data type IDs, you should always use API functions to extract information from a data type ID about a data type in your S-function. For more information, refer to “Data Type IDs” on page A-12.

Requirement

To use this function, you must include `fixedpoint.h` and `fixedpoint.c`. For more information, see “Structure of the S-Function” on page A-5.

Languages

C

TLC Functions

None.

See Also

`ssRegisterDataTypeFxpBinaryPoint`,
`ssRegisterDataTypeFxpFSlopeFixExpBias`,
`ssRegisterDataTypeFxpScaledDouble`